

HYDRAULIC TOOLS

S Series - Hydraulic Spreaders



Capacity Range▶ .75 - 1 ton
 Weight▶ 5 - 25 lbs.
 Spread Range▶ .38 - 11.5 in.

- ▶ Closed narrow ends starting at .38".
- ▶ Large spreading range up to 11.5".
- ▶ Return spring assists the jaws to the closed position.
- ▶ Durable all metal construction to withstand any tough environment.
- ▶ Quality high flow coupler for fast tool setup.

S2000A and S3000A Shown

Hydraulic Tools



HOSES - pages 78 - 79

Heavy duty and thermo plastic hydraulic hoses to meet your requirements and safety factor.



COUPLERS - pages 74 - 75


High flow quick disconnect couplers provide a quick change to a variety of pumps.




POWER PUMPS - pages 43 - 65

Simplex offers a wide variety of lightweight power pumps to fit any application.

S2000A

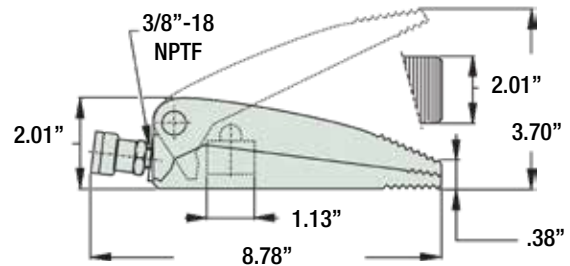

S3000A

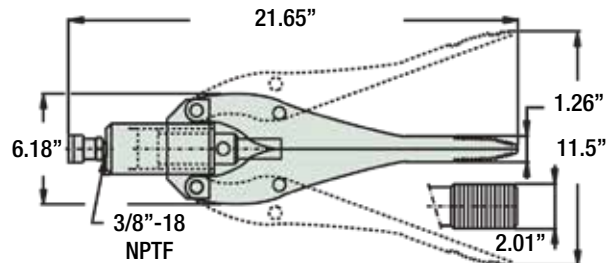

The Simplex S2000A spreader was used to remove this rusted anchor plate from a brick wall for mortar patching to begin. ▼



Model	Capacity (tons)	Pressure @ Capacity (PSI)	Oil Capacity Required (cu.in.)	Weight (lbs)	Width (in)	Suggested Hand Pump
S2000A	1	10,000	.61	5	2.01	P42
S3000A	.75	10,000	3.91	25	2.01	P42