


Perma-Tite® Watertight Wiring Devices



Standard Features

- UL, ETL listed and CSA certified
- IP69K Rated with High-Pressure Wash Down of 1,500 PSI
- Extreme industrial duty, outdoor rated, watertight wiring devices
- Double tongue & groove sealing system provides environmental protection of NEMA Type 4, 4X, 6, 6P, IP67, & IP 69K
- Devices resist high-pressure hose down of 1,000 psi
- Plug & connector bodies made with PBT chosen for its high resistance to moisture absorption, high voltage arcing and carbon tracking
- Removable/replaceable self-retained sealing cap provided with connector to keep out contaminants when not in use
- Available NEMA configurations shown on back
- Made in the USA

Dimensions:

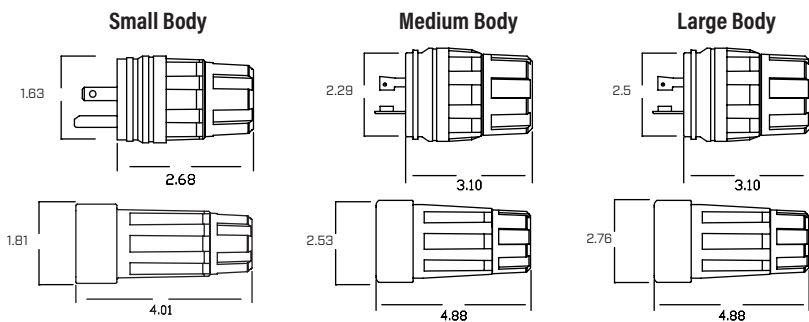

Applications

- Commercial & Industrial Construction
- OEM
- Power Generation
- Petro-Chemical & Refinery Facilities
- Ship Yards & Marine
- Harsh & Demanding Applications

Accessories:



Plug and connector covers available



1.800.ERICSON · ericson.com · info@ericson.com



Selection Guide:

	Face View	NEMA Configuration	Electrical Rating		Base Model		Industry Reference	
			Amps	Voltage	Plug	Connector	Plug	Connector
2-pole, 3-wire		NEMA 5-15	15A	125V	1510-PW6P	1610-CW6P	14W47	15W47
		NEMA 5-20	20A	125V	1512-PW6P	1612-CW6P	14W33	15W33
		NEMA 6-15	15A	250V	1514-PW6P	1614-CW6P	14W49	15W49
		NEMA 6-20	20A	250V	1516-PW6P	1616-CW6P	14W48	15W48
		NEMA L5-15	15A	125V	1520-PW6P	1620-CW6P	24W47	25W47
		NEMA L6-15	15A	250V	1522-PW6P	1622-CW6P	24W49	25W49
		NEMA L7-15	15A	277V	1524-PW6P	1624-CW6P	24W34	25W34
		NEMA L5-20	20A	125V	2310-PW6P	2410-CW6P	26W47	27W47
		NEMA L6-20	20A	250V	2312-PW6P	2412-CW6P	26W48	27W48
		NEMA L7-20	20A	277V	2314-PW6P	2414-CW6P	26W49	27W49
3-pole, 3-wire		Non-NEMA	20A	125 / 250V	2316-PW6P	2416-CW6P	26W08	27W08
		Non-NEMA	20 / 10A	250 / 600V	2317-PW6P	2417-CW6P	26W74	27W74
		Non-NEMA	15 / 10A	125 / 250V	1507-PW6P	1607-CW6P	26W75	27W75
		Non-NEMA	30A	125 / 250V	2516-PW6P	2616-CW6P	26W76	27W76
3-pole, 4-wire ²		NEMA L14-20	20A	125 / 250V	2320-PW6P	2420-CW6P	26W74	27W74
		NEMA L15-20	20A	250V / 3Ø	2322-PW6P	2422-CW6P	26W75	27W75
		NEMA L16-20	20A	480V / 3Ø	2324-PW6P	2424-CW6P	26W76	27W76
2-pole, 3-wire		NEMA L5-30	30A	125V	2510-PW6P	2610-CW6P	28W47	29W47
		NEMA L6-30	30A	250V	2512-PW6P	2612-CW6P	N/A	N/A
		NEMA L7-30	30A	277V	2514-PW6P	2614-CW6P	N/A	N/A
3-pole, 4-wire ²		NEMA L14-30	30A	125 / 250V	2520-PW6P	2620-CW6P	28W74	29W74
		NEMA L15-30	30A	250V / 3Ø	2522-PW6P	2622-CW6P	28W75	29W75
		NEMA L16-30	30A	480V / 3Ø	2524-PW6P	2624-CW6P	28W75	29W76
		NEMA L17-30	30A	600V / 3Ø	2526-PW6P	2626-CW6P	28W77	29W77
4-pole 4-wire		NEMA L18-30	30A	120/208V 3Ø wye	2530-PW6P	2630-CW6P	N/A	N/A
		Non-NEMA	30A	120/208V 3Ø wye	2528-PW6P	2628-CW6P	N/A	N/A



Ericson Manufacturing Company
4323 Hamann Parkway
Willoughby, OH 44094, USA



1.800.374.2766
info@ericson.com
www.ericson.com
L1000845A