

Since 1918

ERICSSON®




Solutions Guide 2014

Ericson Manufacturing: The Evolution

1916

The Rubber industry brings Edward Oscar Ericson (founder of Ericson Manufacturing) to Akron, Ohio where his awareness of worksite safety hazards brought forth inspiration to develop products for a safer workplace.



Edward O. Ericson (top)
John Ericson Sr. (bottom)

1918

With Edward Oscar Ericson's patent for first Rubber Handlamp awarded in 1918, Ericson Manufacturing Company is officially born. Which also operated under the name of C&E Sales.

1927

Ericson's insulated Handlamp Guard revolutionizes the industry.




1928

The US Navy Department of Engineering standardizes on Ericson rubber handlamp for improved safety performance.

1929

Ericson's invention of the first "Dead-Front, Back-Wired" electrical plug revolutionizes the wiring device industry.



1931

Ericson designs a plug suitable for the needs of Ontario's Hydro Electrical Power Commission Dept. of Engineering establishing international business in Canada.



1936

Patent for first Dead-Front-Back-Wired Plug and Connector awarded, the NEC and OSHA still require its use today.



1939

Introduction of first explosion and vapor proof handlamp.



1945

Ericson Manufacturing is recognized for supplying the Armed Forces with electrical equipment to help win WWII



1948

Cord reels with handlamp accessories introduced



1959

Ericson introduces the first 4-way insulated electrical box.



1960

Ericson introduces new fluorescent inspection lamps.



1964

Ericson's handlamps and wiring devices become yellow... "Yellow for Safety".



1970

Ericson's Patent on the industries' first portable GFCI awarded.



1985

Ericson patent of Ground and Continuity Monitor (GCM) Wiring Devices awarded.

1990

Ericson manufactures the "Go Anywhere" inline and plug style GFCI.




2001

The Oscar is introduced to the market, named after Ericson's founder.



2007

The award winning E-cart™ family of mobile power transformation equipment introduced to the marketplace.



2013

Ericson introduces TuffTraxx™ cable protectors & LED lighting.



2014

Ericson introduces Perma-Kleen™ Anti-Microbial wiring devices.



2014

98 years and counting of manufacturing the industries' safest and most reliable temporary power, lighting, and engineered solutions.

E.O. Ericson

Our story is built around you. Our customer. We believe in listening, implementing and adapting. We are a customer driven, sales driven, innovative industry leader committed to “exceeding customer expectations.”

We are YOUR PARTNER – With on time shipments of 96% or better, ISO Certification of Quality, a helpful technical team, dedication to solve your individual issues, ease of doing business and follow up customer care after the sale...Ericson is and will always be your best choice...

We are FAMILY – Since 1918, The Ericson family continues to bring quality products and the promise of customer satisfaction to a growing customer base. With the flexibility of a mid-sized U.S. company with autonomy to operate in the best manner to satisfy your needs.

We are READY – Our dedication to your satisfaction starts with a “Yes we can...” attitude and the willingness to offer 24/7 Emergency Service to cover your operating hours, not ours. We are ready to ship your product quickly to meet your schedule.

We are INNOVATION – We design and build innovative, safe and cost effective temporary power and lighting systems solutions. Our award winning designs and patents granted through the years are proof positive that Ericson consistently brings innovation to you.

We are QUALITY – We are certified to the latest ISO 9001 certified Quality Standards and are known throughout the industry for manufacturing the highest quality products available. We constantly test and measure the quality of our products to meet or exceed your expectations.

We are SAFETY – Ericson emphasizes 3rd party NRTL Agencies to demonstrate our commitment to safety. UL, ETL, CSA and QPS listings as well as NEC/CEC and OSHA/Workers Compensation Code Compliance are integrated into every design.

We are SOLUTIONS – Our in-house Applications Engineering team is available to assist you in providing design and layout solutions. We have an impressive history of providing solutions with custom applications.



Since 1918
ERICSON[®]

Table of Contents

New Products	6-7	Perma-Link® Devices	113
Temporary Power	8-53	5266 Economy Devices	114
TuffTraxx.....	12-13	Configuration Adapters	115
e-Cart™ Series	14-23	PWDX Series Heavy Duty Outlet Receptacles	116-119
Big-E™ Series	24-27	Perma-Tite® 2 FS Series Cover Plates	120-123
Oscar® Series.....	28-47	Hospital Grade Devices.....	124
8000 Series Outlet Boxes	48-49	Light Industrial Perma-Link® 50 A Devices	125
6000 Series Outlet Boxes	50-51	Cordsets	126-143
6100 Series Outlet Boxes	52-53	Perma-Kleen™ Cordsets and Cord Drops	128-131
Temporary Lighting	54-101	Camlock Power Cables	132
Stringlight Selection Guide	56-57	50, 60 & 100 Amp Cordsets.....	133
Stringlights	56-69	Heavy Duty W & Y Cordsets	134
Baylite™ Metal Halide Fixture	67	Emergency Generator GFCI Cordsets	135
2000 Series LED	70-71	7000 Series Tri-Tap Multiple Outlet Boxes.....	136
Wide Area Fluorescent	72-73	Contractor Grade Molded End Cordsets	137
Emergency Egress Lighting	74	SmartMonitor™ Series	138
Industrial Extension Lights	75-76	Factory Assembled Cord Sets	139
Low Volt Transformers	76	6100 Series - Factory Wired Portable Outlet Boxes	140
Magnet Mount Work Lighting	77-79	Factory Wired 3-Phase Alternate-Wired Power Stringer	141
Heavy Duty Tube LED/Fluorescent Work Lights	80-81	TuffTraxx™ Cable Protectors.....	142-143
Wide Area Rough Service LED/Fluorescent.....	82-83	MINI-SYNC™ & MICRO-SYNC™ Devices	144-167
Handlamp Selection Guide.....	82	MINI-SYNC™ Devices	146-155
Handlamps	84-99	MICRO-SYNC™ Devices	156-167
Boiler Lights	100	GFCI	168-177
Wiring Devices	102-125	How a GFCI Works	170-171
NEMA Configuration	104-105	XG2 Series	172-174
Perma-Kleen Anti-Microbial	106-107	1075 Panel Mount GFCI	175
SmartMonitor Series	108-109	1060 Series	176
Perma-Tite® 2 Devices	110-111	Custom GFCI.....	177
Perma-Grip™ Devices	112	Reels	178-193

Looking for us ?

At Ericson, we value the listing marks of 3rd party NRTL or International Underwriting Safety Agencies and understand the importance of up-to-date Listing Information to you, our customer. 1. Contact your local Ericson Rep for a listing lookup
 2. Contact Customer Service at 1-800-ERICSON (374-2766) M-F 8-6 EST
 3. 24/7 Web Search - TO SEARCH A PART - SEE THE FULL LISTING ON OUR WEBSITE WWW.ERICSON.COM/AGENCY



Table of Contents

2900 Series	180	SmartMonitor™ Series	250
3000 Series - Light Duty Cord Reels	181	Perma-Link® - Conversion For Weather Resistance	251
3200 Series - Light Duty Cord Reels	182	Grommet Sizes	252-253
Industrial Reels	183	Portable Electrical Cord Reference	254
4000 Series - Industrial Grade Cord Reels	184-185	Industrial Wiring Device Innovations	255
5000 Series Large Cable Cord Reels	186	Cordset & Power Cable Selection Guide	256
6000/7000 Series Extra Long Cord Reels	187	Low Voltage Transformers.....	257
8000 Series - Hazardous Location Reels	188	Metal Gang Box Danger.....	258
SDR Series Static Discharge Reels	189	Lamp Comparison Chart	259
Reel Accessories	190	Do's & Don'ts- Temporary Lighting	260-261
Reel Dimensions.....	191-193	Stringlight Types	262
Pendant Stations	194-209	Stringlight Assembly Configurator	263
Applications	196	How a GFCI Works	264-265
5500 Pistol Grip Pendant Station	197	Push Button Pendant Stations	266
5500 General Duty.....	198-199	Switch Operations	267
5500 Switches	200-202	Reel Construction	268
5500 Electrical Jumpers	203	Specifying Your Cable Reel	269
5500 Enclosures	204	NEMA Type Designations	270
5500 Replacement Parts & Legend	205	IP Rating System	271
5500/5502/5503 Dimensions.....	206-207	Hazardous Locations	272-274
5500 Custom Ordering	208	Temperature Conversion	275
e-Grips	210-245	Metric Conversion Chart	276
e-Grips - Uses	208	Electrical Formulas	277
Support Grips	209-223	OSHA Product Match	278-281
Pulling Grips	223-226	Glossary of Terms	282-285
Strain Relief Grips	227-236	IPDM & VMM Options	286
e-Grip Technical Reference	237-240	Numerical Listing	287-301
Technical Reference	246-286		
Temporary Power - Do's & Don'ts.....	248-249		

Origin of Products

Made in the USA - This symbol is shown on products that all or nearly all parts are made and assembled in the USA.

Assembled in the USA - This symbol is shown on products that most of the parts are from US Origin and assembled in the USA.



Small Business
CAGE 82832
GSA #
GS-07F-0313Y

PERMAKLEEN™




Ericson's Perma-Kleen Anti-microbial Wiring Devices deliver exceptional protection against anti-microbial growth, even on hidden, hard to clean surfaces. Retrofitting current installations with these cost effective solutions will provide confidence and peace of mind by knowing every possible step has been taken to protect consumers against harmful and potentially deadly, microbial contamination.

- UL Listed
- Inhibits Growth of Bacteria, Molds, Mildews and Fungi
- Anti-microbial Additives Embedded in Polymer
- Resistant to High Pressure Hose-down
- NEMA Type 4, 4X, 6, 6P-And IP67 Protection

See page 106

TUFFTRAXX®

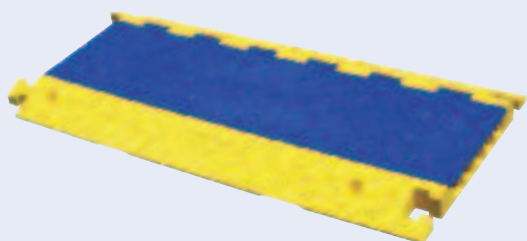

TuffTraxx™ Cable Protectors

Protect expensive cables from foot-traffic and equipment damage while eliminating tripping hazards caused by cables with Ericson's CP5 Series Cable Protectors. Made from rugged, all-weather polyurethane construction known for its resilience, hardness and impact resistance for demanding environments.

See page 12



Mini-e PDU

Lots of power in a small rugged jobsite enclosure is the exclusive design of the Mini-e. NEMA 3R In-Use Rain Rated with multiple configurations to chose from, the Mini-e is the answer to your power needs. Cord connected or male power inlet styles make this design a versatile PDU for all applications.

See page 30



Oscar® PowerCart PDU

Oscar® PowerCart, Mobile Temporary Power Distribution Center

- UL Listed and QPS Listed for Canada
- Up to 200 amp
- 120/208V, 240V, 480V or 600V
- Breaker and Receptacle Personalization
- Camlock and Terminal Lug Options
- Up to (18) 20A GFCI Circuits Out
- Many Styles to Choose From


See page 44



LED Wide Area Lighting: 1000LED Series

- cULUS Listed for Outdoor/Wet Location
- LED Energy Efficient Lighting Technology
- Impact-Resistant molded Polycarbonated Housing
- Durable, Rugged Indoor/Outdoor Construction
- Dual magnets for Secure Mounting on Metallic Surfaces
- Light Weight Design

See page 78

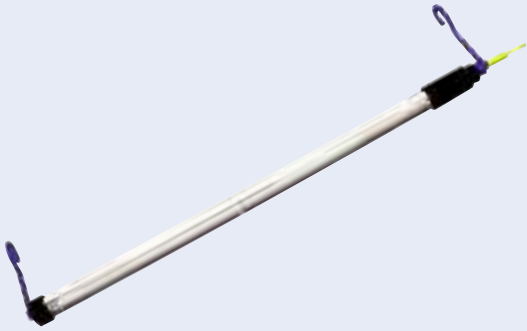

LED Heavy Duty Tube Work Lights: 800 Series

- cULus Outdoor / Wet Location Listed
- LED Energy Efficient Lighting Technology
- Durable, Rugged Indoor/Outdoor Construction
- Low Power Utilization / Consumption
- Available Sealed Switch Option
- Easily "Daisy-chained" to Cover Larger Areas
- 50,000 Hour Life Expectancy

See page 80



LED Heavy Duty Wide Area Lighting

- cULus Outdoor / Wet Location Listed
- LED Energy Efficient Lighting Technology
- Durable, Rugged Indoor/Outdoor Construction
- Lightweight, Impact Resistant Material
- Flexible Based / Floor or Hanging
- Easily "Daisy-chained" to Cover Larger Areas
- 50,000 Hour Life Expectancy

See page 82



Hazardous Duty LED, Incandescent & Fluorescent Handlamps

- ETL, cETL Listed
- 120 or 12 Volt
- Incandescent or CFL bulb
- EZ to Replace Parts
- New Cord Grip & Strain Relief
- Up to #12/3 SO Cord
- 12 Volt or 120 Volt
- Class I & II, Div 1 & 2, Groups C, D, F, G

See page 98



2000 Series LED Lamp

- cULus Listed
- Outdoor / Wet Location Rated
- Cool, Safe Operation
- IP65 Environmental Rating
- 120° Beam Angle, High-power LED
- 5mm High Strength Tempered Glass
- 50,000 Hour Rated Life
- High Efficiency Operation

See page 70



e-Cart™ Jr. Transformer Based PDU

Now available from Ericson...The e-Cart Jr.™, Mobile Temporary Power Distribution Centers for your jobsite.

- UL Listed and QPS Listed for Canada
- 600 or 480V, 3 phase or single phase 60Hz power input
- 15kVA encapsulated transformer
- Output power options: 120Y/208V with 3-phase transformer or 120V/240V with single-phase transformer
- Combo load center with GFCI circuit breakers
- NEMA TYPE 3R main disconnect switch
- Code compliant
- Award winning design



e-Cart2™ Transformer Based PDU

Now available from Ericson...The e-Cart 2™ Mobile Temporary Power Distribution Centers for your jobsite.

- UL Listed and QPS Listed for Canada
- Industrial duty powder coated steel frame with lifting eyes, wheels or stands
- Three phase or single phase NEMA 3R 480V or 600V 60Hz ventilated transformer
- NEMA 3R load center with GFCI breakers installed, sized per transformer
- NEMA 3R fused primary disconnect, sized per transformer
- EZ to move and store
- Code compliant
- Patent pending design
- Award winning design

XP e-Cart2™ - Explosion Proof PDU

XP e-Cart2™, Explosion Proof Mobile Temporary Power Distribution Center

- Class I, Div. 2, Groups C and D Certified
- NEMA 3R Rated Cart
- Heavy Duty, Light Weight, Spark Resistant Aluminum Frame
- 480 V or 600 V Main Power Flexibility
- Award Winning Design



Big-E™ Jr. PDU

The Big E Jr.™, Mobile Temporary Power Distribution Center

- UL Listed and QPS Listed for Canada
- Up to 200 amp
- 120/208V or 240V
- IEC or camlock In
- Up to (18) 20A GFCI circuits out
- Many styles to choose from



Big-E™ PDU

The Big E™, Mobile Temporary Power Distribution Center

- UL Listed and QPS Listed for Canada
- 600, 480 or 208 or 240 volt power distribution
- All connections and circuit breakers under one NEMA 3R rain proof cover
- Up to 400 Amp
- 3R rainproof tested
- Camlock main power connected or rear panel entry
- Welder power distribution 480V (select models)
- Powder coated for corrosion resistance
- Frames stack & lock together for storage



Oscar® Boxes - 1066/1067 Series

Available from Ericson...Oscar® Box Temporary Power Distribution Units. Versatile protection for your jobsite, the Oscar® box is available in many standard GFCI protected configurations or contact the factory for a custom need.

- 50A 240V input
- (8) receptacles out
- Full GFCI compliance



Oscar II PDU

When you need a temporary power distribution box that will meet your requirements, look to the Oscar® 2 Series from Ericson. The flexible design platform of the new Oscar® 2 allows you to configure a Temporary Power Distribution Center that is right for you. The Oscar® 2 Expo Series picks up where the 1066/1067 leaves off.

Typical Applications Include:

- Convention Centers
- Outdoor Events
- Festivals
- Carnivals, etc.
- Concerts
- Stage & Studio



1068 Series 3 Phase 208V Features:

- Choice of main inlet types - IEC309 power-inlet and power-outlet or camlock
- Exclusive IPDM module installed
- GFCI or non-gfci circuit breakers available
- Receptacles protected by Ericson's FS Series flip seal covers
- Camlock inputs available



Oscar® PowerCart PDU

Oscar®PowerCart, Mobile Temporary Power Distribution Center

The basic construction consists of:


- UL Listed and QPS Listed for Canada
- Up to 200 amp
- 120/208V, 240V, 480V or 600V
- Breaker and Receptacle Personalization
- Camlock and Terminal Lug Options
- Up to (18) 20A GFCI circuits out
- Many styles to choose from



It All Works Together


14kVA Generator (G14)

Usually single phase only 56A available at 120/240 (3) 20A duplex GFCIs, (1) L14-30 & (1) CS6369 240V 50A twist terminal block connection

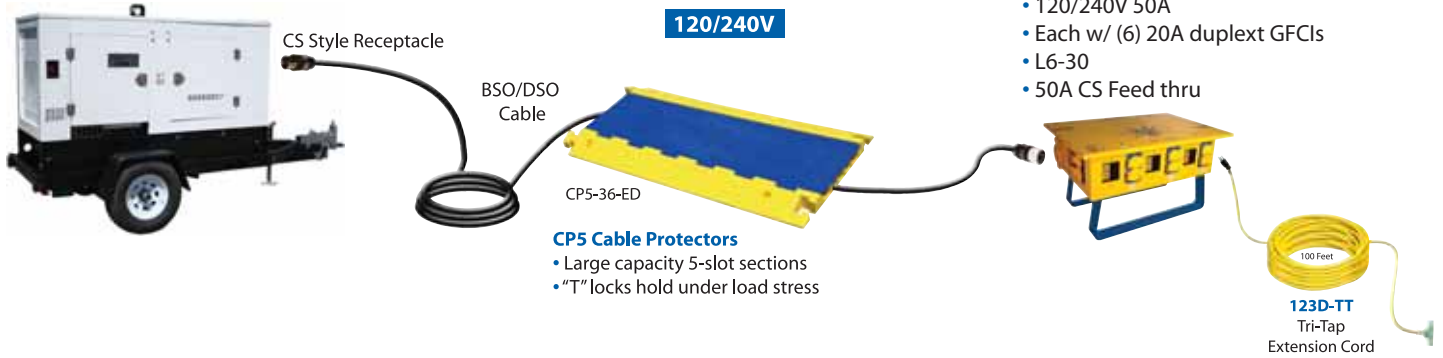


25kVA Generator (G25)

Usually single phase and 3 phase outputs available 75A at 120/240V or 63A at 120/208V or 27A at 277/480 (2) 20A Duplex GFCIs, (1) L14-30 & (1) CS6369 240V 50A twist Terminal block connection

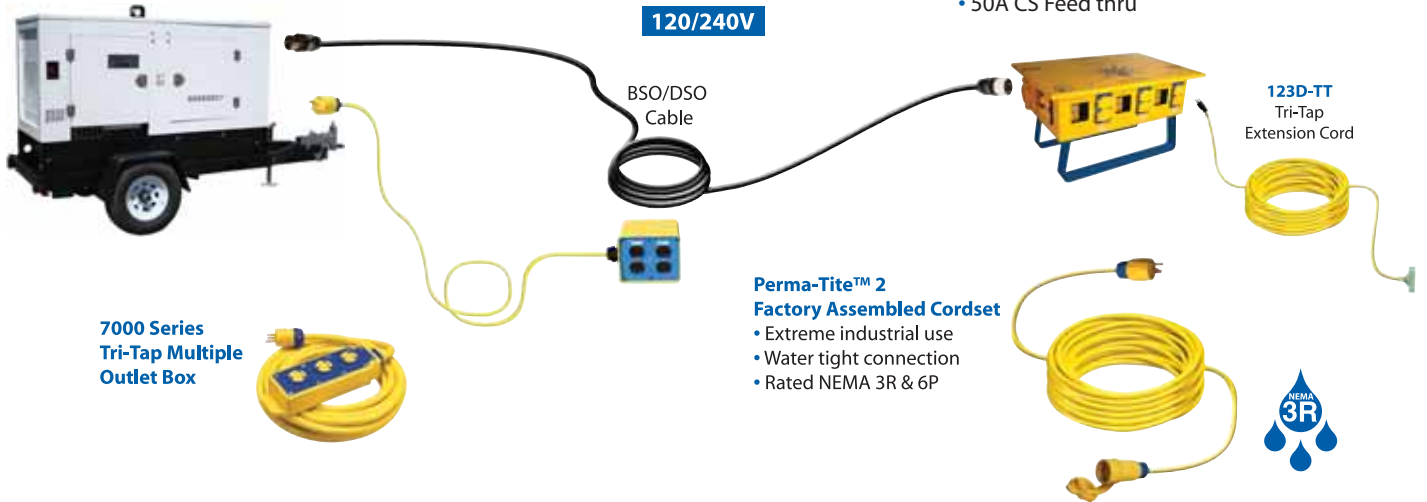

70kVA Generator (G70)

Usually single phase and 3 phase outputs available 242A at 120/240V or 200A at 120/208V or 87A at 277/480V (2) 20A Duplex GFCIs, (1) L14-30 & (2) CS6369 240V 50A twist Terminal block connection

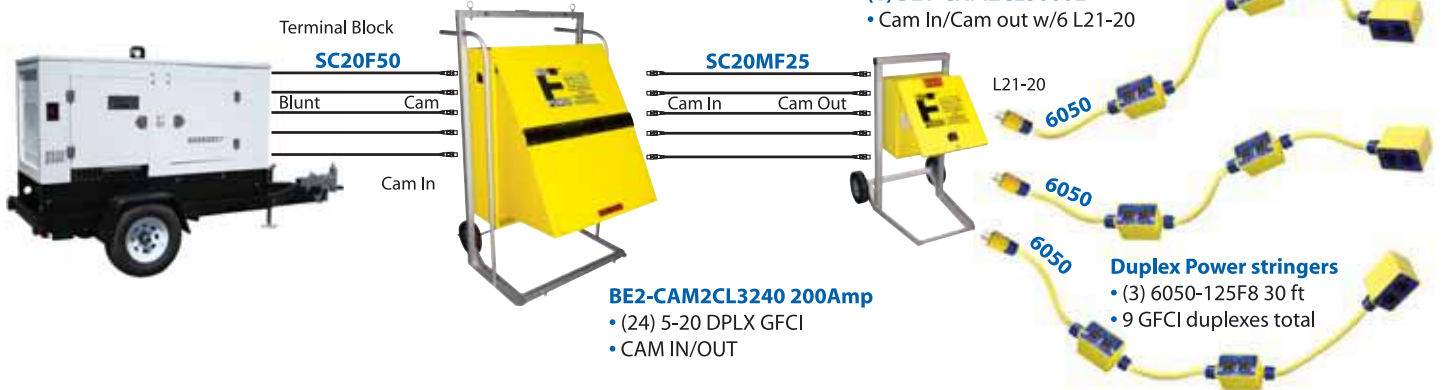

**Generator Capacity & Receptacles are for Estimation Purposes Only.
Be Sure to Check Your Specific Unit for Exact Equipment Specs!**


25kVA Generator (G25)

Usually single phase and 3 phase outputs available
75A at 120/240V or 63A at 120/208V or 27A at 277/480V
(2) 20A Duplex GFCIs, (1) L14-30 & (1) CS6369 240V 50A twist
Terminal block connection



- 1140 Series**
- 20 Watt LED or 40 Watt fluorescent
 - Lightweight, impact resistant material

- 800 Series Tube Lights**
- cULus Outdoor Listed
 - Connect up to 12 units
 - LED • 14, 18 or 22 Watt
 - 1 x T8 Tube • 17-40 Watt

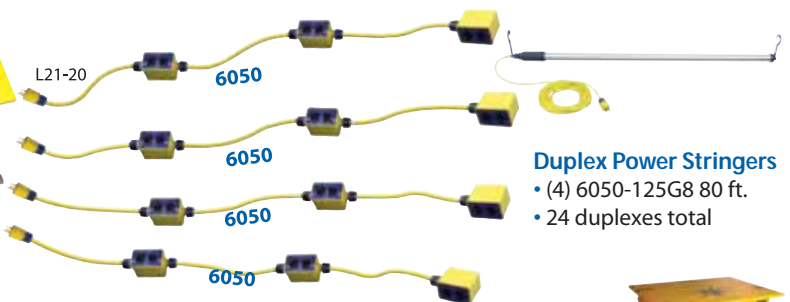

- Duplex Power Stringers**
- (4) 6050-125G8 80 ft.
 - 24 duplexes total


50kVA Generator (G50)

Usually single phase and 3 phase outputs available
158A at 120/240V or 133A at 120/208V or 58A at 277/480V
(2) 20A Duplex GFCIs, (1) L14-30 & (1) CS6369 240V 50A twist
Terminal block connection



- 120/240V Big E Jr.**
BE1-CAM2CL1063 (CAM in & out)
(6) 20A GFCI duplex,
(3) CS Oscar feeds

- Oscar™ - 1066FS**
- 120/240V 50A
 - Each w/(6) 20A duplex GFCIs
 - L6-30
 - 50A CS Feed thru

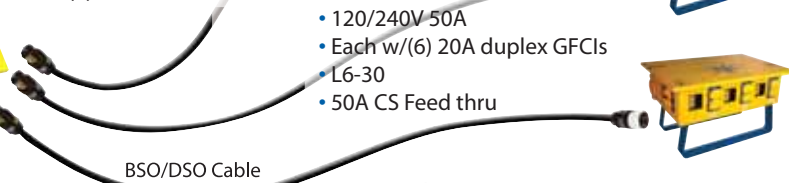

85kVA Generator (G85)

Usually single phase and 3 phase outputs available
279A at 120/240V or 233A at 120/208V or 101A at 277/480V
(2) 20A Duplex GFCIs, (1) L14-30 & (2) CS6369 240V 50A twist
Terminal block connection



- 120/240V BE4-CAMCL1008T**
- 400A PDU w/ (8) CS6369
 - 240V 50A twistlocks

- 1000LED**
- cULus Listed
 - 14/3 cable, 5-15 plug
 - Heavy-duty magnet mount



- Oscar™ - 1066FS**
- 120/240V 50A
 - Each w/(6) 20A duplex GFCIs
 - L6-30
 - 50A CS Feed thru


85kVA Generator (G85)


Usually single phase and 3 phase outputs available
279A at 120/240V or 233A at 120/208V or 101A at 277/480V
(2) 20A Duplex GFCIs, (1) L14-30 & (2) CS6369 240V 50A twist
Terminal block connection



- 480V BE4 480V 200A PDU**
- Part number 09100807
 - (8) L16-20 480V receptacles

- Up to (5) 15kVA Ecart Jrs**
- Each w/ (6) 20A duplex GFCIs

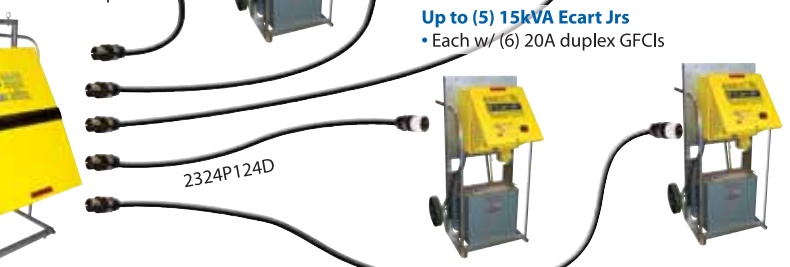

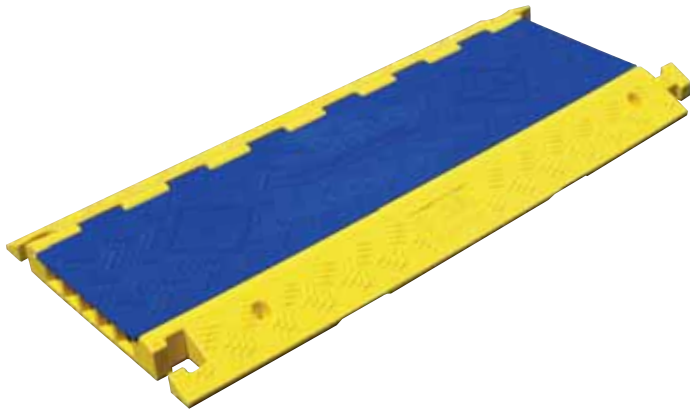

CP5-36-ID : 27,000 Lbs / Axle
CP5-36-ED : 50,000 Lbs / Axle

FEATURES:

- Industrial and extreme duty service ratings
- Load ratings up to 50,000 lbs/axle
- Y-Adapters deliver 45° and 90° cable routing
- Customizable to match corporate branding style
- Non-conductive shock barrier protection
- Rounded dividers protect cables from snags and tears
- T-style connector interlocks for secure operation
- Hinged lid for easy cable loading
- Rugged, all-weather polyurethane construction
- Tread plate surface for increased traction
- Clearly Identifiable molded safety warning symbols
- Tapered end caps provide gradual egress
- Light-weight design for easy handling and storage
- Meets NEC & OSHA requirements
- Large capacity (1.3 inch) linear sections

Ericson's TuffTraxx Series of Industrial Duty and Extreme Duty Cable Protectors deliver unmatched security and protection against cable and hose damage. Easy to install and reconfigure, the non-metallic TuffTraxx Series shields interconnect cabling from harmful equipment traffic, thus minimizing expensive down-time and repairs. Flexible Y-Adapters offer exceptional cable routing flexibility ideal for large diameter cable or multi-directional cable runs.

Protecting pedestrian traffic from dangerous trip hazards, whether at the work site or during public events, has never been easier than with this safe and affordable solution. Constructed from light-weight, durable polyurethane and tested to rigorous quality and operational standards, these products are built to withstand years of punishing service without compromised performance.

TuffTraxx Industrial and Extreme Duty Cable Protectors feature a compact, flexible design that simplifies setup and transportation making them ideal for a wide range of applications including:

- | | | | |
|----------------------------------|--------------------------|------------------------|------------------------|
| • Oil / Gas Exploration | • Oil / Gas Refineries | • Construction | • Entertainment Venues |
| • Digital / Telecommunications | • Defense / Safety | • Utility Maintenance | • Sporting Events |
| • Mining Operations | • Carnivals and Fairs | • Rental Services | • Transportation |
| • Stadiums / Racetracks / Arenas | • Universities / Schools | • Convention /Theaters | • Aerospace / Airports |



Made in the USA


Specifications

Material:	
Straight section, end caps, Y-adapter	UV Stabilized Polyurethane
Hinge	Reinforced Fiberglass
Operating Temperature Range:	
-40 °F to +120 °F (-40 °C to +49 °C)	
Maximum Load per Tire (straight section):	
CP5-36-ID	13,500 lbs. @ 70 °F (4,763 kg. @ 21 °C)
CP4-36-ED, CP5-36-ED	25,000 lbs. @ 70 °F (4,763 kg. @ 21 °C):
Maximum Load per Axle (straight section):	
CP5-36-ID	27,000 lbs. @ 70 °F (4,763 kg. @ 21 °C)
CP4-36-ED, CP5-36-ED	50,000 lbs. @ 70 °F (4,763 kg. @ 21 °C):


Catalog Number	Description	A-Length	B-Width	C-Height	D-Channel Width	E-Channel Height	Weight
CP5-36-ID	Industrial Duty 5-slot, 36" straight section	36"	17.25"	1.95"	1.30"	1.35"	20.6 lbs
CP4-36-ED	Extreme Duty 4-slot, 36" straight section	36"	19.5"	2.25"	1.80"	1.35"	23.5 lbs
CP5-36-ED	Extreme Duty 5-slot, 36" straight section	36"	19.5"	2.25"	1.40"	1.35"	23.5 lbs

Max. Allowable Cable Size

Cord Type	Voltage	Size
SOOW Portable	(600V)	2/3
SOOW Control	(600V)	18/30, 16/52, 14/24
Type W (2000V)	(2000V)	2/2, 2/3, 4/4, 6/5
Stage Lighting	(600V)	4/0
Welding	(600V)	500MCM
Utility Ground	(600V)	2/0 and 4/0
Type G-GC	(2000V)	8/3 to 4/3

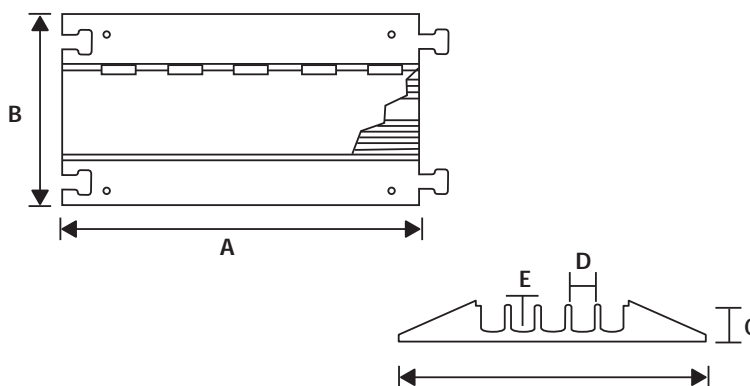

Catalog Number	Description	A-Length	B-Width	C-Height	D-Channel Width	E-Channel Height	Weight
CP5-45Y-ID	Industrial Duty 5-Channel, "Y" Adapter	20" (508mm)	17.25" (438mm)	1.95" (50mm)	1.3" (33mm)	1.3" (33mm)	11 lbs
CP5-ECP-ID	Industrial Duty 5-Channel End Cap (Pair)	4.75" (120mm)	17.25" (438mm)	1.95" (50mm)	1.3" (33mm)	1.3" (33mm)	2.7 Lbs.

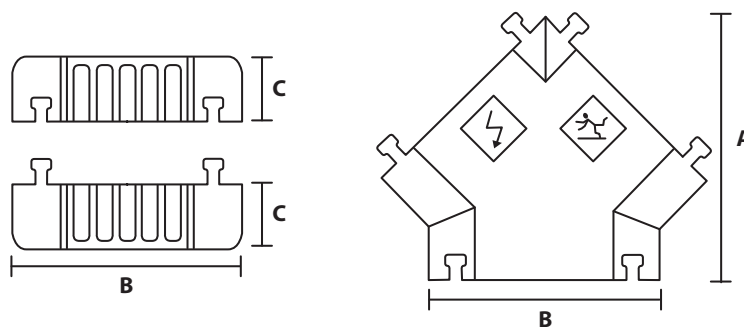

Note: Safety warning symbols per ANSI Z535.3-1991



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



FEATURES:

- Standard units UL listed for US, QPS certified for Canada
- 480V or 600V, 3 phase or single phase 60Hz power input
- 15kVA epoxy encapsulated 3R transformer
- Output power options: 120Y/208V with 3-phase transformer or 120V/240V with single-phase transformer
- Combo load center with GFCI circuit breakers
- NEMA TYPE 3R main disconnect switch
- Twist lock closure
- Rain Guard flaps fold into cover
- Heavy-Duty cart with handle for easy maneuvering around job site
- 50A Receptacle
- Easy rolling wheels
- Engineered solutions available, contact factory for more information

EXCLUSIVE

NEMA type 3R Ericson engineered circuit breaker/ receptacle “combo” enclosure panel.

- Combines circuit breaker panel with receptacle operation
- Heavy duty enclosure
- NEMA 3R rainproof “in use” flip top assembly

Examples:

IN 480V → e-Cart™ Jr. → OUT 120V

IN 600V → e-Cart™ Jr. → OUT 120V


Note: 6 feet of cable installed on primary disconnect sized to transformer. UL Models Only (not shown).



See the Video



Inside View

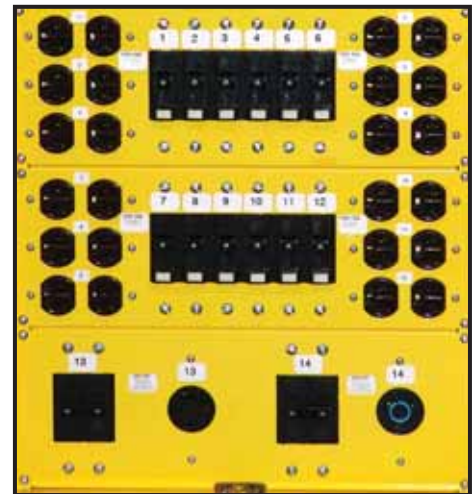

Order with 50A output to power Oscar® boxes.




UL Listed Frame Style	Panel Board	Combo Enclosure Styles		

Standard NEMA 3R Panel with Pigtails.

Note: Panel with pigtails or boxes cannot be UL Listed due to code and standard restrictions.

480 or 600 Volt

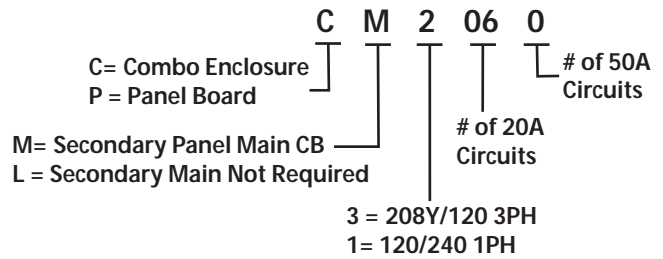

Catalog No.	INPUT POWER				SECONDARY INFO			OUTPUT CONNECTIONS			UL/OPS Listed
	Voltage IN	Phase	Primary Connection	Transformer Size (kVA)	Secondary Voltage OUT	Secondary Panel MCB Installed	Panel and Connections Style	Receptacles Installed	Circuit & Personnel Protection		
EJR4115CL10600-UL	480/600	1	6 ft SOW Blunt	15	120/240	NO	C	(6) 5-15/20 T Slot GFCI DPLX	(6) 20A STD BRKRS	YES	
EJR4115CM1061-UL	480/600	1	6 ft SOW Blunt	15	120/240	YES	C	(6) 5-15/20 T Slot GFCI DPLX & (1) CS6369 50A	50A 2P C.B. (6) 20A STD BRKRS	YES	
EJR4315CL30600-UL	480/600	3	6 ft SOW Blunt	15	120/208Y	NO	C	(6) 5-15/20 T Slot GFCI DPLX	(6) 20A STD BRKRS	YES	
EJR4315CM30310-UL	480/600	3	6 ft SOW Blunt	15	120/208Y	YES	C	(3) 5-15/20 T Slot GFCI DPLX & (1) CS6369 50A	(3) 20A STD BRKRS & (1) 50A 2P C.B.	YES	
EJR4315CM3061-UL	480/600	3	6 ft SOW Blunt	15	120/208Y	YES	C	(6) 5-15/20 T Slot GFCI DPLX & (1) CS6369 50A	(6) 20A STD BRKRS & (1) 50A 2P C.B.	YES	
EJR4315CM31200-UL	480/600	3	6 ft SOW Blunt	15	120/208Y	YES	C	(12) 5-15/20 T Slot DPLX	(12) 20A GFCI C.B.	YES	
EJR4115CL10600	480/600	1	Hardwire In	15	120/240	NO	C	(6) 5-15/20 T Slot GFCI DPLX	(6) 20A STD BRKRS	MFG	
EJR4115CM1061	480/600	1	Hardwire In	15	120/240	YES	C	(6) 5-15/20 T Slot GFCI DPLX & (1) CS6369 50A	50A 2P C.B. (6) 20A STD BRKRS	MFG	
EJR4115PL10600	480/600	1	Hardwire In	15	120/240	NO	P	(6) 5-15/20R T Slot (1612-CW6P) PGTLS	(6) 20A GFCI C.B.	MFG	
EJR4315CL30600	480/600	3	Hardwire In	15	120/208Y	NO	C	(6) 5-15/20 T Slot GFCI DPLX	(6) 20A STD BRKRS	MFG	
EJR4315CM30310	480/600	3	Hardwire In	15	120/208Y	YES	C	(3) 5-15/20 T Slot GFCI DPLX & (1) CS6369	(3) 20A STD BRKRS & (1) 50A 2P C.B.	MFG	
EJR4315CM3061	480/600	3	Hardwire In	15	120/208Y	YES	C	(6) 5-15/20 T Slot GFCI DPLX & (1) CS6369 50A	(6) 20A STD BRKRS & (1) 50A 2P C.B.	MFG	
EJR4315CM31200	480/600	3	Hardwire In	15	120/208Y	YES	C	(12) 5-15/20 T Slot DPLX	(12) 20A GFCI C.B.	MFG	
EJR4315PL30600	480/600	3	Hardwire In	15	120/208Y	NO	P	(6) 5-15/20R T Slot (1612-CW6P) PGTLS	(6) 20A GFCI C.B.	MFG	
EJR4315PL3060L	480/600	3	Hardwire In	15	120/208Y	NO	P	(6) L5-20R LKG PGTLS	(6) 20A GFCI C.B.	MFG	
EJR4315PM30310	480/600	3	Hardwire In	15	120/208Y	YES	P	(3) 5-15/20 T Slot GFCI DPLX & (1) CS6369 50A9	(3) 20A GFCI C.B. & (1) 50A 2P C.B.	MFG	
EJR4315PM3120	480/600	3	Hardwire In	15	120/208Y	YES	P	(12) 5-15/20R T Slot (1612-CW6P) PGTLS	(12) 20A GFCI C.B.	MFG	
EJR4315PM3120L	480/600	3	Hardwire In	15	120/208Y	YES	P	(12) L5-20R LKG PGTLS	(12) 20A GFCI C.B.	MFG	

1. MFG = Assembled from listed or certified components - assembled cart is not listed.
 2. Panel type: C = Combo Enclosure, P = Panel Board.
 3. Change "4" to "6" in the catalog number for 600 input.



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.





FEATURES:

- Standard units UL listed for US, QPS certified for Canada
- Industrial duty aluminum frame with lifting eyes, wheels or stands
- Three phase or single phase NEMA 3R 480V or 600V 60Hz ventilated transformer
- NEMA 3R load center with GFCI breakers installed, sized per transformer
- NEMA 3R fused primary disconnect, sized per transformer
- (4) Cable hooks, (4) tie down lift eyes
- Narrow frame fits through a standard 36" doorway
- Choice of solid 10" rubber tires (2 steering with brakes, 2 fixed) or hard legs
- Optional extra "welder" 480 or 600V receptacles
- Easy to move
- Engineered solutions available, contact factory for more information


Extend the Power! Order Separately



Combo Style Load Center

Features:

- In-use NEMA 3R rainproof design
- GFCI circuit breaker adjacent to receptacle
- Duplex receptacles offer more electrical connections for maximum jobsite power
- With or without MCB (main circuit breaker)



1/4 turn latch


Fold down rain side panels



Rainproof "in-use"

Steel power coated

- MCB
- GFCI circuit breakers
- 20 Amp receptacles
- 50 Amp feed

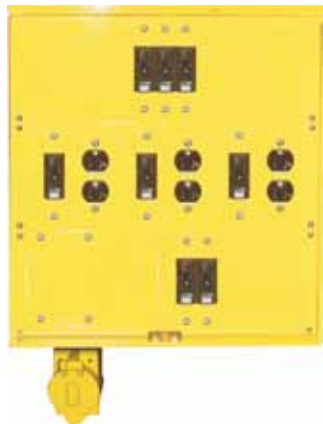

GFCI circuit breaker and duplex or breakers




Many combinations available. [See charts](#)




See the Video



U-Pick Components

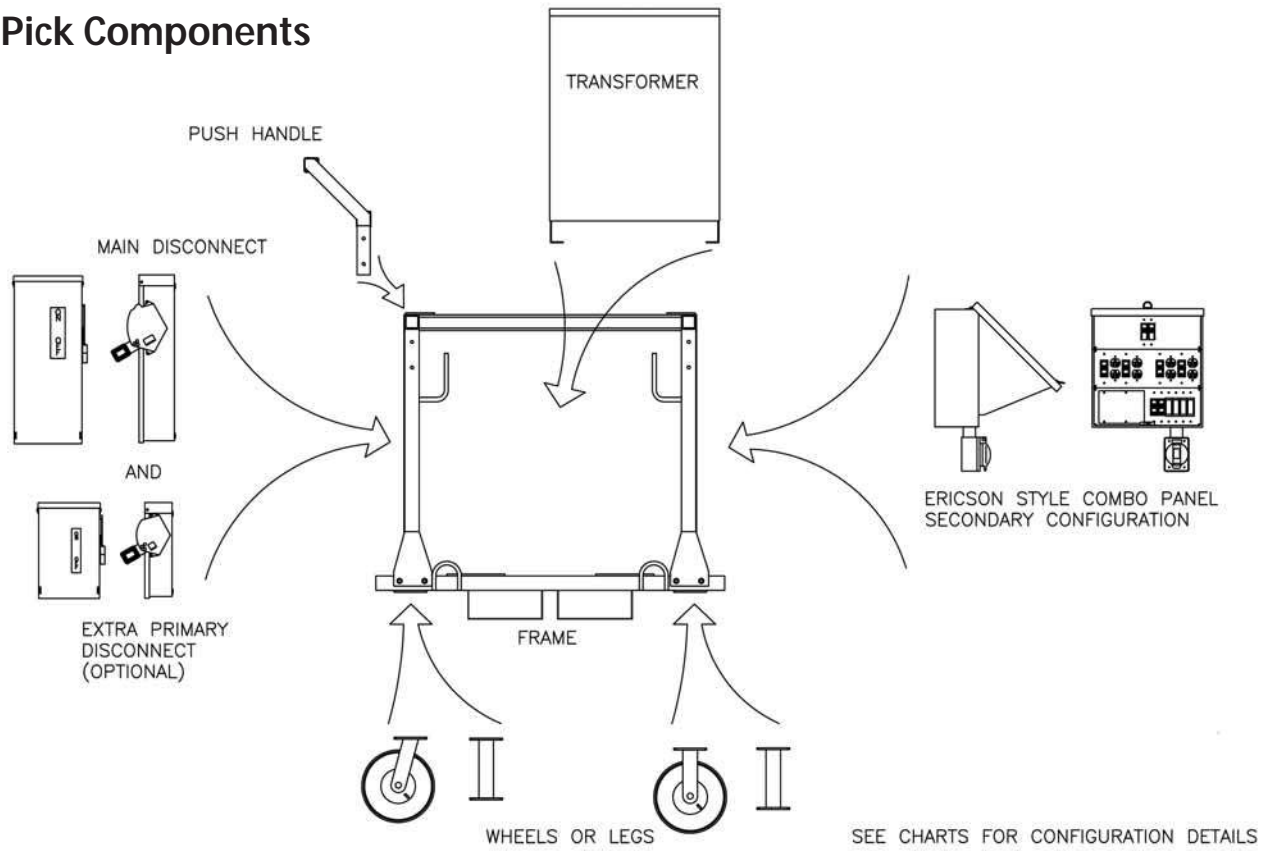


Frame Choices

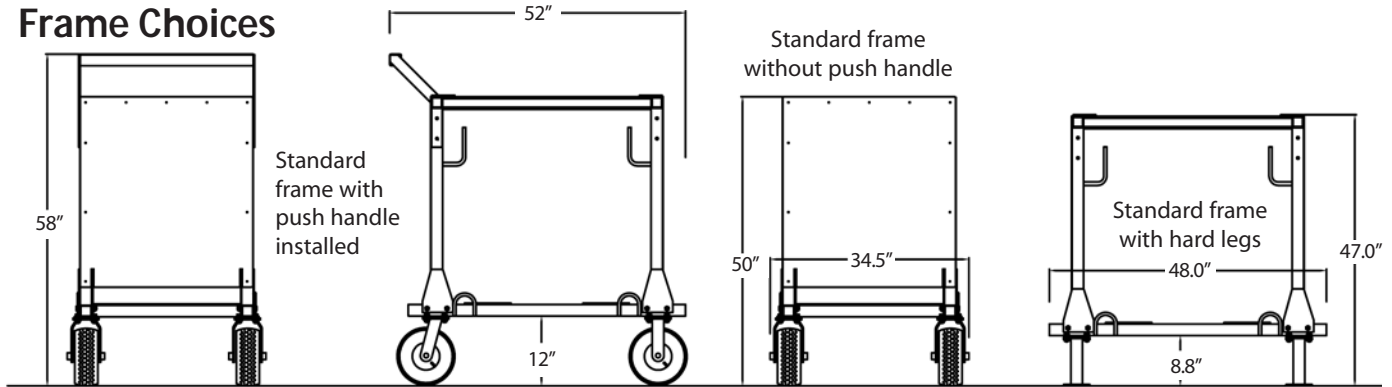

Frame Selection

1. Most configurations require the standard frame.
2. During the quoting process, we will advise you if the taller frame is required.
3. Wheels and legs are easily interchanged on site with simple tools.
4. Leg stands can also be bolted down at jobsite.

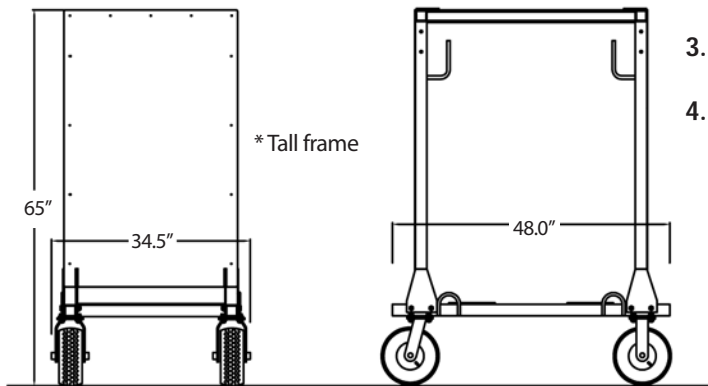

Sometimes required for larger panels



10" Solid rubber tires



8" Leg stands



Leg bottom plate drilled for floor mounting



3Ø
120/208V
OUT

Combo Enclosure Styles

Panel Board & Pigtail Style

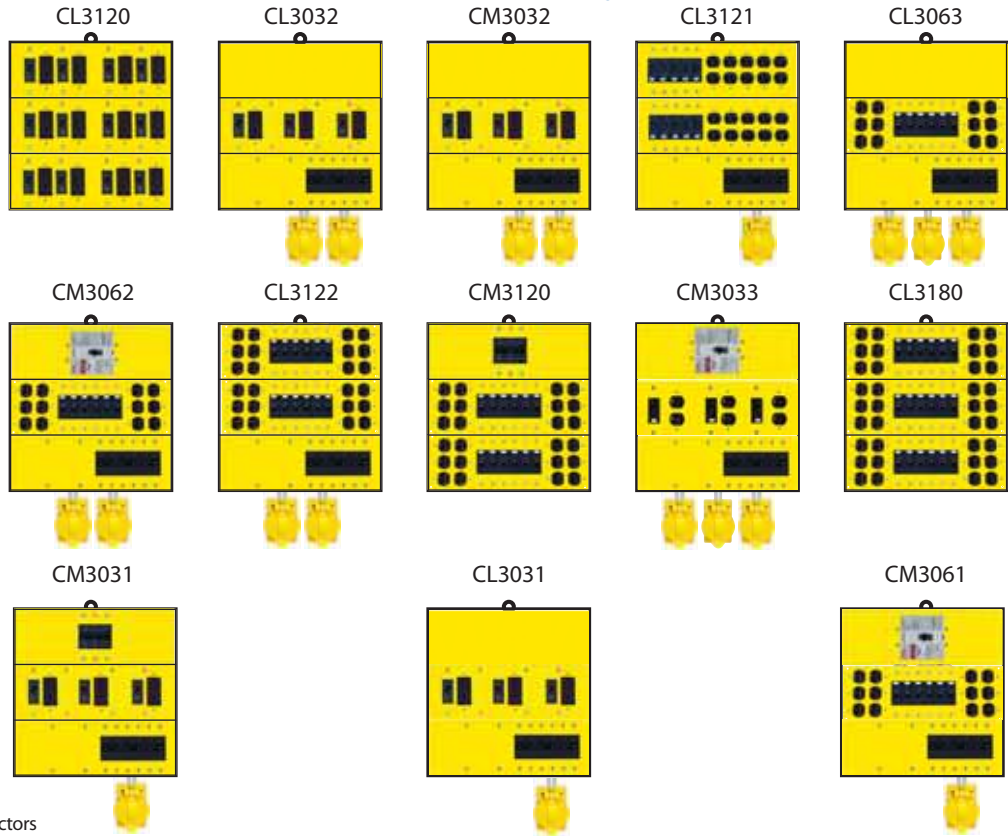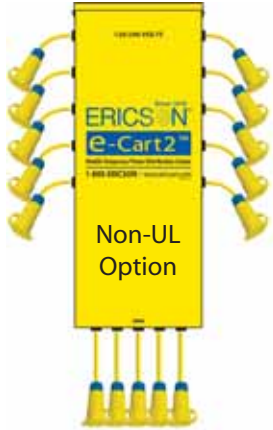

Standard panel with pigtails (cord & connectors or boxes/receptacles) are available upon request.
Note: These configurations CANNOT be "Listed" by any NRTL (UL Listed) due to the configuration. Call for more details.

3 PHASE 120/208V SECONDARY CONFIGURATION SELECTIONS

Secondary Output Configuration	Panel or Ericson Combo Enclosure	Secondary Panel Main Circuit Breaker	# of 20 amp 120V Circuits NEMA 5-20R	# of 50 amp Oscar Feed circuits CS6369 Twistlock	Sized for Transformer KVA		
CL3120	Combo	No	12	0	30 KVA		
CL3031			3	1	30 KVA		
CL3180			18	0	45 KVA		
CL3121			12	1	45 KVA		
CL3032			3	2	45 KVA		
CL3122			12	2	75 KVA		
CL3063			6	3	75 KVA		
CM3120			Combo	Yes	12	0	30 KVA
CM3031					3	1	30 KVA
CM3061					6	1	45 KVA
CM3032					3	2	45 KVA
CM3062					6	2	75 KVA
CM3033					6	2	75 KVA



Note: Duplex 5-20R on combo panels



1Ø
120/240V
OUT

Combo Enclosure Styles

Panel Board & Pigtail Style

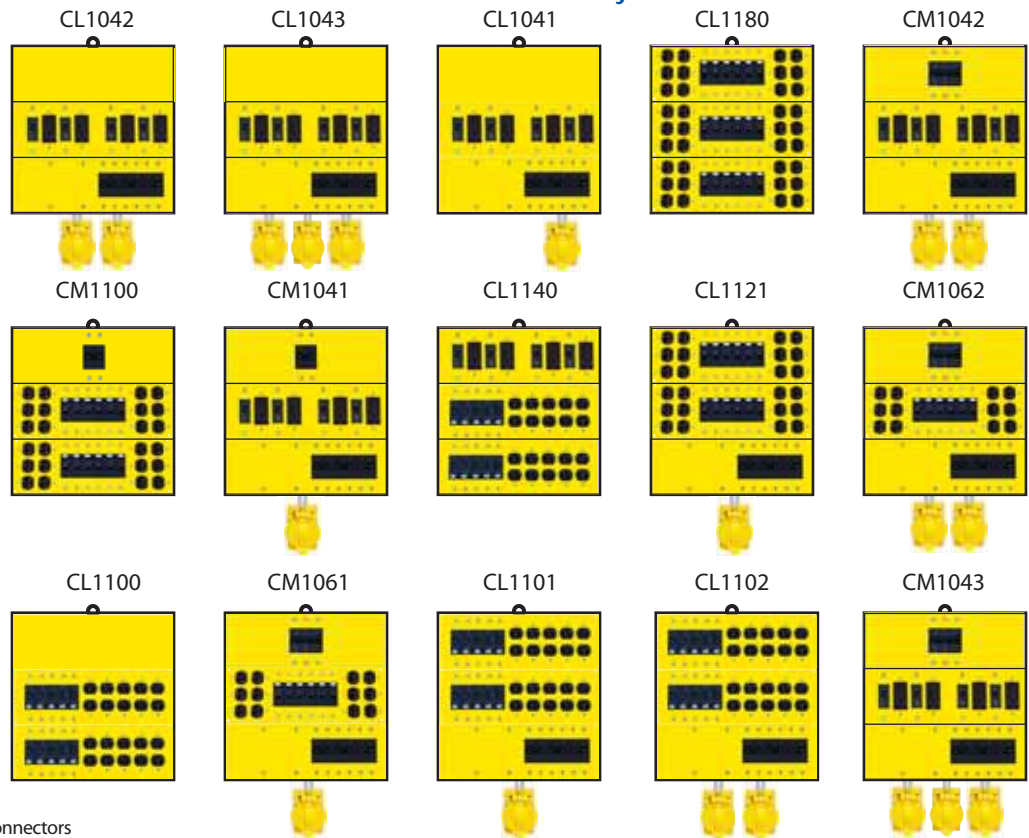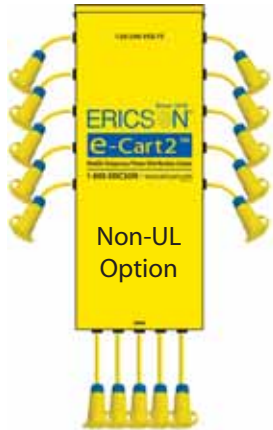

Standard panel with pigtails (cord & connectors or boxes/receptacles) are available upon request.
Note: These configurations CANNOT be "Listed" by any NRTL (UL Listed) due to the configuration. Call for more details.

1 PHASE 120/240V SECONDARY SELECTIONS

Secondary Output Configuration	Panel or Ericson Combo Enclosure	Secondary Main Circuit Breaker	# of 20 amp 120V circuits	# of 50 amp Oscar™ Feed circuits	Sized for Transformer KVA
CL1100	Combo	No	10	0	25 KVA
CL1041			4	1	25 KVA
CL1140			14	0	37.5 KVA
CL1101			10	1	37.5 KVA
CL1042			4	2	37.5 KVA
CL1180			18	0	50 KVA
CL1121			12	1	50 KVA
CL1102			10	2	50 KVA
CL1043			4	3	50 KVA
CM1100			Combo	Yes	10
CM1041	4	1			25 KVA
CM1120	12	0			37.5 KVA
CM1061	6	1			37.5 KVA
CM1042	4	2			37.5 KVA
CM1062	6	2			50 KVA
CM1043	4	3			50 KVA

Note: 4 panel engineered solution available



EC2

Frame

S- Standard
H - Hi-boy tall


Wheels/Legs

S - Solid 10" rubber
L - 8" leg stands

Push Handle

H - With handle
X - No handle

(Note: Handle not available on tall frame models)

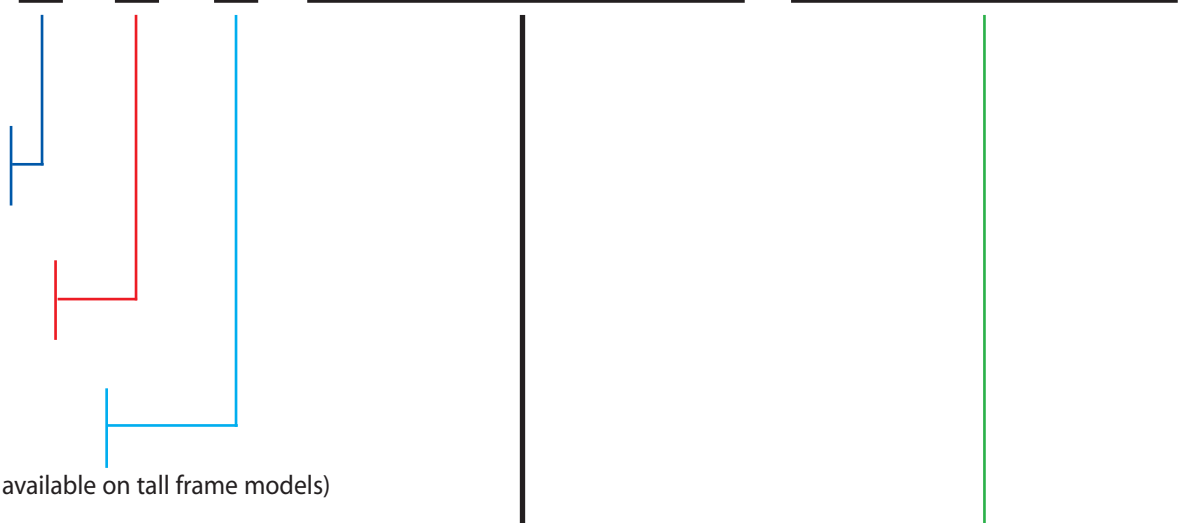

3 Phase 4W	No Extra Primary Disconnect Or Welder Receptacles	480V	480V, 30 KVA w/ 60A Main Disconnect Switch	43030XX
			480V, 45 KVA w/ 100A Main Disconnect Switch	43045XX
			480V, 75 KVA w/ 200A Main Disconnect Switch	43075XX
		600V	480V, 112.5 KVA w/ 200A Main Disconnect Switch	43112XX
			600V, 30 KVA w/ 60A Main Disconnect Switch	63030XX
			600V, 45 KVA w/ 60A Main Disconnect Switch	63045XX
	With Extra Primary Disconnect and/or Welder Receptacles*	480V	600V, 75 KVA w/ 100A Main Disconnect Switch	63075XX
			600V, 112.5 KVA w/ 200A Main Disconnect Switch	63112XX
			480V, 30 KVA w/ 100A Main Disconnect Switch, 30A AUX Switch*	43030A3
		600V	480V, 30 KVA w/ 100A Main Disconnect Switch, 30A AUX Switch, 30A Welding Recept	43030W3
			480V, 45 KVA w/ 200A Main Disconnect Switch, 30A AUX Switch	43045A3
			480V, 45 KVA w/ 200A Main Disconnect Switch, 60A AUX Switch	43045A6
	480V	480V, 45 KVA w/ 200A Main Disconnect Switch, 30A AUX Switch, 30A Welding Recept	43045W3	
		480V, 45 KVA w/ 200A Main Disconnect Switch, 60A AUX Switch, 60A Welding Recept	43045W6	
		480V, 75 KVA w/ 200A Main Disconnect Switch, 60A AUX Switch	43075A6	
	600V	480V, 75 KVA w/ 200A Main Disconnect Switch, 60A AUX Switch, 60A Welding Recept	43075W6	
		600V, 30 KVA w/ 100A Main Disconnect Switch, 30A AUX Switch	63030A3	
		600V, 45 KVA w/ 200A Main Disconnect Switch, 30A AUX Switch	63045A3	
	600V	600V, 45 KVA w/ 200A Main Disconnect Switch, 60A AUX Switch	63045A6	
		600V, 75 KVA w/ 200A Main Disconnect Switch, 30A AUX Switch	63075A3	
		600V, 75 KVA w/ 200A Main Disconnect Switch, 60A AUX Switch	63075A6	

1 Phase 3W	No Extra Primary Disconnect or Welder Receptacles	480V	480V, 25 KVA w/ 100A Main Disconnect Switch	41025XX
			480V, 37.5 KVA w/ 100A Main Disconnect Switch	41037XX
			480V, 50 KVA w/ 200A Main Disconnect Switch	41050XX
		600V	600V, 25 KVA w/ 60A Main Disconnect Switch	61025XX
			600V, 37.5 KVA w/ 100A Main Disconnect Switch	61037XX
			600V, 50 KVA w/ 100 Main Disconnect Switch	61050XX
	With Extra Primary Disconnect and/or Welder Receptacles*	480V	600V, 25 KVA w/ 200A Main Disconnect Switch, 30A AUX Switch	41025A3
			480V, 37.5 KVA w/ 200A Main Disconnect Switch, 30A AUX Switch	41037A3
			480V, 37.5 KVA w/ 200A Main Disconnect Switch, 60A AUX Switch	41037A6
		600V	600V, 25 KVA w/ 100A Main Disconnect Switch, 30A AUX Switch	61025A3
			600V, 37.5 KVA w/ 200A Main Disconnect Switch, 30A AUX Switch	61037A3
			600V, 50 KVA w/ 200A Main Disconnect Switch, 30A AUX Switch	61050A3
	600V	600V, 50 KVA w/ 200A Main Disconnect Switch, 60A AUX Switch	61050A6	
		600V, 50 KVA w/ 200A Main Disconnect Switch, 100A AUX Switch	61050A1	

* Requires main circuit breaker in secondary selections.

Secondary Outlet Selection Code

6 Digit Code From previous pages

3 Phase - See previous chart

1 Phase - See previous chart





Configuration Options

- Input Primary switchgear
- Output Secondary Panels and receptacles
- Color
- Labeling and Branding
- Much, much, more...

Need a custom e-cart2? We can modify our base design and build a custom e-cart2 to your specifications. Provide us with the changes and any customization specs you would like and let us provide you with a solution today! Call us for details and own your own customized quality built e-cart2.



6 phase e-Cart™2





Product of The Year
AWARD WINNER



FEATURES:

- Class I, Div. 2, Groups C and D Certified
- NEMA 3R rated cart
- Heavy duty, light weight, spark resistant aluminum frame
- 480 V or 600 V main power flexibility
- 1Ø or 3Ø configuration flexibility
- (18) 120 V circuit secondary power
- GFCI circuit protection
- 15 A to 100 A circuit breakers
- Removable cover circuit breaker access
- Front mounted main locking handle
- 30 kVA to 75 kVA rated transformers
- Electrical grade silica encapsulated and ventilated transformers
- Copper-free cast aluminum alloy distribution panels
- EZ roll tires with fork lift tubes
- Safety earth ground connection
- Engineered solutions available, contact factory for more information

Ericson Manufacturing is leading the way with turn-key, explosion proof temporary power solutions ideal for a wide range of hazardous location applications. The job-tested E-Cart 2™ XP power distribution family is built rugged enough to survive the harshest jobsite environments, while being designed to the meet the latest Safety Certifications and Standards.


Flexible configuration alternatives, based on a standard platform constructed of heavy-duty welded aluminum, provide the ability to meet unique application requirements without the cost typically associated with custom solutions. Designed for simplified plug-n-play use, the Ericson “system” of XP Temporary Power Carts require minimal setup and teardown time saving valuable time and the associated expense.

The E-Cart™ XP is ideal for a wide range of applications including:

- | | |
|-------------------------------|---------------------|
| • Petrochemical | • Waste Water |
| • Pulp and Paper | • Ship Building |
| • Power Generation | • Food Processing |
| • Tank and Container Cleaning | • Military Aircraft |

Consult factory for configuration alternatives



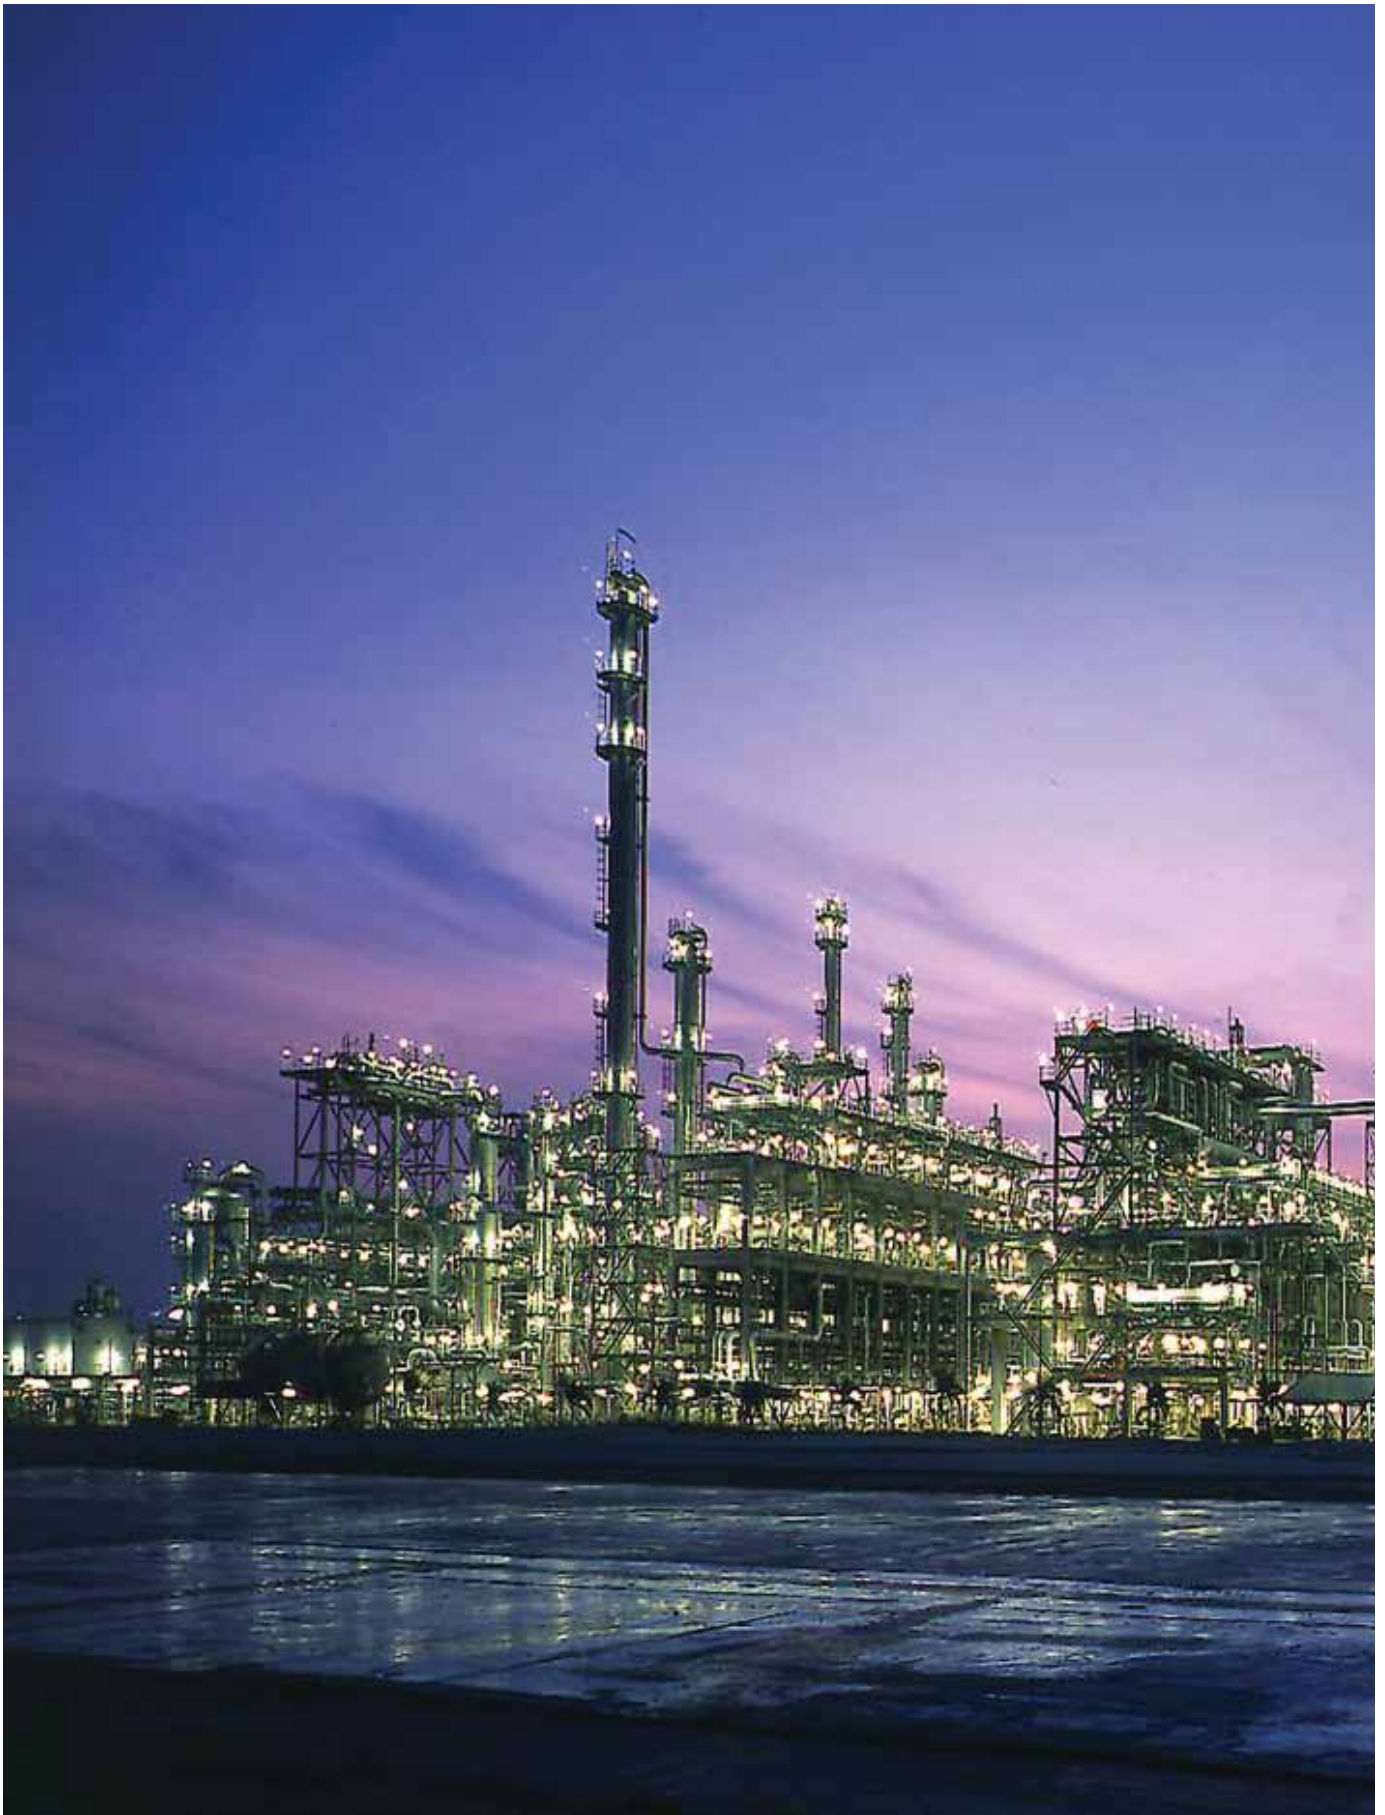



FEATURES:

- UL & cQPS Listed
- 36" high
- Circuit breakers under NEMA 3R rain proof cover
- Exclusive combo panel design puts receptacles and breakers under one cover
- No small flip covers to break
- All steel enclosure construction with powder coating inside and out
- Heavy Duty, yet light, aluminum welded frame
- 24/7 Safety monitoring with the optional I.P.D.M. module
- Camlock input connection on rear panel makes hookup easy and quick
- Twist lock lid closure
- Engineered solutions available, contact factory for more information

Big power in a small compact sized PDU is what the Big-E Jr. is all about. Designed for quick, easy-to-connect, code compliant distribution for indoor or outdoor venues and jobsites, the Big-E Jr. Portable PDU is the choice for your power needs. The award winning Combo Panel design is NEMA 3R In Use Rain rated and withstands heavy and windblown rain environments. With all the configurations of circuits to choose from, you are sure to find the PDU that meets your needs.



Power Input
(See chart for details)

4 Panel Option Available
Please Call Factory for Details

Multiple Receptacle Combinations
See Chart




Rain Flaps Fold Into Top For Storage



See the Video



Big-E Jr™ Series - 200 Amp Power Distribution

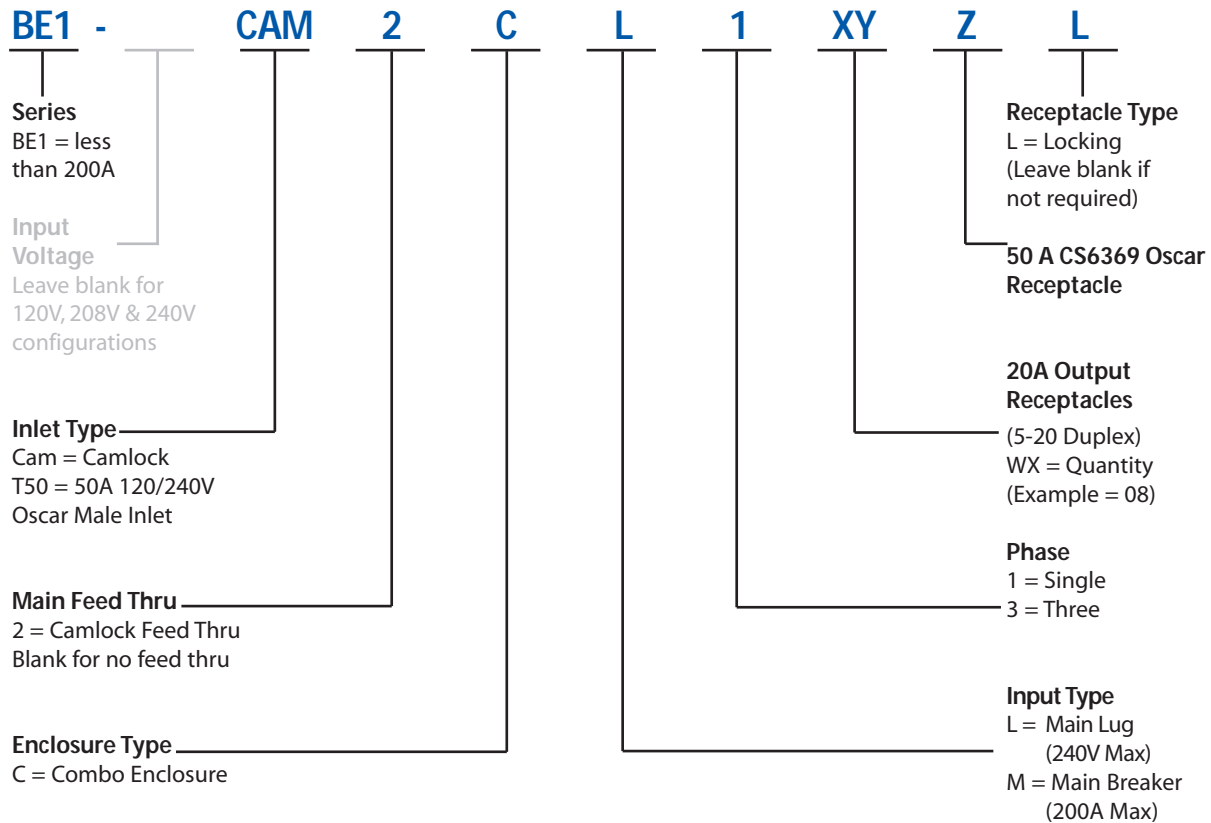

Big-E™ Jr.

Catalog Number	INPUT POWER				OUTPUT CONNECTIONS	
	Voltage	Phase	Male Inlet Type	Female Mains Feed Thru	Receptacles Installed	Circuit & Personnel Protection
BE1-T50CM1080¹	240	1	CS6375 Twistlock	--	(8) NEMA 5-15/20 T Slot GFI DPLX	(8) GFCI DPLX, (8) 20A C.B.
BE1-CAMCL1061	240	1	CAM SET (4)	--	(6) NEMA 5-15/20 T Slot DPLX (1) CS6369	(6) GFCI C.B. & (1) 50A C.B.
BE1-CAMCL1062	240	1	CAM SET (4)	--	(6) NEMA 5-15/20 T Slot DPLX (2) CS6369	(6) GFCI C.B. & (2) 50A C.B.
BE1-CAMCL1120	240	1	CAM SET (4)	--	(12) NEMA 5-15/20 T Slot GFI DPLX	(12) GFCI DPLX, (12) 20A C.B.
BE1-CAMCL1180	240	1	CAM SET (4)	--	(18) NEMA 5-15/20 T Slot DPLX	(18) GFCI C.B.
BE1-CAM2CL1063	240	1	CAM SET (4)	CAM SET (4)	(6) NEMA 5-15/20 T Slot DPLX (3) CS6369	(6) GFCI C.B., (3) 50A C.B.
BE1-CAM2CL1120	240	1	CAM SET (4)	CAM SET (4)	(12) NEMA 5-15/20 T Slot GFI DPLX	(12) GFCI DPLX, (12) 20A C.B.
BE1-CAM2CL1180	240	1	CAM SET (4)	CAM SET (4)	(18) NEMA 5-15/20 T Slot DPLX	(18) GFCI C.B.
BE1-CAMCL3003	208	3	CAM SET (5)	--	(3) CS6369 "Oscar Feeder"	(3) 50A C.B.
BE1-CAMCL3006	208	3	CAM SET (5)	--	(6) CS6369 "Oscar Feeder"	(6) 50A C.B.
BE1-CAMCL3060L	208	3	CAM SET (5)	--	(6) L21-20	(6) 3P 20A C.B.
BE1-CAMCL3061	208	3	CAM SET (5)	--	(6) NEMA 5-15/20 T Slot DPLX(1) CS6369	(6) GFCI C.B. & (1) 50A C.B.
BE1-CAMCL3062	208	3	CAM SET (5)	--	(6) NEMA 5-15/20 T Slot DPLX(2) CS6369	(6) GFCI C.B. & (2) 50A C.B.
BE1-CAMCL3063	208	3	CAM SET (5)	--	(6) NEMA 5-15/20 T Slot DPLX(3) CS6369	(6) GFCI C.B. & (3) 50A C.B.
BE1-CAMCL3120	208	3	CAM SET (5)	--	(12) NEMA 5-15/20 T Slot GFI DPLX	(12) GFCI DPLX, (12) 20A C.B.
BE1-CAMCL3180	208	3	CAM SET (5)	--	(18) NEMA 5-15/20 T Slot DPLX	(18) GFCI C.B.
BE1-CAM2CL3006	208	3	CAM SET (5)	CAM SET (5)	(6) CS6369	(6) 50A C.B.
BE1-CAM2CL3063	208	3	CAM SET (5)	CAM SET (5)	(6) NEMA 5-15/20 T Slot DPLX (3) CS6369	(6) GFCI C.B. & (3) 50A C.B.
BE1-CAM2CL3120	208	3	CAM SET (5)	CAM SET (5)	(12) NEMA 5-15/20 T Slot GFI DPLX	(12) GFCI DPLX, (12) 20A C.B.
BE1-CAM2CL3180	208	3	CAM SET (5)	CAM SET (5)	(18) NEMA 5-15/20 T Slot DPLX	(18) GFCI C.B.

Note: 1. MCB = Main Circuit Breaker installed



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.





FEATURES:

- UL & cQPS Listed
- 600 V, 480 V or 120/208 V or 240 volt power distribution
- Circuit breakers under NEMA 3R rain proof cover
- Up to 400 Amp capacity
- Camlock main power connections
- Welder power distribution 480V (select models)
- Heavy duty welded metal frame
- Powder coated steel enclosure for corrosion resistance
- Easy to move and store
- Frames stack & lock together for storage
- Lifting eyes
- Utilizes industry standard circuit breakers
- 48" high
- Hinged flip lid assembly
- Rain side flaps fold in for storage
- Engineered solutions available, contact factory for more information

Cover folds flat when unit is not in use




Hinged folding front panel



See the Video



Big-E™ Series - 400 Amp Power Distribution

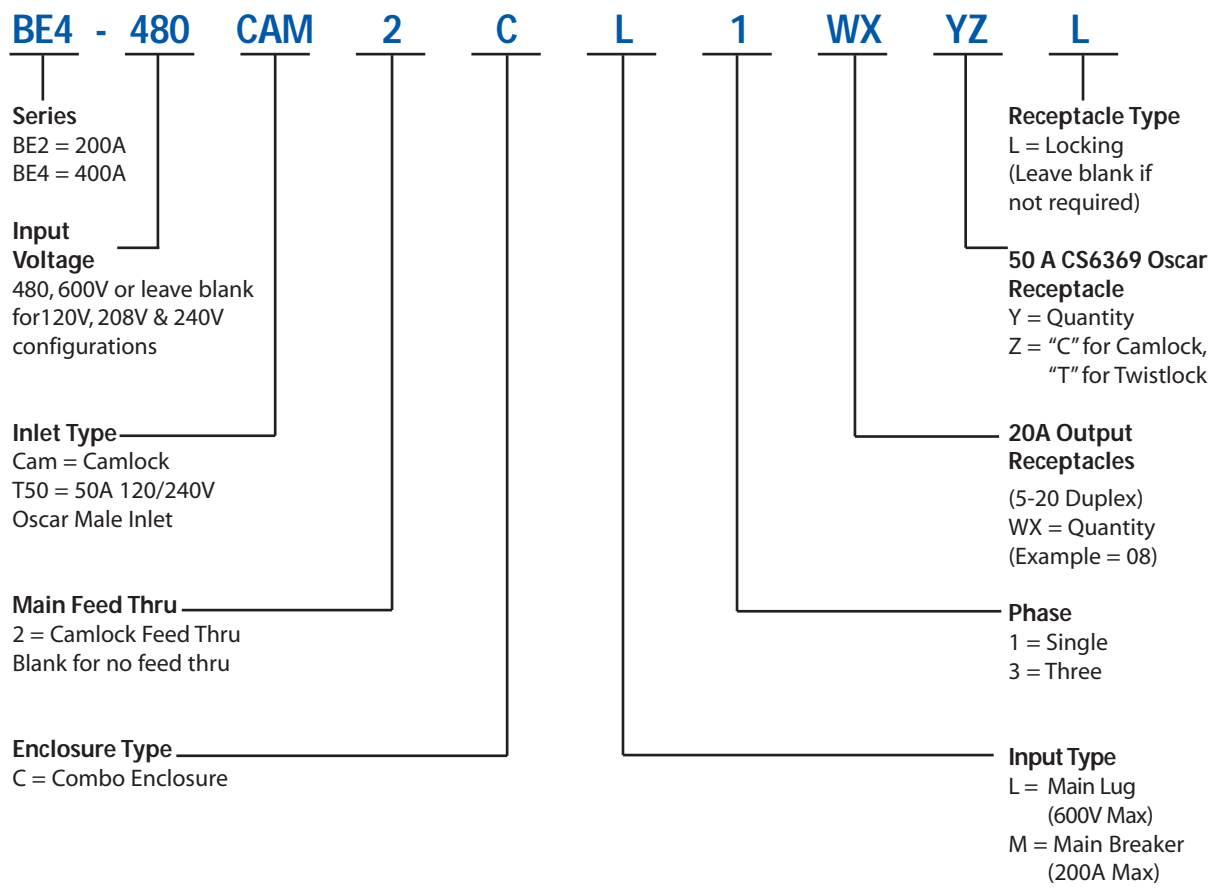

Catalog Number	INPUT POWER				OUTPUT CONNECTIONS	
	Voltage	Phase	Inlet Type	Mains Feed Thru	Receptacles Installed	Circuit & Personnel Protection
BE4-CAM2CL3062CL	208	3	CAM SET (5)	CAM SET (5)	(6) L21-20 & (2 SETS) CAMLOCK	(6) 20A 3P C.B. Non-GFCI
BE4-CAM2CL3122C	208	3	CAM SET (5)	CAM SET (5)	(12) 5-20 DPLX & (2 SETS) CAMLOCK	(12) 20A GFCI C.B.
BE4-CAMCL1008T	240	1	CAM SET (4)	--	(8) CS6369 "Oscar Feeder"	(8) 50A 2P C.B.
BE4-CAMCL3004C	208	3	CAM SET (5)	--	(4 SETS) CAMLOCK	(4) 100A 3P C.B.
BE4-CAMCL3062CL	208	3	CAM SET (5)	--	(6) L21-20 & (2 SETS) CAMLOCK	(6) 20A 3P C.B. Non-GFCI
BE4-CAMCL3122C	208	3	CAM SET (5)	--	(12) 5-20 DPLX & (2 SETS) CAMLOCK	(12) 20A GFCI C.B.
BE4-480CAM2CL3002C	480	3	CAM SET (4)	CAM SET (4)	(2 SETS) CAMLOCK	480V (4) 100A 3P C.B.
BE4-480CAMCL3004C	480	3	CAM SET (4)	--	(4 SETS) CAMLOCK	480V (4) 100A 3P C.B.
BE4-480CAMCL3004I	480	3	CAM SET (4)	--	(4) 100A IEC 4100RA7 Angled	480V (4) 100A 3P C.B.
BE4-600CAM2CL1004C	600	1	CAM SET (4)	CAM SET (4)	(4 SETS) CAMLOCK (1 Phase)	600V (4) 100A 3P C.B.
BE4-600CAM2CL3004C	600	3	CAM SET (4)	CAM SET (4)	(4 SETS) CAMLOCK	600V (4) 100A 3P C.B.
BE4-600CAMCL3004C	600	3	CAM SET (4)	--	(4 SETS) CAMLOCK	600V (4) 100A 3P C.B.



Available from Ericson...Oscar® Box Temporary Power Distribution Units

Versatile protection for your jobsite, the Oscar® box is available in many standard GFCI protected configurations or contact the factory for a custom need.

Applications:

- Industrial, commercial and residential construction projects
- General maintenance and repair work (MRO) in industrial facilities
- Temporary power distribution at carnivals, circuses, fairs & similar events
- Convention centers to distribute power for exhibitions & maintenance
- Photo studios to distribute power to flash & other photographic equipment



mini-e™ PDU Features:

- CS6375 50Amp, 240V 4W power inlet
- 20A GFCI protected circuit breaker
- Indoor & outdoor models



1066 Series Basic Contractor PDU Features:

- CS6375 50Amp, 125/250V power inlet
- Six(6) NEMA 5-20 (20A,125V) straight blade duplex receptacles with circuit breaker and GFCI protection
- Each NEMA 5-20 outlet is individually GFCI protected
- One(1) NEMA L6-30(30A,250V) locking outlet with circuit breaker protection
- 50A, 125/250V power outlet
- Indoor & outdoor models



1067-LC Series Industrial PDU Features:

- CS6375 50Amp, 125/250V power inlet
- FS series weather-resistant flip seal outlet covers protect each outlet. Use with Ericson's Perma-Tite® plug to provide maximum weather resistance
- Six(6) NEMA 5-20 (20A,125V) straight blade receptacles with circuit breaker and GFCI protection
- Each NEMA 5-20 outlet is individually GFCI protected
- One(1) NEMA L6-30(30A,250V) locking outlet with circuit breaker protection
- 50A, 125/250V power outlet
- Indoor & outdoor models



1067 Series Deluxe Electronic Industrial PDU Features:

- CS6375 50Amp, 125/250V power inlet
- Input power diagnostic module (IPDM), adjacent to power inlet, provides visual indication of supply power status - easy to read chart for quick reference. Standard on all models and field replaceable
- Exclusive voltage monitor modules (VMM) continuously monitors voltage - if supply voltage falls outside of safe operating range VMM disconnects power to GFCIs/outlets
- Each NEMA 5-20 outlet is individually GFCI protected



1068 Series 3 Phase 208V PDU Features:

- Choice of main inlet types - IEC309 power-inlet and power-outlet or camlock
- Exclusive IPDM module installed
- GFCI or non-gfci circuit breakers available
- Receptacles protected by Ericson's FS Series flip seal covers
- Camlock inputs available



Oscar™ PowerCart - Temporary Power Distribution Center

- Single and Three Phase Operation
- 200 A, 100 A, and 60 A Options
- 120 V / 208 V, 120 V / 240 V, 480 V, 600 V
- Job-site Friendly Breaker Panel Access



Ericson P/N	Electrical Rating	Receptacle Flip Covers	GFCI & C.B. Protected 20A Circuits	NON-GFCI 30A C.B.	GFCI C.B. For 30A Circuit	5-20R Duplexes	L6-30R Single Recept	5-20R Straight Recepts	L5-20R Recepts (Single)	Daisy Chain Feed Thru Recept W/ Flip Cover
1066	125/250V 1PH 4W 50A		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		6	1			<input checked="" type="checkbox"/>
1066-B	125/250V 1PH 4W 50A		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	6	1			<input checked="" type="checkbox"/>
1066FS	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		6	1			<input checked="" type="checkbox"/>
1066-BFS	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	6	1			<input checked="" type="checkbox"/>
1067-LC	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			1	6		<input checked="" type="checkbox"/>
1067-ALC	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			1		6	<input checked="" type="checkbox"/>
1067-BLC	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		1	6		<input checked="" type="checkbox"/>
1067-CLC	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		1		6	<input checked="" type="checkbox"/>
1067-LCNF	125/250V 1PH 4W 50A		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			1	6		<input checked="" type="checkbox"/>
1067-ALCNF	125/250V 1PH 4W 50A		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			1		6	<input checked="" type="checkbox"/>
1067-BLCNF	125/250V 1PH 4W 50A		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		1	6		<input checked="" type="checkbox"/>
1067-CLCNF	125/250V 1PH 4W 50A		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		1		6	<input checked="" type="checkbox"/>
1067	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			1	6		<input checked="" type="checkbox"/>
1067-A	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			1		6	<input checked="" type="checkbox"/>
1067-B	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		1	6		<input checked="" type="checkbox"/>
1067-C	125/250V 1PH 4W 50A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		1		6	<input checked="" type="checkbox"/>
3 PHASE							L21-20	5-20	L5-20	
1068	208Y/120V 3PH 5W 60A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					6		<input checked="" type="checkbox"/>
1068-A	208Y/120V 3PH 5W 60A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						6	<input checked="" type="checkbox"/>
1068-C	208Y/120V 3PH 5W 125A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					6		<input checked="" type="checkbox"/>
1068-1	208Y/120V 3PH 5W 100A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				2	4		<input checked="" type="checkbox"/>
1068-1A	100A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				2		4	<input checked="" type="checkbox"/>
1068-1C	125A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					6		<input checked="" type="checkbox"/>

	3R	Recept Style	30A GFCI	Flip Style 6/1	Flip Style In/Out
1067-LC	Y	T-slot 20	N	LCFL/LCFL	50A/FS
1067-ALC	Y	L5-20	N	LCFL/LCFL	50A/FS
1067-BLC	Y	T-slot 20	Y	LCFL/LCFL	50A/FS
1067-CLC	Y	L5-20	Y	LCFL/LCFL	50A/FS
1067	Y	T-slot 20	N	LCFL/LCFL	50A/FS
1067-A	Y	L5-20	N	LCFL/LCFL	50A/FS
1067-B	Y	T-slot 20	Y	LCFL/LCFL	50A/FS
1067-C	Y	L5-20	Y	LCFL/LCFL	50A/FS





FEATURES:

- UL/cQPS Listed
- 20A, 30A and 50A models
- NEMA 3R outdoor rated
- Innovative NEMA 3R in-use cover assembly
- Automatic power up GFCI protection
- Twist-lock input power cable/connector (20A and 30A models)
- Input power connector (50A model)
- Main power feed-thru (30A model)
- Outdoor approved ground clearance
- Heavy duty 18 AWG welded steel enclosure
- Safety yellow powder-coated enclosure
- Twist lock lid


Ericson's mini-e™ Temporary Power Distribution (PDU) Center is ideal for a wide range of applications, delivering safe reliable operation in an easy to use format. The mini-e is built rugged enough to survive the harshest jobsite environments, while providing user benefits such as simplified connectivity, configuration flexibility and light weight portability. Ericson's solutions are designed to meet the latest safety certifications and standards affording exceptional peace of mind and confidence.

Flexible configuration alternatives, based on a standard platform constructed of heavy-duty welded steel, offer the ability to meet unique application requirements without the cost typically associated with custom solutions. Designed for simplified plug-n-play use, the Ericson "system" of Oscar PDU's requires minimal setup and teardown activity, saving valuable time and the associated expense.

The mini-e is ideal for a wide range of applications including:

- | | | |
|----------------------|-------------------|------------------------|
| • Convention Centers | • Outdoor Events | • Festivals |
| • Carnivals | • Concerts | • Stage & Studio |
| • Construction | • Photo Studios | • Entertainment Venues |
| • Maintenance | • Sporting Events | • Rental Services |



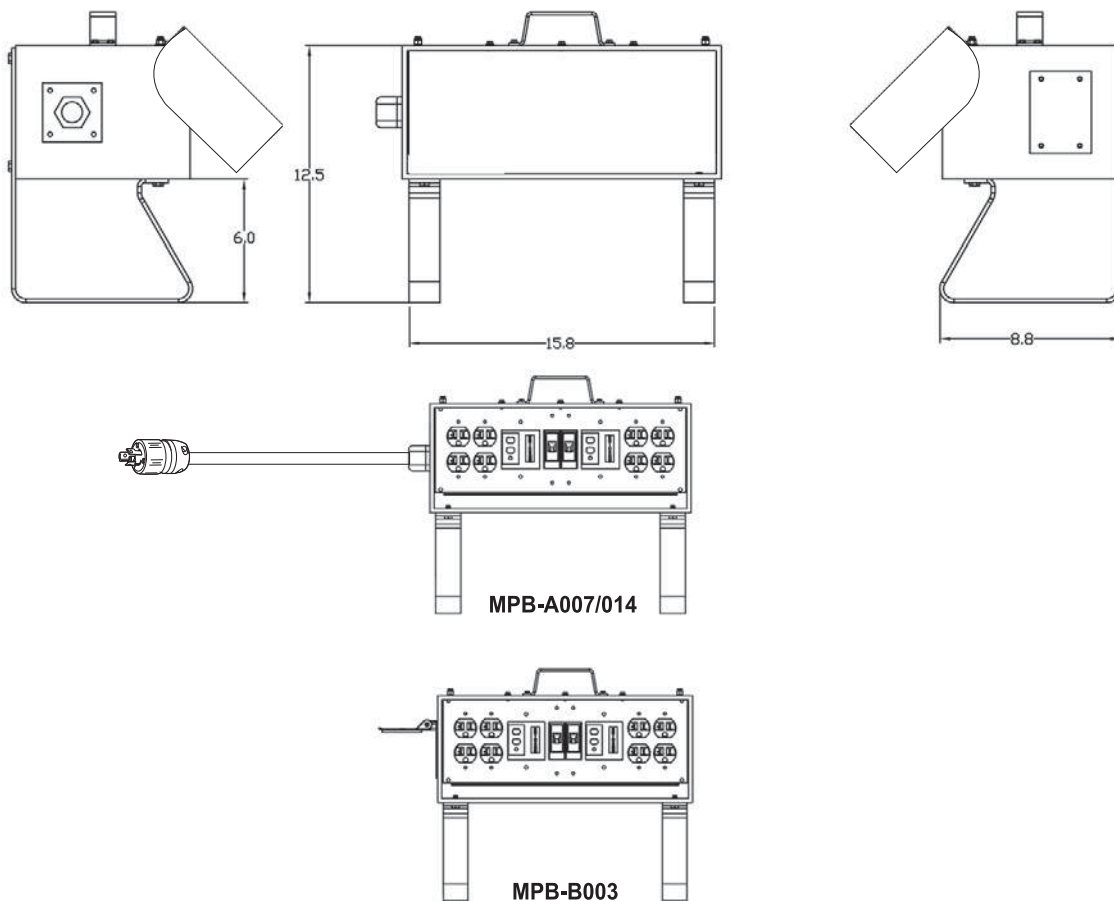

P/N	Electrical Rating	Plug/Inlet	Mains Feed Thru	Receptacles	Circuit Breakers
MPB-A007	125/250 V 1PH 20 A	L14-20	Optional	(4) 5-20 Dplx	(2) CB 20A & (2) 1075 GFCI
MPB-A014	125/250 V 1PH 30 A	L14-30	YES		
MPB-B003	125/250 V 1PH 50 A	50A 240V 4W CS6375 Flip Inlet	Optional		





CS6369
50A,
125/250V
power
inlet.



FEATURES:

- Power inlet & outlet clearly marked on lid for quick identification
- Heavy-duty safety yellow powder-coated enclosure
- Each NEMA 5-20 outlet is individually GFCI protected with open neutral protection
- 50A, 125/250V power inlet
- Automatic power-up GFCIs are ready immediately
Only need to push reset after a trip
- Heavy-duty powder-coated steel skids to insure rugged, dependable jobsite performance
- Flip covers protects outlets from damage & the weather
- A variety of accessories are available
- Unit is field repairable by qualified personnel. Parts list and wiring diagram appear on underside of lid
- Product label with clear markings for easy identification of model number, serial number and specifications

Typical Applications Include:

- Industrial, commercial and residential construction projects
- General maintenance and repair work (MRO) in industrial facilities
- Temporary power distribution at carnivals, circuses, fairs & similar events
- Convention centers to distribute power for exhibitions & maintenance
- Photo studios to distribute power to flash & other photographic equipment



Selection Guide

Catalog Number	1066	1066-B	1066FS	1066-BFS
Electrical Rating	50A 125/250V 6250W/12500W	50A 125/250V 6250W/12500W	50A 125/250V 6250W/12500W	50A 125/250V 6250W/12500W
Enclosure	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated
Environmental/NEMA Rating	Indoor Use Only	Indoor Use Only	Indoor/Outdoor 3R	Indoor/Outdoor 3R
Receptacles				
A Type (6 per box)	NEMA 5-20 T Slot Duplex (125V 20A)	NEMA 5-20 T Slot Duplex (125V 20A)	NEMA 5-20 T Slot Duplex (125V 20A)	NEMA 5-20 T Slot Duplex (125V 20A)
Qty.	6	6	6	6
GFCI Protection	Yes	Yes	Yes	Yes
Overload Protection	Yes - 1P 20A C.B. (1 per Duplex)	Yes - 1P 20A C.B. (1 per Duplex)	Yes - 1P 20A C.B. (1 per Duplex)	Yes - 1P 20A C.B. (1 per Duplex)
Flip Covers	No	No	Yes	Yes
B Type (1 Per Box)	L6-30 (30A, 250V)	L6-30 (30A, 250V)	L6-30 (30A, 250V)	L6-30 (30A, 250V)
Qty.	1	1	1	1
240V GFCI Protection	No	Yes	No	Yes
Overload Protection	Yes - 2P NON-GFCI	Yes - 2P GFCI	Yes - 2P NON-GFCI	Yes - 2P GFCI
Flip Covers	No	No	Yes	Yes
Main Power Inlet	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)
Inlet Flip Cover	No	No	Yes	Yes
Main Power Outlet (Mains Feed Thru)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)
Mains Feed thru Flip Cover	Yes	Yes	Yes	Yes
Weight (lbs.)	34	34	36	36
Dimensions	22.5"L x 16.25"W x 11.75"H	22.5"L x 16.25"W x 11.75"H	22.5"L x 16.25"W x 11.75"H	22.5"L x 16.25"W x 11.75"H

Notes: Contact factory for custom assemblies

Accessories

Cat. Number	Description
63DSO ⁽¹⁾	Cord set, 100', #6/3 - 8/1 SO 50A 125V/250V
63BSO ⁽¹⁾	Cord set, 50', #6/3 - 8/1 SO 50A 125V/250V
SR50	Power Outlet Receptacle in weatherproof box with lift cover and 24" leads 50A, 125V/250V

Note: ⁽¹⁾ Also available as a secondary cable assembly - cord with connector only - to hard wire into your power source.



See Our Complete Line of 50Amp Power Cords in the Power Cord Section





CS6369
50A,
125/250V
power
outlet.




FEATURES:

- Heavy-duty safety, yellow powder-coated enclosure provides NEMA 3R weather resistance protection for circuitry
- Each NEMA 5-20 outlet is individually GFCI protected
- Blue flip seal covers are labeled for quick identification of electrical ratings.
- CS6375 50Amp, 125/250V power inlet
- Flip up door protects circuit breakers from damage & the weather
- Heavy-duty powder-coated steel skids to insure rugged, dependable jobsite performance
- Automatic power-up GFCIs are ready immediately. Only need to push reset after a trip
- Power inlet & outlet clearly marked on lid for quick identification
- FS series weather-resistant flip seal outlet covers protect each outlet. Use with Ericson's Perma-Tite plug to provide maximum weather resistance
- Unit is field repairable by qualified personnel. Parts list and wiring diagram appear on underside of lid

Typical Applications Include:

- Industrial, commercial and residential construction projects
- General maintenance and repair work (MRO) in industrial facilities
- Temporary power distribution at carnivals, circuses, fairs & similar events
- Convention centers to distribute power for exhibitions & maintenance
- Photo studios to distribute power to flash & other photographic equipment

Power Option: Can be daisy chained together!



Note: Meets OSHA & NEC Codes for jobsites and carnivals, fairs and outdoor events.



Selection Guide

Catalog Number	1067LC	1067-ALC	1067-BLC	1067-CLC
Electrical Rating	50A 125/250V	50A 125/250V	50A 125/250V	50A 125/250V
	6250W/12500W	6250W/12500W	6250W/12500W	6250W/12500W
Enclosure	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated
Environmental/NEMA Rating	Indoor/Outdoor 3R	Indoor/Outdoor 3R	Indoor/Outdoor 3R	Indoor/Outdoor 3R
Receptacles				
A Type (6 per box)	NEMA 5-20 T Slot Single (125V 20A)	NEMA L5-20 Locking Single (125V 20A)	NEMA 5-20 T Slot Single (125V 20A)	NEMA L5-20 Locking Single (125V 20A)
Qty.	6	6	6	6
GFCI Protection	Yes	Yes	Yes	Yes
Overload Protection	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)
Flip Covers	Yes	Yes	Yes	Yes
B Type (1 Per Box)	L6-30 (30A, 250V)	L6-30 (30A, 250V)	L6-30 (30A, 250V)	L6-30 (30A, 250V)
Qty.	1	1	1	1
240V GFCI Protection	No	No	Yes	Yes
Overload Protection	Yes - 2P NON-GFCI	Yes - 2P NON-GFCI	Yes - 2P GFCI	Yes - 2P GFCI
Flip Covers	Yes	Yes	Yes	Yes
Main Power Inlet	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)
Inlet Flip Cover	Yes	Yes	Yes	Yes
Main Power Outlet (Mains Feed Thru)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)
Mains Feed thru Flip Cover	Yes	Yes	Yes	Yes
Weight (lbs.)	35	35	37	37
Dimensions	22.5"L x 16.25"W	22.5"L x 16.25"W	22.5"L x 16.25"W	22.5"L x 16.25"W
	x 11.75"H	x 11.75"H	x 11.75"H	x 11.75"H

Note: 1.NF models are rated for INDOOR ONLY and do not have flip covers installed.
 2. See our complete line of 50Amp power cords in the power cord section.

Accessories

Cat. Number	Description
63DS0 ⁽¹⁾	Cord set, 100', #6/3 - 8/1 SO 50A 125V/250V
63BS0 ⁽¹⁾	Cord set, 50', #6/3 - 8/1 SO 50A 125V/250V
SR50	Power Outlet Receptacle in weatherproof box with lift cover and 24" leads 50A, 125V/250V

Note: ⁽¹⁾Also available as a secondary cable assembly - cord with connector only - to hard wire into your power source.





CS6369
50A,
125/250V
power
outlet.

FEATURES:

- Heavy-duty safety, yellow powder-coated enclosure provides NEMA 3R weather resistance protection for circuitry
- Each NEMA 5-20 outlet is individually GFCI protected
- Blue flip seal covers are labeled for quick identification of electrical ratings.
- Automatic power-up GFCIs are ready immediately. Only need to push reset after a trip
- Heavy-duty powder-coated steel skids to insure rugged, dependable jobsite performance
- Flip up door protects circuit breakers from damage & the weather
- CS6375 50Amp, 125/250V power inlet
- Power inlet & outlet clearly marked on lid for quick identification
- Unit is field repairable by qualified personnel. Parts list and wiring diagram appear on underside of lid
- VMM & IPDM available (see Technical Reference section)

Typical Applications Include:

- Industrial, commercial and residential construction projects
- General maintenance and repair work (MRO) in industrial facilities
- Temporary power distribution at carnivals, circuses, fairs & similar events
- Convention centers to distribute power for exhibitions & maintenance
- Photo studios to distribute power to flash & other photographic equipment



Selection Guide

Catalog Number	1067	1067-A	1067-B	1067-C
Electrical Rating	50A 125/250V	50A 125/250V	50A 125/250V	50A 125/250V
	6250W/12500W	6250W/12500W	6250W/12500W	6250W/12500W
Enclosure	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated
Environmental/NEMA Rating	Indoor/Outdoor 3R	Indoor/Outdoor 3R	Indoor/Outdoor 3R	Indoor/Outdoor 3R
Receptacles				
A Type (6 per box)	NEMA 5-20 T Slot Single (125V 20A)	NEMA L5-20 Locking Single (125V 20A)	NEMA 5-20 T Slot Single (125V 20A)	NEMA L5-20 Locking Single (125V 20A)
Qty.	6	6	6	6
GFCI Protection	Yes	Yes	Yes	Yes
Overload Protection	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)
Flip Covers	No	No	Yes	Yes
B Type (1 Per Box)	L6-30 (30A, 250V)	L6-30 (30A, 250V)	L6-30 (30A, 250V)	L6-30 (30A, 250V)
Qty.	1	1	1	1
240V GFCI Protection	No	No	Yes	Yes
Overload Protection	Yes - 2P NON-GFCI	Yes - 2P NON-GFCI	Yes - 2P GFCI	Yes - 2P GFCI
Flip Covers	Yes	Yes	Yes	Yes
Power Inlet	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)	4W CS6375 (50A,125/250V)
Inlet Flip Cover	Yes	Yes	Yes	Yes
Power Outlet (Mains Feed Thru)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)	4W CS6369 (50A,125/250V)
Mains Feed thru Flip Cover	Yes	Yes	Yes	Yes
Weight (lbs.)	35	35	37	37
Dimensions	22.5"L x 16.25"W	22.5"L x 16.25"W	22.5"L x 16.25"W	22.5"L x 16.25"W
	x 11.75"H	x 11.75"H	x 11.75"H	x 11.75"H

Note: 1. Contact factory for IPDM and VMM option (see Technical Reference section).
2. See our complete line of 50Amp power cords in the power cord section.

Accessories

Cat. Number	Description
63DSO ⁽¹⁾	Cord set, 100', #6/3 - 8/1 SO 50A 125V/250V
63BSO ⁽¹⁾	Cord set, 50', #6/3 - 8/1 SO 50A 125V/250V
63YSTW	Cord set, 3 ft. "Y" #6/3 & #8/1 (Gnd) 50A
SR50	Power Outlet Receptacle in weatherproof box with lift cover and 24" leads 50A, 125V/250V

Note: ⁽¹⁾Also available as a secondary cable assembly - cord with connector only - to hard wire into your power source.



63DSO



SR50



63YSTW












1068 shown



FEATURES:

- UL Listed
- IEC309 power-inlet and power-outlet or camlock
- Receptacles protected by Ericson's FS Series flip seal covers
- Clear polycarbonate window allows visual identification of circuit breaker status
- Several main inlet types to choose from
- Wide variety of receptacles available
- Powder coated to prevent corrosion
- All steel heavy duty construction
- Up to 100 Amp 3 phase 208Y 120V
- Heavy duty steel leg skirts
- GFCI circuit breakers available
- Spring loaded flip lid with internal seal

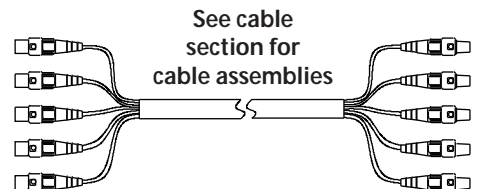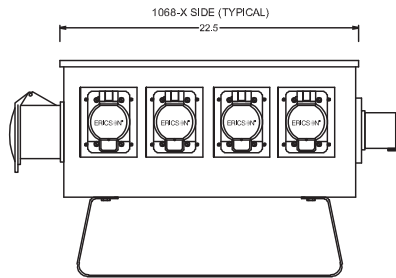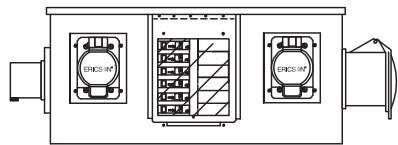

See cable section for cable assemblies



Selection Guide

Catalog Number	1068	1068-A	1068-C	1068-1	1068-1A	1068-1C
Electrical Rating	3 Ph 208Y/120 60A	3 Ph 208Y/120 60A	3 Ph 208Y/120 125A	3 Ph 208Y/120 100A	3 Ph 208Y/120 100A	3 Ph 208Y/120 125A
Enclosure	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated	Steel Welded Powder Coated
Environmental/NEMA Rating	Indoor/Outdoor 3R	Indoor/Outdoor 3R	Indoor/Outdoor 3R	Indoor/Outdoor 3R	Indoor/Outdoor 3R	Indoor/Outdoor 3R
Receptacles						
A Type	NEMA 5-20 T Slot Single (125V 20A)	NEMA L5-20 Locking Single (125V 20A)	NEMA L5-20 Locking Single (125V 20A)	NEMA 5-20 T Slot Single (125V 20A)	NEMA L5-20 Locking Single (125V 20A)	NEMA L5-20 Locking Single (125V 20A)
Qty.	6	6	6	4	4	6
GFCI Protection	Yes	Yes	Yes	Yes	Yes	Yes
Overload Protection	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)	Yes - 1P 20A C.B. (1 per Receptacle)
Flip Covers*	Yes	Yes	Yes	Yes	Yes	Yes
B Type	n/a	n/a	n/a	NEMA L21-20R (208V 3PH 5W 20A)	NEMA L21-20R (208V 3PH 5W 20A)	n/a
Qty.	n/a	n/a	n/a	2	2	n/a
GFCI Protection	n/a	n/a	n/a	No	No	n/a
Overload Protection	n/a	n/a	n/a	Yes - 3P C.B. per circuit	Yes - 3P C.B. per circuit	n/a
Flip Covers*	n/a	n/a	n/a	Yes	Yes	n/a
Main Power Inlet	5W 208V 60A IEC 5 pin 560I9 Configuration	5W 208V 60A IEC 5 pin 560I9 Configuration	CAMLOCK S (150 Amp size) 5 color Male L1,L2,L3,N,G	5W 208V 100A IEC 5 pin 5100I9 Configuration	5W 208V 100A IEC 5 pin 5100I9 Configuration	CAMLOCK S, LARGE (400 Amp size) 5 color Male L1,L2,L3,N,G
Inlet Flip Cover	No	No	No	No	No	No
Main Power Outlet (Mains Feed Thru)	5W 208V 60A IEC 5 pin 560R9 Configuration	5W 208V 60A IEC 5 pin 560R9 Configuration	CAMLOCK S (150 Amp size) 5 color Female L1,L2,L3,N,G	5W 208V 100A IEC 5 pin 5100R9 Configuration	5W 208V 100A IEC 5 pin 5100R9 Configuration	CAMLOCK S, LARGE (400 Amp size) 5 color Female L1,L2,L3,N,G
Mains Feed thru Flip Cover	Yes	Yes	Yes - Individual flips per camlock	Yes	Yes	Yes - Individual flips per camlock
Weight (lbs.)	42	42	44	44	44	46
Dimensions	22.5"L x 16.25"W x 16.25"H	22.5"L x 16.25"W x 16.25"H	22.5"L x 16.25"W x 16.25"H	22.5"L x 16.25"W x 16.25"H	22.5"L x 16.25"W x 16.25"H	22.5"L x 16.25"W x 16.25"H



Cat. Number	Rating	Length (ft)	Cord Size	Cord Type	Plug	Connector
65BSO 65DSO	60 A	50	#6/5	SO	4P 5W 60 Amp IEC 560P9E or equiv	4P 5W 60 Amp IEC 560C9E or equiv
65PGTL-50 65PGTL-100		100			Blunt - ROJ 8"	
45BSO 45DSO	90 A	50	#4/5	G	4P 5W 100 Amp IEC 5100P9E or equiv	4P 5W 100 Amp IEC 5100C9E or equiv
45PGTL-25		25			Blunt - ROJ 8"	
45PGTL-50 45PGTL-100		100				

Note: #2/5 also available - call for details.



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.





Custom Oscar® 2 Expo Series with color-coded duplex receptacles



FEATURES:

- 12 standard side slots
- 125A, 120/208V, 4P5W, IEC309 power inlet shown
- Choice of metal flip top or smoke clear removable top enables visual inspection without entering the panel
- Two side panels accommodate a wide range of devices
- Up to 19* available slots accommodate a variety of devices
- Front & rear panels accommodate a wide range of standard devices
- Other power input options include single-phase and CAM type devices
- Optional removable leg assemblies enable the panel to be used in a variety of configurations
- Main feed thru receptacle is optional and not standard on this series

When you need a temporary power distribution box that will meet your requirements, look to the Oscar® 2 Series from Ericson. The flexible design platform of the new Oscar® 2 allows you to configure a Temporary Power Distribution Center that is right for you. The Oscar® 2 Expo Series picks up where the 1066/1067 leaves off.

Typical Applications Include:

- Convention Centers • Outdoor Events • Festivals • Carnivals, etc. • Concerts • Stage & Studio
- Meets NEC 525 for venue temporary power
- Meets OSHA requirements for public venue power





OS2E03100C4CNLE
Indoor version



OS2E03100XPML D
Outdoor version



Oscar® 2 Expo Series Catalog Number Structure

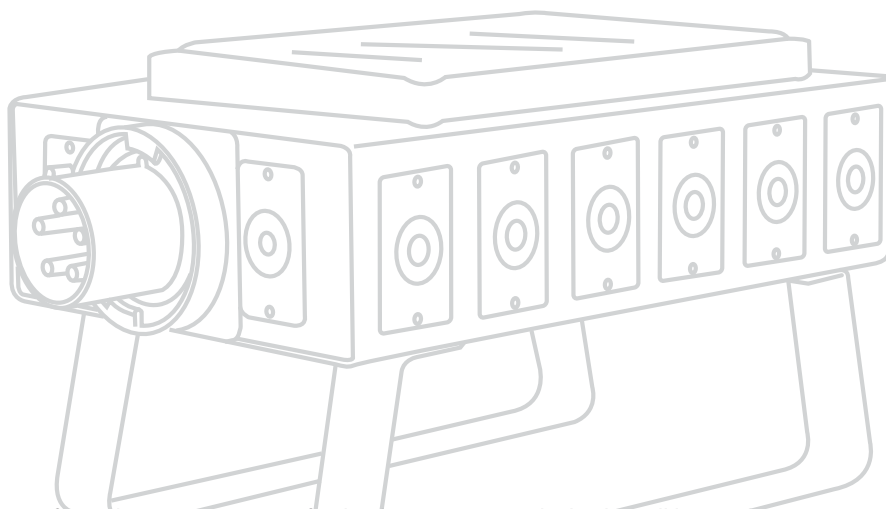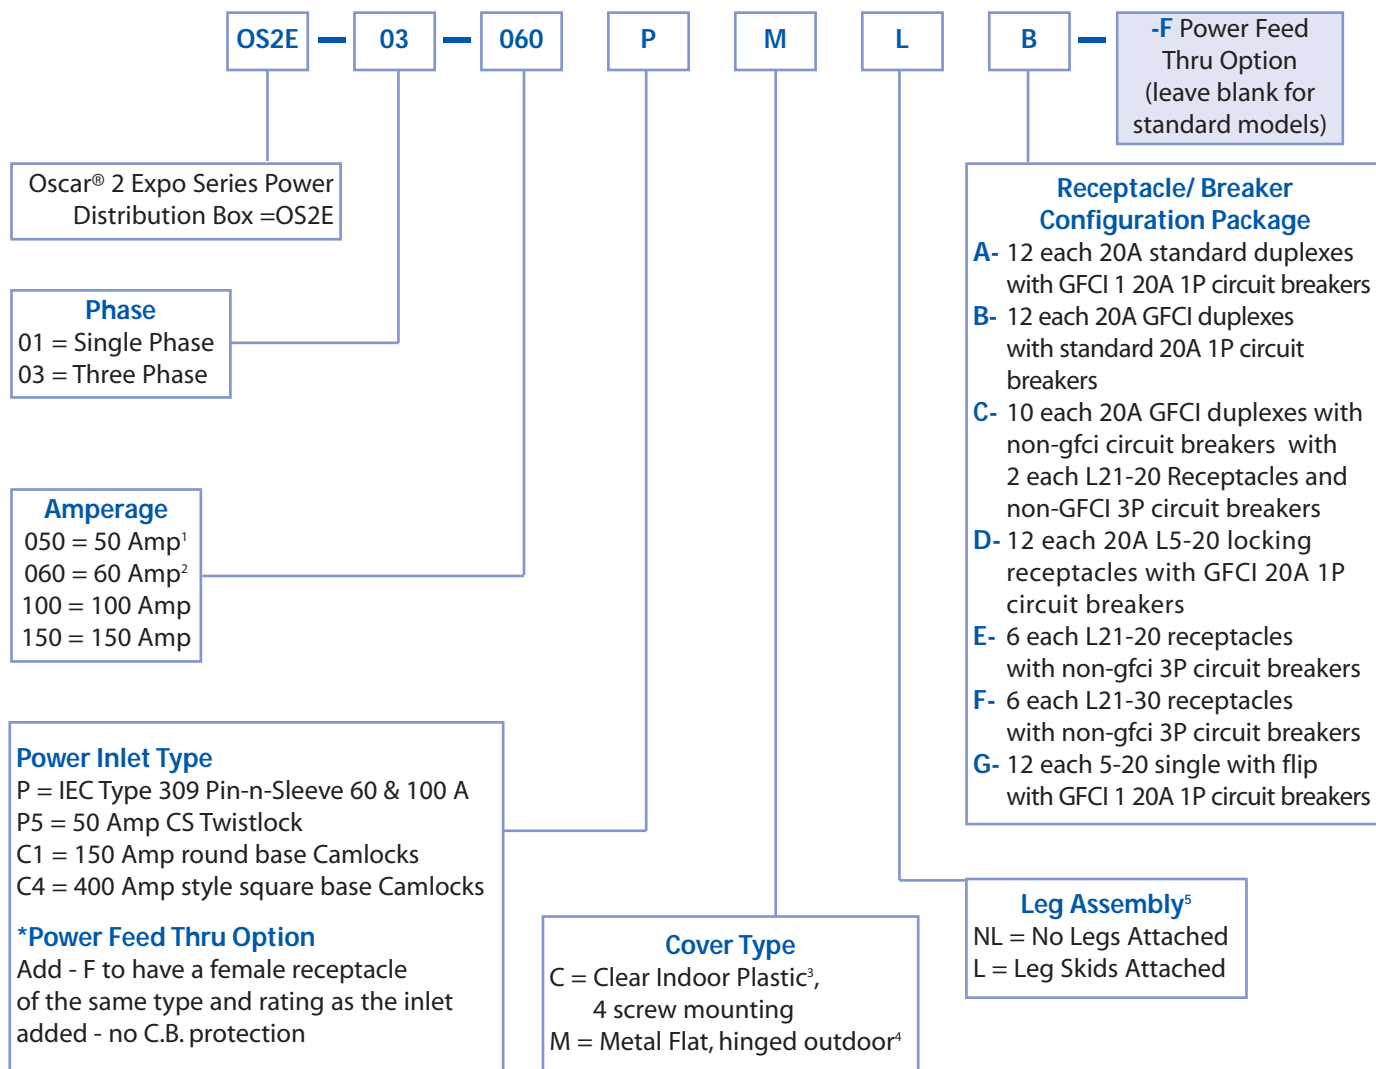

Notes:

1. Selection of 50 Amp is for 1 phase 4W 120/240V feed only. CS6375 Twistlock inlet will be used.
2. Selection of 60 Amp is for 3 phase 5W 208/120V feed only. IEC 560B9X inlet will be used.
3. Selection of the Indoor Plastic cover will automatically place non-flip cover face covers over the receptacles.
4. Selection of the Outdoor Metal Cover will automatically select FS style flip covers with internal plug grip seals.
5. Leg assemblies required for all outdoor events per NEC 525.



Military Temporary Power Distribution Center



Tactical Oscar® (Jungle)
OS2T-SB Full Green



Tactical Oscar® (desert)
Custom OS2T-SB Sand



FEATURES:

- All Weather
- Convenient hinged lid for easy interior circuit breaker access.
- Military style class L inlet & feed through (60 or 100 Amp, 3ph or 1ph)
- Ground lug for grounding rod use
- Tactical color schemes (sand or green)
- Outdoor use- wet or dry locations
- Enclosure rated NEMA Type 3R- rainproof, suitable for use in damp locations
- IPDM indicator lights are recessed for tactical situations
- Government Purchase Card payment accepted.

Ericson's Oscar® 2-Tactical Temporary Power Distribution Center is built to Military Requirements. Based on the award-winning Oscar® box, the Oscar® 2 has been customized to meet the demands of Military personnel. It features a military style Class L Inlet and Feed thru, Ericson exclusive Input Power Diagnostic Module (IPDM) both GFCI and non-GFCI outlets and all steel construction.

Selection Guide

Input Electrical Rating ¹	Device ²	Ratings	Protection		GFCI	Catalog Number
			Qty.	Overload		
60A, 3-phase, 120/208V AC 5-wire	Single Outlet Straight Blade Receptacle Class "L" Inlet Class "L" Outlet	NEMA 5-20, 20A/125V	6	Yes	2 of 6	OS2T-SB*
		60A, 3-phase Y, 120/208V	1	No	No	
		60A, 3-phase Y, 120/208V	1	No	No	
60A, 3-phase, 120/208V AC 5-wire	Single Outlet Locking Receptacle Class "L" Inlet Class "L" Outlet	NEMA L5-20, 20A/125V	6	Yes	2 of 6	OS2T-LK*
		60A, 3-phase Y, 120/208V	1	No	No	
		60A, 3-phase Y, 120/208V	1	No	No	
60A, 3-phase, 120/208V AC 5-wire	Single Outlet Straight Blade Receptacle Class "L" Inlet Class "L" Outlet	NEMA 5-20, 20A/125V	12	Yes	No	OS2T-SB* Full
		60A, 3-phase Y, 120/208V	1	No	No	
		60A, 3-phase Y, 120/208V	1	No	No	
60A, 3-phase, 120/208V AC 5-wire	Single Outlet Locking Receptacle Class "L" Inlet Class "L" Outlet	NEMA L5-20, 20A/125V	12	Yes	No	OS2T-LK* Full
		60A, 3-phase Y, 120/208V	1	No	No	
		60A, 3-phase Y, 120/208V	1	No	No	

Notes: 1. 100 Amp available - Contact factory
Pick color scheme - green or sand

Oscar® 2 Tactical Cord Sets Selection Guide


Description	Ratings	Catalog Number
Cordset, Pigtail, 6ft., #6/5		65MIL PGTL
Cordset, 50ft., #6/5	60A, 120/208V-5wire	65BSOM
Cordset, 100ft., #6/5		65DSOM



65DSOM
Class L Mil Type



Deployment Temporary Power Distribution Kit

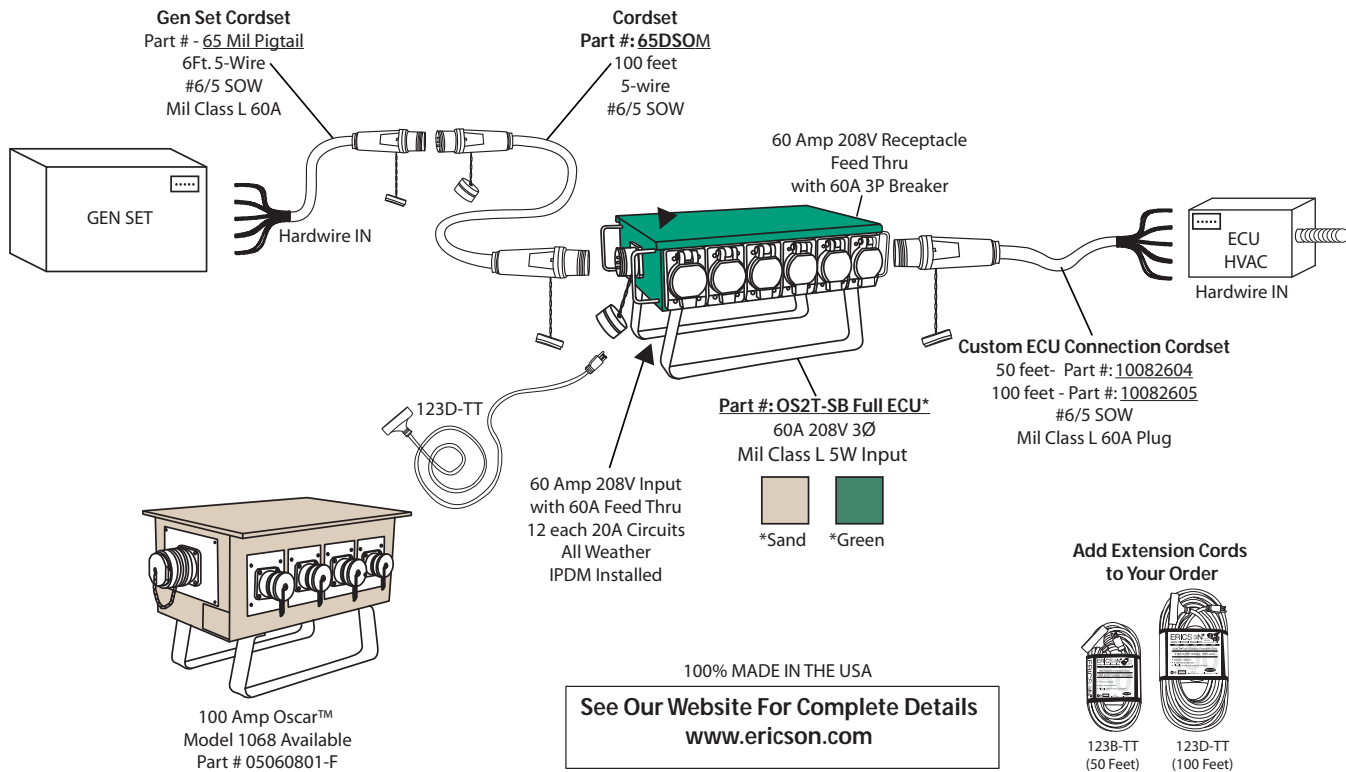

FOB/TOC Power Distribution (100 AMP)
Using Mil Type 1068 Oscar™ Box





FEATURES:

- UL & cQPS Listed
- Breaker and receptacle personalization
- 200 A, 100 A, and 60 A options
- 120 V / 208 V, 120 V / 240 V, 480 V, 600 V
- Single and three phase operation
- Main lug of pigtail connectivity
- Job-site friendly breaker panel access
- Flexible bottom panel main power access
- Easy-pull tow handle with easy roll tires
- Increased stability and maneuverability
- Dual frame handles for easy lifting
- Snow and mud access clearance
- Camlock and terminal lug options
- Heavy duty welded frame
- Optional main breaker configurations
- Designed to NEMA 3R rain standards
- Built-in forklift access points

Ericson Manufacturing is leading the way with Temporary Power solutions ideal for a wide range of challenging locations and applications with next generation C-Panel functionality. The PowerCart is built rugged enough to survive the harshest jobsite environments, while delivering user benefits such as simplified connectivity access, configuration flexibility and ease of portability. Ericson’s solutions are also designed to meet the latest Safety Certifications and Standards affording exceptional peace of mind and confidence.

Flexible configuration alternatives, based on a standard platform constructed of heavy-duty welded steel, provide the ability to meet unique application requirements without the cost typically associated with custom solutions. Designed for simplified plug-n-play use, the Ericson “system” of Temporary Power Carts require minimal setup and teardown time, saving valuable time and associated expense.

The Oscar-PowerCart is ideal for a wide range of applications including:

- | | | |
|-------------------------|---------------------|------------------------|
| • Oil / Gas Exploration | • Construction | • Entertainment Venues |
| • Emergency Response | • Defense / Safety | • Maintenance |
| • Sporting Events | • Mining Operations | • Rental Services |



Standard Configuration

Model	Phase	Voltage (V)	Current (A)	Inlet Type	Breaker Type	Main Feed-Thru	Receptacles	Poles	Description
OPC-01-120-100-LSLN-1615-C	1	120/240	100	LUG	STAB	NO	16	16	OUTDOOR (16) 5-15 DPLX GFCI
OPC-01-120-100-LSLN-1615-U	1	120/240	100	LUG	STAB	NO	16	16	OUTDOOR (16) 5-15 DPLX GFCI
OPC-03-208-100-LSLN-1515-C	3	120Y208	100	LUG	STAB	NO	15	15	OUTDOOR (15) 5-15 DPLX GFCI
OPC-03-208-100-LSLN-1515-U	3	120Y208	100	LUG	STAB	NO	15	15	OUTDOOR (15) 5-15 DPLX GFCI
OPC-03-208-100-LSLN-09150330-C	3	120Y208	100	LUG	STAB	NO	12	15	OUTDOOR (9) 5-15 DPLX GFCI (3) L6-30
OPC-03-208-100-LSLN-09150330-U	3	120Y208	100	LUG	STAB	NO	12	15	OUTDOOR (9) 5-15 DPLX GFCI (3) L6-30
OPC-01-120-200-LBLN-14150250-C	1	120/240	200	LUG	BOLT	NO	16	18	OUTDOOR (14) 5-15 DPLX GFCI (2) CS6369
OPC-01-120-200-LBLN-14150250-U	1	120/240	200	LUG	BOLT	NO	16	18	OUTDOOR (14) 5-15 DPLX GFCI (2) CS6369
OPC-03-208-200-LBLN-12150350-C	3	120Y208	200	LUG	BOLT	NO	15	18	OUTDOOR (12) 5-15 DPLX GFCI (3) CS6369
OPC-03-208-200-LBLN-12150350-U	3	120Y208	200	LUG	BOLT	NO	15	18	OUTDOOR (12) 5-15 DPLX GFCI (3) CS6369
OPC-01-120-200-LBLN-121502300250-C	1	120/240	200	LUG	BOLT	NO	16	18	OUTDOOR (12) 5-15 DPLX GFCI (2) L6-30 (2) CS6369
OPC-01-120-200-LBLN-121502300250-U	1	120/240	200	LUG	BOLT	NO	16	18	OUTDOOR (12) 5-15 DPLX GFCI (2) L6-30 (2) CS6369
OPC-03-208-200-LBLN-101503300350-C	3	120Y208	200	LUG	BOLT	NO	16	22	OUTDOOR (10) 5-15 DPLX GFCI (3) L6-30 (3) CS6369
OPC-03-208-200-LBLN-101503300350-U	3	120Y208	200	LUG	BOLT	NO	16	22	OUTDOOR (10) 5-15 DPLX GFCI (3) L6-30 (3) CS6369

- Note:**
1. 480 V, 600 V and configurations ≥ 200 A require bolt-on breakers.
 2. 120 V, 208 V, 200 V and configurations < 200 A have the option to be configured with stab-in breakers.
 3. "-C" Canada only model. "-U" USA only model.

Universal Panel - Typical Layouts

Option 1



Supports 15 A, 20 A and 30 A receptacles





Option 2



Supports high current 60 A and 100 A receptacles

Option 3



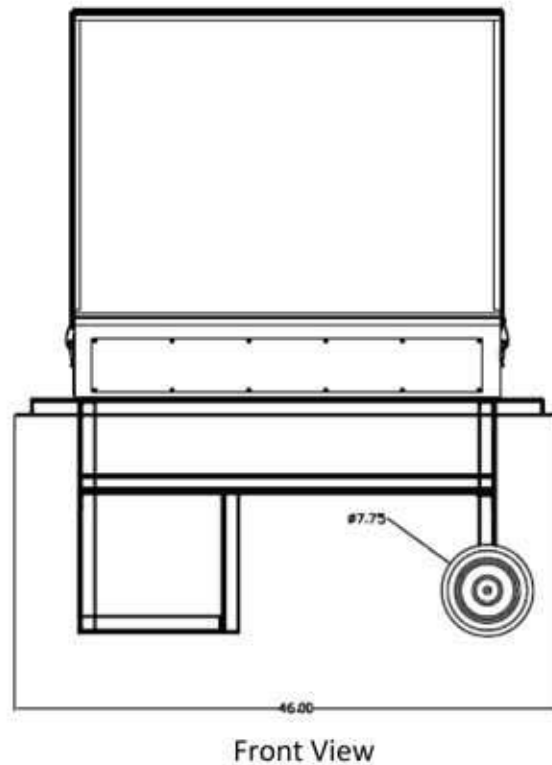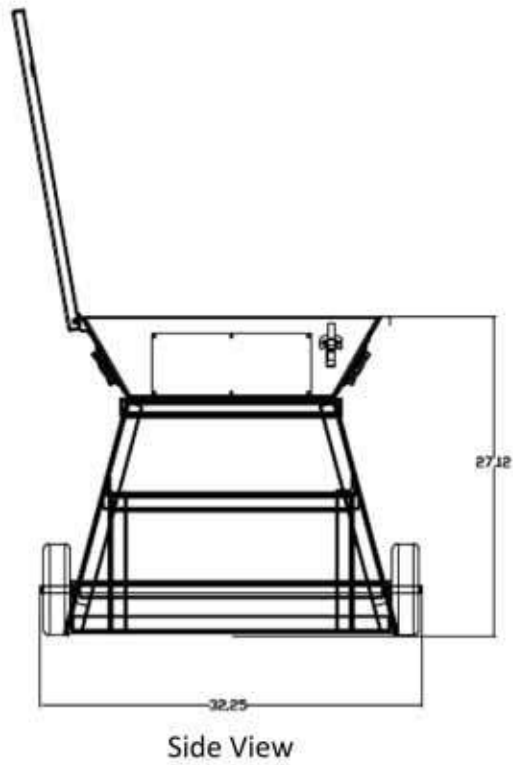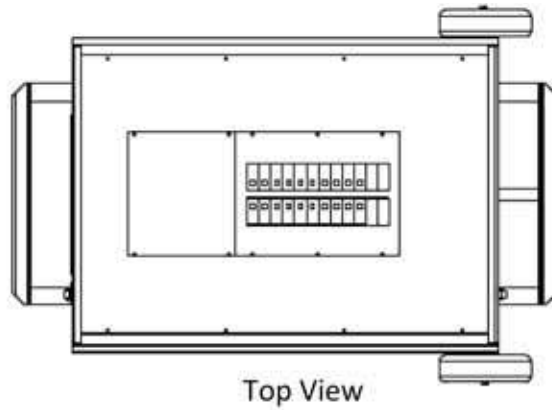


Chassis / Frame Usability Features:

- 1) Bolt-on punch-out cable access plate
- 2) Dual side plates
- 3) Cable Tie-down to frame assembly
- 4) Captive side plate screws
- 5) Side plate access for Camlock connection



Universal Panel - Flexible Configurator

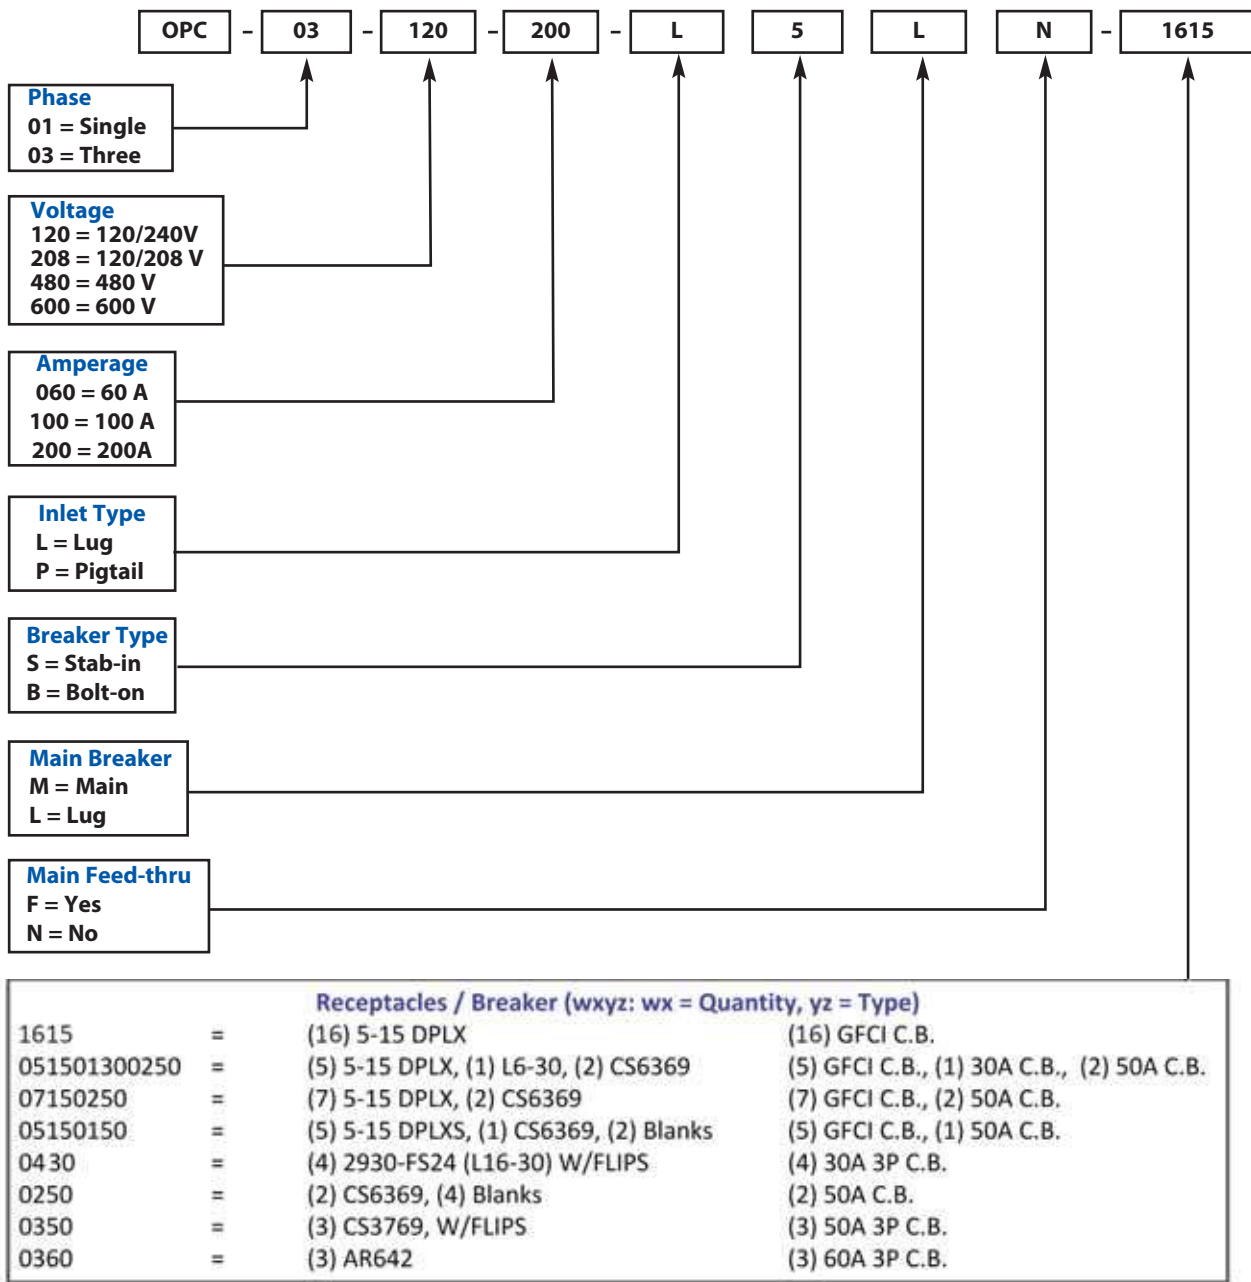

Configuration Options:

- 1) General Electric and Eaton (Cutler-Hammer) panels
- 2) Stab-in breakers and bolt-on breakers
- 3) 6' SOW pigtail with E-Grips strain relief
- 4) No-wheel, carry only



8000 Series - Portable Industrial Grade Outlet Boxes



8206FS 1.56" Round



8005



8208FS cover
Combo 1.56" & Duplex



8201FS cover
(2) Duplex



8205 cover
TT 30 RV

FEATURES:

- Extra-deep box provides additional wiring space - perfect for use with all cords up to 6/4
- Molded of thermoplastic elastomer (TPE) these non-conductive boxes are crush proof and resistant to jobsite oils
- Plates (sold separately) accommodate a wide range of devices (screw kits included)
- Available with a wide range of cover plates and a full range of replacement parts
- Plate available for use with Ericson's 1075 GFCI module (not included) for added protection and code compliance (class A open neutral protection)
- Cover plates and cord grips are molded of impact resistant nylon and resistant to jobsite oils
- Available as pendant and feed-through boxes
- Wire mesh cord grips available

8000 Series portable electrical enclosures with large internal wiring area which allows for cords from 18/3 to 6/4 cable. Rugged and durable, these outlet boxes are engineered to provide protection against electric shock under harsh conditions.


Selection Guide

Catalog #	Description
8005	Box with 1 x 1/2" npt hole
8005F	Box with 2 x 1/2" npt holes (1 hole at each end)
8034	Box with 1 x 3/4" npt hole
8034F	Box with 2 x 3/4" npt holes (1 hole at each end)
8010	Box with 1 x 1" npt hole
8010F	Box with 2 x 1" npt holes (1 hole at each end)


Catalog #	Strain Relief Kits
82005	Strain Relief, Cord 1/2 IN NPT W/ Grommets
82034	Strain Relief, Cord, 3/4 IN NPT
82010	Strain Relief, Cord, 1 IN NPT
82005W	Strain Relief, Wire, Cord .5 IN 1/2 NPT
82034W	Strain Relief, Wire, Cord, 3/4 IN NPT
82010W	Strain Relief, Wire, Cord, 1IN NPT

Catalog #	Plates
8200	Plate Blank
8201	Plate, 2 Duplex - No Flip Covers
8201FS	Plate, 2 Duplex With Flip Covers
8202	Plate, 1 GFCI 1075 No Flip Req'd
8203	Plate, 1 GFCI Duplex Receptacle No Flip
8203FS	Plate, 1 GFCI Receptacle With Flip
8204	Plate, 2 GFCI Receptacle - No Flip Covers
8204FS	Plate, 2 GFCI Receptacle With Flip Covers
8205	Plate, 1 LG Recept RV TT-30 - No Flip Cover
8206	Plate, 2 Single 1.56" Round Recept- No Flip Cover
8206FS	Plate, 2 Single 1.56" Round Recept With Flip Covers
8207	Plate, 1 Single 1.56" Round Recept - No Flip- 1/2 Blank
8207FS	Plate, 1 Single 1.56" Round Recept With Flip Cover - 1/2 Blank
8208	Plate, 1 Single 1.56" Round & 1 Duplex Recept - No Flip
8208FS	Plate, 1 Single 1.56" Round & 1 Duplex Recept With Flip Covers


How To Order

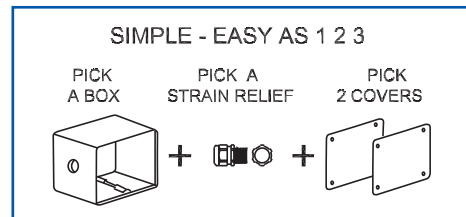









Made in the USA

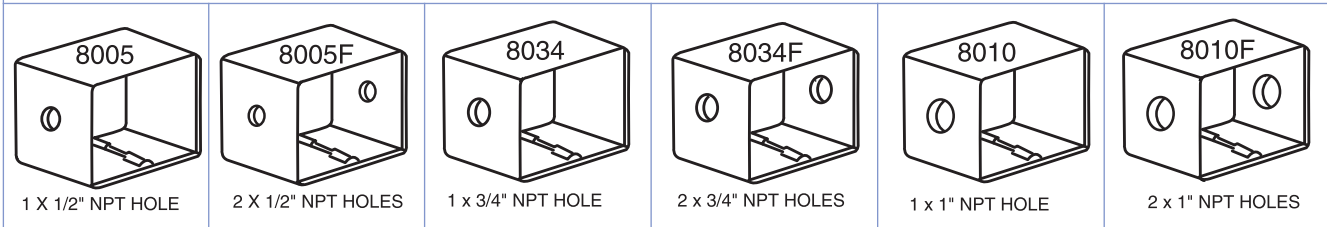


Pre-Punched Boxes




Strain Relief Kits

Cable Ranges (strain relief)	Catalog Number	Cable Ranges (wire mesh)	Catalog Number
1/2" NPT Fits Cable Ranges .37 - .61	 82005	1/2" NPT Fits Cable Ranges .375 - .500	 82005W WIRE MESH
		1/2" NPT Fits Cable Ranges .500 - .625	 82005W-1 WIRE MESH
3/4" NPT Fits Cable Ranges .45 - .70	 82034	3/4" NPT Fits Cable Ranges .625 - .750	 82034W WIRE MESH
		3/4" NPT Fits Cable Ranges .750 - .875	 82034W-1 WIRE MESH
1" NPT Fits Cable Ranges .59 - 1.00	 82010	1.0" NPT Fits Cable Ranges .875 - 1.000	 82010W WIRE MESH

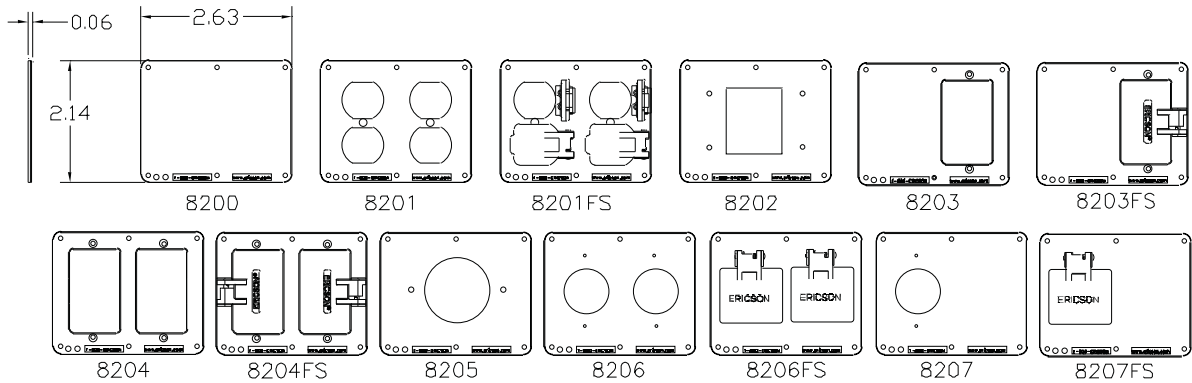

Hole Ø Inches:

8205 = 2.40
8206 = 1.57
8207 = 1.57
8208 = 1.57

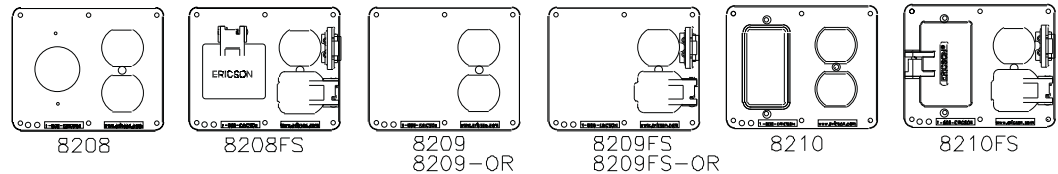

ACTUAL PLATE CONFIGURATION, REF.



MANY ERICSON PRODUCTS ARE LISTED OR CERTIFIED.
 FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



6000 Series - Portable Outlet Boxes



FEATURES:

- Rugged and durable, these outlet boxes are engineered to provide protection against electric shock while using portable power cords
- Molded of thermoplastic elastomer (TPE) these non-conductive boxes are crush proof and resistant to jobsite oils
- High-visibility dual-color safety system for easy identification on the jobsite
- Cover plates and clamps are molded of impact resistant nylon and resistant to jobsite oils
- Built-in TPE cord entrance seals out dirt, dust and other contaminants
- Accommodates wide range of devices
- Extra-deep box provides additional wiring space - perfect for use with #12/3 cord and larger
- Available as pendant and feed-through boxes
- Available with a wide range of cover plates and a full range of replacement parts
- Available with Ericson's in-line type GFCIs for added protection and code compliance

NOTICE:
The NEC restricts the use of metal job boxes as temporary power cords

6000 Series Portable Outlet Boxes Selection Guide

Cord Clamp* Style Box With Open Covers						
	For (2) Duplex Receptacles		For (2) Single Receptacles: 1.390" dia. Hole		For (2) Single Receptacles: 1.572" dia. Hole	
	Standard Depth	Extra Deep	Standard Depth	Extra Deep	Standard Depth	Extra Deep
Pendant	6000	6002	6005	6006	6010	6011

Note: * No feed thru box available with cord clamp style

6000 Series Portable Outlet Boxes Selection Guide

Cord Grip Feed Thru * Style Box With Open Covers						
	For (2) Duplex Receptacles		For (2) Single Receptacles: 1.390" dia. Hole		For (2) Single Receptacles: 1.572" dia. Hole	
	Standard Depth	Extra Deep	Standard Depth	Extra Deep	Standard Depth	Extra Deep
*Feed-Through	6000-F	6002-F	6005-F	6006-F	6010-F	6011-F

Notes:
Standard depth box = 3-3/16"
Extra deep box = 4-5/32"
* All 6000 Series feed-throughs have cord grip nuts and grommets (see photo of 6000-F above)



6000 Series Replacement Boxes



Standard Depth Box
Catalog Number - 6030



Standard Depth Box
Catalog Number - 6030B




Extra Deep Box
Catalog Number - 6029

* No feed thru box available with cord clamp style

6000 Series Replacement Cover Plates

Duplex Receptacle Cover Plates



Catalog # - 6031



Catalog # - 6031B

Single Receptacle Cover Plates
1.390" Dia. Opening



Catalog # - 6032



Catalog # - 6032B

Single Receptacle Cover Plates
1.572" Dia. Opening



Catalog # - 6033



Catalog # - 6033B

GFCI Duplex Receptacle Cover Plates



Catalog # - 6035



Catalog # - 6035B

Blank Cover Plates




Catalog # - 6034



Catalog # - 6034B

6000 Series Dimensions

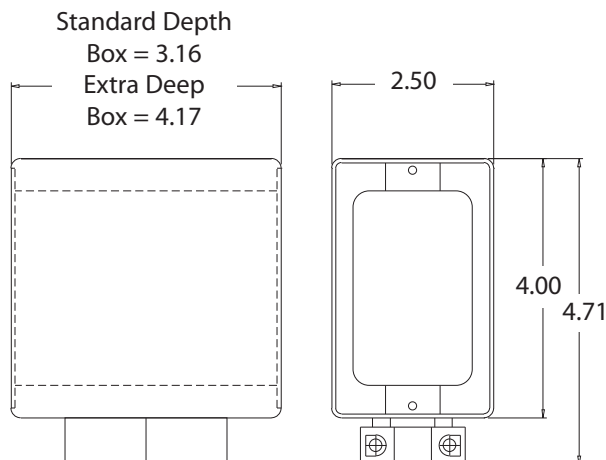



6100

6102



FEATURES:

- Non-metallic, non-conductive design provides protection against electric shock while using portable power cords
- Spring-loaded flip seal covers protect receptacle
- Heavy-duty stainless steel springs provides dependable, long service life
- Molded of thermoplastic elastomer (TPE) these non-conductive boxes are crush proof and resistant to jobsite oils
- Supplied with cord grip bushings that accommodate #16/3 SO through #12/3 SO cord
- Cover plates and flip seals are molded of impact resistant PBT thermoplastic
- Accommodates a wide range of devices
- Extra-deep box provides additional wiring space
- Available as pendant and feed-through boxes
- Available with a wide range of cover plates and a full range of replacement parts
- Available with Ericson's in-line GFCIs for added protection and code compliance

6100 Series Weather Resistant Portable Outlet Boxes Selection Guide

Cord Grip Style Box With Flip Covers						
	For (2) Duplex Receptacles		For (2) Single Receptacles: 1.390" dia. Hole		For (2) Single Receptacles: 1.572" dia. Hole	
	Standard Depth	Extra Deep	Standard Depth	Extra Deep	Standard Depth	Extra Deep
Pendant	6100	6102	6105	6106	6110	6111
Feed-Through	6100-F	6102-F	6105-F	6106-F	6110-F	6111-F

Notes: Standard depth box= 3-3/16"
Extra deep box = 4-5/32"

Selection Guide

All Black Box With Covers		
	For 2 Duplex Receptacles	
	Standard Depth	Extra Deep
Pendant	6100B	6102B
Feed-Thru	6100B-F	6102B-F

Available in black for Stage, Studio and Entertainment

Molded black box with black cover plates blends into the background. Ideal for stage, studio, entertainment and other applications where you want the box to not attract attention.



Replacement Boxes



Standard Depth
Catalog Number - 6130



Extra Deep Box
Catalog Number - 6129



Standard Depth
Catalog Number - 6130B



Extra Deep
Catalog Number - 6129B

Standard Depth Box with
Feed Through (not shown)
Catalog Number - 6130-F

Extra Deep Box with Feed
Through (not shown)
Catalog Number - 6129-F

Standard Depth Box with
Feed Through (not shown)
Catalog Number - 6130B-F

Extra Deep Box with Feed
Through (not shown)
Catalog Number - 6129B-F

Replacement Cover Plates



For Single Receptacles
1.390" Dia. Opening
Catalog Number - 6132



For Single Receptacles
1.572" Dia. Opening
Catalog Number - 6133



For Duplex Receptacles
Catalog Number - 6131



Blank Cover plate
Catalog Number - 6034



For GFCI Receptacles
Catalog Number - 6135Y



Catalog Number - 6135





Catalog Number - 6131B



Catalog Number - 6034B

Dimensions

Standard Depth
Box = 3.16
Extra Deep
Box = 4.17



MANY ERICSON PRODUCTS ARE LISTED OR CERTIFIED.
FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.



Stringlights

Reduce the risks associated with dark passages and work environments or safely illuminate outdoor activities with Ericson's growing family of stringlight products. These solutions are ideally suited for a wide range of applications including hazardous location, industrial construction and event lighting.

- LED configuration alternatives
- Construct-O-Lite® – 2-wire contractor grade molded stringlights
- E-Lite™ 3-wire commercial grade molded stringlights
- 3-Wire heavy duty molded stringlights
- Hazardous location explosion proof stringlights



High Bay Temporary Lighting

Safe and reliable high bay temporary lighting is an essential component of virtually every industrial construction project due to the exceptional light coverage and simplicity of use.

Several configuration alternatives, combined with flexible input power taps, make these lights an ideal fit for a wide range of applications.

- 400 Watt pulse start ballast
- 250 Watt pulse start ballast



Wide Area Lighting

Essential wide area lighting characteristics include flexible mounting, rugged construction, impact-resistant lens assemblies and wet location use, all of which have been pioneered at Ericson. Additional functionality such as emergency battery backup egress and long lasting, efficient LED lighting options further extend the utility of this product family.

- 60 Watt LED
- 50 Watt LED flood
- 70 Watt high pressure sodium
- 70 Watt metal halide
- 39 Watt fluorescent
- Emergency battery backup egress




Task Lighting

Ericson's LED Heavy Duty Work Lighting Solutions provide uncompromised safety and performance by combining wet location listings, rugged construction, and energy efficient LED technology. Ideal for indoor and outdoor use these innovative work lights are lightweight, impact resistant, and designed to deliver years of worry free operation.

A wide range of configuration alternatives simplify product selection for applications such as construction, task and tent, entertainment, emergency medical care, defense /safety, utility maintenance and detailed repair work lighting.

- Single and dual tube light LED and fluorescent options

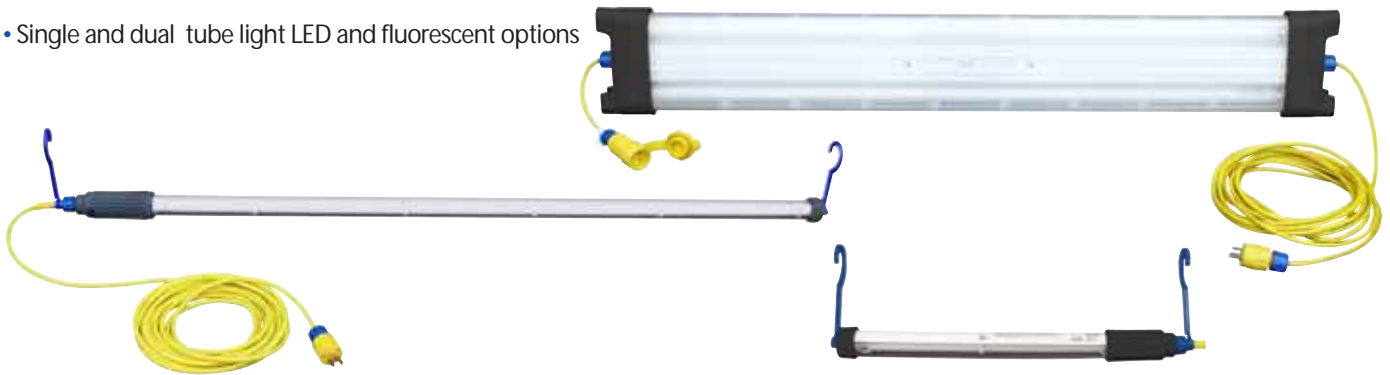

Hand Lamps

Choose the right handlamp for the task at hand from one of the widest selections in the industry. Configurations range from light duty commercial grade to heavy duty industrial to vapor and explosion proof.

- Commercial and light duty handlamps
- Industrial duty incandescent handlamps
- Vapor-Gard® handlamps
- Industrial fluorescent handlamps
- Industrial low voltage fluorescent handlamps
- Low voltage handlamps with in-line transformer



Hazardous Location

Designed for use in the world's most challenging environments where equipment is routinely exposed to explosive concentrations of vapor, liquid, dust or fibers, Ericson's complete line of hazardous location lighting offers exceptional performance and flexibility. Designed and tested to the most rigorous standards, models are available for use in Class I & II, Div 1 & 2 and other challenging environments.

Incorporating the latest LED lighting technology, the 2600 LED handlamps deliver long operational life, exceptional durability, reduced eye stress and lower operational costs. Low voltage models with integral transformers are also available, eliminating high voltage levels in confined and other dangerous areas.



Types of Stringlights:

There are several types of stringlights available. These types differ in construction and the environments for which they are designed to operate. The basic design of a stringlight set is a medium Edison base lamp socket electrically connected to a cord via several methods:

1. Mechanically Attached Sockets – Like our model X-142100, these indoor rated stringlights use lamp sockets with insulation displacement or piercing pins to make the electrical connection through the cord jacket insulation. The socket is then held on with mechanical means and the stringlight is supported by hanger hooks at each socket location. Economically priced, these stringlights are normally used only a few times and then discarded.
2. Molded Sockets – The design of these stringlights varies, but the basic design is a medium Edison base socket that is held in an overmolded material area attached to the cord. The electrical connections and socket are protected from the environments and this reduces corrosion and electrical faults. The cord jacket and the overmold material vary from manufacturer to manufacturer and the durability depends on this material formulation to ensure a watertight bond.

Rules for Use:

There are many rules governing the use of stringlights. These are a few of the more common questions that arise. Consult your local inspection authority before installing stringlights.

1. Length of Time - Stringlights are normally used in *Temporary Use Locations* (defined by NEC Article 590) and the length of time is defined in that article.
2. Article 590.4 of the NEC 2008 states that all lamps will have protection from accidental contact or damage.
3. Two wire stringlights (no ground wire) must use non-conductive lamp guards.
4. Three wire stringlights can use metallic or non-metallic guards, but the metallic guards must be grounded with a continuous ground wire through the stringlight.
5. Depending on your local inspector, stringlights can be “hard wired” to a panel as long as there is no strain on the connection.
6. Stringlights must be held aloft by the hanging tabs located at each lamp socket and not by the cord/conductors unless permission by the manufacturer is given.
7. According to article 590 of the 2008 NEC, lighting circuits and power circuits in temporary locations should not be mixed. You should not protect a stringlight circuit with GFCI protection.


Do's and Don'ts

1. Never use indoor rated stringlights in outdoor situations
2. Never install lamps with wattage greater than the manufacturer's specifications for that stringlight
3. Never operate stringlights without lamp guards in place – replace any broken guards
4. Use hang tabs or a “messenger wire” to suspend stringlights over the work area



Contractor Grade Construct-O-Lite 2-Wire Stringlights				
Item Number	Wire Type	Guard Type (included)	Primary Plug	Secondary Connector
142100	14/2 SJT 300V	Plastic Lattice 04201	Molded NEMA 5-15P	Molded NEMA 5-15C
X-142100	14/2 Flat 300V	Plastic Lattice Snap-on	blunt	blunt
122100STW	12/2 STW 600V	Plastic Lattice 04201	Molded NEMA 5-15P	Molded NEMA 5-15C
122100STW-C		Clear Rain 212	Molded NEMA 5-15P	Molded NEMA 5-15C
Commercial Grade 3-Wire E-Lite Stringlights				
Item Number	Wire Type	Guard Type (included)	Primary Plug	Secondary Connector
143100STWY-1L	14/3 STW 600V	Plastic Lattice 04201	Molded NEMA 5-15P	Molded NEMA 5-15C
143100STWY-1W		Welded Wire 211	Molded NEMA 5-15P	Molded NEMA 5-15C
143100STWY-1C		Clear Rain 212	Molded NEMA 5-15P	Molded NEMA 5-15C
123100STWY-1L	12/3 STW 600V	Plastic Lattice 04201	Molded NEMA 5-15P	Molded NEMA 5-15C
123100STWY-1W		Welded Wire 211	Molded NEMA 5-15P	Molded NEMA 5-15C
123100STWY-1C		Clear Rain 212	Molded NEMA 5-15P	Molded NEMA 5-15C
Industrial Grade 3-Wire Molded Stringlights				
Item Number	Wire Type	Guard Type	Primary Plug	Secondary Connector
143100Y-1	14/3 SEOW	Order Separately	1510-PW6P (NEMA 5-15P)	1610-CW6P (NEMA 5-15C)
143100Y-2		Order Separately	1520-PW6P (NEMA L5-15P)	1620-CW6P (NEMA L5-15C)
123100Y-1	12/3 SEOW	Order Separately	1510-PW6P (NEMA 5-15P)	1610-CW6P (NEMA 5-15C)
123100Y-2		Order Separately	1520-PW6P (NEMA L5-15P)	1620-CW6P (NEMA L5-15C)
123100Y-3		Order Separately	2310-PW6P (NEMA L5-20P)	2410-CW6P (NEMA L5-20C)



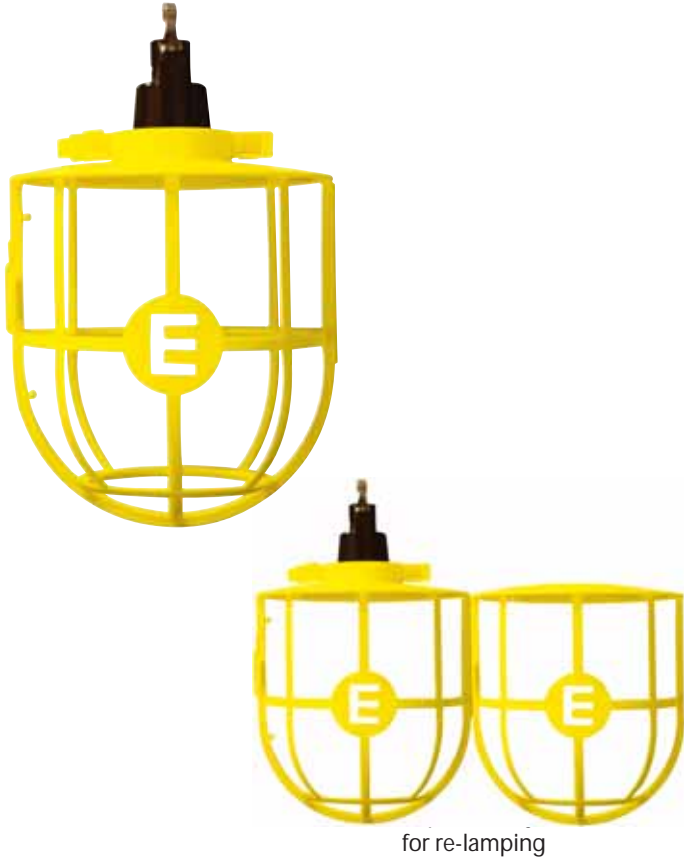

FEATURES:

- Meets OSHA construction site requirements
- Meets NEC requirements for temporary lighting
- Designed for applications that require rapid set-up/tear-down and an economy stringlight
- Easy relamping with non-conductive, snap-open cage guard
- Built-in hanger for easy installation with messenger cable or hooks
- Accommodates one Type A-19 or one Type A-23 Lamp per socket max 150W
- For indoor use only
- Guard style may vary

Catalog Number	X-142100
Specifications:	
Listings	N/A
Electrical	120 V, 12.5A, 1500W
Overall length	100 ft.
Cable gauge & type	AWG #14/2
Guard	Snap on lattice
Number of sockets	10
Socket spacing	10 ft. centers
Max watts per socket	150W
Primary	9' Blunt
Secondary	1' Blunt with shrink tube cap



Contractor Grade - Construct-O-Lite®2-Wire Molded Stringlights



Re-lamping is easy with the snap-open cage guard.

FEATURES:

- UL or cULus Listed
- Meets OSHA construction site requirements
- Meets NEC/CEC requirements for temporary lighting
- Designed for applications that require rapid set-up/tear-down and an economy stringlight
- Full threaded screwshell to ensure proper contact
- Easy relamping with non-conductive, snap-open cage guard
- Built-in hanger for easy installation with messenger cable or hooks
- Standard models supplied with 15Amp, 2-wire straight-blade (NEMA 1-15) plug & (NEMA 1-15) connection
- #14/2 and #12/2 cord types

	#14/2 AWG	#12/2 AWG	
Item Number	142100	122100STW	122100STW-C
Specifications:			
Listings	UL Listed	cULus Listed	cULus Listed
Electrical	120 V/60Hz	120 V/60Hz	120 V/60Hz
Overall Length	100 ft.	100 ft.	100 ft.
Cable gauge & type	14/2 SJTW 300V	12/2 STW 600V	12/2 STW 600V
Guard	04201 snap on lattice	04201 snap on lattice	212 Rain Guard
Number of sockets	10	10	10
Socket spacing	10 ft. centers	10 ft. centers	10 ft. centers
Max watts per socket	150	150	150
Primary	NEMA 1-15 plug	NEMA 1-15 plug	NEMA 1-15 plug
Secondary	NEMA 1-15 connection	NEMA 1-15 connection	NEMA 1-15 connection

Note:
50 ft available - call for details

Universal Stringlight Hook Kit
10 S hooks per bag (order separately)
SLHK-01

212 Rain Guards included with model 122100STW-C



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.



USE WITH LED, CFL OR INCANDESCENT BULBS



Use up to 150W bulbs

FEATURES:

- Meets OSHA construction site requirements
- Meets NEC/CEC requirements for temporary lighting
- Designed for applications that require rapid set-up/tear-down and a 3-wire stringlight
- Full threaded screwshell to ensure proper contact
- Available with non-conductive, snap-open cage guard grounded wire guard or clear rain guards
- Built-in hanger for easy installation with messenger cable or hooks
- Units come standard with Extra-Hard-Usage ST cord in 50 ft. and 100 ft. lengths (50' socket, 100' socket)
- Stringlights come standard with Ericson's molded plugs and connectors

Guard Options



04201
Rugged Plastic Guard
"L"



211
Zinc Coated Wire Guard
"W"

Screws on
Grounds
When
Installed



211-P
Vinyl Coated Wire Guard
"WP"

Indoor/Outdoor Use



212
Clear Lexan Guard
"C" Models




216
End Cap
Order Separately

Universal Stringlight Hook Kit

10 S hooks per bag (order separately)



SLHK-01



211-BG
Zinc Coated
Wire Guard
Snap on Bottom

E-Lite™ 3-Wire Commercial Grade Molded Stringlights Selection Guide

Standard products come with 9 ft. primary (lead) and 1 ft. secondary (tail)

Stringlights with #12/3 STW Cable:

	#12/3 STW w/ Plastic Lattice Guard	#12/3 STW w/ Wire Cage Guard	12/3 STW w/Clear Lexan Rain Guard
50 ft. Overall Length	12350STWY-1L	12350STWY-1W	12350STWY-1C
100 ft. Overall Length	123100STWY-1L	123100STWY-1W	123100STWY-1C
Specifications:			
Listing	cULus Listed	cULus Listed	cULus Listed
Electrical	120 V/60Hz	120 V/60Hz	120 V/60Hz
Overall Length	see above	see above	see above
Cable gauge & type	12/3 STW	12/3 STW	12/3 STW
Guard	04201 snap on lattice	211 Wire guard	212/216 Guard
Number of sockets:			
50 ft. stringlights	5	5	5
100 ft. stringlights	10	10	10
Socket spacing	10 ft. centers	10 ft. centers	10 ft. centers
Max watts per socket:			
50 ft. stringlights	200	200	200
100 ft. stringlights	150	150	150
Plug	NEMA 5-15	NEMA 5-15	NEMA 5-15
Connector	NEMA 5-15	NEMA 5-15	NEMA 5-15

Notes:

1. For vinyl coated wire guards add "P": Example 123100STWY-1WP
2. 216 End caps ordered separately
3. Contact Ericson for your custom stringlight configurations

Stringlights with #14/3 STW Cable:

	#14/3 STW w/ Plastic Lattice Guard	#14/3 STW w/ Wire Cage Guard	14/3 STW w/Clear Lexan Rain Guard
50 ft. Overall Length	14350STWY-1L	14350STWY-1W	14350STWY-1C
100 ft. Overall Length	143100STWY-1L	143100STWY-1W	143100STWY-1C
Specifications:			
Listings	UL Listed	UL Listed	UL Listed
Electrical	120 V/60Hz	120 V/60Hz	120 V/60Hz
Overall Length	see above	see above	see above
Cable gauge & type	14/3 STW	14/3 STW	14/3 STW
Guard	04201 snap on lattice	211 Wire guard	212/216 Guard
Number of sockets:			
50 ft. stringlights	5	5	5
100 ft. stringlights	10	10	10
Socket spacing	10 ft. centers	10 ft. centers	10 ft. centers
Max watts per socket:			
50 ft. stringlights	200	200	200
100 ft. stringlights	150	150	150
Plug	NEMA 5-15	NEMA 5-15	NEMA 5-15
Connector	NEMA 5-15	NEMA 5-15	NEMA 5-15

Notes:

1. For vinyl coated wire guards add "P": Example 123100STWY-1WP
2. 216 End caps ordered separately
3. Contact Ericson for your custom stringlight configurations



Industrial Grade - Heavy Duty 3, 4 & 5-Wire Molded Stringlights



FEATURES:

- UL Listed and CSA Certified
- Meets OSHA construction site requirements – 1926.405(a)(2)(ii)(E&F)
- Meets NEC/CED requirements for temporary lighting
- Designed for applications that require rapid set-up/tear-down and a 3-wire stringlight
- Full threaded screwshell to ensure proper contact
- Available with non-conductive, snap-open cage guard grounded wire guard or clear rain guards
- Built-in hanger for easy installation with messenger cable or hooks
- Units come standard with Extra-Hard-Usage cord in 50 ft. and 100 ft. lengths
- Stringlights come standard with Ericson's Perma-Tite®2 plugs and connectors.
- Custom lengths & socket spacing available
- Power drops available

Guards & end caps sold separately on Heavy Duty stringlights



ALL INDUSTRIAL GRADE STRINGLIGHTS COME WITH WATERTIGHT NEMA 6P RATED PLUG & CONNECTOR



Full metal socket



Also available in black, See chart notes



Universal Stringlight Hook Kit
10 S hooks per bag (order separately)

SLHK-01



Selection Guide

Standard products come with 9 ft. primary (lead) and 1 ft. secondary (tail)

	#14/3 SEOW Cable		#12/3 SEOW Cable			240V #12/4 Cable	208V 3 Ph #12/5 Cable
50 ft. Overall Length	14350Y-1	14350Y-2	12350Y-1	12350Y-2	12350Y-3	12460Y-4	12560Y-5
100 ft. Overall Length	143100Y-1	143100Y-2	123100Y-1	123100Y-2	123100Y-3	124100Y-4	12590Y-5
Specifications:							
Listings	UL Listed	UL Listed	cULus/CSA Listed	cULus/CSA Listed	cULus Listed	N/A	N/A
Electrical	120 V/60Hz	120 V/60Hz	120 V/60Hz	120 V/60Hz	120 V/60Hz	240V	208Y/120 V
Overall Length	50 = 50 ft 100 = 100 ft	50 = 50 ft 100 = 100 ft	50 = 50 ft 100 = 100 ft	50 = 50 ft 100 = 100 ft	50 = 50 ft 100 = 100 ft	60 = 60 ft 100 = 100 ft	60 = 60 ft 90 = 90 ft
Cable gauge & type	14/3 SEOW	14/3 SEOW	12/3 SEOW	12/3 SEOW	12/3 SEOW	12/4 SEOW	12/5 SEOW
Guard	Not included see note 1	Not included see note 1	Not included see note 1	Not included see note 1	Not included see note 1	Not included see note 1	Not included see note 1
Number of sockets:							
Short stringlights	5	5	5	5	5	6	6
Long stringlights	10	10	10	10	10	10	9
Socket spacing	10 ft. centers	10 ft. centers	10 ft. centers	10 ft. centers	10 ft. centers	10 ft. centers	10 ft. centers
Max watts per socket:	See note 2	See note 2	See note 2	See note 2	See note 2	See note 2	See note 2
Plug	-1	-2	-1	-2	-3	-4	-5
Connector	-1	-2	-1	-2	-3	-4	-5
Color	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
Connections	PLUG		CONNECTOR				
	-1 = 1510-PW6P (NEMA 5-15)		1610-CW6P (NEMA 5-15)				
	-2 = 1520-PW6P (NEMA L5-15)		1620-CW6P (NEMA L5-15)				
	-3 = 2310-PW6P (NEMA L5-20)		2410-CW6P (NEMA L5-20)				
	-4 = 2320-PW6P (NEMA L14-20)		2420-CW6P (NEMA L14-20)				
	-5 = L21-20P (non water tight)		L21-20C (non water tight)				

Color = Yellow is standard - Replace "Y" with "B" in part number for all black. Example: 123100B-1

Notes:

- Order guards separately - wire, coated or clear rain
- For 10 socket strings 150 Watts is max per socket. For less than 10 sockets, up to 200 Watts per socket is permissible although socket may be marked 150W
- 214 Guard max is 150W bulb for any string
- Guards and end caps sold separately on heavy duty stringlights
- All wire guards are grounded when installed

Drop with 211-P Guard



Drop with 214 Guard



216 End Cap

Part Number Chart - How To Order

123 Wire Gauge 143 = 14/3 123 = 12/3 124 = 12/4 125 = 12/5	100 Overall Length Feet	Y - 1 Yellow or Black Plug/Connector 1= 5-15 Straight 2= L5-15 Locking 3= L5-20 Locking* 4= L14-20* 5= L21-20* * Not available on 14/3 cable
--	--------------------------------------	--

Cat. #	Guard Type
211	Welded wire zinc coated
211-P	Vinyl coated welded wire
214	Clear rain
216	Rain guard snap-on bottom



Heavy Duty Stringlight Lamp Guards



USE WITH LED, CFL OR INCANDESCENT BULBS



FEATURES:

- Heavy-Duty Rain-Guard®
 - Meets OSHA requirements for temporary lighting
 - One-piece molded high-impact polycarbonate
 - Transparent to let light shine through while protecting bulb from jobsite debris and moisture
 - Collar diameters - 1-3/4" or 1-1/2"
 - Easy snap on guard and end cap
 - Built-in vents dissipate heat
 - Prevents accidental contact with bulb
- Heavy Duty Wire Guards
 - Collar diameter 1-3/4"
 - Available plated or vinyl coated
 - For use with the E-Lite™ Series & Heavy-Duty Molded Stringlights



Description	Collar Diameter	
	1-3/4"	1-1/2"
Guard Only	#214	#212
Guard with end cap	#215	#226
End cap only	#216	#216

Length 6- 5/8". Diameter 4-11/16"
 214 guards fit heavy duty grade stringlights
 212 guards fit commercial grade E-Lite stringlights

Selection Guide - Universal style plated or vinyl coated

Guard Style	#211	#222
Lamp Size	up to 150 watt A-23-RS or 200 watt A-23/Std.	150 watt A-23/RS or 200 watt A-23/Std.
Plated	#211	#222-L
Vinyl coated	#211-P	#222-LP
Collar Diameter*	1-3/4"	1-3/4"
Dimensions	Length 7" Diameter 4-3/4"	Length 6-1/2" Diameter 4"



Notes:
 1. For use with E-Lite™ Series stringlights & heavy-duty molded stringlights.






FEATURES:

- Design allows for wire guard mounting
- 1/16" thick for durability
- Grounding tab for wire guards
- High temperature silicone rubber
- Provides weather tight seal around lamp base
- High Temp material for use up to 600 °F (315.5 °C)
- Can be used with Ericson's plated, vinyl-coated & plastic lattice guards. Not recommended for use with 214 or 212 RainGuard®
- Side cutouts provided for use with metal grounding tabs
- Keeps electrical contacts dry and clean
- Fits all stringlights

The Socket Sleeve adds an extra layer of environmental protection between the elements and the socket. It slips easily over the socket and seals tight around the lamp. The socket sleeve is available for the E-Lite and the heavy-duty industrial string lights.

Selection Guide

Description	Catalog Number	Qty
Socket Sleeve for use with E-Lite & Construct-O-Lite® string lights 1 1/2"	SS-E-LITE	10/Bag
Socket Sleeve for use with heavy-duty string light 1 3/4"	SS-HD	10/Bag

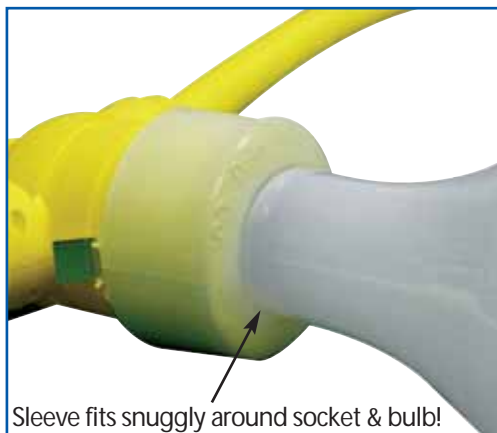

Sleeve fits snugly around socket & bulb!



See the Video



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.





USE WITH LED, CFL OR INCANDESCENT BULBS

FEATURES:

- Available in 5 light (50') and 10 light (100')
- Can use LED, incandescent, or self-ballasted CFL bulbs (included)
- Tough molded "T" drop bonds to SEOW cord
- #12/3 cord SEOW standard
- 10 ft. spacing on lamps drops
- Class I & II, Div 1 & 2, Groups C, D, F & G
- NEMA 4X rated
- Heavy-duty thick hang tab
- Union style nut holds lamp assembly firmly to "T" drop
- Easy to remove & repair
- Aluminum anti-spark guard
- Tempered glass globe provides 360° illumination
- Rubber bumper protects lamps during storage and installation
- Snap-on bumper protects employees from overhead injuries
- Snap-on bumper can be replaced with a hook
- Class I, Div. 1 style plug & connector available

Selection Guide

Model	Overall Length (ft)	# of Lamps	Lamps Installed	Lamp Center Spacing (ft)	Lead Cord Length (ft)	Plug ¹	Connector ¹	
12350LEDXPI-BL	50	5	11W LED ²	10	10	blunt blunt	blunt	
123100LEDXPI-BL	100	10					blunt	
12350LEDXPI-1	50	5					5-15P (1510-PW6P)	5-15C (1610-CW6P)
123100LEDXPI-1	100	10					5-15P (1510-PW6P)	5-15C (1610-CW6P)
12350XPI-BL	50	5	120 V Incandescent ³		9	blunt	blunt	
123100XPI-BL	100	10			9	blunt	blunt	
12350XPI-1	50	5			9	5-15P (1510-PW6P)	5-15C (1610-CW6P)	
123100XPI-1	100	10			9	5-15P (1510-PW6P)	5-15C (1610-CW6P)	
12350XPI-3	50	5			9	L5-20P (2310-PW6P)	L5-20C (2410-CW6P)	
123100XPI-3	100	10			9	L5-20P (2310-PW6P)	L5-20C (2410-CW6P)	
12345XPI-1-LP	45	3			24	5-15P (1510-PW6P)	5-15C (1610-CW6P)	
12365XPI-1-LP	65	5			24	5-15P (1510-PW6P)	5-15C (1610-CW6P)	
12350CFLXPI-BL	50	5	120 V CFL Edison Base ⁴	10	blunt blunt	blunt		
123100CFLXPI-BL	100	10				blunt		
12350CFLXPI-1	50	5				5-15P (1510-PW6P)	5-15C (1610-CW6P)	
123100CFLXPI-1	100	10				5-15P (1510-PW6P)	5-15C (1610-CW6P)	

Notes:

1. Plug is not explosion proof and is intended to be used outside of the hazardous area; contact factory for acceptable XP plug options
2. 11 watt LED bulb included
3. 23 Watt self-ballasted bulb included
4. 12 V bulb included
5. Contact factory for custom assemblies
6. Ericson uses extra hard usage cord to ensure long life and sized to the electrical load



**Class I, Div. 1
Style
Plug & Connector
Available**



**Class I & II
Div 1 & 2
CERTIFIED**



Baylite™ - 400 & 200 Watt Pulse Start Metal Halide Temporary Light Fixture



Model 1004-MHX-25PS
50' also available
(1004-MHX-50PS)

FEATURES:

- cULus Listed - suitable for damp locations
- Pulse Start ballast meets the requirements of the Energy Independence Act of 2007
- Open-air ballast for cooler operation
- Multi-Tap ballast: 120 V, 208V, 240V, 277V: Factory wired at 120 V
- Base models have 3 ft 18/3 power cord with 5-15P molded plug. Feed thru models have 14/3 molded primary and secondary cords attached. (see chart)
- Clear metal halide pulse type O lamp included (NEC 2008 Compliant)
- Average rated lamp life of over 10,000 hours
- Super bright metal halide lamp has a color temperature of 4000K
- Easy hook with locking feature - fixture mounts in seconds, no tools required
- (2) 3/4" knock-outs for optional conduit access (on base models only)
- Double envelope bulb stops ruptures at end of life
- Heavy duty steel, powder coated enclosure
- Easy internal taps for 208, 240, 277 volts

Specifications

Catalog Number	Wattage	Guard	Primary Feed	Secondary feed
1004-MHXPS	400	Open Cage	18/3 3ft 5-15P	N/A
1004-MHX-50PS	400	Open Cage	14/3 1ft 5-15P	50 ft 14/3 5-15C
1002-MHXPS	250	Open Cage	14/3 1ft 5-15P	N/A

Notes:

Sold in 2 pack cartons - add "-2" to each order. 1004-MHX-50PS CSA only.

Replacement Parts

Catalog Number	Description
1004-MHX-LPS	Type O 400W M155 E Pulse Start Bulb
1002-MHX-LPS	Type O 250W M155 E Pulse Start Bulb
1004-MHX-G	Wire guard for 1004-MHXPS
1004-MHX-BG	Bottom snap-on guard



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.



STRINGLIGHT FEATURES:

- cETLus listed
- Class I & II, Div 1 & 2, groups C & D and F & G, explosion proof
- 12VAC stringlight with Class 1 Div I Killark style plug
- 8 W, 12 V LED bulbs deliver 500 lumens per bulb
- NEMA 4X rated
- Wet location rated
- Tough molded "T" drop bonds to SEOW cord
- #14/3 SEOW cable with 50 foot lead
- Heavy-duty thick hang tab
- Union style nut holds lamp assembly firmly to "T" drop
- Aluminum anti-spark guard
- Tempered glass globe provides 360° Illumination
- Rubber bumper protects lamps during use
- Snap-on bumper protection accessory
- Multiple stringlight drop configurations available

TRANSFORMER BOX FEATURES:

- CSA Certified
- Class I Div 2, non-incentive
- NEMA 3R polycarbonate enclosure with convenient carry handle
- 120VAC 60Hz to 12VAC step down, rated at 400VA
- Quad secondaries provide 12VAC power to 4 receptacles
- Each receptacle can supply power to 10-drop LED stringlight
- Class I Div 1 rated decontactor-style receptacle
- Enclosure designed for Div II use/areas only

Ericson's 2600 LED Low Voltage Series of Heavy Duty Stringlights are designed for use in the world's most challenging environments where equipment is routinely exposed to explosive concentrations of vapor, liquid, dust or fibers. This 12V AC low voltage stringlight with integral transformer solution adds additional safety by eliminating high voltage exposure in the work place, including confined and other dangerous areas. The rugged polycarbonate transformer enclosure ensures safe operation by incorporating Killark style receptacles designed to mate directly with the stringlight assemblies.

Incorporating the latest LED lighting technology, the 2600 LED handlamps deliver long operational life, exceptional durability, reduced eye stress and lower operational costs. The 2600 Series is rugged and designed to last, incorporating features such as an aluminum anti-spark guard, durable handle with no-slip grip, tempered glass globe, rubber bumpers, and heavy duty hang tabs to further enhance the usability of this product. Designed and tested to the most rigorous standards, the 2600 Series is certified for use in Class I & II, Div 1 & 2, Groups C, D, F & G environments.

Ideal for use in a wide range of applications and industries including:

- Petrochemical
- Ship / Marine
- Sewage Treatment
- Mining
- Aircraft
- Pharmaceutical
- Grain Elevators
- Oil Refineries



Class I & II
Div 1 & 2
CERTIFIED



Stringlight Selection Guide

Part Number ³	Primary Lead Length (ft)	# of Lamps	Bulb Spacing	Bulb Type	Lumen Output	Supply Voltage	Plug
123100LEDXPI-5L	50	5	12.5'	8W LED, 12V AC	500	12V AC, 40W	UGP-15231
123100LEDXPI-6L	50	6	10'			12V AC, 48W	

Transformer Selection Guide

Part Number ^{4,5,6}	Input Power	Input Cable	Input Plug	Output	Number of Receptacles	Receptacle Type	Enclosure Rating
1941-12-C1D2	120V AC, 60Hz	#14/3 SEOW 6' Pigtail	ENP5151	12V AC	4	UGRP-20231F	NEMA 4

NOTES:

1. 12V LED bulb included
2. Ericson uses extra hard usage cord to ensure long life and sized to the electrical load
3. Contact factory for 14 guage configurations
4. Upstream breaker protection required by customer
5. Ordinary location FRP NEMA 4 construction with no switches, breakers or fuses
6. Contact factory for alternative input plug configurations

1. Heavy-duty thick hang tab
2. Tough molded "T" drop encapsulates wire terminations
3. #14/3 SEOW
4. Cord heat bonded to overmold "T"
5. Large "union" nut holds lamp in place
6. Internal weather seal keeps connections dry
7. Single hex set screw secures drop body
8. Single molded drop body threads onto socket assembly
9. Screw terminals are color coded
10. Grounding ring assures all metal parts are grounded
11. Single piece replaceable heavy-duty socket threads into base
12. 12V AC LED Bulb
13. Rubber bumper protects against drops
14. Light weight alloy guard assembly
15. Heavy-duty tempered glass globe resists breakage
16. Rubber "nose" protects personnel & equipment from overhead Bump hazard





FEATURES:

- cULus Listed
- Outdoor / Wet location rated
- Cool, safe operation
- Light weight, portable design
- IP65 environmental rating
- 120° beam angle, high-power LED
- 5mm high strength tempered glass
- Heavy duty die cast aluminum case
- 50,000 hour rated life
- No start-up delays
- High efficiency operation

Tripod - T1000

- Maximum height - 9.8 feet with extension or 8 feet without extension
- Minimum height - 5 feet

Ericson's 2000 Series LED Wide Area Work Light provides uncompromised safety and performance by combining the respected cULus listing with an IP 65 environmental rating, rugged construction and energy efficient LED technology in a convenient, compact design. Ideal for indoor and outdoor use these innovative work lights are lightweight, impact resistant, and designed to deliver years of worry free operation.

Flexible mounting configurations include a heavy duty, multi-light tripod, and bulkhead magnetic base, to tailor the light to meet changing requirements. Additionally, the heavy duty die cast aluminum case, combined with high-strength tempered glass, provides the durability required to meet the needs of the most demanding applications.

The 2000 Series LED Wide Area Work Light is ideal for a wide range of applications including:

- Construction Lighting
- Task Lighting
- Tent Lighting
- Entertainment Venues
- Emergency Medical Care
- Defense / Safety
- Utility Maintenance
- Detailed Repair Work




Selection Guide

2000	PORTABLE LED 50W FLOOD W/MOUNTING BRACKET
2000T	DOUBLE LIGHT HEAD PORTABLE LED 50W FLOOD W/TRIPOD
2000M	PORTABLE LED 50W PANEL W/MAGNET MOUNT
2000FS	PORTABLE LED 50W FLOOD W/MOUNTING BRACKET & FLOOR STAND
2000L	REPLACEMENT LENSE
T1000	HEAVY DUTY, POWDER COATED TRIPOD

Specifications

Electrical Ratings	100-240 VAC
Amperage Draw	.46 A
Primary Cord Length	4.5 Ft.
Ballast Location	Main Body
Wet Location Ratings	Yes
Cable Gauge/Type	18/3 SJTW
Bulb Type	LED Panel
Initial Lumens	4000
Color Rendition Index (CRI)	70
Color Temperature (K)	6000K
Avg. Rated Bulb Life (Hours)	50,000 Hours
Low Temp Start	-20° C
Fixture Weight (exclusive of cable)	7.75 Lbs.

Notes: Sunlight is simulated with a light that is about 5000 K. The higher the number the whiter the light.

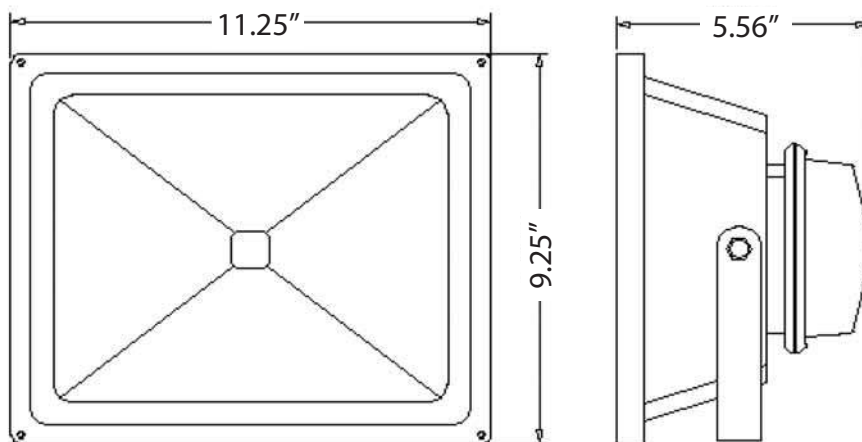



Optional GFCI protected receptacle with Perma-Tite Flip-Seal Cover

Dual Magnet Mounting System for mounting on metal surfaces¹

Lens cover 1000-LRK

FEATURES:

- UL listed and CSA certified
- Impact-resistant molded polycarbonate housing
- Impact-resistant, high temperature clear lens
- Blondel Prisms on inner surface to provide optimum light diffusion
- Available with a 70 watt high-pressure-sodium
- Dual magnets for secure mounting on metal surfaces
- Integral eye-hook for overhead mounting
- #14/3 SJOW cord supplied standard
- HPS model available with optional receptacle, GFCI or both
- Supplied with 70W lamp

Selection Guide

1000 Series HPS Wide Area

Model	Voltage	Cord Length	Location Rating	With Non-GFCI Side Receptacle	With Side Receptacle with GFCI Class A Open Neutral Protection
1000	120/ 60 Hz	6	Wet	n/a	n/a
1000-25	120/ 60 Hz	25	Wet	n/a	n/a
1000-50	120/ 60 Hz	50	Wet	n/a	n/a
1000-R	120/ 60 Hz	6	Dry	Installed	n/a
1000-R25	120/ 60 Hz	25	Dry	Installed	n/a
1000-R50	120/ 60 Hz	50	Dry	Installed	n/a
1000-RG	120/ 60 Hz	6	Wet	n/a	Installed
1000-RG25	120/ 60 Hz	25	Wet	n/a	Installed
1000-RG50	120/ 60 Hz	50	Wet	n/a	Installed

Specifications:

Cord: #14/3 SJOW or Equiv

Plug: Nema 5-15P (1510-P)

Lamp: 70 Watt HPS Clear

Bulb: B17 shape med base

CRI: 22

Lumens: 5450

K Temp: 1900

Avg Life Hrs: 24,000

Note: (1)Use chain or cable if mounted overhead



Wide Area Lighting - 1000 Series Fluorescent



Inside view

Optional Receptacle with Perma-Tite Flip-Seal Cover



FEATURES:

- Available in 120 VAC
- Impact-resistant molded polycarbonate housing
- Impact-resistant, high temperature clear lens with Blondel Prisms on inner surface to provide optimum light diffusion
- Dual magnets for secure mounting on metal surfaces
- Integral eye-hook for overhead mounting
- #16/3 SOOW cord supplied standard
- Supplied with (3) 13W T4 Quad fluorescent bulbs
- Light weight design
- 3 separate ballast/bulb light systems in each lamp provides triple redundant light for emergency operations
- Available with a variety of options:
 - Switch
 - Receptacle
 - GFCI

Selection Guide

1000F Series Wide Area Light

Model	Voltage	Cord Length	Location Rating	With Non-GFCI Side Receptacle
1000F	120/ 60 Hz	6	Wet	n/a
1000F-25	120/ 60 Hz	25	Wet	n/a
1000F-50	120/ 60 Hz	50	Wet	n/a
1000F-R	120/ 60 Hz	6	Dry	Installed
1000F-R25	120/ 60 Hz	25	Dry	Installed
1000F-R50	120/ 60 Hz	50	Dry	Installed

Specifications:

Cord: #16/3 SOOW or Equiv

Plug: Nema 5-15P (1510-P)

Lamp: 3 x 13 watt Quad GX23T4 CFL

CRI: 82

Lumens: 900 x 3 = 2200

K Temp: 4100K

Avg Life Hrs: 10,000

Low Temp Start: 32 Deg F



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



FEATURES:

- Automatically stays on in the event of power loss
- Over 90 minutes of egress lighting
- Auto charges battery/ballast assembly
- Test and main on/off switches
- 2 separate 13W lamp/ballast assemblies
- Internal battery / ballast comb
- Energy efficient
- Impact resistant, high-temperature lens with inner surface prisms for optimum light diffusion
- Integral eye hook for overhead lighting


Selection Guide

	120 VAC
w/ 6' cord	1000F-EMBT
w/ 25' cord	1000F-EMBT-25
w/ 50' cord	1000F-EMBT-50
Specifications	
Electrical Ratings	120 VAC 43WATT
Environmental Ratings	NEMA 3R
Cord Gauge/Type	16/3 SOOW
Plug Type	NEMA 5-15P

Notes:
 1. Contact factory for custom assemblies 2. Use chain or cable if mounted overhead

Conditions	Normal Lamp Operation	Normal Lamp Operation Testing Battery Backup	Emergency Loss of Power at Cord	Lamp Off for Storage
Main Switch (Toggle ON/OFF)	ON	ON	ON	OFF
Test Switch (Momentary)	OFF	PUSH & HOLD	OFF	OFF
120 V Power at Cord	ON	ON	OFF	OFF
Lamps On	2 lamps On Charge Lamp On	2 to 1 when TEST is pushed	1 lamp for 90+ minutes	ALL OFF
Backup Battery	Charging	AUTO switchover	ON	Holding Charge



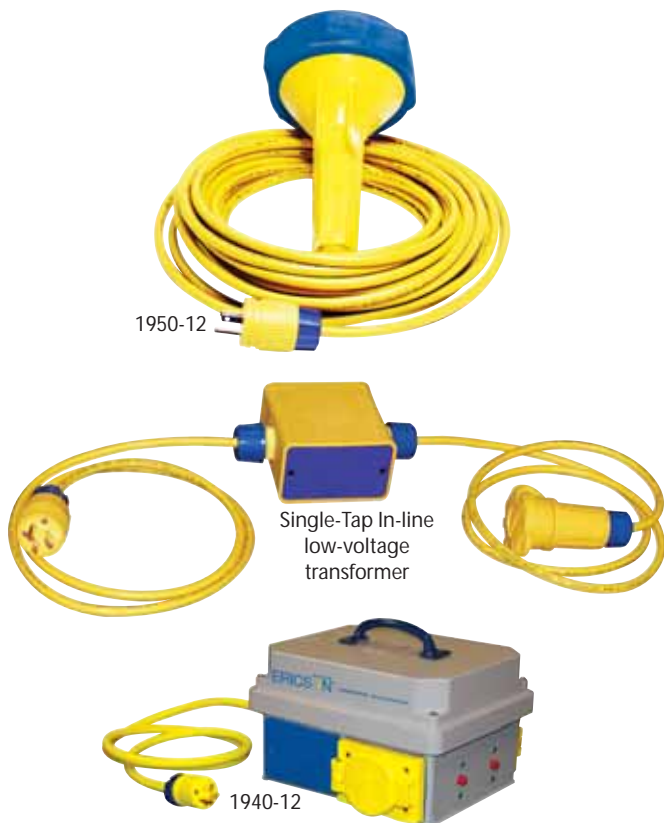

FEATURES:

Extention Light

- CF model has crowsfoot plug
- Non-metallic design and non-glass lense
- Suitable for food and beverage processing facilities that require low voltage confined space tank entry and inspection
- Connect to 1940 & 1941 Low voltage transformers
- Built tough to last

Single Tap Low-Volt Transformer

- Ideal for when you need only one outlet
- Converts 120 VAC/60Hz to 12 VAC (30VA max)
- Compact size is easy to use, store and transport
- Complies with OSHA requirement 1926.405(a)(2)(ii)(G)
- For use with 1950 or 926LV series handlamps

Selection Guide

	1950-12	1950-12 CF ²
Specifications:		
Input (primary) voltage	12 VAC	12 VAC
Cord gauge/type	#16/3 SOW	#16/3 SOW
Cord length	50 ft.	50 ft.
Plug	NEMA 5-15	Crowsfoot (☩)
Included lamp	12 V/30 watt	12 V/30 watt



- Notes:**
1. Contact factory for custom assemblies
 2. Factory wired with water tight crowsfoot plug to mate with CF series transformers


Catalog Number	Description
LVT-12-STCF	Low voltage transformer, 12 Volt, 5-15 plug & single tap non-NEMA crowsfoot connector



Low Volt Transformers



1940-12

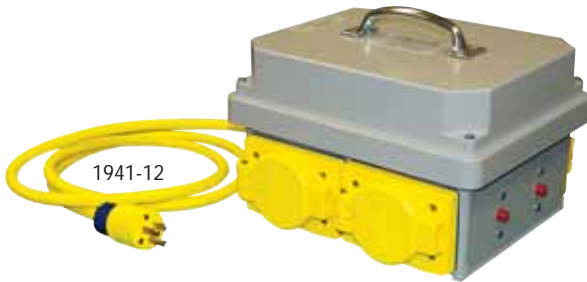

1941-12



FEATURES:

- Transformers convert 120 VAC/60Hz line voltage to 12 VAC
- Corrosion resistant enclosures are made from non-conductive engineering resin so they are resistant to impacts, and jobsite chemicals such as acids, alkalines, oils and salts
- NEMA 5-15 outlets are rated at 100va each (CF models use crows foot style)
- Outlets operate independently of each other - 4 x 100va outputs
- Circuit breakers wired individually to each receptacle and operate independently of each other – if one circuit opens the other continues to operate
- Heavy duty SOW cord
- Non-metallic enclosure

 CF Series transformers feature non-NEMA crowsfoot receptacles.

Ericson's Heavy duty isolation-type low voltage transformers feature low voltage safety and extreme weather resistance. Designed for demanding environments, these transformers withstand long periods of rugged use. Available in 12 Volt models with either 2 or 4 outlets. Each outlet is covered by Ericson's flip seal cover to provide added protection against the most extreme environments such as: boiler inspection, work inside drums, tanks and vessels. In damp, confined locations it is imperative that line voltage be reduced to eliminate the hazards of shorts and shock and to meet the requirements of OSHA/NEC/CEC.

Selection Guide

	12 Volt Transformers	
With NEMA 5-15 Outlets	1940-12	1941-12
With Non-NEMA Crowsfoot Outlet	1940-12CF	1941-12CF
Specifications:	200 VA	400 VA
Number of Outlets (lamps)	2	4
Outlet Configuration (1)	NEMA 5-15 	Crowsfoot 
Input (primary) voltage	120 V/60Hz	120 V/60Hz
Output (secondary) voltage	12 V, 200VA (2 x 100VA)	12 V, 400VA (4 x 100VA)
Outlet Rating (each)	10Amp/100VA	10Amp/100VA
Cord gauge/type	14/3 SOW	14/3 SOW
Cord length	6 ft.	6 ft.
Plug (1)	NEMA 5-15	NEMA 5-15
Enclosure Environmental Rating	TYPE 4	TYPE 4
Dimensions (in) (LxWxH)	7 x 7 x 6-1/2	11 x 9 x 6-1/2
Weight (lbs)	13.5	22.5

Notes: 1. Contact factory for custom assemblies

Many Low Voltage Lamps To Choose From...



1948-12

1950-12

926-25 LV

1946-12

2200



Made in the USA



FEATURES:

- cULus Listed-Assurance of quality by independent testing agency-Safety, performance and reduced downtime
- Available with high pressure sodium or metal halide lamp-choice of light source that is right for you
- Metal Halide Lamp-Provides bright, white light for color-rendering applications
- High Pressure Sodium Lamp-Long-life for extended lighting applications
- Die-cast aluminum housing-Lightweight, rugged dependability in demanding environments combined with excellent surface finish
- 6ft. #14/3 oil-resistant cable with molded-on 5-15 plug resists jobsite oils with out deterioration
- Heavy-duty magnet mount
- Built-in carry handle with integral "eye"-provides for overhead mounting and easy-carry, even when wearing work gloves
- Impact resistant, high-temperature lens with inner surface prisms for optimum light diffusion

Selection Guide

	Metal Halide ⁽¹⁾	High Pressure Sodium ⁽¹⁾
	70 Watt	70 Watt
6 ft. Cord	1000-MH	1003-HPS
Specifications		
Electrical Ratings	120 V/60Hz	120 V/60Hz
Environmental Rating	WET LOCATION	WET LOCATION
Cord Gauge/Type	#14/3 SJTOW	#14/3 SJTOW
Plug Type	NEMA 5-15	NEMA 5-15
Bulb Type	70W MH/E26/ED/Clear	70W HPS/E26/ED/Clear
Avg. Rated Bulb Life	8000 hr.	16000 hr.
Initial Lumens	5500	5160
Color Rendition Index (CRI) ⁽²⁾	65	<40
Color Temperature (K) ⁽³⁾	4000K	2100K
Low Temp Start	-20 ° C	-20 ° C
Replacement Parts		
Lens	1000-MH-LENS	1000-MH-LENS
Handle	1000-HAN	1000-HAN
Bulb	1010-MH (70W MH)	1010 (70W HPS)
Magnet	1000-MH-MAG	1000-MH-MAG

Notes:

1. Use secondary safety chain or cable if mounted overhead
2. Based on a scale from 1 to 100 where 100 represents sunlight. The higher the number the truer the color appears
3. Sunlight is simulated with a light that is about 5000 K. The higher the number the whiter the light





FEATURES:

- cULus listed
- Outdoor use, wet location
- LED energy efficient lighting technology
- 50,000 hour lamp life expectancy
- 3550 lumens
- 5600K color temperature
- Durable, rugged construction
- Impact resistant, high temperature lens
- Easily daisy chained to cover large areas
- Light weight die cast aluminum housing
- Built-in handle
- Integral mounting magnet
- On/Off switch option
- NEMA 5-15 watertight plug and connector option
- Multiple configuration alternatives available

Ericson's 1000LED Series of Wide Area Work Lights features exceptional state-of-the-art LED lighting performance, light-weight rugged construction, low power consumption and flexible magnetic mounting. Ideal for indoor and outdoor use, these innovative work lights are lightweight and compact, impact resistant and designed to deliver years of worry free operation.

Cool white LED lighting reduces eye stress and improves visual acuity thus enhancing the work space environment, all while reducing energy costs. An optional daisy-chain feed-thru capability further extends the utility of the 1000LED by providing the ability to light large areas with a single power drop, freeing vital circuits for other essential activities. The built-in handle is ideal for overhead mounting and carry, even while wearing gloves and the integral heavy-duty magnet is ideal for mounting the light to any metal surface for hands-free operation.

The 1000 Series LED Work Light is ideal for a broad range of temporary lighting applications including:

- Construction
- Food Processing
- Petroleum / Chemical
- Ship Building
- Defense/Safety
- Utility Maintenance




Selection Guide

1000LED-6	LAMP WITH 6FT MOLDED CORD
1000LED-6S	LAMP WITH 6FT MOLDED CORD WITH SWITCH
1000LED-6F	LAMP WITH 6FT CORD & 1FT FEED-THRU PW6P/CW6P
1000LED-6FS	LAMP WITH 6FT CORD & 1FT FEED-THRU PW6P/CW6P WITH SWITCH
1000LED-25F	LAMP WITH 25FT CORD & 1FT FEED-THRU PW6P/CW6P
1000LED-25FS	LAMP WITH 25FT CORD & 1FT FEED-THRU PW6P/CW6P WITH SWITCH

Specifications


Electrical Ratings	100-240 VAC
Amperage Draw	0.4 A
Primary Cord Length	See ordering information
Ballast Location	Main Body
Wet Location Ratings	Yes (Requires watertight plug/connector)
Cable Gauge/Type	14/3 SJTOW
Bulb Type	LED Panel
Initial Lumens	3550
Color Rendition Index (CRI)	70
Color Temperature (K)	5600K
Avg. Rated Bulb Life (Hours)	50,000 Hours
Low Temp Start	-30° C
Fixture Weight (exclusive of cable)	8.6 Lbs.

Notes: Sunlight is simulated with a light that is about 5000 K. The higher the number the whiter the light.

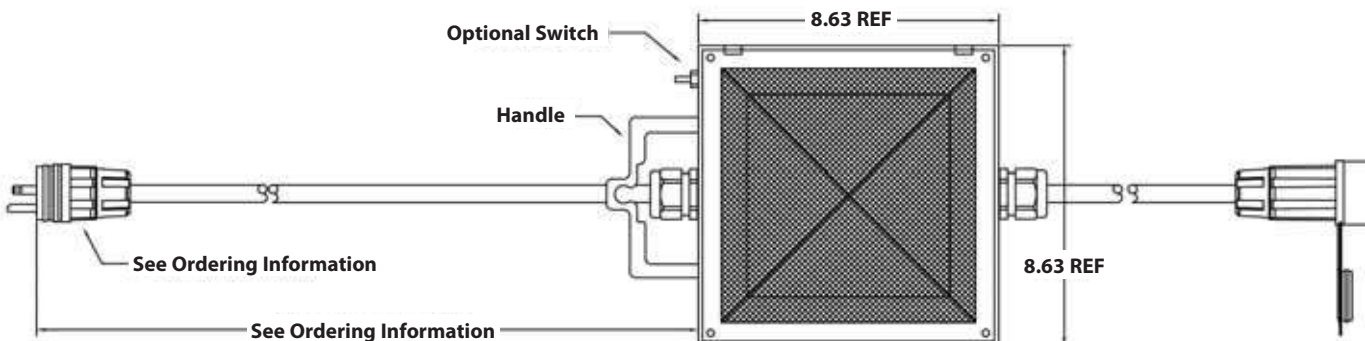

FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

800 Series Heavy Duty Tube Work Lights - LED/Fluorescent

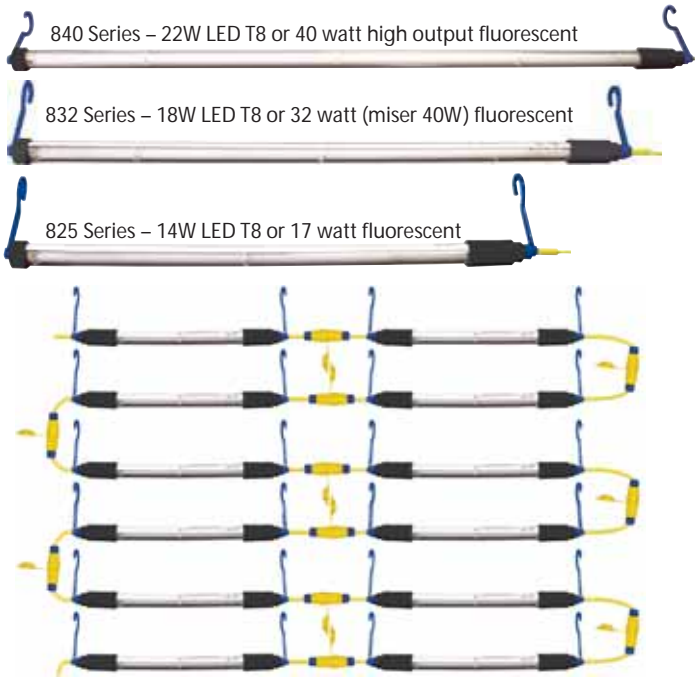

FEATURES:


- cULus outdoor / wet location listed
- LED energy efficient lighting technology
- Durable, rugged indoor / outdoor construction
- Lightweight, impact resistant material
- Rubberized non-conductive / corrosive handle
- Flex strain relief at critical bending points
- Extreme temperature rated (-20°C to +40°C)
- Cool white LED for reduced eye stress
- Cool, glare-free lighting alternative
- Green / ecologically friendly materials
- Low power utilization / consumption
- Available sealed switch option
- Easily "daisy-chained" to cover larger areas
- 50,000 hour life expectancy

Built-in Daisy-chain Feed-thru Capability: Up to 75 Lights (825-4F-LED)

Ericson's 800 Series of LED or Fluorescent Heavy Duty Work Lighting Solutions provide uncompromised safety and performance by combining cULus wet location listing (LED only), rugged construction, and energy efficient LED technology. Ideal for indoor and outdoor use these innovative work lights are lightweight, impact resistant, and designed to deliver years of worry free operation.

Additionally, the 800 Series is available in multiple configurations and wattage ratings making these solutions ideal for a wide range of applications including:

- Tunnel Lighting
- Task Lighting
- Tent Lighting
- Entertainment Venues
- Emergency Medical Care
- Defense / Safety
- Utility Maintenance
- Sporting Events

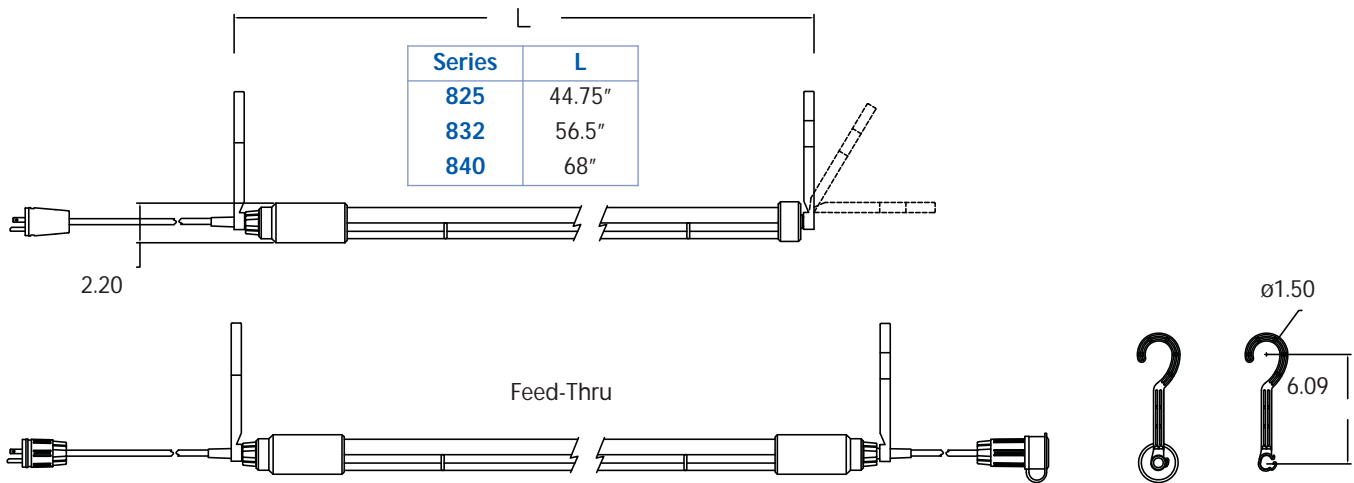

800 Series LED Selection Guide

Configuration	Description	14W LED	18W LED	22W LED
Standard Unit	Portable LED, 25FT Cord	825-25-LED	832-25-LED	840-25-LED
	Portable LED, 50FT Cord	825-50-LED	832-50-LED	840-50-LED
Standard Unit w/Sealed Switch	Portable LED, 25FT Cord w/Sealed Switch	825-25S-LED	832-25S-LED	840-25S-LED
	Portable LED, 50FT Cord w/Sealed Switch	825-50S-LED	832-50S-LED	840-50S-LED
Feed-Thru Unit	Portable LED, 4FT Feed-Thru Cord	825-4F-LED	832-4F-LED	----
	Portable LED, 25FT Feed-Thru Cord	825-25F-LED	832-25F-LED	840-25F-LED
	Portable LED, 50FT Feed-Thru Cord	825-50F-LED	832-50F-LED	840-50F-LED
Feed-Thru Unit w/Sealed Switch	Portable LED, 25FT Feed-Thru Cord w/Sealed Switch	825-25FS-LED	832-25FS-LED	840-25FS-LED
	Portable LED, 50FT Feed-Thru Cord w/Sealed Switch	825-50FS-LED	832-50FS-LED	840-50FS-LED
Specifications		14W LED	18W LED	22W LED
	Electrical Ratings	120 V, 60Hz	120 V, 60Hz	120 V, 60Hz
	Amperage Draw	150mA	190mA	220mA
	Primary Cord Length	25 ft.	25 ft.	25 ft.
	Secondary Cord Length (Feed-Thru Units Only)	10 in.	10 in.	10 in.
	Max Units Connected (Applies to Feed-Thru Models Only) (2)	75	62	53
	Ballast Location	Handle	Handle	Handle
	Wet Location Rating	Yes	Yes	Yes
	Cable Gauge/Type (Base Units Only)	#16/3 SOOW	#16/3 SOOW	#16/3 SOOW
	Cable Gauge/Type (Feed-Thru Units Only)	#14/3 SJOW	#14/3 SJOW	#14/3 SJOW
	Plug (Base units equipped with molded PW6P plug)	NEMA 5-15 1510-PW6P	NEMA 5-15 1510-PW6P	NEMA 5-15 1510-PW6P
	Connector (Feed-Thru Units Only)	NEMA 5-15 1610-CW6P	NEMA 5-15 1610-CW6P	NEMA 5-15 1610-CW6P
	Bulb Type	LED T8	LED T8	LED T8
	Initial Lumens	1358	1735	2160
	Color Rendition Index (CRI) (3)	>74	>74	>74
	Color Temperature (K) (4)	6000K	6000K	6000K
	Avg. Rated Bulb Life (Hours)	50000	50000	50000
	Low Temp Start	-20C	-20C	-20C
	Fixture Weight (exclusive of cable)	2.5 Lbs.	3.0 Lbs.	3.6 Lbs.

800 Series Fluorescent Selection Guide

		17 W Fluorescent	25 W Fluorescent	32 W Fluorescent	40 W Fluorescent
Base Units	with 25 ft. cord	817-25	825-25	832-25	840-25
	with 50 ft. cord	817-50	825-50	832-50	840-50
Feed-Thru Units	with 25 ft. cord	817-25F	825-25F	832-25F	840-25F
	with 50 ft. cord	817-50F	825-50F	832-50F	840-50F
Specifications					
	Electrical Ratings	120 V, 60Hz	120 V, 60Hz	120 V, 60Hz	120 V, 60Hz
	Amperage Draw	0.25A	0.35A	0.43A	0.48A
	Primary Cord Length	25 ft.	25 ft.	25 ft.	25 ft.
	Secondary Cord Length (Feed-Thru Units Only)	10 in.	10 in.	10 in.	10 in.
	Max Units Connected(Applies to Feed-Thru Models Only) (2)	12	12	12	12
	Ballast Location	Handle	Handle	Handle	Handle
	Wet Location Rating	Yes	Yes	Yes	Yes
	Cable Gauge/Type (Base Units Only)	#16/3 SOOW	#16/3 SOOW	#16/3 SOOW	#16/3 SOOW
	Cable Gauge/Type (Feed-Thru Units Only)	#14/3 SJOW	#14/3 SJOW	#14/3 SJOW	#14/3 SJOW
	Plug (Base units equipped with molded PW6P feed thru)	NEMA 5-15 1510-PW6P	NEMA 5-15 1510-PW6P	NEMA 5-15 1510-PW6P	NEMA 5-15 1510-PW6P
	Connector (Feed-Thru Units Only)	NEMA 5-15 1610-CW6P	NEMA 5-15 1610-CW6P	NEMA 5-15 1610-CW6P	NEMA 5-15 1610-CW6P
	Bulb Type	F17T8SPX41	F25T8SPX41	F32T8SPX41	F40T8SPX41
	Initial Lumens	1325	2150	2950	3725
	Color Rendition Index (CRI) (3)	86	86	86	84
	Color Temperature (K) (4)	4100	4100	4100	4100
	Avg. Rated Bulb Life (Hours)	20000	20000	20000	20000
	Low Temp Start	0 °F	0 °F	0°F	0 °F
	Fixture Weight	3.2 lb	3.8 lb	4.2 lb	4.6 lb

Notes:

1. Consult factory for custom assemblies.
2. Based on nominal primary length of 25ft. and secondary length of 10in. with #16/3 cable operating from a single 15A supply receptacle.
3. Based on a scale from 1 to 100 where 100 represents sunlight. The higher the number the truer the color appears.
4. Sunlight is simulated with a light that is about 5000 K. The higher the number the whiter the light.



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.






FEATURES:

- cULus outdoor / wet location listed
- LED energy efficient lighting technology
- Durable, rugged indoor / outdoor construction
- Lightweight, impact resistant material
- Flexible based / floor or hanging
- Base designed for cord egress
- Impact resistant heavy duty rubber ends
- Cool white LED for reduced eye stress
- Cool, glare-free lighting alternative
- Green / ecologically friendly materials
- Low power utilization / consumption
- Easily "daisy-chained" to cover larger areas
- 50,000 hour life expectancy


Ericson's 1140 Series of LED Wide Area Lighting Solutions provide uncompromised safety and performance by combining cULus wet location listing, OSHA compliance, rugged construction, and energy efficient LED technology. Ideal for indoor and outdoor use these innovative work lights are lightweight, impact resistant, and designed to deliver years of worry free operation.

Additionally, the 1140 Series is available in multiple configurations and wattage ratings making these solutions ideal for a wide range of applications including:


- Tunnel Lighting
- Task Lighting
- Tent Lighting
- Entertainment Venues
- Emergency Medical Care
- Defense / Safety
- Utility Maintenance
- Sporting Events



1200 Series

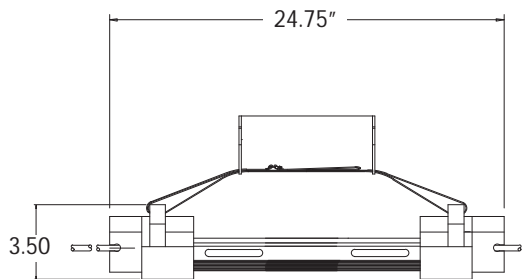

1140 Series

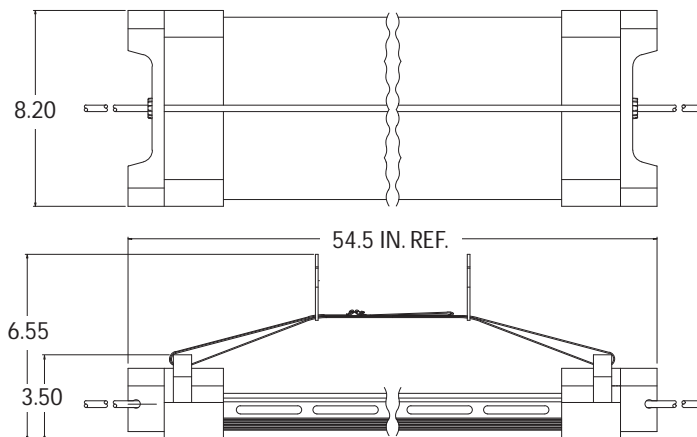

Selection Guide

Model Number	Electrical Ratings	Primary Cord Length (ft)	Secondary Cord Length (ft)	Primary Plug (NEMA)	Secondary Connector (NEMA)	Bulb Type (2X)	Lumens	CRI	Weight (lbs)
1140 Series LED									
1140-4-LED	120 V 60Hz	4	n/a	5-15	--	20W LED T9	3220	>70	20
1140-4F-LED	120 V 60Hz	4	1	5-15	5-15	20W LED T9	3220	>70	21
1140-25-LED	120 V 60Hz	25	n/a	5-15	--	20W LED T9	3220	>70	22.80
1140-25F-LED	120 V 60Hz	25	1	5-15	5-15	20W LED T9	3220	>70	23
1140-50-LED	120 V 60Hz	50	n/a	5-15	--	20W LED T9	3220	>70	26
1140-50F-LED	120 V 60Hz	50	1	5-15	5-15	20W LED T9	3220	>70	27
1142-25-LED⁽²⁾	120 to 277 V 50/60 Hz	25	n/a	(1)	(1)	20W LED T9	3220	>70	22
1142-25F-LED⁽²⁾	120 to 277 V 50/60 Hz	25	1	(1)	(1)	20W LED T9	3220	>70	23
Current Draw: 390 mA @120V									
1140-4	120 V 60Hz	4	n/a	5-15	--	T8 32W	6000	86	14
1140-4F	120 V 60Hz	4	1	5-15	5-15	T8 32W	6000	86	14.5
1140-25	120 V 60Hz	25	n/a	5-15	--	T8 32W	6000	86	18
1140-25F	120 V 60Hz	25	1	5-15	5-15	T8 32W	6000	86	18.5
1140-50	120 V 60Hz	50	n/a	5-15	--	T8 32W	6000	86	20
1140-50F	120 V 60Hz	50	1	5-15	5-15	T8 32W	6000	86	20.5
1142-25	120 to 277 V 50/60 Hz	25	n/a	(1)	(1)	T8 32W	6000	86	18
1142-25F	120 to 277 V 50/60 Hz	25	1	(1)	(1)	T8 32W	6000	86	18.5
1145-4	120 V 60Hz	4	n/a	5-15	--	T5 54W	10,000	86	14
1145-4F	120 V 60Hz	4	1	5-15	5-15	T5 54W	10,000	86	14.5
1145-25	120 V 60Hz	25	n/a	5-15	--	T5 54W	10,000	86	18
1145-25F	120 V 60Hz	25	1	5-15	5-15	T5 54W	10,000	86	18.5
1145-50	120 V 60Hz	50	n/a	5-15	--	T5 54W	10,000	86	20
1145-50F	120 V 60Hz	50	1	5-15	5-15	T5 54W	10,000	86	20.5
1147-25	120 to 277V 50/60 Hz	25	n/a	(1)	(1)	T5 54W	10,000	86	18
1147-25F	120 to 277V 50/60 Hz	25	1	(1)	(1)	T5 54W	10,000	86	18.5
Current Draw: 460 mA @ 120 V, 200 mA @ 277 V									
1239 Series									
1239-4	120 V 60Hz	4	n/a	5-15	--	F39BX	5700	86	8
1239-4F	120 V 60Hz	4	1	5-15	5-15	F39BX	5700	86	8.5
1239-25	120 V 60Hz	25	n/a	5-15	--	F39BX	5700	86	11
1239-25F	120 V 60Hz	25	1	5-15	5-15	F39BX	5700	86	11.5
1239-50	120 V 60Hz	50	n/a	5-15	--	F39BX	5700	86	14
1239-50F	120 V 60Hz	50	1	5-15	5-15	F39BX	5700	86	14.5

Note: 1. Shipped without the plug and connector. The electronic ballast in the 1140/1142 series automatically adjusts to any voltage level within the range 120 to 277 Volts. Not UL Listed.



Handlamp Selection Guide



70-NGQL



744



926-25



918



2500

Descriptions	Light Duty	Medium Duty Commercial	Heavy Duty Industrial	Vapor Proof Industrial	Explosion Proof - Hazardous Location	120V	12 V	LED Bulb	Incandescent Bulb	Fluorescent Bulb
2900 Series	X					X			X	
800 Mini - Lite Fluorescent	X					X				X
400 Series Angle	X					X				X
500 Series Pivot		X				X				X
7 Series Single Bulb		X				X			X	
9 Series Single Bulb		X				X			X	
70-NG Series				X		X	X		X	
900 Series Fluorescent			X			X	X			X
926 Series Fluorescent			X			X	X			X
1917 Series 30 Watt		X				X	X		X	
1918 Series 30 Watt		X				X	X		X	
1950 Series 30 Watt			X				X		X	
1924 Series				X		X	X		X	
1926 Series					X	X	X		X	
2200 Series					X	X			X	
2500 Series					X	X				X
2600 Series					X	X	X	X	X	X





801-25



2900

FEATURES:

Light Duty Fluorescent Handlamp

- Cool glare-free light ideal for close-up work
- Lamp secured by shock-absorbing retainers
- Flexible hook for easy positioning
- Shatter-resistant plastic housing

Light Duty Incandescent Handlamp: 2900 Series

- UL & cUL Listed
- Lightweight and compact
- Handle constructed of high-impact black nylon
- Includes switch
- 50' cord length with molded on NEMA 5-15 plug
- Receptacle in handle

Light Duty Fluorescent Handlamps

	15-watt
with 25' cord	801-25
Specifications:	
Electrical Ratings	120 V, 60Hz
Replacement lamp	F15T8/CW
Ballast Location	Integral with plug
Plug	NEMA 5-15
Switch	Yes
Overall Length	26
Max. O.D.	2-1/8
Weight	2.5 lbs.

Light Duty Incandescent Handlamps

	2900 Series
with 25' cord	2925
with 50' cord	2950
Specifications:	
Electrical Ratings	120 V, 60Hz
Max. Wattage	100 watt
Cord Size/# Conductors	#16/3
Cord Type	SJTW
Plug	Molded NEMA 5-15 plug
Switch	Yes
Outlet in Handle	Yes (NEMA 5-15)
Reflector Guard	Yes
Swing Open Guard	Yes
Swivel Hook	No



Industrial Duty Incandescent Handlamps



7425-R shown



9425-R shown

FEATURES:

- cULus Listed and CSA Certified, ETL and cETLus Listed
- Molded flexible rubber handle impervious to impact and resistant to jobsite chemicals
- Standard with NEMA 5-15 side outlet (9 Series only)
- Available with optional switch
- Wide selection of pre-wired handlamps and component parts
- Superior low temperature performance

Material

- Proprietary Rubber
- Lampholder/Cord Entry Seal: Rubber
- Screwshell: Tin-plated brass
- Side Outlet: NEMA 5-15R (900 Series only)

Electrical

- Operating voltage: 120 V or 12 V (bulb choice)

Mechanical

- Color: Yellow
- Cord Types: SOW
- Up to 14/3 SOW

USE WITH LED, CFL OR INCANDESCENT BULBS



All Weather Switch Models Available











Customize with:

- Color
- Handle marking
- Cord marking

ERICSON MANUFACTURING COMPANY WWW.ERICSON.COM 1-800-ERICSON



Industrial Duty Handlamps

Complete Ready To Wire or Cord Supplied Lamps			7 Series		9 Series	
						
Handlamp Handles w/Guard			Closed-end	Closed-end	Closed-end	Closed-end
Reflector	Switch	Cord Length				
No	No	N/A	744	718	944	918
No	No	N/A	744-I	-	944-I	-
Yes	No	N/A	744-R	-	944-R	-
Yes	Yes	N/A	744-RS	-	944-RS	-
No	Yes	N/A	744-S	718-S	944-S	918-S
Pre-Wired Models with SOW cord and NEMA 5-15 Plug						
						
No	No	25'	7425	7825	9425	9825
No	No	25'	7425-I	-	9425-I	-
Yes	No	25'	7425-R	-	9425-R	-
No	No	50'	7450	7850	9450	9850
No	No	50'	7450-I	-	9450-I	-
Yes	No	50'	7450-R	-	9450-R	-
No	Yes	25'	7425-S	7825-S	9425-S	9825-S
Yes	Yes	25'	7425-RS	-	9425-RS	-
No	Yes	50'	7450-S	7850-S	9450-S	9850-S
Yes	Yes	50'	7450-RS	-	9450-RS	-
Specifications:						
Electrical Ratings			120 V, 60Hz		120 V, 60Hz	
Cord Size/# Conductors			#16/3		#14/3	
Cord Type			SOW		SOW	
Plug			NEMA 5-15		NEMA 5-15	

Notes:

1. Consult factory for custom assemblies
2. Bulbs are not furnished with handlamps
3. Vinyl insulated guards available: Add "I" to catalog number to specify (not on R models).
4. Switch available: Add "S" to catalog Number to specify. Example 7425-R becomes 7425-RS



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

Industrial Duty Handlamps



7 Style Handle

- Molded plug end
- With ground tab for wire guards
- Just add guard



9 Style Handle

- Receptacle in handle
- Molded cord plug
- With ground tab for wire guard
- Just add guard

7 Style Handle Pre-Wired	Cat. #
Handle With 25 Ft #16/3 SOOW Cord & 5-15 Plug - No Switch	7-A25
Handle With 50 Ft #16/3 SOOW Cord & 5-15 Plug - No Switch	7-A50
Handle With 25 Ft #16/3 SOOW Cord & 5-15 Plug - With Switch	7-SA25
Handle With 50 Ft #16/3 SOOW Cord & 5-15 Plug - With Switch	7-SA50

9 Style Handle Pre-Wired	Cat. #
Handle With 25 Ft #16/3 SOOW Cord & 5-15 Plug - No Switch	9-A25
Handle With 50 Ft #16/3 SOOW Cord & 5-15 Plug - No Switch	9-A50
Handle With 25 Ft #16/3 SOOW Cord & 5-15 Plug - With Switch	9-SA25
Handle With 50 Ft #16/3 SOOW Cord & 5-15 Plug - With Switch	9-SA50

Lamp Guards for 7 and 9 Series Handlamps






Closed End Wire Guards				For PS25 Bulb
	No Reflector	104		104-I
With Reflector		104-R		
Max Wattage		100W		150W

Open End Wire Guards		For PS25 Bulb	For PS25 Bulb	For PAR 38 Bulb
	No Reflector	107-I	119	
With Reflector			119-R	
Max Wattage	150W	300W		150W PAR38 or 300W type R

Note: These open end guards are not certified or listed, per UL 153 Standard. Adding these guards to a handlamp constitutes a product that can't be UL listed.



Replacement parts

7 Series Handles		9 Series Handles		Socket, Ground Clip & Switch for use with 7 and 9 Series Handles		
						
No Switch	With Switch	No Switch with Receptacle	With Switch with Receptacle	Socket with 6" leads	Ground Clip with lead	Switch with weather boot
Handle Only						
7	7-S	9	9-S	44-W	710	79
Handle Assembly (with socket & ground clip)						
7-A	7-SA	9-A	9-SA			



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



70-N Vapor-Gard® Handlamps

12 VAC Model



1948-12
75W
(12 V bulb included)



USE WITH LED, CFL OR INCANDESCENT BULBS



FEATURES:

- cETLus Listed
- Meets NEC and OSHA requirements
- Molded handle impervious to impact and resistant to jobsite chemicals
- Glass globe is heat and impact resistant and threads into handle sealing bulb and socket
- Guard is constructed out of heavy-gauge steel wire and finished with a Zinc-Chromate plating to resist corrosion
- Optional Quik-Latch (part # 703) guard makes bulb changes easy – No tools required
- Cord entry provides strain relief and seals out moisture and dirt
- Wide selection of pre-wired handlamps and component parts
- Prewired models come with #16/3 SOW cord and Ericson's molded sealing plug
- Vapor-Gard® hand lamps are grounded and not available with a switch

Selection Guide

Catalog Number	Cord Length	Cord Type	Plug	Guard Type	Reflector	Vinyl Coated	Voltage
70-NGQL	N/A	N/A	N/A	703	No	No	12 - 240 V
70-NGQL25	25	#16/3 SOW	Molded-on 5-15P	703	No	No	125 V
70-NGQL50	50	#16/3 SOW	Molded-on 5-15P	703	No	No	125 V
70-NGQL100	100	#16/3 SOW	Molded-on 5-15P	703	No	No	125 V
1948-12	50	#14/3 SOW	Molded-on 5-15P	703	No	No	12 V
1948-12CF	50	#14/3 SOW	1507-P Crowsfoot	703	No	No	12 V

Notes:

1. Ericson uses Extra Hard Use 600V cord to ensure long lasting performance and sized to the electrical load ampacity
2. Voltage is determined by the bulb used. - Bulbs not included with "70" series handlamps
3. 12 Volt Incandescent Bulb included - "1948" models only

Available Guard



703

Replacement Parts



707

44-W

708

Description	Catalog Number
Quik-Latch guard	703
Glass globe	707
Handle only, no socket, no cord nut/grommets	708
Socket with pigtails	44-W
Repair Kit with socket tool	712
12 V 75W incandescent bulb	1935-12





FEATURES:

- cULus for wet locations
- Cool, Glare - Free Light - Ideal for those applications where hot glaring light can be a hazard
- Switch (optional) - Heavy duty rubber boot, push on/off operation, seals out water
- Field Serviceable - Field repairs are quick and convenient with a wide-range of replacement parts
- Rubberized Handle - is non-conductive, non-corrosive and easy to grip
- Flex Strain Relief - Provides added protection for cord at critical bending points
- Lightweight - Non-conductive construction with high-impact lens
- Ballast - Enclosed in handle, so it's easy to move around the jobsite
- Molded plug mates with water tight connectors
- 16/3 SOOW
- TPV end caps
- Low voltage model available

900 Series-Fluorescent Work Lights

	13 Watts	26 Watts
with 25 ft. cord - no switch	900-25	N/A
with 50 ft. cord - no switch	900-50	N/A
without Cord - no switch	900-LO	926-NS-LO
with 25 ft. cord and switch	900-25S	926-25
with 50 ft. cord and switch	900-50S	926-50
without Cord - switch	900-LOS	926-LO

Specifications

Electrical Ratings	120 V, 60Hz	120 V, 60Hz
Primary Cord Length	see above	see above
Ballast Location	Handle	Handle
Cable Gauge/Type (Base Units Only)	#16/3 S00W	#16/3 S00W
Molded on Plug	NEMA 5-15	NEMA 5-15
Bulb Type	F13DBX23T4/SPX41	F26DBX/SPX41
Initial Lumens	825	1710
Color Rendition Index (CRI) ⁽²⁾	82	82
Color Temperature (K) ⁽³⁾	4100	4100
Avg. Rated Bulb Life (Hours)	10000	10000
Low Temp Start	32 °F (0 °C)	10 °F (-12 °C)
Fixture Weight (w/ 25ft cable)	2.5 lb	1.87 lb

Notes:

1. Consult factory for custom assemblies.
2. Based on a scale from 1 to 100 where 100 represents sunlight. The higher the number the more true the color appears (ie grey vs green).
3. Sunlight is simulated with a light that is about 5000 K. The higher the number the whiter the light.
4. LO models are not UL listed.



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



Factory-wired with water tight crowsfoot plug to mate with CF series transformers.



Requires low voltage transformer



926-25 LV

FEATURES:

- OSHA Compliant - Meets OSHA regulations for confined space requirements
- Outdoor Use - Fixture is rated or demanding for outdoor and in-plant environments
- Cool, Glare-Free Light - Ideal for those applications where hot, glaring light can be a hazard
- Switch (optional) - Heavy duty rubber boot, push on/off operation, seals out water
- Field Serviceable - Field repairs are quick and convenient with a wide-range of replacement parts
- Rubberized Handle - is non-conductive, non-corrosive and easy to grip
- Flex Strain Relief - provides added protection for cord at critical bending points
- Lightweight - non-conductive construction with high-impact lens
- Ballast - Enclosed in handle, so it's easy to move around the jobsite

The next generation of OSHA Compliant temporary lighting is now available. Low Voltage Fluorescent Fixtures are an ideal alternative to the hot, glaring light produced by incandescent fixtures.

OSHA 1926.405(a)(2)(ii)(G): "Portable electric lighting used in wet and/or other conductive locations, as for example, drums, tanks, and vessels, shall be operated at 12 volts or less.

120 V to 12 VAC Transformer
Can Operate 2 Lamps



1940-12CF


Selection Guide

26 Watt Low-Voltage Fluorescent Handlamps	
w/ 25 ft. cord	926-25LV ⁽³⁾
w/ 50 ft. cord	926-50LV ⁽³⁾
Specifications	
Electrical Ratings	12 VAC/26 Watt
Ballast Location	In Handle
Switch Location	In Handle
Cable Gauge/Type	#16/3 SOOW
Plug (Crowsfoot ☺)	1507-PW6P
Bulb Type	F26DBX/SPX41
Initial Lumens	1710
Color Rendition Index (CRI) (1)	82
Color Temperature (K) (2)	4100
Avg. Rated Bulb Life	10,000 hours
Low Temp Start	10F (-12C)
Fixture Weight:	1.87 lbs

Notes:

1. Based on a scale from 1 to 100 where 100 represents sunlight. The higher the number the more true the color appears (ie grey vs. green)
2. Sunlight is simulated with a light that is about 5000 K. The higher the number the whiter the light
3. For use with 12 VAC power source; Ericson CF Series transformers
4. Also available in a DC version. Consult factory for custom assemblies



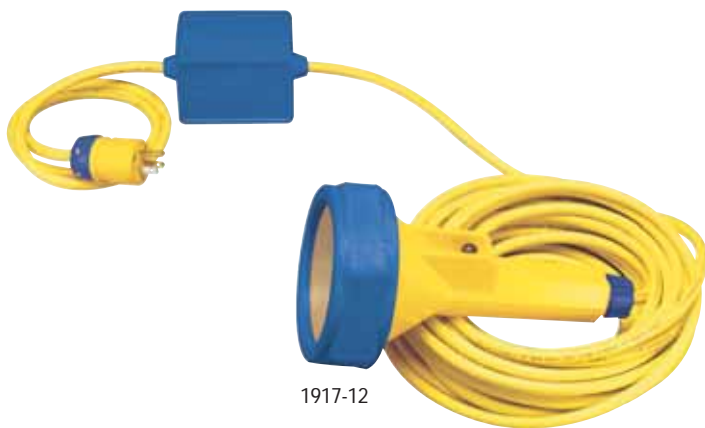

FEATURES:

- All non-metallic construction
- Non-glass lens for food & beverage processing work
- Can be mounted to an electric cord reel (call for details)
- Large rubberized cushion will not mar or scratch surfaces
- Drop and abuse resistant design and construction
- Switch has all weather boot covering for water tight operation
- Rubberized sealed inline transformer assembly converts 120 to 12 VAC
- High output 50,000 candle power lamp draws only 30 watts
- 120 V to 12 V
- Lexan, non-glass clear protective lens
- Nylon body

Selection Guide


	12 Volt, 30 Watts	
	w/out switch	w/ switch
Spotlights	1917-12	1917-12S
Floodlights	1918-12	1918-12S
Specifications:		
Primary Voltage	120 VAC, 60Hz	120 VAC, 60Hz
Secondary Voltage	12 VAC	12 VAC
Maximum Wattage	30 watts	30 watts
Primary cord gauge & type	#16/3 SOW	#16/3 SOW
Primary cord length	4 ft.	4 ft.
Secondary cord gauge & type	#16/3 SOOW	#16/3 SOOW
Secondary cord length	50 ft.	50 ft.
Plug	NEMA 5-15	NEMA 5-15

Note: Consult factory for custom assemblies


GREAT FOR:

- Food processing
- Beverage tanks
- Beer, wine, spirit distilling

1917-LENS



1917-BUMP

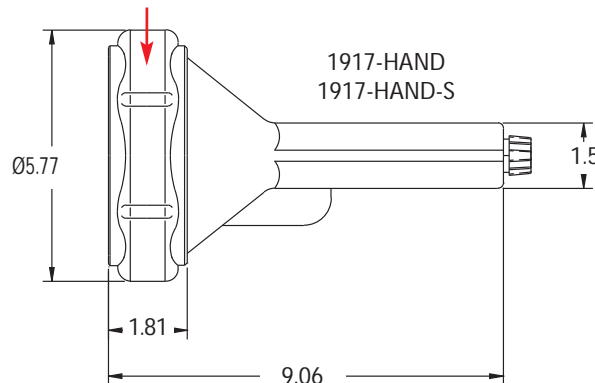

FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

Low Voltage Handlamps with In-Line Transformer





1924-12A

FEATURES:


- Step-down transformers reduce 120 VAC line voltage to 12 VAC
- Extra-thick walled rubber housing with non-corrosive stainless steel hardware protects transformer from jobsite contaminants
- Transformers incorporate a grounded metal shield between primary and secondary windings to ensure the two voltages are isolated providing an added degree of protection
- Each transformer is subjected to a factory dielectric test of 1600 volts between primary and secondary windings and between each winding and ground to ensure safety
- 1924 Series is vapor proof only
- Shock resistant

OSHA 1926.405(a)(2)(ii)(G): "Portable electric lighting used in wet and/or other conductive locations, as for example, drums, tanks, and vessels, shall be operated at 12 volts or less. However, 120-volt lights may be used if protected by a ground-fault circuit interrupter.

120 Volt AC To 12 Volt AC		
Low voltage hand lamps	Vapor Proof	Explosion Proof
with 25' secondary cord	1924-12A	1926-12A
with 50' secondary cord	1924-12B	1926-12B
Specifications:		
Primary Voltage	120 V, 60Hz	120 V, 60Hz
Secondary Voltage	12 V	12 V
Maximum Wattage	100 watts	75 watts
Primary cord gauge & type	#16/3 SOW	#16/3 SOW
Primary cord length	10 ft.	10 ft.
Secondary cord gauge & type	#14/3 SOW	#14/3 SOW
Plug	NEMA 5-15	NEMA 5-15

Notes: 1926 lamp assembly only is certified Class I & II, Div 1 & 2. Transformer is not hazardous location rated. Consult factory for custom assemblies

Notes: 1926 lamp assembly only is certified Class I & II, Div 1 & 2. Transformer is not hazardous location rated. Consult factory for custom assemblies

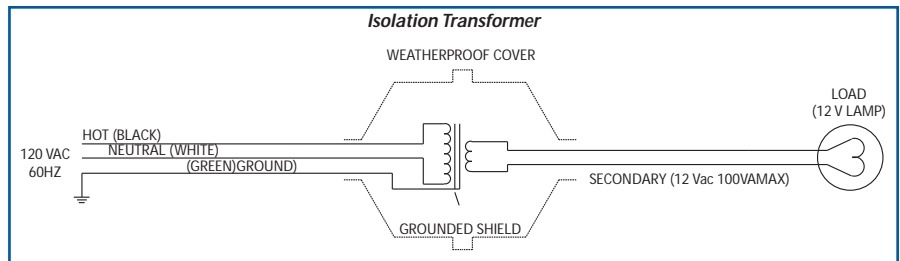



FEATURES:

2200 Series

- 12 Volt
- Spot bulb
- Lightweight
- Hook for light placement
- Class I, Div I Group D
- 100,000 candle power
- 50 watts

2500 Series

- 120 Volt
- Ballast in handle
- 26W QuadT5 CFL bulb
- Long thin design for hard to reach areas
- Class I & II
 - Div 1 & 2
 - Groups C, D, F, G

2600 Series

- 120 or 12 Volt
- LED, Incandescent or CFL bulb
- EZ to replace parts
- New cord grip & strain relief
- Up to #12/3 SO cord
- 12 volt or 120 volt
- Class I & II
 - Div 1 & 2
 - Groups C, D, F, G
- NEMA 4X rated

USE WITH LED, CFL OR INCANDESCENT BULBS





FEATURES:

- UL Listed and CSA Certified
- Class I, Div 1 Group D
- Lightweight construction features non-sparking aluminum guard and non-conductive, high-impact glass reinforced handle
- Designed for applications requiring weather resistant or spark resistant construction
- Unique cord restraint seal system includes flex relief and cable cord clamp to provide superior water resistance at cord entry
- Cable cord clamp can be inspected or adjusted without disassembly of handle
- High-impact tempered glass globe threads directly into specially designed handle
- Handle construction provide superior strength and high insulation properties
- Resistant to heat up to 300° F and withstands chemicals, acids and chipping
- Heavy-duty aluminum guard features 360° swivel hook
- 50 watts, 100,000 candle power, T3C rated
- Requires a 12-14 VAC source

Selection Guide

	2200 Series Spotlight
Handlamp Only	2200
w/ 25 ft. cord, 16/3 SOOW	2225
w/ 50 ft. cord, 16/3 SOOW	2250


Specifications:

Environments	Class I, Group D
Primary Voltage (3)	12 V
Maximum Wattage	50 watts
Primary cord gauge & type	#16/3 SOOW
Plug (1)	Molded 5-15P
Guard	Cast Aluminum
Globe	Tempered Glass
Handle	Glass reinforced phenolic

Notes:

1. Plug is not explosion proof and is intended to be used outside of the hazardous area.
2. Contact factory for custom assemblies
3. Requires 12-14V AC source

2200 Series

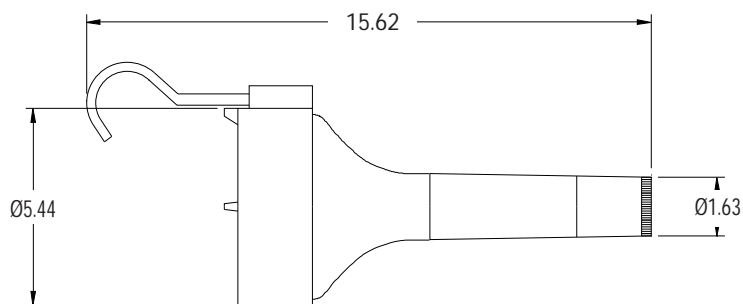

1940-12

120 V to 12 V





FEATURES:

- UL Listed for Class I & II Div 1 & 2 locations
- Lightweight construction features non-sparking aluminum guard and non-conductive, high-impact glass reinforced handle
- Designed for applications requiring weather resistant or spark resistant construction
- Unique cord restraint seal system includes flex relief and cord clamp to provide superior water resistance at cord entry
- Cable cord clamp can be inspected or adjusted without disassembly of handle
- Handle construction provide superior strength and high insulation properties
- Resistant to heat up to 300° F and withstands chemicals, acids and chipping
- Heavy-duty aluminum guard features 360° swivel hook
- Fits up to #14/3 cord
- Cool, bright compact fluorescent T5 quad tube bulb (26W)
- Temp rating T6

Selection Guide

	2500 Series
Handlamp Only	2500
Handlamp with 25' cord	2525
Handlamp with 50' cord	2550
Specifications:	
Environments	Class I, Div 1 & 2, Group C, D Class II, Div 1 & 2, Group F, G
Electrical	120 V/60Hz
Maximum Wattage	26 watts
Cord gauge & type	#16/3 SOW
Plug (1)	NEMA 5-15
Guard	Cast Aluminum
Globe	Tempered Glass
Handle	Glass reinforced phenolic

Notes:

1. Plug is not explosion proof and is intended to be used outside of the hazardous area
2. Contact factory for custom assemblies





2600-LED

USE WITH LED, CFL OR INCANDESCENT BULBS



FEATURES:

- ETL Listed & certified
- NEMA 4X
- Lightweight construction features non-sparking aluminum guard and non-conductive, high-impact glass reinforced handle
- Designed for applications requiring weather resistant or spark resistant construction
- Unique cord restraint seal system includes flex relief to provide superior water resistance at cord entry
- Accommodates #16/3 to #14/3 types S, SO, ST or STO cords
- High-impact tempered glass globe threads directly into specially designed guard assembly
- Handle construction provides superior strength and high insulation properties
- Resistant to heat up to 300° F and withstands chemicals, acids and chipping
- Heavy-duty aluminum guard features swivel hook
- Incandescent handlamp accommodates up to 100 watt bulb
- Easy to replace parts
- Class I & II Div 1 & 2, Groups C, D, F & G
- Temp Rating T3C with 100 Watt Incandescent -20°C to 40°C Ambient
- Explosion proof stringlights also available, see stringlights


Selection Guide

	2600 LED ²	2600 Low Voltage ²	2600 Incandescent ²	2600 Fluorescent ²
Handlamp Only	2600-LED	2600-LED-L	2600	2600-CFL
Handlamp with 25' cord ¹ 16/3 SOOW	2625-LED	2625-LED-L	2625	2625-CFL
Handlamp with 50' cord ¹ 16/3 SOOW	2650-LED	2650-LED-L	2650	2650-CFL
Handlamp with 100' cord ¹ 16/3 SOOW	26100-LED	26100-LED-L	26100	26100-CFL
Specifications:				
Electrical	120 V	12 VAC	120 VAC	120 VAC
Maximum Wattage	11W	7.5W	100 W	23 Watt Self Ballast CFL
Cord gauge & types	#16/3 SOOW	#16/3 SOOW	#16/3 SOOW	#16/3 SOOW
Plug ¹	5-15	5-15	5-15	5-15

Notes:

1. Plug is not explosion proof and is intended to be used outside of the hazardous area
2. Includes bulb
3. Contact factory for custom assemblies



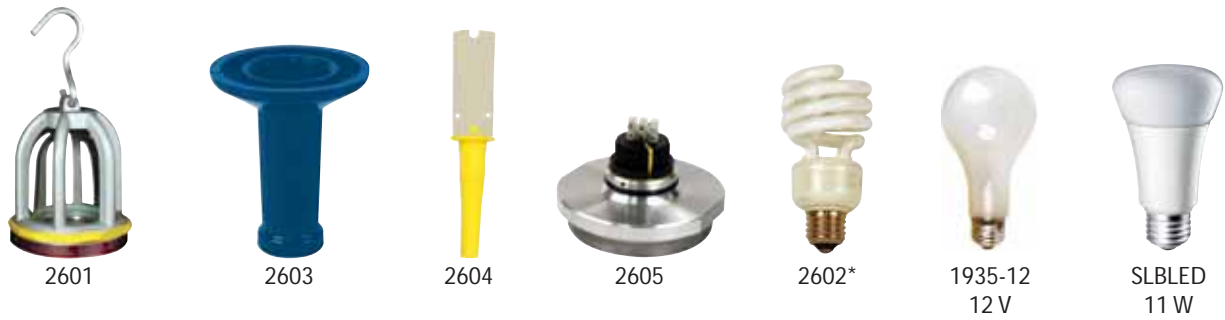

Replacement Parts

	2600 Series Fluorescent
Guard & globe assembly	2601
Lamp, SB 23W CFL Edison base (6 pk)	2602
2600 handle only	2603
2600 cord strain relief kit	2604
2600 replacement base & socket assembly	2605
Snap-on reflector	2606
Hook assembly	2607
12 V incandescent bulb 75W	1935-12
LAMP, LED, 11W	SLBLED

Other Plug Options For XP Service	
Crouse Hinds	BP49
Killark	UGP-15231
Killark	UGP-15231MG

Notes: Sold in packs of 6 lamps only




Cut-As-U-Go cord grip strain relief allows cord from #16/3 to #14/3 SO



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

Specialty Lighting - Boiler Lights

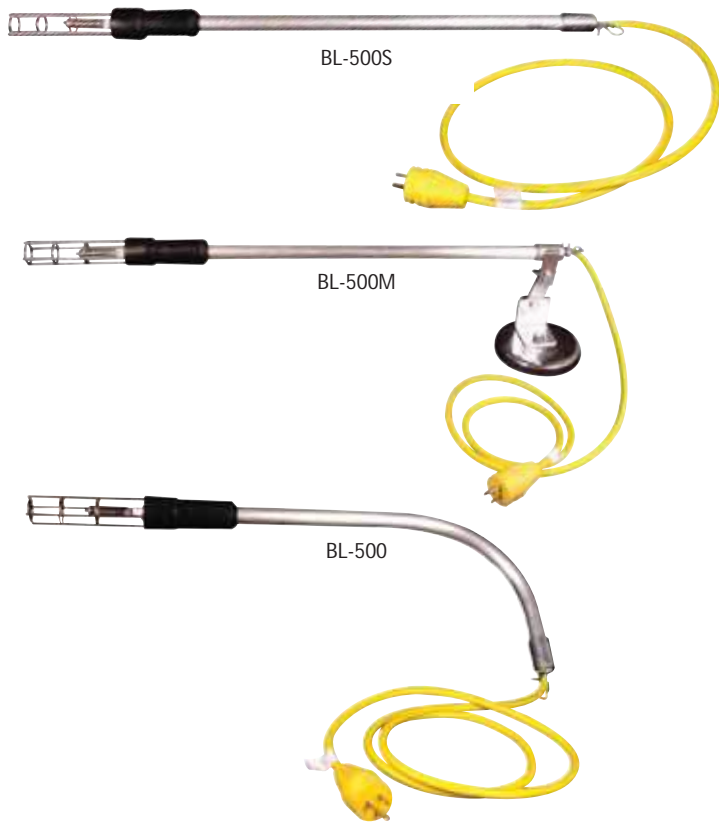

FEATURES:

- Extra bright light - 500 watt tungsten
- 8800 lumens
- Curved handle allows light to reach into the farthest corner
- Small diameter fits through site hole (1.8" Dia. Max)
- NEMA 5-15 plug molded cord
- 120 volt operation
- Welded steel cage protects bulb
- Grounded metal tube handle
- Not for hazardous locations
- Use GFCI inline for confined space use
- 5' SOW cord for long service life
- Molded 5-15 plug

Selection Guide


Item	Description	Product Picture	Cord Length	Length	Bulb Wattage
BL500S	Boiler light, straight		5 feet	32"	500W
BL500	Boiler light, 90°			25" & 9"	
BL500M	Boiler light, with magnet			32"	

Selection Guide

Item	Description	Product Picture
104-R	Alternate reflector guard (optional)	
BL500-G	Replacement Guard	
BL500-L	Replacement Bulb, 500 Watt	
BL500-MAG	Replacement Magnet Kit	



Note: Not for retrofit of non-magnet lights





Application: Ericson stringlights (custom E-lite) outline San Francisco skyline buildings.



Application: Ericson stringlights (custom 12/3 black Navy Drop) light up bridge in Tempe, Arizona.

Ericson Manufacturing Company offers a wide variety of plugs and connectors to fit your needs.

PERMAKLEEN™



Ericson's Perma-Kleen Anti-microbial Wiring Devices deliver exceptional protection against anti-microbial growth, even on hidden hard to clean surfaces. Retrofitting current installations with these cost effective solutions will provide confidence and peace of mind by knowing every possible step has been taken to protect consumers against harmful, and potentially deadly, microbial contamination.

- Inhibits Growth of Bacteria, Molds, Mildews and Fungi
- Anti-microbial Additives Embedded in Polymer
- Resistant to High Pressure Hose-down
- NEMA Type 4, 4X, 6, 6P and IP67 Protection

SmartMonitor™



Features of All SmartMonitor™ Plugs & Connectors:

- Super bright 2-color LED technology
- SmartMonitor™ Module
- Easy to wire
- Clear internal wiring cover
- Multiple cord grommets included
- Makes OSHA safety compliance easy and cost effective

24/7 Monitoring of These 7 Events

- No Ground
- Loss of Ground In Cord
- Hot/Neutral Swap
- Reverse Polarity
- Hot on Ground
- Open Neutral

3 Styles to Pick From:

- Perma-Link® • Perma-Grip™ • Perma-Tite® 2

PERMATITE® 2



- Tongue & groove sealing system provides extreme environmental protection of:
 - NEMA Type 4, 4X, 6, 6P & IP67
- Devices resist high-pressure hose down of 1,500 psi.
- Withstand high impact, corrosion, oils, greases, solvents and other chemicals across -20 °C to + 100°C
- Removable/replaceable self-retained sealing cap provided with connector to keep out contaminants when not in use (plug cap also available)
- Custom marking available on cord grip nut
- Available in all black

PERMAGRIP™




- Quick field assembly with cord grip nut
- Superior water/mud/dust resistance provided by safety compression cord grips
- Withstand high impact, corrosion, oils, greases, solvents and other chemicals across -20 °C to + 100°C
- Flexibility of reverse-cover design (straight blade devices) creates weather-resistant connections by interchanging covers
- Custom marking available on cord grip nut
- Available in all black

PERMALINK®



- Two-screw cable clamp secures cord and provides superior strain-relief
- Withstand high impact, corrosion, oils, greases, solvents and other chemicals across -20 °C to + 100°C
- Individual wire pockets help prevent flashovers
- Rubberized outer housing for superior grip and impact resistance
- Flexibility of reverse-cover design creates weather-resistant connections by interchanging covers
- Internal cord seals keep out water/mud/dust
- Available in all black

Commercial Grade



- Translucent body allows device to glow from power on lamp
- Wide open "suitcase" style construction makes wiring easy
- Fits 10/3 to 18/3 cord diameters
- Rugged design withstands abuse on the jobsite
- Color coded termination screws for ground, hot and neutral
- Combo screw heads speed up installation
- Rubberized "grip" cushions and surrounds device
- Economy priced

Double Outlet Receptacle with Cover Plates - PWDX Series



- Weather resistant boot seals around Ericson Perma-Tite plug to provide weather resistant protection
- Spring-loaded flip-lid covers the receptacle when not in use
- Two independent fully rated receptacles in one easy to install assembly
- Impact, chemical & corrosion resistant construction stands up to demanding environments
- Mounts easily to 6200 series FS/FD boxes and any flat surface

FS Series Single Receptacles & Male Inlets Under All Weather Flip Covers



- Weather resistant boot seals around Ericson Perma-Tite plug to provide weather resistant protection
- Spring-loaded flip-lid covers receptacle when not in use
- Includes cover plate, rubber boot, stainless steel mounting plate/mounting screws
- Impact, chemical & corrosion resistant construction stands up to demanding environments
- Mounts easily to 6200 or 6300 series FS/FD boxes and any flat surface
- Collar plug seals and grips all types of round plugs or connectors

50 Amp Devices



- Rugged nylon construction resists impact, corrosion and jobsite oils/chemicals
- Quick field assembly, with color coded markings
- Nickel plated blades and stainless steel screws provide optimum corrosion resistance
- Boots can be threaded together with the optional sealing collar system to provide maximum environmental protection
- Available in plugs, connectors, inlets and receptacles
- Rubberized grey "Twist-Grip" for ease of connection

NEMA Change Adapters



Now make quick, secure connections between straight-blade and locking plugs and connectors with Ericson's NEMA configuration adapters.

- Heavy-duty non-conducting housing and using heavy gauge solid brass blades
- Compact size makes them easy to use and transport
- Available in molded style or short cords



Ericson Wiring Device Selection Chart

Face View	NEMA Configuration	Electrical Ratings			Base Model		Cross Reference	
		Amps	Volts	UL/CSA Listing ⁴	Plug ^{1,2}	Connector ^{1,2}	Basic ³	
					1510-P	1610-C	Plug	Connector
2-pole, 3-Wire Grounding								
	5-15	15	125	AC/DC	1510-P	1610-C	1447	1547
	5-20	20	125	AC/DC	1512-P	1612-C	1433	1533
	6-15	15	250	AC/DC	1514-P	1614-C	1449	1549
	6-20	20	250	AC/DC	1516-P	1616-C	1448	1548
	L5-15	15	125	AC/DC	1520-P	1620-C	2447	2547
	L6-15	15	250	AC/DC	1522-P	1622-C	2449	2549
	L7-15	15	277	AC	1524-P	1624-C	2434	2534
	L5-20	20	125	AC/DC	2310-P	2410-C	2647	2747
	L6-20	20	250	AC/DC	2312-P	2412-C	2648	2748
	L7-20	20	277	AC	2314-P	2414-C	2649	2749
3-Pole, 3-Wire Non-Grounding								
	Non-NEMA	20	125/250	AC/DC	2316-P	2416-C	2608	N/A
	Non-NEMA	20/10	250/600	AC	2317-P	2417-C	N/A	N/A
	Non-NEMA	15A/10A	125V/250V	AC	1507-P	1607-C	N/A	N/A
3-Pole, 4-Wire Grounding⁵								
	L14-20	20	125/250	AC/DC	2320-P	2420-C	2847	2774
	L15-20	20	250, 3Ø	AC	2322-P	2422-C	2848	2775
	L16-20	20	480, 3Ø	AC	2324-P	2424-C	2849	2776
2-Pole, 3-Wire Grounding								
	L5-30	30	125	AC/DC	2510-P	2610-C	2674	2947
	L6-30	30	250	AC/DC	2512-P	2612-C	2675	2948
	L7-30	30	277	AC	2514-P	2614-C	2676	2949
3-Pole, 3-Wire Non-Grounding⁵								
	Non-NEMA	30	125/250	AC/DC	2516-P	2616-C	2808	2908
3-Pole, 4-Wire Grounding⁵								
	L14-30	30	125/250 3Ø	AC/DC	2520-P	2620-C	2874	2974
	L15-30	30	250, 3Ø	AC	2522-P	2622-C	2875	2975
	L16-30	30	480, 3Ø	AC	2524-P	2624-C	2876	2976
	L17-30	30	600, 3Ø	AC	2526-P	2626-C	2877	2977
4-Pole, 4-Wire⁵								
	L18-30	30	120/208 3Ø wye	AC	2530-P	2630-C	2878	2978
4-Pole, 4-Wire Non-Grounding⁵								
	Non-NEMA	30	120/208 3Ø wye	AC	2528-P	2628-C	2809	2909

Notes:

1. Base model plug and connector = Ericson Perma-Link® style
2. See configuration examples for water tight "Perma-Tite 2", Perma-Grip, SmartMonitor and Perma-Kleen
3. Add "W" for water tight, ie 1447 = 14W47
4. UL/CSA Listed designations apply to Perma-Link, Perma-Grip and Perma-Tite styles only
5. Not available in Perma-Grip configuration





PERMA-LINK®

Base Model Configuration

1510-P - Plug

1610-C - Connector



PERMA-GRIP™

Add "G" to Base Model Configuration

1510-PG - Plug

1610-CG - Connector



PERMA-TITE® 2

Add "W6P" to Base Model Configuration

1510-PW6P - Plug

1610-CW6P - Connector



PERMA-KLEEN™

Perma-Grip™ Configuration

Add "-AM" to Desired Configuration

1510-PG-AM - Plug

1610-CG-AM - Connector



PERMA-TITE® 2 Configuration

Add "-AM" to Desired Configuration

1510-PW6P-AM - Plug

1610-CW6P-AM - Connector



SmartMonitor™

Perma-Grip™ Configuration

Add "MGL" to Desired Configuration

1510-PMGL - Plug

1610-CMGL - Connector



PERMA-TITE® 2 SmartMonitor™ Configuration

Add "L" to Desired Configuration

1510-PW6PL - Plug

1610-CW6PL - Connector



PERMA-KLEEN™



**Untreated
E-Coli @ 24 hours**



**Treated
E-Coli @ 24 hours**

FEATURES:

- UL and CSA Listed
- NSF Certified
- Patent pending
- Inhibits growth of bacteria, molds, mildews and fungi
- Escherichia (E. Coli):
 - Log Reduction > 4.8, Log Reduction % > 99.998%
- Staphylococcus (Staph), MRSA:
 - Log Reduction > 3.9, Log Reduction % > 99.98%
- RoHS Compliant (Non-Halogenated)
- Anti-microbial additives embedded in polymer
- Antimicrobial additive resistant to scuffing and cleaning
- Independently tested and certified
- Resistant to high pressure hose-down
- Tongue & groove environmental sealing
- Keyed body and cover for alignment
- NEMA Type 4, 4X, 6, 6P and IP67 protection

Ericson's Perma-Kleen Anti-microbial Wiring Devices deliver exceptional protection against anti-microbial growth, even on hidden hard to clean surfaces. Retrofitting current installations with these cost effective solutions will provide confidence and peace of mind by knowing every possible step has been taken to protect consumers against harmful, and potentially deadly, microbial contamination.

Perma-Kleen plugs and connectors are engineered and manufactured to the highest quality standards to provide the ultimate in electrical service and protection. These devices are designed and proven to do their best under the worst conditions and in a wide range of challenging applications.


Perma-Kleen Anti-microbial Wiring Devices are ideal for a wide range of applications including:

- | | | |
|-----------------------------|-----------------------|--------------------|
| • Poultry Processing | • Seafood Processing | • Meat Processing |
| • Pharmaceutical Processing | • Food Packaging | • Food Preparation |
| • Agriculture | • Beverage Processing | • Health Care |



PERMAKLEEN™

EXTRA GROMMETS Color coded rubber cord sealer grommets supplied for a variety of diameters.



UNIQUE WATER/DUST WIPER
Seals out moisture, mud and particles.

ORIGINAL DEAD-FRONT BACK-WIRED CONSTRUCTION
We set industry standards with this design with no exposed current carrying parts.

FINGER GRIPS
Non-slip finger grips aid in assembly

CORD JACKET SEAL

PBT BODY
Rugged thermoplastic polyester body in plug and connector.


CORROSION RESISTANT NICKEL PLATED BLADES
Current carrying blades and contacts of high conductivity copper alloy with nickel plating for corrosion resistance.

DOUBLE INSULATED
Superior PBT body with TPE thermoplastic elastomer cover for extra safety, protection and durability.

SAFETY COMPRESSION CORD GRIP
Non-conductive, long life rugged PBT, powerful cord grip, unique design accepts a variety of wire sizes with no crushing and no inserts to change or add.

CORROSION RESISTANT ASSEMBLY SCREWS
Stainless double lead assembly screws made for plastics exclusively to insure fast assembly and withstand high torque and pullout

EIGHT POINT SEALING
Unique rubber to rubber tongue and groove eight point seal-tite system when mated.

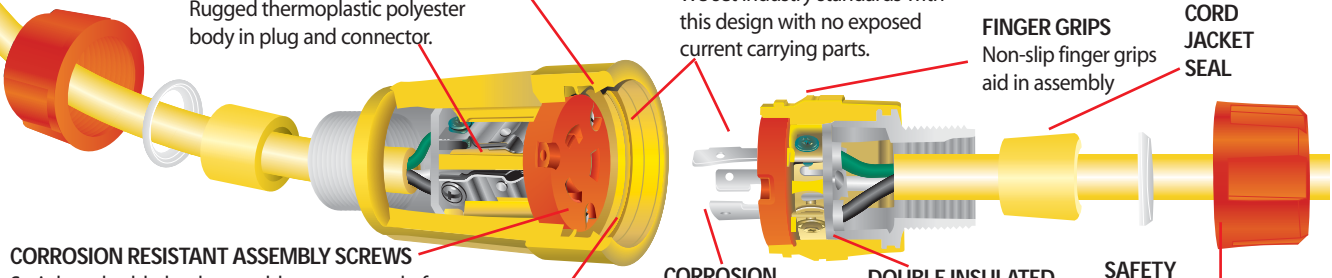

PERMAKLEEN™ Plug Cover

- Use with Ericson's Perma-Tite® plugs to seal out water, dust and other contaminants and to protect blades from damage when plug is not in-use
- Eight-point rubber tongue and groove sealing system provides environmental protection
- Additional protection provided by a unique internal water/dust wiper
- Easy to assemble
- Ericson's Radiant Yellow for High Visibility on job sites



PERMAKLEEN™ Plug Cover Selection Guide

Catalog Number	Description
15PW-AM	Male closure cap, for use with 15A Straight Blade & Locking devices and 20A Straight Blade devices.
16CW-AM	Female replacement cover for CW6P connectors
24CW-AM	Female Large replacement cover for CW6P connectors
26CW-AM	Female 30 Amp Large replacement cover for CW6P connectors






FEATURES:


- Full Diagnostic Capability
- 24/7 Diagnostic Monitoring
- Super Bright LED Technology
- SmartMonitor™ Module
- Keyed body and cover
- Easy to wire
- Clear internal wiring cover
- Non-slip finger grips
- Color coded terminal screws
- Multiple cord grommets included
- Rubberized outer body
- Safety yellow and blue body
- Compatible with power tools

24/7 Monitoring

- No/Open Ground
- Loss of Ground In Cord
- Hot/Neutral Swap
- Reverse Polarity
- Hot on Ground
- No/Open Neutral

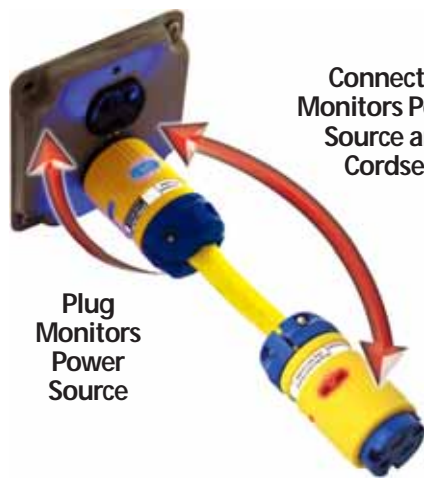

BLUE
OK TO USE



RED
STOP, CALL AN ELECTRICIAN!



Full Diagnostic Safety Cord Capability



No Error Condition

- Ready For Use

Error Condition: Connector

- Check Cord for Nicks, Cuts
- Check Connector Wiring

Error Condition: Plug

- Check Power Source
- Check Cord for Nicks, Cuts
- Check Plug Wiring
- Check Connector Wiring

Cord Clamp Style



Perma-Link™ Cord Clamp Style Features:

- Internal cord seal
- Dual screw self-centering clamp
- Rubberized outer body

Cord Grip Style



Perma-Grip™ Cord Grip Nut Style Features:

- Nickel plated solid brass blades
- Sealing cord grip nut design

Water Tight Style



Perma-Tite2™ All Weather Cord Grip Nut Style features:

- All weather - NEMA 6P rated
- Nickel plated solid brass blades
- Sealing cord grip nut design
- Connector includes cover
- 360° indication

Plug & Connector Selection Guide


Face View	NEMA Configuration	Electrical Ratings		Perma-Link®		Perma-Grip®		Perma-Tite® 2	
		Amps	Volts	Plugs	Connectors	Plugs	Connectors	Plugs	Connectors
Straight Blade, 2-pole, 3-wire Grounding Devices									
	5-15	15	125	1510-PML	1610-CML	1510-PMGL	1610-CMGL	1510-PW6PL	1610-CW6PL
	5-20	20	125	1512-PML	1612-CML	1512-PMGL	1612-CMGL	1512-PW6PL	1612-CW6PL
Locking, 2-pole, 3-wire Grounding									
	L5-20	20	125	2310-PML	2410-CML	2310-PMGL	2410-CMGL	2310PW6PL	2410-CW6PL

Wide variety of grommets for multiple cord diameters.



Power Tool Cord Compatible

- Verifies Power and Safety Ground
- Immediate Visual Indication of Error Condition
- Visual Indication of Acceptable Power Source



Blue No Error Condition

- Ready For Use



PERMA-TITE® 2



**NEMA TYPE
4, 4X, 6 & 6P**

- Excels in demanding outdoor & in-plant environments
- Resists hose directed water, the entry of water during prolonged submersion at a limited depth & damage from external ice formation


FEATURES:

- UL Listed, CSA Certified, ETL Listed
- Tongue & groove sealing system
- NEMA Type 4, 4X, 6 & 6P
- Devices resist high-pressure hose down of 1,500 psi.
- Plug & Connector bodies made with PBT chosen for its high resistance to moisture absorption, high voltage arcing and carbon tracking
- Keyed body and cover for easy alignment/assembly
- Color coded sealing bushings are provided to fit a variety of cord diameters
- Removable/replaceable self-retained sealing cap provided with connector to keep out contaminants when not in use
- Nickel plated blades for corrosion resistance
- Transparent back-plate makes for quick visual wiring checks
- Consult factory for availability in black

Typical Applications Include:

- Food processing
- Pulp and paper mills
- Refineries and Petroc Chem Facilities
- Shipyards
- Utilities
- Marine

PERMA-TITE® 2

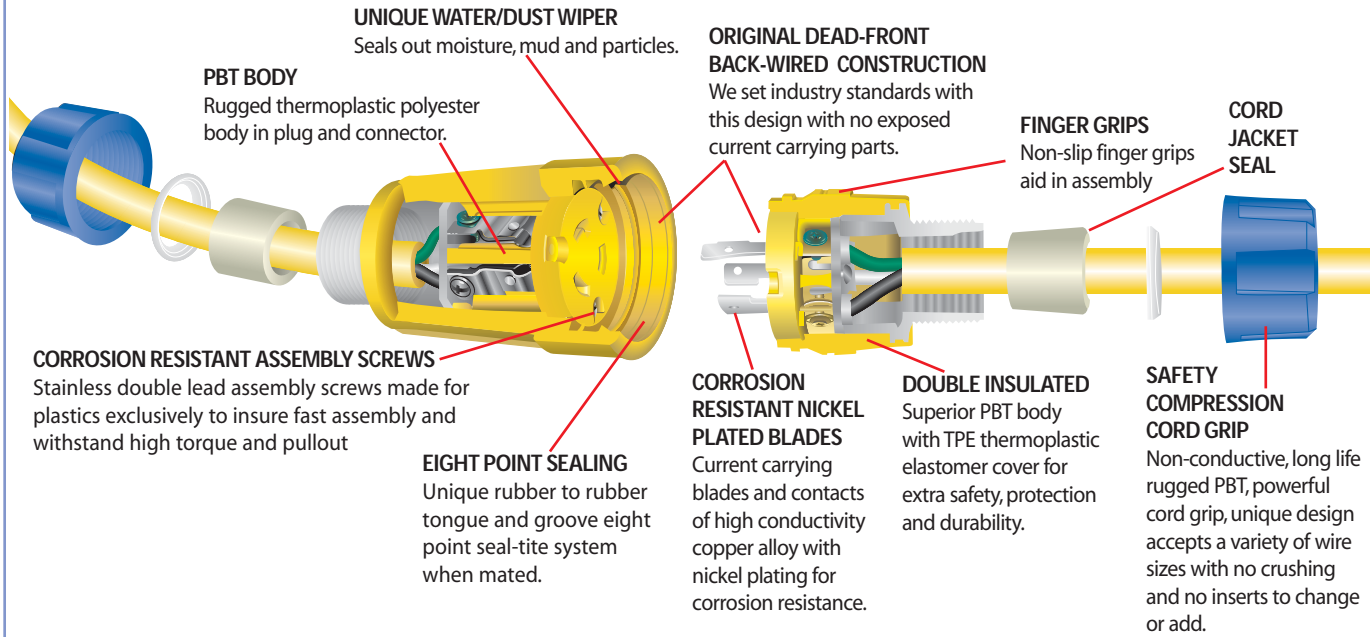

PERMA-TITE® 2



15PW with 1510-PW6P Plug




FEATURES:

- Use with Ericson's Perma-Tite® plugs to seal out water, dust and other contaminants and to protect blades from damage when plug is not in-use
- Eight-point rubber tongue and groove sealing system provides environmental protection
- Additional protection provided by a unique internal water/dust wiper
- Easy to assemble



16CW - Fits 16XXCW6P Connectors

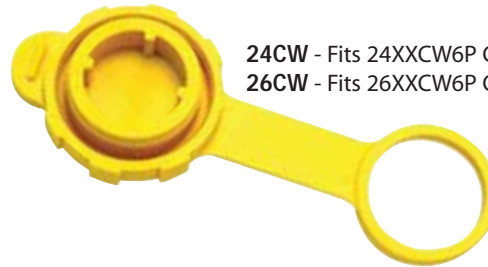

24CW - Fits 24XXCW6P Connectors
26CW - Fits 26XXCW6P Connectors

PERMA-TITE® 2 Plug Cover Selection Guide

Catalog Number	Description
15PW	Male closure cap, for use with 15A Straight Blade & Locking devices and 20A Straight Blade devices.
16CW	Female replacement cover for CW6P connectors
24CW	Female Large replacement cover for CW6P connectors
26CW	Female 30 Amp Large replacement cover for CW6P connectors

EXTRA GROMMETS Color coded rubber cord sealer grommets supplied for a variety of diameters.



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.



PERMA-GRIP™



Complete Kit as Shown

FEATURES:

- UL Listed and CSA Certified
- Quick field assembly, no cable clamp screws to tighten, simply twist on the cord grip nut
- Water/mud/dust resistance provided by safety compression cord grips
- Keyed body and cover for easy alignment/assembly
- Color coded rubber cord-seal bushings accommodate a wide range of cable diameters
- Molded-in non-slip fingers grips makes devices easy to assemble and handle
- Withstand high impact, corrosion, oils, greases, solvents and other chemicals across -20 °C - +65 °C
- Nickel plated brass blades and ground pin stops corrosion and keeps solid electrical contact
- Individual wire pockets help prevent flashovers
- Selected models available with Smart Monitor technology
- Available individually or on factory assembled cord sets
- Reverse-cover design (straight blade devices) creates weather-resistant connections by interchanging covers
- Consult factory for availability in black

Safety Compression Cord Grip

Non-conductive, long life rugged PBT, powerful cord grip, unique design accepts all AWG wire range sizes from #18 through #12 with no crushing and no inserts to change or add

PERMA-GRIP™


High-Visibility Safety Colors
Added safety in dull work areas With Brilliant Blue and Radiant Yellow colors.

Transparent Back Plate


Clear polycarbonate permits visual wiring inspection without disassembly

Keyed PBT Body
Adds to quick alignment and assembly.

Double Insulated
Superior PBT body with TPE thermoplastic elastomer cover for extra safety, protection and durability.

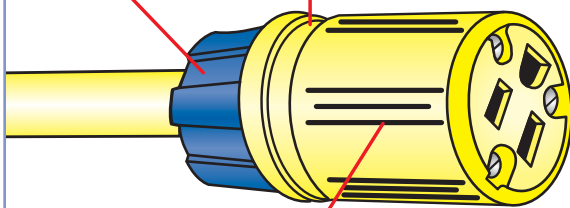

Non-Slip Finger Grips

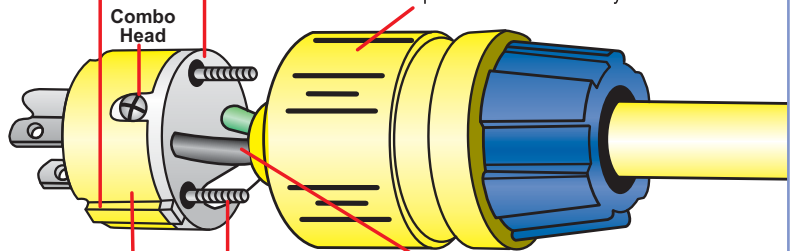

Blades nickel plated to prevent corrosion

Captive Assembly Screws
Double lead screws provide rigid assembly, no bulging of cover, maximum pull out resistance, fast assembly.

Individual Wire Chambers
Accepts up to #12 AWG conductors and prevents flash overs and short circuits.

Dead-Front Back-Wired Design
We set industry standards with this design, no exposed current carrying parts, meets NEC.

EXTRA GROMMETS Color coded rubber cord sealer grommets supplied for a variety of diameters.





FEATURES:

- UL Listed and CSA Certified
- Two-screw cable clamp secures wire and provides strain-relief
- Solid brass blades for optimum electrical and mechanical performance
- Keyed body and cover for easy alignment/assembly
- Molded-in non-slip finger-grips makes devices easy to assemble and handle
- Withstand high impact, corrosion, oils, greases, solvents and other chemicals across -20 °C to 100 °C
- Individual wire pockets help prevent flashovers
- Transparent back plate speeds wiring inspection
- Selected models available with Smart Monitor technology
- Available individually or on factory assembled cord sets
- Flexibility of reverse-cover design creates weather resistant connections by interchanging covers
- Consult factory for availability in black

Transparent Back Plate


Superior thermoplastic polyester body with TPE thermo-plastic elastomer cover for extra safety, protection and durability.

Double Insulated


Superior PBT body with TPE thermoplastic elastomer cover for extra safety, protection and durability.

Recessed Assembly Screws

Safety isolated from all live parts.

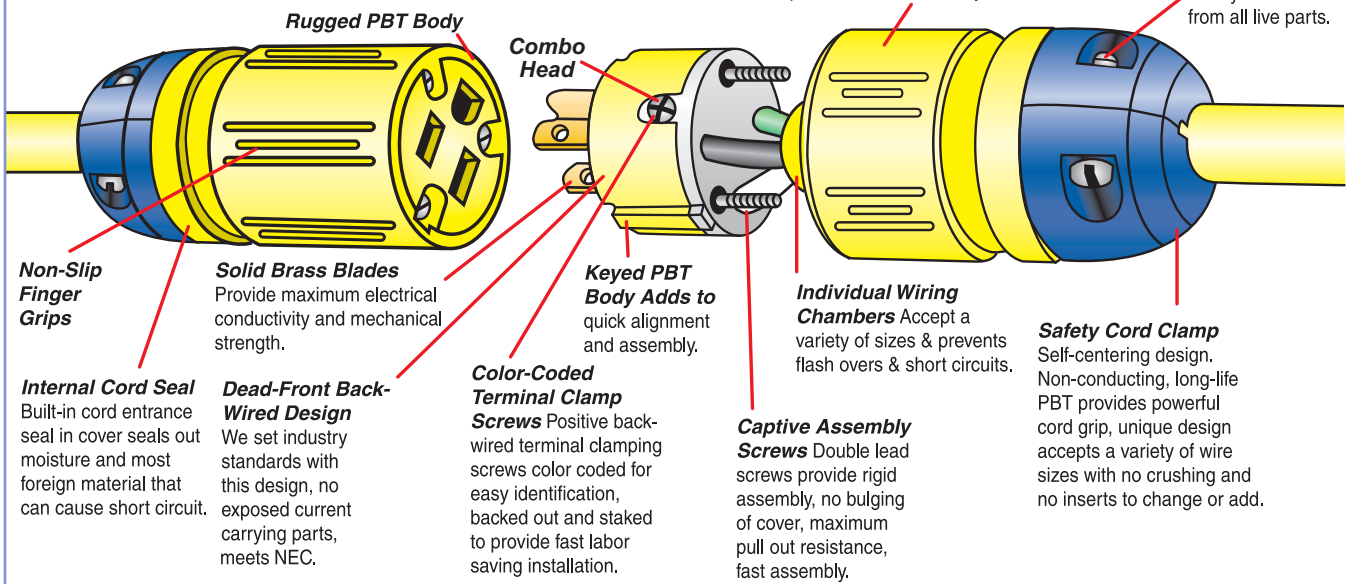

FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

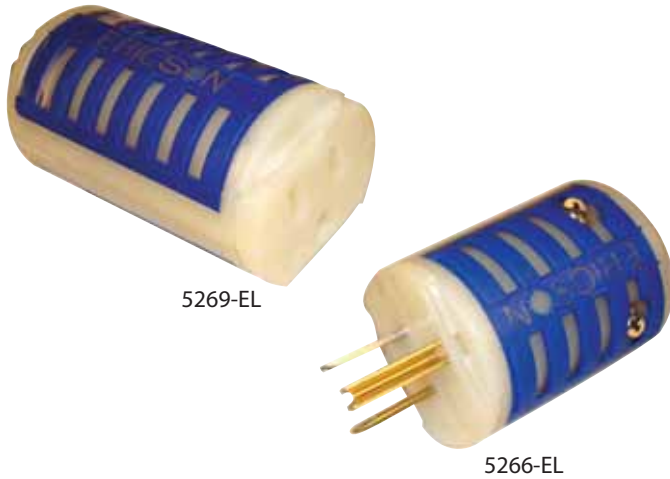

FEATURES:


- ETL & CETL certified to US & Canadian Standards
- Translucent body allows device to glow from power on lamp
- Tough, durable, rubber overmold grip surrounds device body
- Wide open "suitcase" style construction makes wiring easy
- Two captive screw body clamp design is easy to assemble
- Cord diameter matching inserts fit a wide range of cord sizes
- Solid brass blades for optimum electrical contact
- Fits 10/3 to 18/3 cord diameters
- Rugged design withstands abuse on the jobsite
- Clear internal conductor cover allows visual inspection
- Color coded termination screws for ground, hot and neutral
- Combo screw head

1 Piece Design - EZ To Wire



- Clear terminal cover (available on EL models only)
- Power on 360° glow module
- Built-in internal secondary cord clamps
- Color coded terminal screws
- Cord diameter inserts
- Inserts allow a wide range of cord sizes #16/3 to #10/3

Devices Selection Guide

Face View	NEMA Configuration	Electrical Ratings		With Internal Glow Light	
		Amps	Volts	Plugs	Connectors
Straight Blade, 2-pole, 3-wire Grounding Devices					
	5-15	15	125	5266-EL	5269-EL

Notes:

1. Cord diameters - .3 to .6 inch
2. Slot - Phillips





FEATURES:

- Heavy-duty housing
- Heavy gauge solid brass blades
- Compact size makes them easy to use and transport
- Available in four of the most popular models

NEMA Configuration Adapters

Now make quick, secure connections between straight-blade and locking plugs and connectors with Ericson's NEMA configuration adapters.

NEMA Configuration Adapters Selection Guide

Catalog Number	NEMA Configuration		Description
	Male	Female	
1705			Male 15A, 125V twist (L5-15P) to 20A, 125V straight (5-20R)
1712			Male 15A, 125V straight (5-15P) to 15A, 125V twist (L5-15R)
1740			Male 20A, 125V twist (L5-20P) to 20A, 125V straight (5-20R)
1744			Male 15A, 125V straight (5-15P) to 20A, 125V twist (L5-20R)
123-15P20C			Male 15A, 125V straight (5-15P) to 20A, 125V twist (L5-20R)



All Weather Heavy Duty Wet Location Double Outlet Receptacle with Cover Plates



 WET LOCATION TESTED & APPROVED

FEATURES:

- UL Listed to American and Canadian Standards for wet or damp locations
- Impact, chemical and corrosion resistant
- Superior interior splash and hose down protection
- Exceptional all weather outdoor protection
- Simplified, flexible mounting alternatives
- Secure power access lockout / tagout capability
- Popular NEMA configuration alternatives
- Pre-wired for quick installation
- Rubberized box with stainless steel hardware
- Non-metallic cord grip
- Spring loaded flip covers

Ericson's PWDX Series of all weather, heavy duty double outlet receptacles are ideal for a wide range of demanding applications where splash and hose-down protection is required. A perfect fit for food and liquid processing facilities, the non-metallic enclosure and optional cord grip construction guards against metal and glass fragments that can pose health and safety risks, while the extra deep internally sealed spring-loaded flip covers provide protection when not in use.



The versatile PWDX Series receptacles, when mated with Ericson's Perma-Tite2 plugs, provide NEMA 4X levels of protection against dust, rain, hose/spray, chemical, and snow/ice. The 8-point seal-tite mating design seals around the plug to provide unmatched weather resistance.

Flexible mounting configurations, including pendant, rigid conduit, wall and "stringer" cordset, make this an ideal solution for a wide range of applications including:


- | | | | |
|---------------------------|-----------------------|------------------------|----------------------|
| • Food Processing | • Beverage Processing | • Marina Ship-to-shore | • Petro-Chemical |
| • Vehicle / Engine Heater | • Pulp / Paper Mills | • Utilities | • Refineries |
| • Venue Landscape | • Outdoor Events | • Automotive | • Harsh Environments |



PWDX Series - All Weather Heavy Duty Receptacles

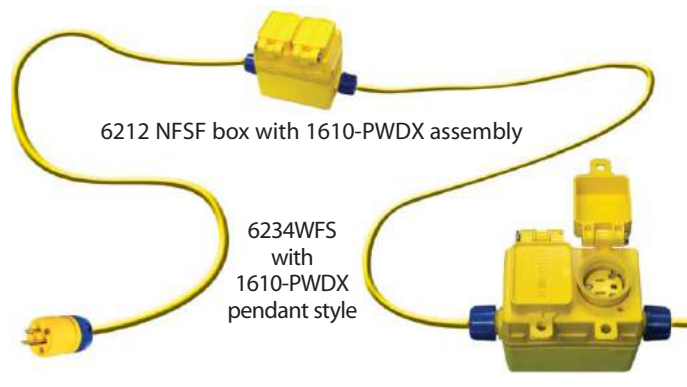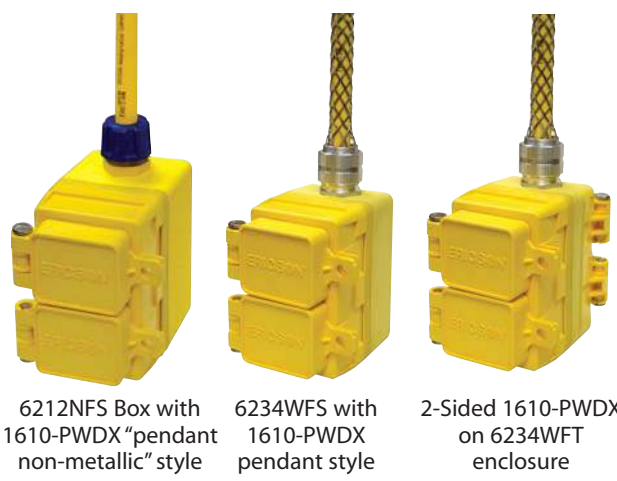




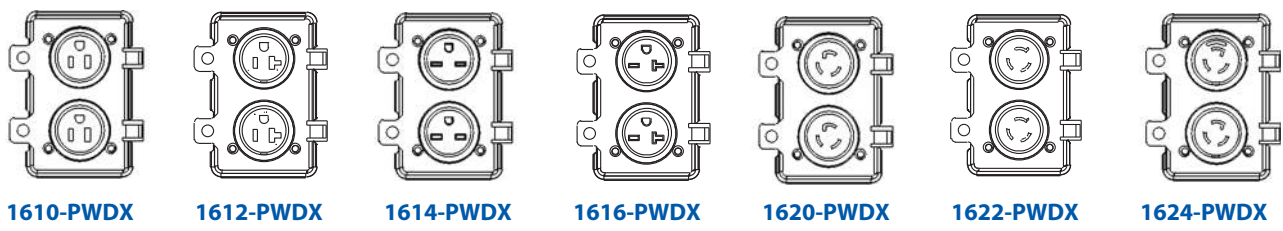





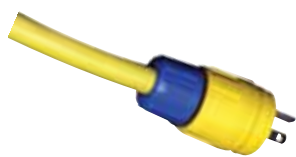




NOTICE:
 *The NEC restricts the use of metallic "job" boxes for use in temporary relocateable power cords. Only use non-metallic enclosures designed and tested to meet compliance.



Part Number	Description	NEMA Config	Amps	Volts
PWDX Dual Receptacle & Cover Assembly/ Prewired				
Straight				
1610-PWDX	Receptacle & Flip Cover, Duplex, All Weather, 5-15, Weather Resistant	5-15	15	125
1612-PWDX	Receptacle & Flip Cover, Duplex, All Weather, 5-20, Weather Resistant	5-20	20	125
1614-PWDX	Receptacle & Flip Cover, Duplex, All Weather, 6-15, Weather Resistant	6-15	15	250
1616-PWDX	Receptacle & Flip Cover, Duplex, All Weather, 6-20, Weather Resistant	6-20	20	250
Locking				
1620-PWDX	Receptacle & Flip Cover, Duplex, All Weather, L5-15	L5-15	15	125
1622-PWDX	Receptacle & Flip Cover, Duplex, All Weather, L6-15	L6-15	15	250
1624-PWDX	Receptacle & Flip Cover, Duplex, All Weather, L7-15	L7-15	15	277





Ericson Perma-Tite®2 Series Mating Plugs			
PWDX Part Number	Mating Plug Perma-Tite 2®	Perma-Tite 2® Series Plug	Plug Bushing Kit
1610-PWDX	1510-PW6P		
1612-PWDX	1512-PW6P		
1614-PWDX	1514-PW6P		
1616-PWDX	1516-PW6P		
1620-PWDX	1520-PW6P		
1622-PWDX	1522-PW6P		
1624-PWDX	1524-PW6P		

Rubberized FS & FD Boxes			
 6212FS	 6234FD	 6234FT	 6234WFS
 6212NFS	 6212NFD	 6212NFT	 6212WFD
 6234NFS	 6234NFD	 6234NFT	 6234WFT

Wall/Post Mount Kit 6260WK		(NM) Non Metallic Bushing Kits		Wire Mesh Grips	
Optional Wall Mount Kit		82034 - 3/4"	82010 - 1"		
				82005W = 1/2"	
				82034W = 3/4"	
				82010W = 1"	
				82005W-1	
				82034W-1	



Boxes for PWDX - Punched - No Bushing Kit			
	Part Number	Description	
	6212FS	Box, Std Depth, PWDX, No bushing, 1/2" NPT	
	6234FS	Box, Std Depth, PWDX, No bushing, 3/4" NPT	
	6210FS	Box, Std Depth, PWDX, No bushing, 1" NPT	
	6212FD	Box, Deep, PWDX, No bushing, 1/2" NPT	
	6234FD	Box, Deep, PWDX, No bushing, 3/4" NPT	
	6210FD	Box, Deep, PWDX, No bushing, 1" NPT	
	6212FT	Box, OPEN, PWDX, No bushing, 1/2" NPT	
	6234FT	Box, OPEN, PWDX, No bushing, 3/4" NPT	
	6210FT	Box, OPEN, PWDX, No bushing, 1" NPT	
	6212FSF	Box, Std Depth, PWDX, No Bushing, Feed thru, 1/2" NPT	
	6234FSF	Box, Std Depth, PWDX, No Bushing, Feed thru, 3/4" NPT	
	6210FSF	Box, Std Depth, PWDX, No Bushing, Feed thru, 1" NPT	
	6212FDF	Box, Deep, PWDX, No Bushing, Feed thru, 1/2" NPT	
	6234FDF	Box, Deep, PWDX, No Bushing, Feed thru, 3/4" NPT	
	6210FDF	Box, Deep, PWDX, No Bushing, Feed thru, 1" NPT	
	6212FTF	Box, OPEN, PWDX, No Bushing, Feed thru, 1/2" NPT	
6234FTF	Box, OPEN, PWDX, No Bushing, Feed thru, 3/4" NPT		
6210FTF	Box, OPEN, PWDX, No Bushing, Feed thru, 1" NPT		
Boxes for PWDX - 1/2" NPT Bushing Installed (N = Non Metallic W = Wire Mesh)			
	6212NFS	Box, Std Depth, PWDX, NM Bushing, 1/2" NPT	
	6212NFD	Box, Deep, PWDX, NM Bushing, 1/2" NPT	
	6212NFT	Box, OPEN, PWDX, NM Bushing, 1/2" NPT	
	6212NFSF	Box, Std Depth, PWDX, NM Bushing, Feed thru, 1/2" NPT	
	6212NFDF	Box, Deep, PWDX, NM Bushing, Feed thru, 1/2" NPT	
	6212NFTF	Box, OPEN, PWDX, NM Bushing, Feed thru, 1/2" NPT	
	6212WFS	Box, Std Depth, PWDX, WireMesh Bushing, 1/2" NPT	
	6212WFD	Box, Deep, PWDX, WireMesh Bushing, 1/2" NPT	
	6212WFT	Box, OPEN, PWDX, WireMesh Bushing, 1/2" NPT	
	6212WFSF	Box, Std Depth, PWDX, WireMesh Bushing, Feed thru, 1/2" NPT	
	6212WFDF	Box, Deep, PWDX, WireMesh Bushing, Feed thru, 1/2" NPT	
	6212WFTF	Box, OPEN, PWDX, WireMesh Bushing, Feed thru, 1/2" NPT	
	Boxes for PWDX - 3/4" NPT Bushing Installed (N = Non Metallic W = Wire Mesh)		
	6234NFS	Box, Std Depth, PWDX, NM Bushing, 3/4" NPT	
	6234NFD	Box, Deep, PWDX, NM Bushing, 3/4" NPT	
	6234NFT	Box, OPEN, PWDX, NM Bushing, 3/4" NPT	
6234NFSF	Box, Std Depth, PWDX, NM Bushing, Feed thru, 3/4" NPT		
6234NFDF	Box, Deep, PWDX, NM Bushing, Feed thru, 3/4" NPT		
6234NFTF	Box, OPEN, PWDX, NM Bushing, Feed thru, 3/4" NPT		
6234WFS	Box, Std Depth, PWDX, WireMesh Bushing, 3/4" NPT		
6234WFD	Box, Deep, PWDX, WireMesh Bushing, 3/4" NPT		
6234WFT	Box, OPEN, PWDX, WireMesh Bushing, 3/4" NPT		
6234WFSF	Box, Std Depth, PWDX, WireMesh Bushing, Feed thru, 3/4" NPT		
6234WFDF	Box, Deep, PWDX, WireMesh Bushing, Feed thru, 3/4" NPT		
6234WFTF	Box, OPEN, PWDX, WireMesh Bushing, Feed thru, 3/4" NPT		
Boxes for PWDX - 1" NPT Bushing Installed (N = Non Metallic W = Wire Mesh)			
6210NFS	Box, Std Depth, PWDX, NM Bushing, 1" NPT		
6210NFD	Box, Deep, PWDX, NM Bushing, 1" NPT		
6210NFT	Box, OPEN, PWDX, NM Bushing, 1" NPT		
6210NFSF	Box, Std Depth, PWDX, NM Bushing, Feed thru, 1" NPT		
6210NFDF	Box, Deep, PWDX, NM Bushing, Feed thru, 1" NPT		
6210NFTF	Box, OPEN, PWDX, NM Bushing, Feed thru, 1" NPT		
6210WFS	Box, Std Depth, PWDX, WireMesh Bushing, 1" NPT		
6210WFD	Box, Deep, PWDX, WireMesh Bushing, 1" NPT		
6210WFT	Box, OPEN, PWDX, WireMesh Bushing, 1" NPT		
6210WFSF	Box, Std Depth, PWDX, WireMesh Bushing, Feed thru, 1" NPT		
6210WFDF	Box, Deep, PWDX, WireMesh Bushing, Feed thru, 1" NPT		
6210WFTF	Box, OPEN, PWDX, WireMesh Bushing, Feed thru, 1" NPT		



PERMA-TITE®2



FEATURES:

- UL Listed, CSA Certified
- Weather resistant boot seals around Ericson Perma-Tite plug to provide weather resistant protection
- Spring-loaded flip-lid covers receptacle when not in use
- Includes cover plate, rubber boot, stainless steel mounting plate/mounting screws
- Impact, chemical & corrosion resistant construction stands up to demanding environments
- Mounts easily to any FS and FD boxes and any flat surface

The 2705 FS series of male inlets is designed for all weather power inlet on a variety of applications. The heavy duty flip cover assembly and superior round sealing collar provides a superior seal against the elements. Use for inlet power only. Never use these devices for power output or receptacle. These devices must be wired dead and cannot be accidentally energized without a connector in place.

Typical Applications Include Power Inlets For:

- Powered food trolley carts
- Fire and ambulance device charging
- Electric service vehicle charging
- Electric battery charging for cars or golf carts
- Harsh environments service power
- Portable temporary power panels

2705-15	2705-15A	2705-L142	2705-L15	2705-L20
				

Note: Also available in all black or customized - call Ericson for details




PERMA-TITE®2 Single Outlet Cover Plates - FS Series

Face View	NEMA Configuration	Electrical Ratings		FS Female Receptacle	2705 Male Inlet Std Opening	2705 Male Inlet Large Opening
		Amps	Volts			
15A Straight Blade & Locking 20A Straight Blade						
Flip Seal Cover w/ weatherproof boot only				2700-FS ⁽¹⁾	1 7/16" Dia.	2" Dia.
	Non-NEMA	10/15 Amp	125/250 Volt	2715-FS07 ⁽³⁾		
	5-15	15 Amp	125 Volt	2715-FS10	2705-15	2705-15A
	5-20	20 Amp	125 Volt	2715-FS12	2705-20	2705-20A
	6-15	15 Amp	250 Volt	2715-FS14		
	6-20	20 Amp	250 Volt	2715-FS16		
	L5-15	15 Amp	125 Volt	2715-FS20	2705-L15	2705-L15A
	L6-15	15 Amp	250 Volt	2715-FS22		
	L7-15	15 Amp	277 Volt	2715-FS24		
20A & 30A Locking, 3-Wire						
Flip Seal Cover w/ weatherproof boot only				2800-FS ⁽¹⁾	2 1/8" Dia.	
	L5-20	20 Amp	125 Volt	2820-FS10	2705-L20	
	L6-20	20 Amp	250 Volt	2820-FS12		
	L7-20	20 Amp	277 Volt	2820-FS14		
	Non-NEMA	20 Amp	125/250 Volt	2820-FS16		
	Non-NEMA	20 Amp/10 Amp	250 Volt/600 Volt	2820-FS17		
	L5-30	30 Amp	125 Volt	2830-FS10 ⁽²⁾		
	L6-30	30 Amp	250 Volt	2830-FS12 ⁽²⁾		
	L7-30	30 Amp	277 Volt	2830-FS14 ⁽²⁾		
	Non-NEMA	30 Amp	125/250 Volt	2830-FS16		
20A & 30A Locking, 4-Wire						
Flip Seal Cover w/ weatherproof boot only				2900-FS ⁽¹⁾	2 1/8" Dia.	
	L14-20	20 Amp	125/250 Volt	2920-FS20	2705-L142	
	L15-20	20 Amp	250 Volt, 3 ø	2920-FS22		
	L16-20	20 Amp	480 Volt, 3 ø	2920-FS24	2705-L162	
	L14-30	30 Amp	125/250 Volt	2930-FS20		
	L15-30	30 Amp	250 Volt, 3 ø	2930-FS22		
	L16-30	30 Amp	480 Volt, 3 ø	2930-FS24		
	L17-30	30 Amp	600 Volt, 3 ø	2930-FS26		
	L18-30	30 Amp	120/208 Volt, 3 ø wye	2930-FS30		
	Non-NEMA	30 Amp	120/208 Volt, 3 ø wye	2930-FS28		

Notes: 1. Does not include receptacle. Use with standard receptacles of same electrical ratings.
 2. More than one face size available on the market. Check for 2.53" face diameter.
 3. 2715 - FS07 not listed.



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

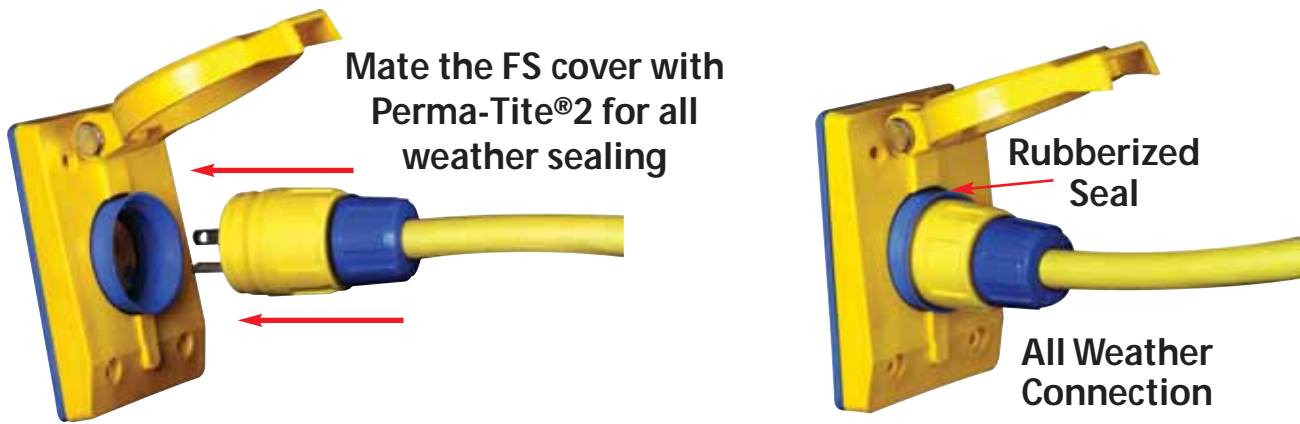

Material

- Flip & base - PBT
- Gasket - TPE


Part Number	A	B	X	Z	Amp
2700 Series	1.42	1.25	.19	1.33	15A-20A
2800 Series	1.94	1.80	.19	1.81	20A-30A (3-wire)
2900 Series	2.14	1.92	.19	1.98	20A - 30A (4-wire)

6200 Series Boxes for FS Series Mounting


Part Number	Description
6212FSK	Box, Std Depth, No bushing, 1/2" NPT
6234FSK	Box, Std Depth, No bushing, 3/4" NPT
6210FSK	Box, Std Depth, No bushing, 1" NPT
6212FDK	Box, Deep, No bushing, 1/2" NPT
6234FDK	Box, Deep, No bushing, 3/4" NPT
6210FDK	Box, Deep, No bushing, 1" NPT
Boxes for 2705 - 1/2" NPT Bushing Installed (N=Non Metallic W = Wire Mesh)	
6212NFSK	Box, Std Depth, NM Bushing, 1/2" NPT
6212NFDK	Box, Deep, NM Bushing, 1/2" NPT
6212WFSK	Box, Std Depth, WireMesh Bushing, 1/2" NPT
6212WFDK	Box, Deep, WireMesh Bushing, 1/2" NPT
6234NFSK	Box, Std Depth, NM Bushing, 3/4" NPT
6234NFDK	Box, Deep, NM Bushing, 3/4" NPT
6234WFSK	Box, Std Depth, WireMesh Bushing, 3/4" NPT
6234WFDK	Box, Deep, WireMesh Bushing, 3/4" NPT
6210NFSK	Box, Std Depth, NM Bushing, 1" NPT
6210NFDK	Box, Deep, NM Bushing, 1" NPT
6210NFTK	Box, OPEN, NM Bushing, 1" NPT
6210WFSK	Box, Std Depth, WireMesh Bushing, 1" NPT
6210WFDK	Box, Deep, WireMesh Bushing, 1" NPT
6210WFTK	Box, OPEN, WireMesh Bushing, 1" NPT




FT Feed Thru Box

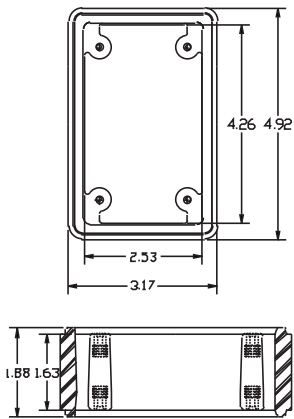


FD Deep Box

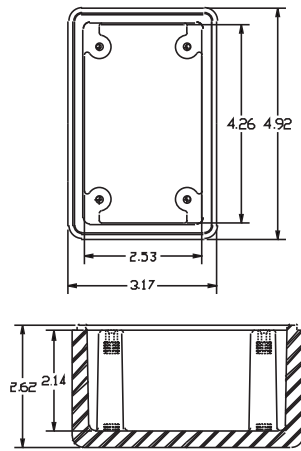




FS Standard Box

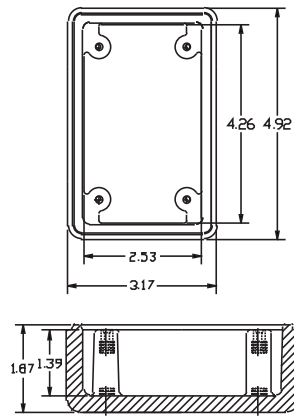


Mounting Templates

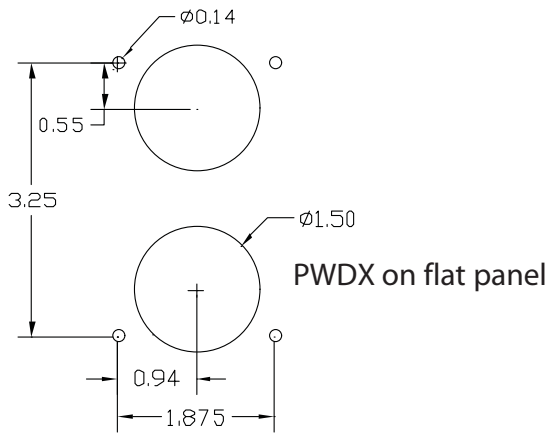

6260 WK Wall Kit

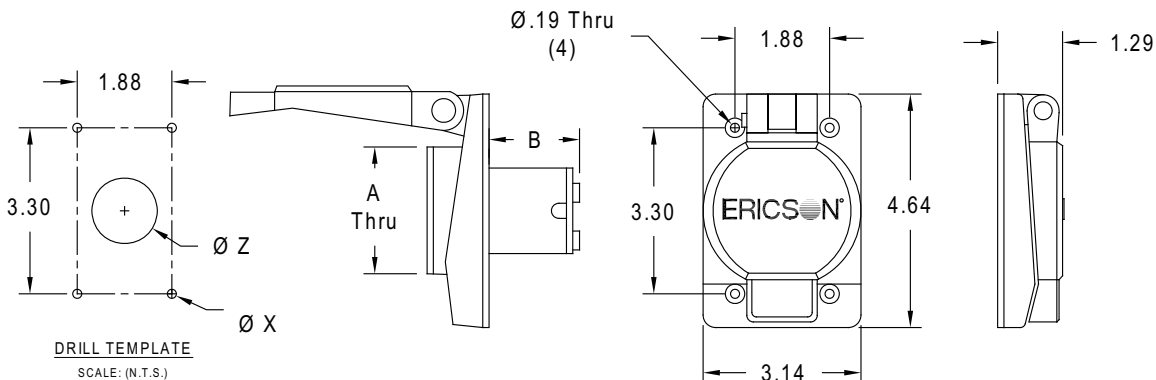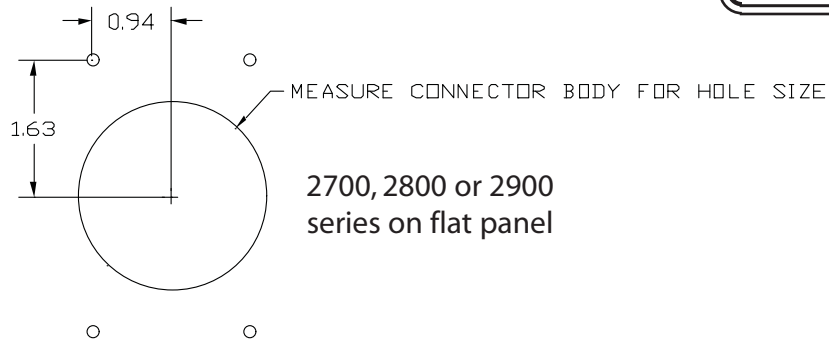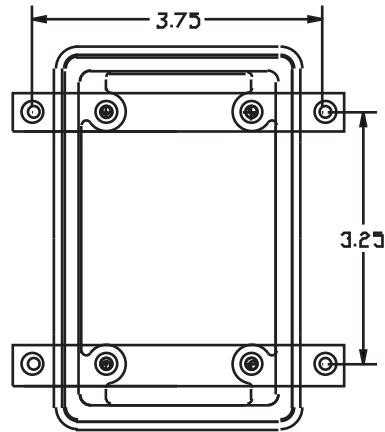

PERMA-LINK®

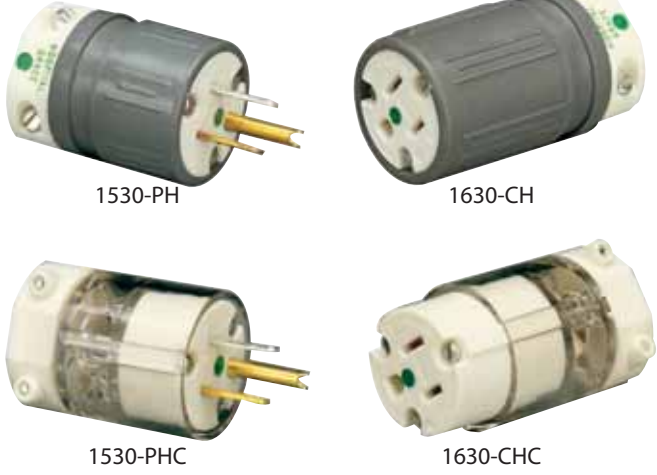

FEATURES:

- UL listed, hospital grade
- Built to withstand exceptional abuse
- Constructed of rugged (PBT) and (TPE)
- Non-conductive cord clamp accommodates cord sizes #16/3 SJ through #12/3 SO (1530-PH & 1630-CH)
- Gray rubber cover provides superior insulation
- Clear cover permits visual inspection of wiring terminations without disassembly
- Impact resistant and non-conductive

Hospital Grade Perma-Link® Plugs and Connectors

The same rugged internal construction as our standard Perma-Link line is found in these units, and in addition they meet UL Hospital Grade standards. Designed for reliable long life, built to withstand exceptional abuse, these dead-front, back-wired devices save installation time, provide maximum protection and can be used for straight blade installations in hospitals, schools, and extended care facilities. Constructed of rugged (PBT) and (TPE), they have passed tests for ground pin retention, ground resistance, face impact, ground temperature contact, fault current, line blade retention and abrupt removal.

Hospital Grade Devices with Gray Covers					
Face View	NEMA Configuration	Electrical Ratings		Perma-Link	
		Amps	Volts	Plugs	Connectors
	5-15	15	125	1530-PH	1630-CH
	5-20	20	125	1532-PH	1632-CH

Hospital Grade Devices with Clear Covers Straight Blade, 2-pole, 3-wire Grounding					
Face View	NEMA Configuration	Electrical Ratings		Perma-Link	
		Amps	Volts	Plugs	Connectors
	5-15	15	125	1530-PHC	1630-CHC
	5-20	20	125	1532-PHC	1632-CHC

EML520R & EML630R

Ericson offers our same heavy duty receptacles that we use in our own Temporary Power Panels. These wiring devices are primarily used in our OSCAR series and can be used as replacement parts for those products. Features such as color coded screw terminals with combo heads for ease of wiring makes these superior devices the best choice.



L6-30
EML630R



L5-20
EML520R





FEATURES:

- UL Listed, CSA Certified, cETLus Listed
- Rugged nylon construction resists impact, corrosion and jobsite oils/chemicals
- Quick field assembly, no need to disassemble the entire device
- Nickel plated blades and stainless steel screws provide optimum corrosion resistance
- Optional heavy-duty weather-proof boots are available and provide added environmental protection and UV resistance
- Boots can be threaded together with the optional sealing collar system to provide maximum environmental protection
- Available in plugs, connectors, inlets and receptacles

Face View	NEMA	Electrical Ratings		Perma-Link®		Receptacles	Flanged Inlets	Inlet with Flip Cover
	Configuration	Amps	Volts	Plugs	Connectors			
Locking, 2-pole, 3-wire Grounding								
	Non-NEMA	50	250VDC, 600VAC	3763-P	3762-C	3771	3777	
Locking, 3-pole, 4-wire Grounding								
	Non-NEMA	50	250VDC, 600VAC	3765-P	3764-C	3769	3775	
			250VDC, 600VAC	7765-P(1)	7764-C(1)	7379	7958	
Locking, California Style, 2-pole, 3-wire Grounding								
	Non-NEMA	50	125	CS6361-P	CS6360-C	-	-	
			250	CS8265-P	CS8264-C	CS8269	CS8275	
			480	CS8465-P	-	CS8469	-	
Locking, California Style, 3-pole, 4-wire Grounding								
	Non-NEMA	50	125/250	CS6365-P	CS6364-C	CS6369	CS6375	CS6375-F
			480, 3Ø	CS8165-P	CS8164-C	CS8169	CS8175	

Notes:


1. For replacement use only, not recommended for new installations
2. Contact factory for custom assemblies

Sealing Collar System

Our exclusive sealing collar system is available to provide maximum moisture protection between cordsets. The two boots are securely sealed together with threaded polycarbonate rings.

Perma-Link® 50-Amp Accessories	Cat. Number
Weatherproof boot for plug or connector	7717
Sealing Collar for weatherproof boots	510-RR
Weatherproof receptacle cover	7788-CR

Note: 7717 & 510-RR not compatible with 6365P & 6364C

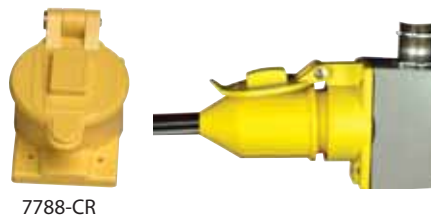

7717 Provides A Superior Seal With Our SR-50 Receptacle



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



Application: Ericson Temporary Power System (1066FS, Big-E Jr., e-Cart™ 2, e-Cart™ Jr.) utilize Ericson's 50 Amp power cable.

24/7 Emergency Assistance Hotline
1-877-OSCAR99 (672-2799)



Perma-Kleen™ Anti-microbial Cordsets, Cord Drops and Bulk Cable

Ericson's Perma-Kleen™ Anti-microbial Cordsets, Cord Drops and bulk cable provide a new and innovative approach to controlling microbial growth by incorporating anti-microbial additives that remain stored in the polymer providing continual, long lasting protection. Inhibiting the growth of harmful and potentially deadly microbial contamination can finally be achieved 24/7 utilizing Ericson's revolutionary embedded anti-microbial protection.



Camlock Power Cable

Multiple Conductor (SC) cordsets for Interconnection with Big-E and Big-E Jr. series temporary panels. Cord is 105°C SC Welding type black. Male and Female connection ends are standard 400A style Camlocks which are color coded for easy plug-n-play hook up.



Factory Assembled Cordsets

Factory assembled to meet the most demanding industrial and construction applications. Available with Ericson's Perma-Link®, Perma-Grip™ or Perma-Tite™ plugs and connectors. Manufactured using heavy-duty SOW cord for maximum durability and longevity.



50 Amp Power Cable

Ericson's complete line of 50 Amp cordsets for use with Oscar Temporary Power Distribution Centers are the best built in the industry. Assembled in the USA with high standards to produce the best cordsets available. Call for custom lengths. Minimum order size required.



Emergency Generator GFCI


Rubberized Box eliminates "hot" un-grounded dangerous metal quad boxes.

- Heavy Duty SJ & SO cord for long service life
- GFCI Protection - GFCI 5-20 Duplexes protecting 5-20 duplex receptacles



Heavy Duty W & Y Cordsets

Y-Adapter provides two outlets so you can keep two tools plugged in. Made from heavy-duty #12/3 STW yellow cable with molded-on plug, connector & Y/W-junction.

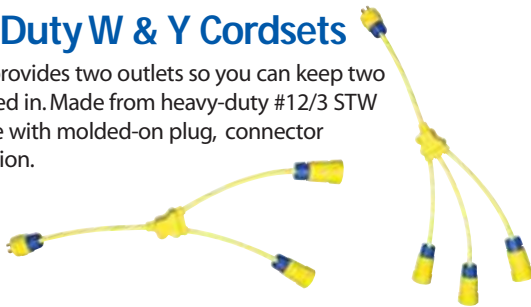

Cordsets

Ericson offers a complete line of high quality jobsite style cordsets for a range of applications. From light tool and generator connection to heavy duty cordsets, the Ericson line of safety cordsets is the right answer to your power cord needs.



Bonus: Custom factory cord jacket printing available

Smart Monitor Cordsets

Industrial application Smart Cords factory built to last. Models with Smarter Connector and both Smart Plug & Connector are available. 24/7 monitoring with assured grounding compliance to NED and OSHA standards. Built with the highest quality materials to withstand challenging environments.




6100 Series Factory Wired Portable Outlet Boxes

These factory assembled outlet boxes save assembly time in the field and assembly cost, plus they give the assurance of proper component matching of cord, box and plug.



TuffTraxx™ Cable Protectors

Protect expensive cables from foot-traffic and equipment damage while eliminating tripping hazards caused by cables with Ericson's CP5 Series GP Cable Protectors. Made from rugged, all-weather polyurethane construction known for its resilience, hardness and impact resistance for demanding environments.

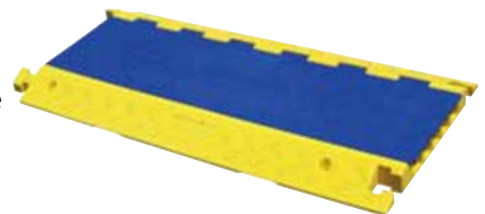



**Untreated
E-Coli @ 24 hours**



**Treated
E-Coli @ 24 hours**

FEATURES:

- UL and CSA Listed / Patent Pending
- Inhibits Growth of Bacteria, Molds, Mildews and Fungi
- Escherichia (E. Coli):
 - Log Reduction > 4.8, reduces surface bacteria by > 99.99%
- Staphylococcus (Staph), MRSA:
 - Log Reduction > 3.9, reduces surface bacteria by > 99.98%
- Listeria monocytogenes:
 - Log Reduction > 4.3, reduces surface bacteria by > 99.99%
- Salmonella
 - Log Reduction > 3.6, reduces surface bacteria by > 99.97%
- RoHS Compliant (Non-Halogenated)
- Anti-microbial Additives Embedded in Polymer
- Resistant to Scuffing, Cleaning, High Pressure Hose Down
- Independently Tested and Certified
- Tongue & Groove Environmental Sealing
- Keyed Body and Cover for Alignment
- NEMA Type 4, 4X, 6, 6P and IP67 Protection

Ericson’s Perma-Kleen™ Anti-microbial Cordsets provide a new and innovative approach to controlling microbial growth by incorporating anti-microbial additives that remain stored in the polymer providing continual, long lasting protection. Inhibiting the growth of harmful and potentially deadly microbial contamination can finally be achieved 24/7 utilizing Ericson’s revolutionary embedded anti-microbial protection.

Embedded Anti-microbial additives are resistant to high pressure hose-down and continue to inhibit the growth of bacteria, mold, mildew and fungi, even when nicked or scraped, as additional anti-microbial additives bloom to the surface. This is not a surface treatment. Micro-organism growth is inhibited, and after a short period of time, they can no longer be measured by standard laboratory equipment.

Perma-Kleen™ Anti-microbial Cordsets/Cord Drops deliver exceptional protection against microbial growth even on hidden, hard to clean surfaces. Independent testing reveals the ability of these assemblies to inhibit the growth of a wide range of Gram (+) & Gram (-) bacteria delivering long lasting benefits to manufacturers beyond traditional cleaning methods.

Ideal for new or existing installations, these cost effective solutions deliver unparalleled confidence and peace of mind from knowing that every possible step has been taken to protect consumers. Perma-Kleen Anti-microbial Cordsets/Cord Drops are ideal for a wide range of applications including:

- | | | |
|-----------------------------|-----------------------|--------------------|
| • Poultry Processing | • Seafood Processing | • Meat Processing |
| • Pharmaceutical Processing | • Food Packaging | • Food Preparation |
| • Agriculture | • Beverage Processing | • Health Care |



Factory Assembled Anti-microbial Cord Sets

- Factory assembled to meet the most demanding industrial and construction applications
- Available with Ericson's Perma-Kleen™ plugs and connectors
- Manufactured using heavy-duty SEOW cord for maximum durability and longevity

1510

Plug/Connector
NEMA Designator
(select part code)

PW6P

123

A

Y

AM

Length
A = 25 ft. OAL
B = 50 ft. OAL
D = 100 ft. OAL
Z = Custom*
*OAL = Overall length

Y = Yellow

AM = Anti-microbial

Plugs/Connectors Code	Face View	NEMA	Electrical Ratings	
		Configuration	Amps	Volts
1510		5-15	15	125
1512		5-20	20	125
1514		6-15	15	250
1516		6-20	20	250
1520		L5-15	15	125
1522		L6-15	15	250
1524		L7-15	15	277
2310		L5-20	20	125
2312		L6-20	20	250
2314		L7-20	20	277
2320		L14-20	20	125/250
2322		L15-20	20	250, 3Ø
2324		L16-20	20	480, 3Ø
2510		L5-30	30	125
2512		L6-30	30	250
2514		L7-30	30	277
2520		L14-30	30	125/250, 3Ø
2522		L15-30	30	250, 3Ø
2524		L16-30	30	480, 3Ø
2526		L17-30	30	600, 3Ø
2530		L18-30	30	120/208 3Ø wye

Cord Size
123 = 12/3 SOW
103 = 10/3 SOW
104 = 10/4 SOW

Perma-Kleen Anti-microbial

PW6P = Extreme Industrial Water Tight Ends



(PW6P) Perma-Kleen™ Anti-microbial Cord Grip Nut Style features:

- All weather - NEMA 6P rated
- Super sealing rings
- Connector includes cover





**Untreated
E-Coli @ 24 hours**



**Treated
E-Coli @ 24 hours**

FEATURES:

- UL and CSA Listed / Patent Pending
- Inhibits Growth of Bacteria, Molds, Mildews and Fungi
- Escherichia (E. Coli):
 - Log Reduction > 4.8, reduces surface bacteria by > 99.99%
- Staphylococcus (Staph), MRSA:
 - Log Reduction > 3.9, reduces surface bacteria by > 99.98%
- Listeria monocytogenes:
 - Log Reduction > 4.3, reduces surface bacteria by > 99.99%
- Salmonella
 - Log Reduction > 3.6, reduces surface bacteria by > 99.97%
- RoHS Compliant (Non-Halogenated)
- Anti-microbial Additives Embedded in Polymer
- Resistant to Scuffing, Cleaning, High Pressure Hose Down
- Independently Tested and Certified
- Tongue & Groove Environmental Sealing
- Keyed Body and Cover for Alignment
- NEMA Type 4, 4X, 6, 6P and IP67 Protection

Ericson's Perma-Kleen™ Anti-microbial Cord Drops provide a new and innovative approach to controlling microbial growth by incorporating anti-microbial additives that remain stored in the polymer providing continual, long lasting protection. Inhibiting the growth of harmful and potentially deadly microbial contamination can finally be achieved 24/7 utilizing Ericson's revolutionary embedded anti-microbial protection.

Embedded Anti-microbial additives are resistant to high pressure hose-down and continue to inhibit the growth of bacteria, mold, mildew and fungi, even when nicked or scraped, as additional anti-microbial additives bloom to the surface. This is not a surface treatment. Micro-organism growth is inhibited, and after a short period of time, they can no longer be measured by standard laboratory equipment.

Perma-Kleen™ Anti-microbial Cordsets/Cord Drops deliver exceptional protection against microbial growth even on hidden, hard to clean surfaces. Independent testing reveals the ability of these assemblies to inhibit the growth of a wide range of Gram (+) & Gram (-) bacteria delivering long lasting benefits to manufacturers beyond traditional cleaning methods.

Ideal for new or existing installations, these cost effective solutions deliver unparalleled confidence and peace of mind from knowing that every possible step has been taken to protect consumers. Perma-Kleen Anti-microbial Cordsets/Cord Drops are ideal for a wide range of applications including:

- | | | |
|-----------------------------|-----------------------|--------------------|
| • Poultry Processing | • Seafood Processing | • Meat Processing |
| • Pharmaceutical Processing | • Food Packaging | • Food Preparation |
| • Agriculture | • Beverage Processing | • Health Care |



Factory Assembled Anti-microbial Overhead Cord Drops

- Factory assembled to meet the most demanding industrial and construction applications
- Available with Ericson's Perma-Kleen™ plugs and connectors
- Manufactured using heavy-duty SEOW cord for maximum durability and longevity

5-15

NEMA Designator
(select part code)

(C)W6P

P = Plug
C = Connector

123

A

Length
A = 25 ft. OAL
B = 50 ft. OAL
D = 100 ft. OAL
Z = Custom*
*OAL = Overall length

Y

Y = Yellow

AM

AM = Anti-microbial

NEMA Configuration	Face View	Electrical Ratings	
		Amps	Volts
5-15		15	125
5-20		20	125
6-15		15	250
6-20		20	250
L5-15		15	125
L6-15		15	250
L7-15		15	277
L5-20		20	125
L6-20		20	250
L7-20		20	277
L14-20		20	125/250
L15-20		20	250, 3Ø
L16-20		20	480, 3Ø
L5-30		30	125
L6-30		30	250
L7-30		30	277
L14-30		30	125/250, 3Ø
L15-30		30	250, 3Ø
L16-30		30	480, 3Ø
L17-30		30	600, 3Ø
L18-30		30	120/208 3Ø wye

Cord Size
123 = 12/3 SOW
103 = 10/3 SOW
104 = 10/4 SOW

Perma-Kleen Anti-microbial

PW6P = Extreme Industrial Water Tight Ends



(PW6P) Perma-Kleen™ Anti-microbial Cord Grip Nut Style features:

- All weather - NEMA 6P rated
- Super sealing rings
- Connector includes cover

Part Number: 515CW6P123AYAM


Cable Spools - Selection Guide

Part #	Length (ft)	Cord Size	Type
1231000AM	1000	12/3	SEOW
1031000AM	1000	10/3	
1041000AM	1000	10/4	


Selection Guide - Cable

Part #	Length (ft)	Cord Size	Type
1231000AM	1000	12/3	SEOW



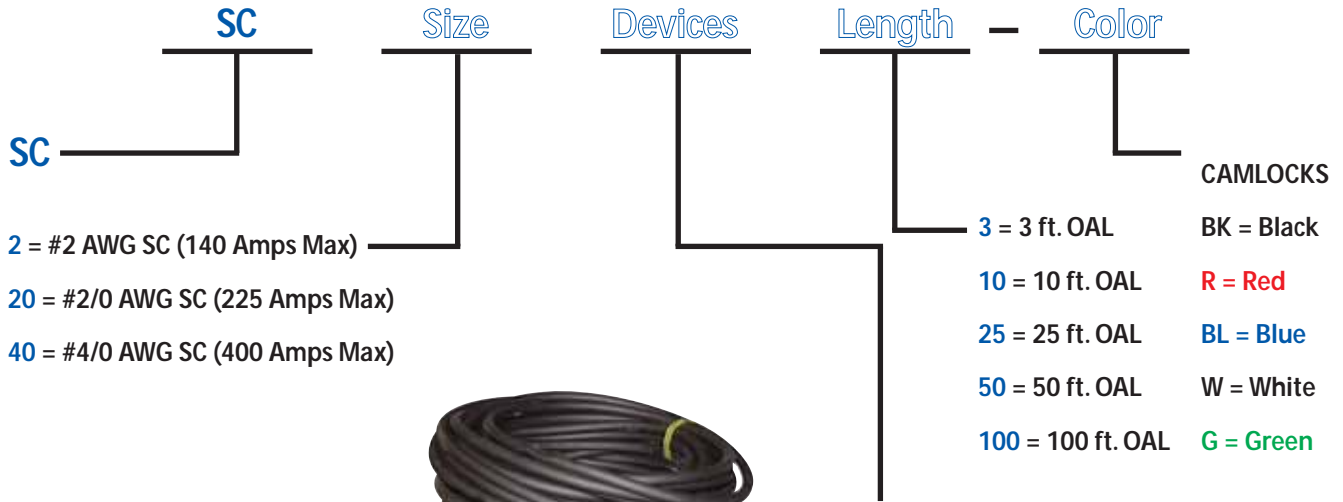


Example:
SC2MF3-R

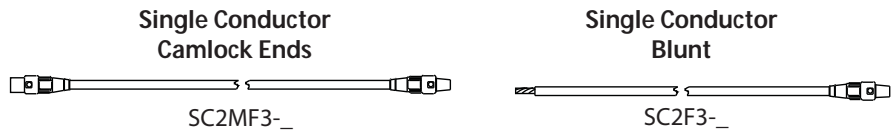

Camlock Colors

Black = Hot A Ø
Red = Hot B Ø
Blue = Hot C Ø
White = Neutral
Green = Ground

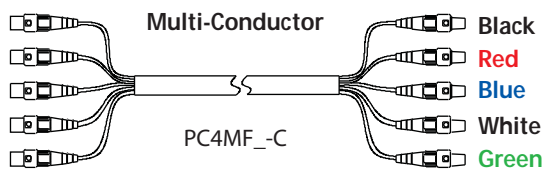

Multiple Conductor Cable Assemblies						
Catalog No.	Plug (male)	Connector (female)	OAL ft	Cord	Amps	Camlock Color Code
PC4MF25-C	Camlock	Camlock	25	#4 W 600V	90	All - Black, Red, Blue, White, Green
PC4MF50-C			50	#4 W 600V		
PC4MF100-C			100	#4 W 600V		
PC2MF25-C			25	#2 W 600V	120	
PC2MF50-C			50	#2 W 600V		
PC2MF100-C			100	#2 W 600V		



50, 60 & 100 Amp Cordsets

50 Amp Cordsets

Ericson's complete line of 50 Amp cordsets for use with Oscar Temporary Power Distribution Centers are the best built in the industry. Assembled in the USA with high standards to produce the best cordsets available. Call for custom lengths. Minimum order size required.

- For use with Oscar Series 1066 and 1067
- Can connect e-Cart Jr and e-Cart2 Series to Oscars
- Blunt pigtail versions make hard wiring into a panel easy and quick (PGTL)
- Available in SOW cord types
- 50 Amp "Y" available



Cat. Number	Rating	Length (ft)	Cord Size	Cord Type	Plug	Connector
63BSO	50 A	50	#6/3 & #8/1 (Gnd)	SOW	Twistlock 50 Amp CS6365-P or equiv	Twistlock 50 Amp CS6364-C or equiv
63DSO		100			Twistlock 50 Amp CS6365-P or equiv	
63PGTLSO-50		50			Blunt - 12" ROJ - 1" Tin	
63PGTLSO-100		100			Blunt - 12" ROJ - 1" Tin	
63YSTW		3 ft "Y"		STW	(1) Twistlock 50 Amp CS6365-P or equiv	(2 each) Twistlock 50 Amp CS6364-C or equiv

60 & 100 Amp Cordsets

Ericson manufactured cordsets are built to the highest quality standards for durability and long service. Our cordsets use the best plugs and connectors possible and are constructed to meet the high demands of industrial and military environments.

- Extra Hard Usage SOW cord
- Highest quality Internationally rated IEC plugs and Connectors
- Military cordsets use exact match Military plug-n-play Class L wiring devices
- Pigtail cordsets allow for hard wiring into panels with tinned ends
- For use with Oscar® 1068, Oscar® 2 and Tactical Oscar® Military Style distribution centers



	Cat. Number IEC Style Cordsets*	Rating	Length (ft)	Cord Size	Cord Type	Plug	Connector
	65BSO	60 A	50	#6/5	SOW	4P 5W 60 Amp IEC 560P9E or equiv	4P 5W 60 Amp IEC 560C9E or equiv
	65DSO		100			4P 5W 60 Amp IEC 560P9E or equiv	
	65PGTL-50		50			Blunt - ROJ 12"	
	65PGTL-100		100			Blunt - ROJ 12"	
	45BSO	90 A	50	#4/5	W	4P 5W 100 Amp IEC 5100P9E or equiv	4P 5W 100 Amp IEC 5100C9E or equiv
	45DSO		100			4P 5W 100 Amp IEC 5100P9E or equiv	
	45PGTL-25		25			Blunt - ROJ 12"	
	45PGTL-50		50			Blunt - ROJ 12"	
	45PGTL-100	100	Blunt - ROJ 12"				
Military Style Cordsets							
	65BSOM	60 A	50	#6/5	SOW	4P 5W 60 Amp Military Class L or equiv	4P 5W 60 Amp Military Class L or equiv
	65DSOM		100			4P 5W 60 Amp Military Class L or equiv	
	65MIL PIGTAIL		6			Blunt - ROJ 12" - Tinned 1" each	
	65MIL PGTL-50		50			Blunt - ROJ 12" - Tinned 1" each	
	65MIL PGTL-100	100	Blunt - ROJ 12" - Tinned 1" each				
	45BSOM	100 A	50	#2/4 with Ground	W	4P 5W 100 Amp Military Class L or equiv	4P 5W 100 Amp Military Class L or equiv
45DSOM	100		4P 5W 100 Amp Military Class L or equiv				
45BSOMPRTL	10		Blunt - ROJ 12" - Tinned 1" each				
45MIL PGTL-50	50		Blunt - ROJ 12" - Tinned 1" each				
	45MIL PGTL-100	100	Blunt - ROJ 12" - Tinned 1" each				


*Note: #2/5 cordsets available - call for details.



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



Heavy Duty W & Y Cordsets

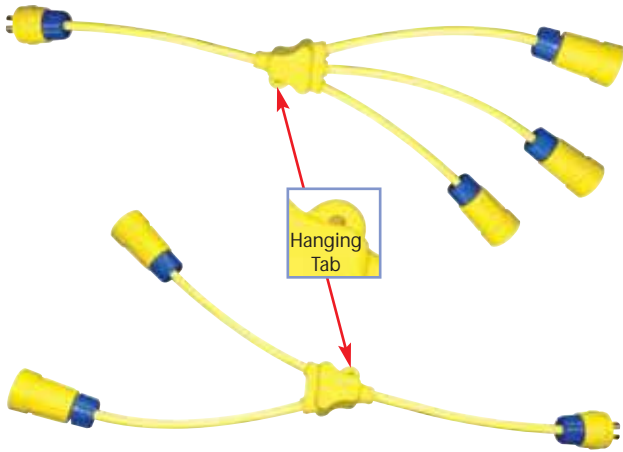

Heavy Duty Grade W & Y Cordsets

- cCSAus Listed
- Provides multiple outlets from a single power source
- Available in "Y" and "W" configurations
- Manufactured using heavy-duty 600V cord
- Standard models available with 18" primary and secondary
- Available with Ericson's Perma-Link or Perma-Tite plugs and connectors
- Custom configurations available with your choice of primary length, secondary length and plug/connectors
- Easy to hang - hanging loop tab



2634 -

A1


Z10

Base Model
2634 = Y
2636 = W

Plug/Conn	Amp	Volts	AWG Cord Size	
			1	2
A = 1510P & 1610-C	15	120	14/3	12/3
B = 1510-PW6P & 1610-CW6P	15	120	14/3	12/3
C = 1520-P & 1620-C	15	120	14/3	12/3
D = 1520-PW6P & 1620-CW6P	15	120	14/3	12/3
E = 2310-P & 2410-C	20	120	12/3	10/3
F = 2310-PW6P & 2410-CW6P	20	120	12/3	10/3
G = 2510-P & 2610-C	30	120	10/3	
H = 2510-PW6P & 2610-CW6P	30	120	10/3	
I = 2320-P & 2420-C	20	120/240	12/4	
J = 2320-PW6P & 2420-CW6P	20	120/240	12/4	
M = L21-20P & L21-20C	20	208	12/5	

Length
Blank = std 3' OAL
Zxx = any length up to 100' OAL

SOW, SOOW, SEOW 600V Rated only.

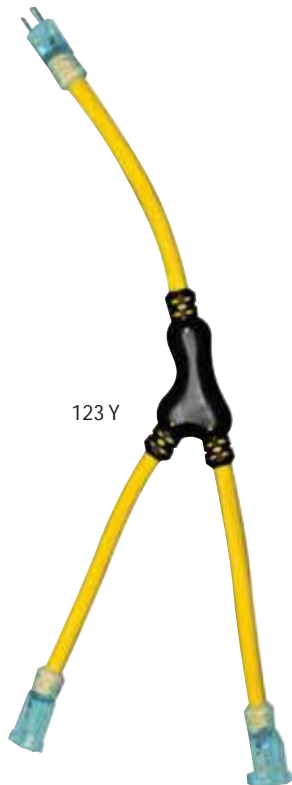

Contractor Grade Y Adapter Features 600V STW Cable

Made from heavy-duty #12/3 STW yellow cable with molded-on plug, connector & Y-junction.

- 2'
- Made from heavy-duty #2 STW yellow cable
- NEMA 5-15 L5-20



Y Adapter Selection Guide


Catalog Number	Electrical Ratings						
	Length	Gauge	Type	Amps	Volts	Plug/Connector	Face View
123Y	2'	#12/3	STW	15A	120V	NEMA 5-15 Straight Blade	
123YL				20A		NEMA L5-20	

Emergency Generator GFCI Cordsets



Side A

8Z3104S08GA

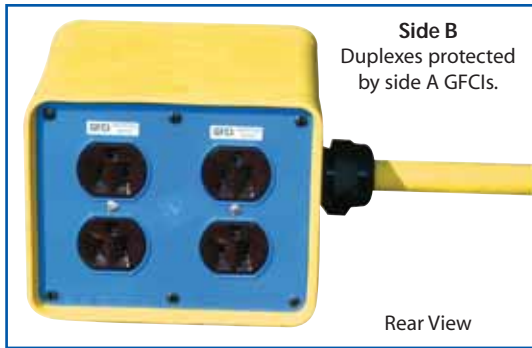

Side B
Duplexes protected
by side A GFCIs.


Rear View

FEATURES:

- 120 & 240V, 3 & 4 Wire 20 & 30 AMP (L5-20, L5-30, L14-20 & L14-30 Plugs)
- Rubberized Box eliminates “hot” un-grounded dangerous metal quad boxes
- Heavy Duty Perma-Link™ Plug with rubberized body
- Heavy Duty SJ & SO cord for long service life
- GFCI Protection
- Heavy Duty cord strain relief at box stands up to rough duty
- 2, 25, 50 and 100 ft cord lengths keeps generator away from family and work area

NOTICE:

The NEC restricts the use of metal job boxes as temporary power cords



3 Wire Systems

Catalog Number	Rating	Plug	Cord Type	Box Config	Length
8V2123SJB6G2	120V 20 AMP	L5-20	#12/3 SJT Black	6000 Box w/ (1) GFCI 5-20 Duplex & (1) Protected 5-20 Duplex	2
8V2123SJB6GA					25
8V2123SJB6GB					50
8V3103SE6G2	120V 30 AMP	L5-30	#10/3 SEO Yellow	6000 Box w/ (1) GFCI 5-20 Duplex & (1) Protected 5-20 Duplex	2
8V3103SE6GA					25
8V3103SE6GB					50
8V3103SE6GD					100

4 Wire Systems

8Z2124SE8G2	240V 20 AMP	L14-20	#12/4 SEO Black	8000 Box w/ (2) GFCI 5-20 Duplex & (2) Protected 5-20 Duplex	2
8Z2124SE8GA					25
8Z2124SE8GB					50
8Z3104S08G2	240V 30 AMP	L14-30	#10/4 SO Yellow	8000 Box w/ (2) GFCI 5-20 Duplex & (2) Protected 5-20 Duplex	2
8Z3104S08GA					25
8Z3104S08GB					50
8Z3104S08GD					100

Other configurations available - call factory for details.



7000 Series - Tri-Tap Multiple Outlet Boxes



FEATURES:


- Available in a variety of amperages and voltages
- Standard NEMA configurations ensure compatibility with existing equipment
- Molded of rugged thermoplastic elastomer (TPE) to provide maximum resistance to oils, chemicals and impact
- Non-conductive housing eliminates possibility of box becoming energized
- Cover plate and non-conductive cord clamp molded from impact and chemical resistant polybutylene terephthalate (PBT)

7000 Series Tri-Tap Multiple Outlet Boxes

Amperage	Voltage	NEMA Configuration	Box Only	Factory Wired Boxes	
				#12/3 SOW	
				25'	50'
15	125	5-15	7000	7000-25-2	7000-50-2
20	125	5-20	7002	7002-25-2	7002-50-2
15	250	6-15	7004	7004-25-2	7004-50-2
15	125	L5-15	7008	7008-25-2	7008-50-2
20	250	L6-15	7010	7010-25-2	7010-50-2
20	125	L5-20	7020	7020-25-2	7020-50-2
20	250	L6-20	7022	7022-25-2	7022-50-2
20	277	L7-20	7024	7024-25-2	7024-50-2


Notes:

1. Consult factory for custom assemblies

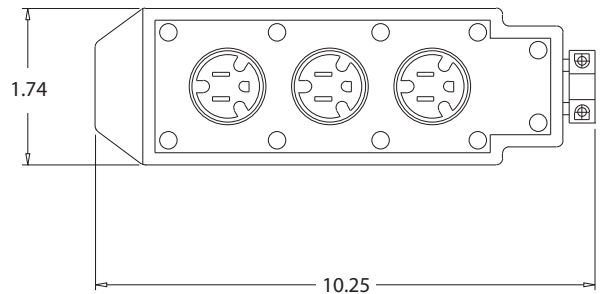

NOTICE:

The NEC restricts the use of metal job boxes as temporary power cords



7000 Series Tri-Tap Outlet Boxes with GFCI Protection

- The features of the 7000 series boxes plus GFCI protection for that added degree of safety

7000 Series Tri-Tap Outlet Boxes with GFCI Protection

Amperage	Voltage	NEMA Configuration	GFCI	Factory Wired Boxes	
				#12/3 SJTW	
				25'	50'
15	125	5-15	In-line	7002-25-2GF	7002-50-2GF
20		5-20		7020-25-2GF	7020-50-2GF
20		L5-20			



Notes:

1. Consult factory for custom assemblies





123D



123D-TT

FEATURES:

- Straight Blade and Twistlock Versions Available
- Heavy Duty SJ Cord for Long Service Life
- Thick Outer Jacket Material from SJTW Cordage Resists Jobsite Abrasion and Is Water Resistant
- Custom Factory Cord Jacket Printing Available on Most Models
- L5-20 also available
- All connectors have power indicator lights

Selection Guide

Face View	Single Molded Ends	Length (ft)	Cord Size	Type	Plug	Connector	Amps	Wattage	Volts
	123B	50	#12/3	SJTW	5-15P	5-15C	15	1875	125
	123D	100	#12/3	SJTW	5-15P	5-15C	15	1875	125



Molded Tri-Tap	Length (ft)	Cord Size	Type	Plug	Connector	Amps	Wattage	Volts
123B-TT	50	#12/3	SJTW	5-15P	5-15C	15	1875	125
123D-TT	100	#12/3	SJTW	5-15P	5-15C	15	1875	125



Custom Cord Printing:

- Custom cord printing for most cordsets and stringers
- Helps prevent theft
- Identifies temporary power investment
- Consult factory for custom lengths and configurations





SmartMonitor Factory Assembled Cord Sets

- Factory assembled to meet the most demanding industrial and construction applications
- Available with Ericson's Perma-Link®, Perma-Grip™ or Perma-Tite™ plugs and connectors
- Manufactured using heavy-duty SOW cord for maximum durability and longevity

1510

Plug/Connector
NEMA Designator¹
(select part code)

P

143

A

(Use for numerical length only when Z code is used)

Length

- A = 25 ft. OAL
 - B = 50 ft. OAL
 - D = 100 ft. OAL
 - Z = Custom¹
- OAL = Overall length

Cord Size¹

- 103 = 10/3 SOW
- 104 = 10/4 SOW
- 123 = 12/3 SOW
- 124 = 12/4 SOW
- 143 = 14/3 SOW
- 163 = 16/3 SOW

Face View	NEMA	Electrical Ratings		Plugs/Connectors Code
	Configuration	Amps	Volts	
	5-15	15	125	1510
	5-20	20	125	1512
	L5-20	20	125	2310

Overall Environmental Grade
(based on plug/connector style)

- PML = Industrial Light
- PGML = Industrial Medium
- PW6PL = Extreme Industrial Water Tight Ends



(P) Perma-Link™ Cord Clamp
Style Features:

- Internal cord seal
- Dual screw self-centering clamp



(PG) Perma-Grip™ Cord Grip Nut
Style Features:

- Nickel plated solid brass blades
- Super sealing cord grip nut design



(PW6P) Perma-Tite2™ All Weather
Cord Grip Nut Style features:

- All weather - NEMA 6P rated
- Super sealing rings
- Connector includes cover

¹ **Note:** Some of the plug/connector amp ratings to cord size configurations are not recommended due to basic electrical safety rules. Customers are responsible for checking local codes and proper usage of any factory built cordset.





Industrial



Extreme Industrial

Factory Assembled Cord Sets

- Factory assembled to meet the most demanding industrial and construction applications
- Available with Ericson's Perma-Link[®], Perma-Grip[™] or Perma-Tite[™] plugs and connectors
- Manufactured using heavy-duty SOW cord for maximum durability and longevity

1510

Plug/Connector
NEMA Designator¹
(select part code)

P

143

Cord Size¹

- 103** = 10/3 SOW
- 104** = 10/4 SOW
- 123** = 12/3 SOW
- 124** = 12/4 SOW
- 143** = 14/3 SOW
- 163** = 16/3 SOW

A

Length

- A** = 25 ft. OAL
 - B** = 50 ft. OAL
 - D** = 100 ft. OAL
 - Z** = Custom¹
- OAL = Overall length

(Use for numerical length only when Z code is used)

Face View	NEMA	Electrical Ratings		Plugs/Connectors Code
	Configuration	Amps	Volts	
	5-15	15	125	1510
	5-20	20	125	1512
	6-15	15	250	1514
	6-20	20	250	1516
	L5-15	15	125	1520
	L6-15	15	250	1522
	L7-15	15	277	1524
	L5-20	20	125	2310
	L6-20	20	250	2312
	L7-20	20	277	2314
	Non-NEMA	20	125/250	2316
	Non-NEMA	20 10	205 600	2317
	Non-NEMA	15A 10A	125V 250V	1507
	L14-20	20	125/250	2320
	L15-20	20	250, 3Ø	2322
	L16-20	20	480, 3Ø	2324
	L5-30	30	125	2510
	L6-30	30	250	2512
	L7-30	30	277	2514
	Non-NEMA	30	125/250	2516
	L14-30	30	125/250, 3Ø	2520
	L15-30	30	250, 3Ø	2522
	L16-30	30	480, 3Ø	2524
	L17-30	30	600, 3Ø	2526
	L18-30	30	120/208 3Ø wye	2530
	Non-NEMA	30	120/208 3Ø wye	2528

Overall Environmental Grade
(based on plug/connector style)

- P** = Industrial Light
- PG** = Industrial Medium
- PW6P** = Extreme Industrial Water Tight Ends



(P) Perma-Link[™] Cord Clamp
Style Features:

- Internal cord seal
- Dual screw self-centering clamp



(PG) Perma-Grip[™] Cord Grip Nut Style Features:

- Nickel plated solid brass blades
- Super sealing cord grip nut design



(PW6P) Perma-Tite^{2™} All Weather Cord Grip Nut Style features:

- All weather - NEMA 6P rated
- Super sealing rings
- Connector includes cover

¹ **Note:** Some of the plug/connector amp ratings to cord size configurations are not recommended due to basic electrical safety rules. Customers are responsible for checking local codes and proper usage of any factory built cordset.



6100 Series - Factory Wired Portable Outlet Boxes



These factory assembled outlet boxes save assembly time in the field and assembly cost, plus they give the assurance of proper component matching of cord, box and plug.

6100 Series Factory Wired Portable Outlet Boxes Selection Guide


	Factory Wired Box	Box w/Receptacles	NEMA Config.	Cord Length	SOW Cord Size	
Factory wired with (2) duplex receptacles						
6100 box w/ (2) duplex 5-15 receptacles, 1' cord w/ 5-15 plug	61001	6101-1	5-15	1'	14/3	
6100 box w/ (2) duplex 5-15 receptacles, 25' cord w/ 5-15 plug	61025		5-15	25'	14/3	
6100 box w/ (2) duplex 5-15 receptacles, 50' cord w/ 5-15 plug	61050		5-15	50'	14/3	
6100 box w/ (2) duplex 5-20 receptacles, 1' cord w/ 5-20 plug	61101		5-20	1'	12/3	
6100 box w/ (2) duplex 5-20 receptacles, 25' cord w/ 5-20 plug	61125		5-20	25'	12/3	
6100 box w/ (2) duplex 5-20 receptacles, 50' cord w/ 5-20 plug	61150		5-20	50'	12/3	
6100 box w/ (2) duplex 5-15 receptacles, no cord			U-Add			
6100 box w/ (2) duplex 5-20 receptacles, no cord			U-Add			
6100 box w/ (2) duplex L5-15 receptacles, 1' cord w/ L5-15 plug	61201		6101-2	L5-15	1'	14/3
6100 box w/ (2) duplex L5-15 receptacles, 25' cord w/ L5-15 plug	61225			L5-15	25'	14/3
6100 box w/ (2) duplex L5-15 receptacles, 50' cord w/ L5-15 plug	61250	L5-15		50'	14/3	
Factory wired with (2) single receptacles						
6106 box w/(2) L5-15 Outlets, 6' cord w/ L5-15 plug	6106-143C2	6106-2	L5-15	6'	14/3	
6106 box w/(2) L5-15 Outlets, 25' cord w/ L5-15 plug	6106-143A2		L5-15	25'	14/3	
6106 box w/(2) L5-15 Outlets, 50' cord w/ L5-15 plug	6106-143B2		L5-15	50'	14/3	
6106 box w/(2) L5-15 Outlets			L5-15			
6111 w/ (2) L5-20, 6' #12/3 cord w/L5-20 plug	6111-123C3	6111-3	L5-20	6'	12/3	
6111 w/ (2) L5-20, 25' #12/3 cord w/L5-20 plug	6111-123A3		L5-20	25'	12/3	
6111 w/ (2) L5-20, 50' #12/3 cord w/L5-20 plug	6111-123B3		L5-20	50'	12/3	
6111 w/ (2) L5-20 receptacles			L5-20			
6111 w/ (2) L6-20, 6' #12/3 cord w/L6-20 plug	6111-123C4	6111-4	L6-20	6'	12/3	
6111 w/ (2) L6-20, 25' #12/3 cord w/L6-20 plug	6111-123A4		L6-20	25'	12/3	
6111 w/ (2) L6-20, 50' #12/3 cord w/L6-20 plug	6111-123B4		L6-20	50'	12/3	
6111 w/ (2) L6-20 receptacles			L6-20			

Notes:

1. Contact factory for custom assemblies



Factory Wired 3-Phase Alternate-Wired Power Stringer

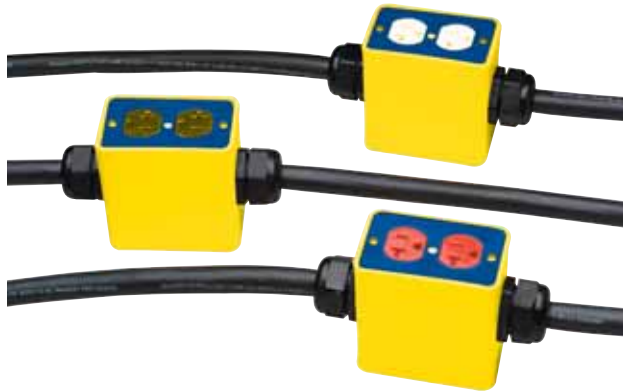

FEATURES:

- 120/208 Volt
- Code compliant
- Perfect for events requiring temporary power such as: conventions, carnivals, circuses, fairs and sporting events
- Available with Ericson's non-metallic, non-conductive outlet boxes
- Molded of thermoplastic elastomer (TPE) these non-conductive boxes are crush proof and resistant to jobsite oils
- High-visibility dual-color safety system for easy identification on the jobsite
- Available with a wide range of cover plates and a full range of replacement parts
- Custom box printing available
- 10 foot leader, boxes 10 foot center


Selection Guide

	Catalog Number	Plug	Receptacles	Overall Length	SOW Cord Size	Box 1	Box 2	Box 3	Box 4	Box 5	Box 6
20 Amp 3Ø											
w/ (3) 6129 boxes ⁶	6050 -125F8	L21-20	5-20	30'	12/5	A-phase	B-phase	C-phase	-	-	-
w/ (6) 6129 boxes ⁶	6050 -125G8			60'	12/5				A-phase	B-phase	C-phase
w/ (3) 6129 boxes ⁶	6050 -105F8			30'	10/5				-	-	-
w/ (6) 6129 boxes ⁶	6050 -105G8			60'	10/5				A-phase	B-phase	C-phase


Notes:


1. Contact factory for custom assemblies
2. Add "BLK" to catalog number for all black boxes & cable. Example: 6050-125F8 becomes 6050-125F8BLK
3. One color-coded duplex outlet per box
4. Indoor use only without snap covers
5. Custom Box Printing. Some restrictions apply. Quantity restrictions apply. Call factory for details.
6. 6129 box with coverplates #6031 and 6034
7. Each 6129 box contains (1) duplex receptacle

30' Streamer



60' Streamer



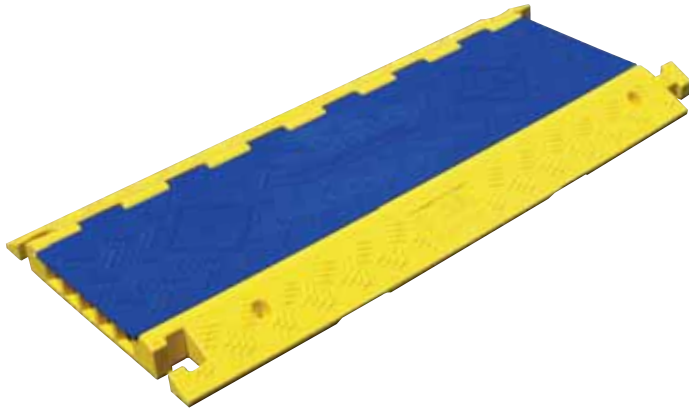

CP5-36-ID : 27,000 Lbs / Axle
CP5-36-ED : 50,000 Lbs / Axle

FEATURES:

- Industrial and extreme duty service ratings
- Load ratings up to 50,000 lbs/axle
- Y-Adapters deliver 45° and 90° cable routing
- Customizable to match corporate branding style
- Non-conductive shock barrier protection
- Rounded dividers protect cables from snags and tears
- T-style connector interlocks for secure operation
- Hinged lid for easy cable loading
- Rugged, all-weather polyurethane construction
- Tread plate surface for increased traction
- Clearly Identifiable molded safety warning symbols
- Tapered end caps provide gradual egress
- Light-weight design for easy handling and storage
- Meets NEC & OSHA requirements
- Large capacity (1.3 inch) linear sections

Ericson's TuffTraxx Series of Industrial Duty and Extreme Duty Cable Protectors deliver unmatched security and protection against cable and hose damage. Easy to install and reconfigure, the non-metallic TuffTraxx Series shields interconnect cabling from harmful equipment traffic, thus minimizing expensive down-time and repairs. Flexible Y-Adapters offer exceptional cable routing flexibility ideal for large diameter cable or multi-directional cable runs.

Protecting pedestrian traffic from dangerous trip hazards, whether at the work site or during public events, has never been easier than with this safe and affordable solution. Constructed from light-weight, durable polyurethane and tested to rigorous quality and operational standards, these products are built to withstand years of punishing service without compromised performance.

TuffTraxx Industrial and Extreme Duty Cable Protectors feature a compact, flexible design that simplifies setup and transportation making them ideal for a wide range of applications including:

- | | | | |
|----------------------------------|--------------------------|------------------------|------------------------|
| • Oil / Gas Exploration | • Oil / Gas Refineries | • Construction | • Entertainment Venues |
| • Digital / Telecommunications | • Defense / Safety | • Utility Maintenance | • Sporting Events |
| • Mining Operations | • Carnivals and Fairs | • Rental Services | • Transportation |
| • Stadiums / Racetracks / Arenas | • Universities / Schools | • Convention /Theaters | • Aerospace / Airports |



Made in the USA


Specifications

Material:	
Straight section, end caps, Y-adapter	UV Stabilized Polyurethane
Hinge	Reinforced Fiberglass
Operating Temperature Range:	
-40 °F to +120 °F (-40 °C to +49 °C)	
Maximum Load per Tire (straight section):	
CP5-36-ID	13,500 lbs. @ 70 °F (4,763 kg. @ 21 °C)
CP4-36-ED, CP5-36-ED	25,000 lbs. @ 70 °F (4,763 kg. @ 21 °C):
Maximum Load per Axle (straight section):	
CP5-36-ID	27,000 lbs. @ 70 °F (4,763 kg. @ 21 °C)
CP4-36-ED, CP5-36-ED	50,000 lbs. @ 70 °F (4,763 kg. @ 21 °C):


Catalog Number	Description	A-Length	B-Width	C-Height	D-Channel Width	E-Channel Height	Weight
CP5-36-ID	Industrial Duty 5-slot, 36" straight section	36"	17.25"	1.95"	1.30"	1.35"	20.6 lbs
CP4-36-ED	Extreme Duty 4-slot, 36" straight section	36"	19.5"	2.25"	1.80"	1.35"	23.5 lbs
CP5-36-ED	Extreme Duty 5-slot, 36" straight section	36"	19.5"	2.25"	1.40"	1.35"	23.5 lbs

Max. Allowable Cable Size

Cord Type	Voltage	Size
SOOW Portable	(600V)	2/3
SOOW Control	(600V)	18/30, 16/52, 14/24
Type W (2000V)	(2000V)	2/2, 2/3, 4/4, 6/5
Stage Lighting	(600V)	4/0
Welding	(600V)	500MCM
Utility Ground	(600V)	4/0
Type G-GC	(2000V)	4/3

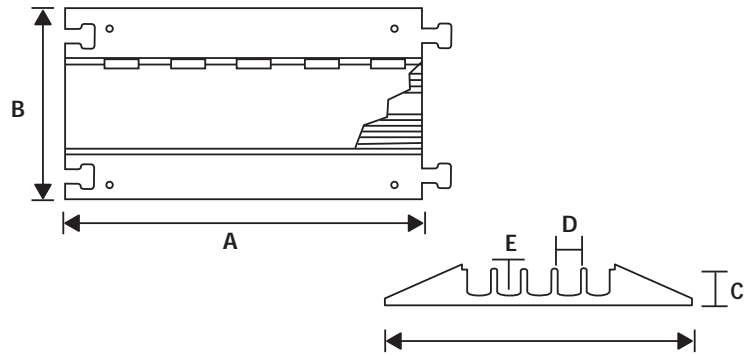

Catalog Number	Description	A-Length	B-Width	C-Height	D-Channel Width	E-Channel Height	Weight
CP5-45Y-ID	Industrial Duty 5-Channel, "Y" Adapter	20" (508.3mm)	17.25" (438.2mm)	1.95" (50mm)	1.3" (33mm)	1.3" (33mm)	11 lbs
CP5-ECP-ID	Industrial Duty 5-Channel End Cap (Pair)	4.75" (120mm)	17.25" (438.2mm)	1.95" (50mm)	1.3" (33mm)	1.3" (33mm)	2.7 Lbs.

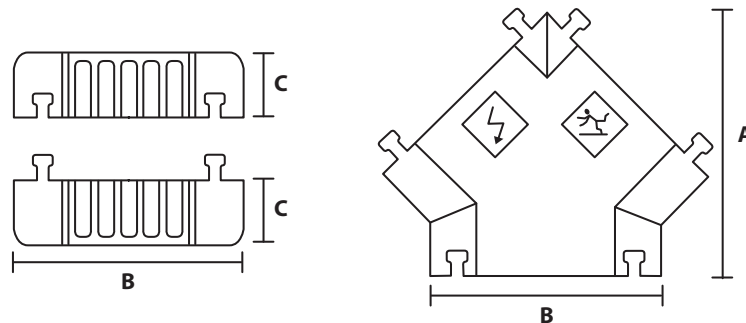

FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



24/7 Emergency Assistance Hotline
1-877-OSCAR99 (672-2799)



Flexible MINI-SYNC™ and MICRO-SYNC™ Connectors, Cable Assemblies and Receptacles



FEATURES:

- NEMA 6P and IP68 protection
- Made in the USA
- Compatible with U.S. and European sensors
- High-impact resistant contact carriers
- Highly accurate machined contacts
- Corrosion resistant gold plated contacts
- Secure pin and contact crimp termination
- Mechanically keyed
- Field installable
- Stress and harsh environment resistant
- Vibration resistant

Ericson's family of MINI-SYNC™ and MICRO-SYNC™ connectors, cable assemblies and receptacles offer the flexibility, vibration resistance and product configuration options necessary for today's challenging manufacturing environments. These connectors have been designed for low amperage AC or DC control systems, and are compatible with the pin configurations used by major U.S. and European sensor manufacturers.

MINI-SYNC™ and MICRO-SYNC™ plugs and cable assemblies are excellent for use where flexibility and resistance to stress, abuse, and harsh physical environments is essential. A wide range of configuration alternatives are available including male and female connections, 2 thru 12 pole pin-outs, straight or 90° configurations, and single or dual keyway.

Flexible connector configurations make these products ideal for applications where proximity switches, limit switches, photoelectric switches and solenoids are used including:

- | | | |
|-----------------------|---------------------|------------------------|
| • Automotive Assembly | • Conveyor Sensors | • Packaging Machinery |
| • Automated Machinery | • Material Handling | • Automated Assembly |
| • Packaging Equipment | • Robotics | • Automated Inspection |



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

SPECIFICATIONS

Materials

Body: PVC

Contact Carrier: Nitrile Rubber

Contact Sleeve: Stainless Steel

Contact: Brass, Gold Plated over Nickel

Coupling Nut: Machined Aluminum,
Black Anodized

Cable: #16 AWG Type PVC, 65 x #34
stranding 105° C

Other cables available

Cable Diameters: 2/C-.37", 3/C-.39", 4/C-.42",
5/C-.50", 6/C-.53"

Electrical

Voltage Rating: 600 VAC

Contact Resistance: ≤;5m Ω

Environmental

Protection: IP68, NEMA 6P

Operating Temp: -20°C to 105°C

Certifications



OPTIONS


#18 AWG (PVC) Plug Assemblies

Stainless Steel Couplers


Plastic Couplers

Consult the factory for custom wire length
and a full range of wire management
product accessories.



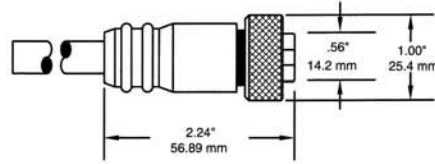







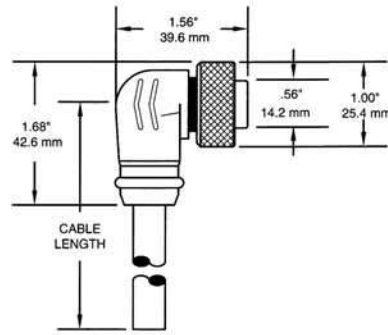Straight Connector



90° Plug Connector



MINI-SYNC™ - 2- 6 Pole - Male & Female - Straight & 90°

Poles	Face View	Rating	Wiring Code	Overall Length (ft./m)	MINI-SYNC™ Straight Male	MINI-SYNC™ Male 90°	MINI-SYNC™ Female Straight	MINI-SYNC™ Female 90°
2	Male  Female 	13A 600V	1-White 2-Black	3 ft./0.91m	82MS003A	82M9003A	82FS003A	82F9003A
				6 ft./1.83m	82MS006A	82M9006A	82FS006A	82F9006A
				12 ft./3.66m	82MS012A	82M9012A	82FS012A	82F9012A
				15 ft./4.57m	82MS015A	82M9015A	82FS015A	82F9015A
				20 ft./6.10m	82MS020A	82M9020A	82FS020A	82F9020A
3	Male  Female 	13A 600V	1-Green 2-Black 3-White	3 ft./0.91m	83MS003A	83M9003A	83FS003A	83F9003A
				6 ft./1.83m	83MS006A	83M9006A	83FS006A	83F9006A
				12 ft./3.66m	83MS012A	83M9012A	83FS012A	83F9012A
				15 ft./4.57m	83MS015A	83M9015A	83FS015A	83F9015A
				20 ft./6.10m	83MS020A	83M9020A	83FS020A	83F9020A
4	Male  Female 	10A 600V	1-Black 2-White 3-Red 4-Green	3 ft./0.91m	84MS003A	84M9003A	84FS003A	84F9003A
				6 ft./1.83m	84MS006A	84M9006A	84FS006A	84F9006A
				12 ft./3.66m	84MS012A	84M9012A	84FS012A	84F9012A
				15 ft./4.57m	84MS015A	84M9015A	84FS015A	84F9015A
				20 ft./6.10m	84MS020A	84M9020A	84FS020A	84F9020A
5	Male  Female 	8A 600V	1-White 2-Red 3-Green 4-Orange 5-Black	3 ft./0.91m	85MS003A	85M9003A	85FS003A	85F9003A
				6 ft./1.83m	85MS006A	85M9006A	85FS006A	85F9006A
				12 ft./3.66m	85MS012A	85M9012A	85FS012A	85F9012A
				15 ft./4.57m	85MS015A	85M9015A	85FS015A	85F9015A
				20 ft./6.10m	85MS020A	85M9020A	85FS020A	85F9020A
6	Male  Female 	8A 600V	1-White 2-Red 3-Green 5-Black 4-Orange 6-Blue	3 ft./0.91m	86MS003A	86M9003A	86FS003A	86F9003A
				6 ft./1.83m	86MS006A	86M9006A	86FS006A	86F9006A
				12 ft./3.66m	86MS012A	86M9012A	86FS012A	86F9012A
				15 ft./4.57m	86MS015A	86M9015A	86FS015A	86F9015A
				20 ft./6.10m	86MS020A	86M9020A	86FS020A	86F9020A



SPECIFICATIONS

Materials

Body: PVC

Contact Carrier: Nitrile Rubber

Contact Sleeve: Stainless Steel

Contact: Brass, Gold Plated over Nickel

Coupling Nut: Machined Aluminum, Black Anodized

Cable: #16 AWG Type PVC, 65 x #34 stranding 105° C

Other cables available

Cable Diameters: 2/C-.37", 3/C-.39", 4/C-.42", 5/C-.50", 6/C-.53"

Electrical

Voltage Rating: 600 VAC

Contact Resistance: ≤5m Ω

Environmental

Protection: IP68, NEMA 6P

Operating Temp: -20°C to 105°C

Certifications



OPTIONS


#18 AWG (PVC) Plug Assemblies

Stainless Steel Couplers


Plastic Couplers

Consult the factory for custom wire length and a full range of wire management product accessories.


**6-8 POLE
Straight Connector**

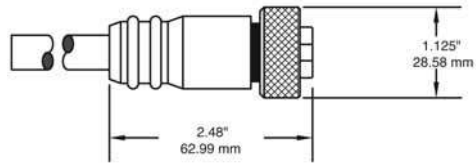


90° Connector

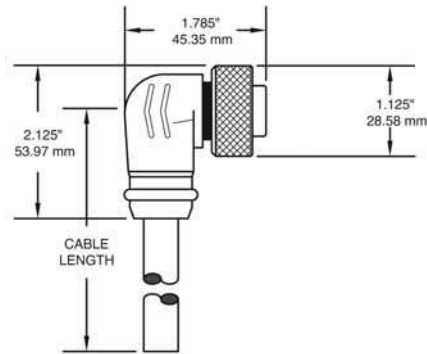

**9-12 POLE
Straight Connector**

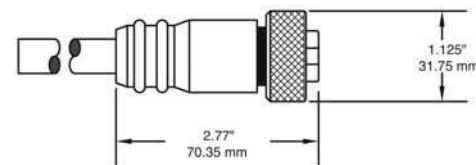

90° Connector

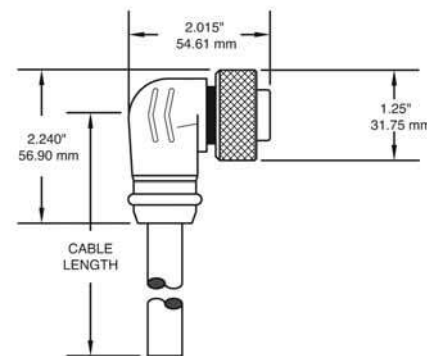

MINI-SYNC™ - 6B- 12 Pole - Male & Female - Straight & 90°

Poles	Male Face View	Rating	Wiring Code	Overall Length (ft./m)	MINI-SYNC™ Straight Male	MINI-SYNC™ Male 90°	MINI-SYNC™ Female Straight	MINI-SYNC™ Female 90°
6 B Size		8A 600V	1-White 2-Red 3-Green 5-Black 4-Orange 6-Blue	3 ft./0.91m	86BMS003A	86BM9003A	86BFS003A	86BF9003A
				6 ft./1.83m	86BMS006A	86BM9006A	86BFS006A	86BF9006A
				12 ft./3.66m	86BMS012A	86BM9012A	86BFS012A	86BF9012A
				15 ft./4.57m	86BMS015A	86M9015A	86BFS015A	86BF9015A
				20 ft./6.10m	86BMS020A	86BM9020A	86BFS020A	86BF9020A
7		7A 600V	1-White 2-Red 3-Green 5-Black 4-Orange 6-Blue 7-Green	3 ft./0.91m	87MS003A	87M9003A	87FS003A	87F9003A
				6 ft./1.83m	87MS006A	87M9006A	87FS006A	87F9006A
				12 ft./3.66m	87MS012A	87M9012A	87FS012A	87F9012A
				15 ft./4.57m	87MS015A	87M9015A	87FS015A	87F9012A
				20 ft./6.10m	87MS020A	87M9020A	87FS020A	87F9020A
8		7A 600V	1-White 2-Red 3-Green 5-Black 4-Orange 6-Blue 7-Green 8-White-Blk.Tr.	3 ft./0.91m	88MS003A	88M9003A	88FS003A	88F9003A
				6 ft./1.83m	88M9006A	88M9006A	88FS006A	88F9006A
				12 ft./3.66m	88MS012A	88M9012A	88FS012A	88F9012A
				15 ft./4.57m	88MS015A	88M9015A	88FS015A	88F9015A
				20 ft./6.10m	88MS020A	88M9020A	88FS020A	88F9020A
9		7A 600V	1-Orange 2-Blue 3-Red-Blk.Tr. 4-Green-Blk.Tr. 5-White 6-Red 7-Green 8-White-Blk.Tr. 9-Black	3 ft./0.91m	89MS003A	89M9003A	89FS003A	89F9003A
				6 ft./1.83m	89MS006A	89M9006A	89FS006A	89F9006A
				12 ft./3.66m	89MS012A	89M9012A	89FS012A	89F9012A
				15 ft./4.57m	89MS015A	89M9015A	89FS015A	89F9015A
				20 ft./6.10m	89MS020A	89M9020A	89FS020A	89F9020A
10		7A 600V	1-Orange 2-Blue 3-White-Blk.Tr. 4-Red-Blk.Tr. 5-Green-Blk.Tr. 6-Orange-Blk.Tr. 7-Red 8-Green 9-Black 10-White	3 ft./0.91m	810MS003A	810M9003A	810FS003A	810F9003A
				6 ft./1.83m	810MS006A	810M9006A	810FS006A	810F9006A
				12 ft./3.66m	810MS012A	810M9012A	810FS012A	810F9012A
				15 ft./4.57m	810MS015A	810M9015A	810FS015A	810F9015A
				20 ft./6.10m	810MS020A	810M9020A	810FS020A	810F9020A
12		7A 600V	1-Orange 2-Blue 3-White-Blk.Tr. 4-Red-Blk.Tr. 5-Green-Blk.Tr. 6-Orange-Blk.Tr. 7-Blue-Blk.Tr. 8-Black-Wht.Tr. 9-Green 10-Red 11-White 12-Black	3 ft./0.91m	812MS003A	812M9003A	812FS003A	812F9003A
				6 ft./1.83m	812MS006A	812M9006A	812FS006A	812F9006A
				12 ft./3.66m	812MS012A	812M9012A	812FS012A	812F9012A
				15 ft./4.57m	812MS015A	812M9015A	812FS015A	812F9015A
				20 ft./6.10m	812MS020A	812M9020A	812FS020A	812F9020A



SPECIFICATIONS

MATERIALS

- Insert Material:** Nitrile Rubber
- Contact:** Brass, Gold Plated over Nickel
- Sleeve:** Stainless Steel
- Shell:** Machined Aluminum, Black Anodized (stainless steel available)
- Wire:** #16 AWG/600 Volts 26 x #30 Stranding
- "O" Ring:** Viton
- Lock nut: Plated Steel (not pictured)

ELECTRICAL

- Voltage Rating:** 600 VAC
- Contact Resistance:** $\leq 5m \Omega$

ENVIRONMENTAL

- Protection:** IP68, NEMA 6P
- Operating Temp:** -50°C to 90°C (UL), -34°C to 90°C (CSA)

CERTIFICATIONS




OPTIONS

Stainless Steel Hardware can be specified - add "SS" after Part Number; to specify 18 AWG Wire add "-18" after the Part Number.






Not available in stainless steel.

DIMENSIONS

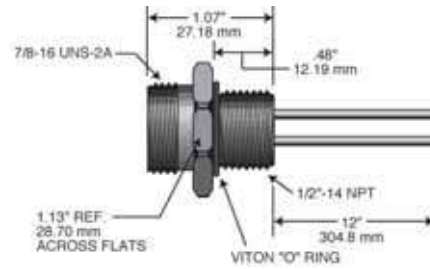Receptacle



MINI-SYNC™ - 2-6 Pole Receptacles

Poles	Face View	Rating	Wiring Code	Overall Length (ft./m)	Male Straight Receptacle 12 in. Leads	Female Straight Receptacle 12 in. Leads
2		13A 600V	1-White 2-Black	12 in.	82MRC	82FRC
3		13A 600V	1-Green 2-Black 3-White	12 in.	83MRC	83FRC
4		10A 600V	1-Black 2-White 3-Red 4-Green	12 in.	84MRC	84FRC
5		8A 600V	1-White 2-Red 3-Green 4-Orange 5-Black	12 in.	85MRC	85FRC
6		8A 600V	1-White 2-Red 3-Green 5-Black 4-Orange 6-Blue	12 in.	86MRC	86FRC



Specifications

MATERIALS

Insert Material: Nitrile Rubber

Contact: Brass, Gold Plated over Nickel

Sleeve: Stainless Steel

Shell: Machined Aluminum, Black Anodized (stainless steel available)

Wire: #16 AWG/600 Volts 26 x #30 Stranding

"O" Ring: Viton

Lock nut: Plated Steel (not pictured)

ELECTRICAL

Voltage Rating: 600 VAC

Contact Resistance: $\leq 5m \Omega$

ENVIRONMENTAL

Protection: IP68, NEMA 6P

Operating Temp: -50°C to 90°C (UL),
-34°C to 90°C (CSA)

CERTIFICATIONS




OPTIONS

Stainless Steel Hardware can be specified - add "SS" after Part Number; to specify 18 AWG Wire add "-18" after the Part Number.


Not available in stainless steel.

DIMENSIONS

6B-8 POLE Receptacle

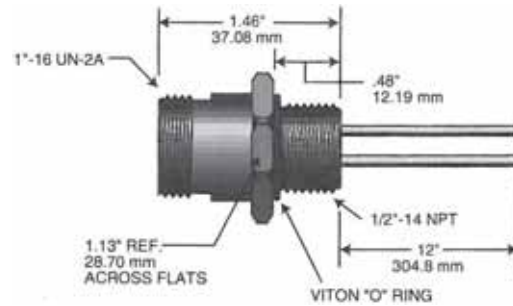

6B-12 POLE Receptacle

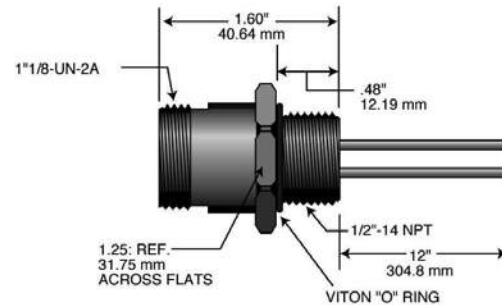

MINI-SYNC™ - 6B-12 Pole Receptacles

Poles	Face View	Rating	Wiring Code	Overall Length (ft./m)	Male Straight Receptacle 12 in. Leads	Female Straight Receptacle 12 in. Leads
6 B Size		8A 600V	1-White 2-Red 3-Green 5-Black 4-Orange 6-Blue 7-Green	12 inches	86BMRC	86BFRC
8		8A 600V	1-White 2-Red 3-Green 5-Black 4-Orange 6-Blue 7-Green 8-White-Blk.Tr.	12 inches	88MRC	88FRC
9		7A 600V	1-Orange 2-Blue 3-Red-Blk.Tr. 4-Green-Blk.Tr. 5-White 6-Red 7-Green 8-White-Blk.Tr. 9-Black	12 inches	89MRC	89FRC
10		7A 600V	1-Orange 2-Blue 3-White-Blk.Tr. 4-Red-Blk.Tr. 5-Green-Blk.Tr. 6-Orange-Blk.Tr. 7-Red 8-Green 9-Black 10-White	12 inches	810MRC	810FRC
12		7A 600V	1-Orange 2-Blue 3-White-Blk.Tr. 4-Red-Blk.Tr. 5-Green-Blk.Tr. 6-Orange-Blk.Tr. 7-Blue-Blk.Tr. 8-Black-Wht.Tr. 9-Green 10-Red 11-White 12-Black	12 inches	812MRC	812FRC



SPECIFICATIONS

MATERIALS

- Body:** PVC
- Contact Carrier:** Nitrile Rubber
- Contact Sleeve:** Stainless Steel
- Contact:** Brass, Gold Plated over Nickel
- Coupling Nut:** Machined Aluminum, Black Anodized

Cable: #16 AWG Type PVC, 65 x
#34 stranding, 105° C
Other cables available

Cable Diameters: 2/C-.37", 3/C-.39",
4/C-.42", 5/C-.50", 6/C-.53"

ELECTRICAL

- Voltage Rating:** 600 VAC
- Contact Resistance:** ≤5m Ω

ENVIRONMENTAL

- Protection:** IP68, NEMA 6P
- Operating Temp:** -20°C to 105°C

CERTIFICATIONS




OPTIONS

- #18 AWG (PVC) Plug Assemblies
- Stainless Steel Couplers
- Plastic Couplers











Consult the factory for custom wire length and a full range of wire management product accessories

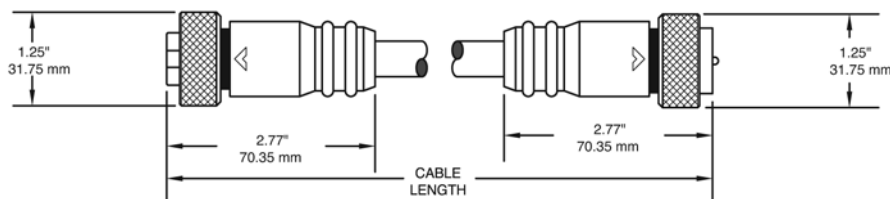DIMENSIONS

Female/Male Cordset




Made in the USA

Poles	Face Views	Rating	Overall Wiring Code	Length (ft./m)	MINI-SYNC™ Male/Female Straight	MINI-SYNC™ Male 90°/Female Straight	MINI-SYNC™ Male 90°/Female 90°	MINI-SYNC™ Female 90° / Male Straight
2	Male  Female 	13A 600V	1-White 2-Black	3 ft./0.91m	82FMS003A	82M9FS003A	82F9M9003A	82F9MS003A
				6 ft./1.83m	82FMS006A	82M9FS006A	82F9M9006A	82F9MS006A
				12 ft./3.66m	82FMS012A	82M9FS012A	82F9M9012A	82F9MS012A
				15 ft./4.57m	82FMS015A	82M9FS015A	82F9M9015A	82F9MS015A
				20 ft./6.10m	82FMS020A	82M9FS020A	82F9M9020A	82F9MS020A
3	Male  Female 	13A 600V	1-Green 2-Black 3-White	3 ft./0.91m	83FMS003A	83M9FS003A	83F9M9003A	83F9MS003A
				6 ft./1.83m	83FMS006A	83M9FS006A	83F9M9006A	83F9MS006A
				12 ft./3.66m	83FMS012A	83M9FS012A	83F9M9012A	83F9MS012A
				15 ft./4.57m	83FMS015A	83M9FS015A	83F9M9015A	83F9MS015A
				20 ft./6.10m	83FMS020A	83M9FS020A	83F9M9020A	83F9MS020A
4	Male  Female 	10A 600V	1-Black 2-White 3-Red 4-Green	3 ft./0.91m	84FMS003A	84M9FS003A	84F9M9003A	84F9MS003A
				6 ft./1.83m	84FMS006A	84M9FS006A	84F9M9006A	84F9MS006A
				12 ft./3.66m	84FMS012A	84M9FS012A	84F9M9012A	84F9MS012A
				15 ft./4.57m	84FMS015A	84M9FS015A	84F9M9015A	84F9MS015A
				20 ft./6.10m	84FMS020A	84M9FS020A	84F9M9020A	84F9MS020A
5	Male  Female 	8A 600V	1-White 2-Red 3-Green 4-Orange 5-Black	3 ft./0.91m	85FMS003A	85M9FS003A	85F9M9003A	85F9MS003A
				6 ft./1.83m	85FMS006A	85M9FS006A	85F9M9006A	85F9MS006A
				12 ft./3.66m	85FMS012A	85M9FS012A	85F9M9012A	85F9MS012A
				15 ft./4.57m	85FMS015A	85M9FS015A	85F9M9015A	85F9MS015A
				20 ft./6.10m	85FMS020A	85M9FS020A	85F9M9020A	85F9MS020A
6	Male  Female 	8A 600V	1-White 2-Red 3-Green 4-Orange 5-Black 6-Blue	3 ft./0.91m	86FMS003A	86M9FS003A	86F9M9003A	86F9MS003A
				6 ft./1.83m	86FMS006A	86M9FS006A	86F9M9006A	86F9MS006A
				12 ft./3.66m	86FMS012A	86M9FS012A	86F9M9012A	86F9MS012A
				15 ft./4.57m	86FMS015A	86M9FS015A	86F9M9015A	86F9MS015A
				20 ft./6.10m	86FMS020A	86M9FS020A	86F9M9020A	86F9MS020A



Closure Caps for Plugs and Receptacles

Adapter for Joining Two Cable Assemblies

Plug

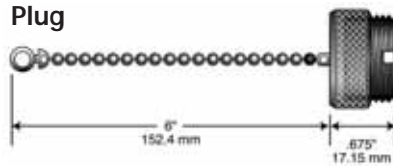

Receptacle

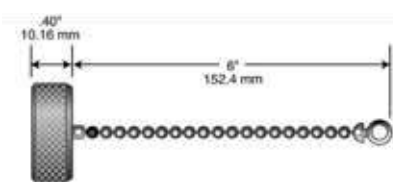

Number of Poles	Part Number
2, 3, 4, 5, or 6 (A Size)	826AJAD
6 (B Size), 7, or 8	86B8JAD
9, 10, or 12	8912JAD

Number of Poles	Plugs	Receptacles
2, 3, 4, 5, or 6 (A Size)	826AETCC	826AITCC
6 (B Size), 7, or 8	86B8ETCC	86B8ITCC
9, 10, or 12	8912ETCC	8912ITCC



SPECIFICATIONS

MATERIALS

Body: PVC
O-Ring: Nitrile Rubber
Contact Carrier: Zytel ST801
Contact: Brass, Gold Plated over Nickel
Coupling Nut: Machined Aluminum, Clear Anodized
Cable: #22 AWG PVC 26 x #36 stranding, 105°C,
 Or #18 AWG PVC 41 x #34 stranding, 105°C,
 UL Recognized, CSA Certified
Cable Diameters: #22 AWG PVC w/o braid, 2/C-.17",
 3/C-.18", 4/C-.19", 5/C-.21", 6/C-.22"

ELECTRICAL

Voltage Rating: 300 VAC
Current Rating: #22 AWG 2 to 5 Pole – 4A,
 6 Pole – 3A, #18 AWG – 5A
 Contact Resistance: <5mΩ

ENVIRONMENTAL

Protection: IP68, NEMA 6P
Operating Temp: -20°C to 105°C
 Certifications





OPTIONS

#18 AWG (PVC) Plug Assemblies (2-5) Poles
 Stainless Steel Couplers
 Plastic Couplers



Consult the factory for custom wire length and a full range of wire management product accessories

DIMENSIONS



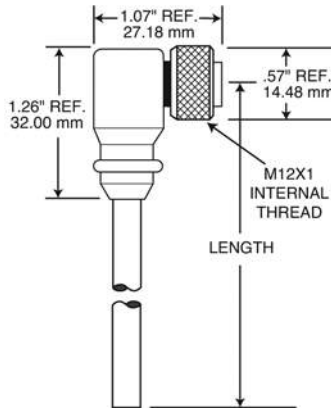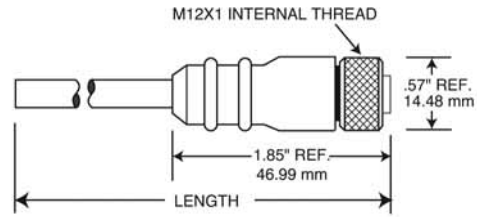

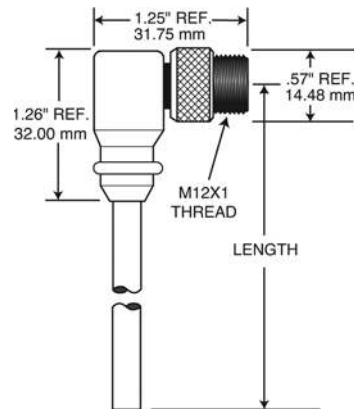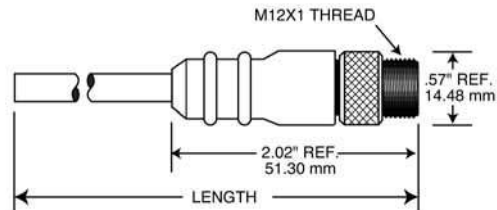

Female Plugs



Male Plugs



MICRO-SYNC™ - Single Key (DC) Male & Female - Straight & 90°

Poles	Face View	Rating	Wiring Code	Overall Length (m/ft.)	MICRO-SYNC™ Straight Male	MICRO-SYNC™ Male 90°	MICRO-SYNC™ Female Straight	MICRO-SYNC™ Female 90°
3	Male 	4A 300V	1-Brown 2-N/A 3-Blue 4-Black	2m / 6.6 ft.	93MSE2G	93M9E2G	93FS2G	93F92G
	Female 			4m / 13.1 ft.	93MSE4G	93M9E4G	93FS4G	93F94G
				5m / 16.3 ft.	93MSE5G	93M9E5G	93FS4G	93F95G
4	Male 	4A 300V	1-Brown 2-White 3-Blue 4-Black	2m / 6.6 ft.	94MSE2G	94M9E2G	94FS2G	94F92G
	Female 			4m / 13.1 ft.	94MSE4G	94M9E4G	94FS4G	94F94G
				5m / 16.3 ft.	94MSE5G	94M9E5G	94FS5G	94F95G
5	Male 	4A 300V	1-Brown 2-White 3-Blue 4-Black 5-Grey	2m / 6.6 ft.	95MSE2G	95M9E2G	95FS2G	95F92G
	Female 			4m / 13.1 ft.	95MSE4G	95M9E4G	95FS4G	95F94G
				5m / 16.3 ft.	95MSE5G	95M9E5G	95FS5G	95F95G



SPECIFICATIONS

MATERIALS

Body: PVC
O-Ring: Nitrile Rubber
Contact Carrier: Zytel ST801
Contact: Brass, Gold Plated over Nickel
Coupling Nut: Machined Aluminum, Clear Anodized
Cable: #22 AWG PVC 26 x #36 stranding, 105°C, Or #18 AWG PVC 41 x #34 stranding, 105°C, UL Recognized, CSA Certified
Cable Diameters: #22 AWG PVC w/o braid, 2/C-.17", 3/C-.18", 4/C-.19", 5/C-.21", 6/C-.22"

ELECTRICAL

Voltage Rating: 300 VAC
Current Rating: #22 AWG 2 to 5 Pole – 4A, 6 Pole – 3A, #18 AWG – 5A
Contact Resistance: <5mΩ

ENVIRONMENTAL

Protection: IP68, NEMA 6P
Operating Temp: -20°C to 105°C

CERTIFICATIONS




OPTIONS

#18 AWG (PVC) Plug Assemblies (2-5) Poles
 Stainless Steel Couplers
 Plastic Couplers




Consult the factory for custom wire length and a full range of wire management product accessories

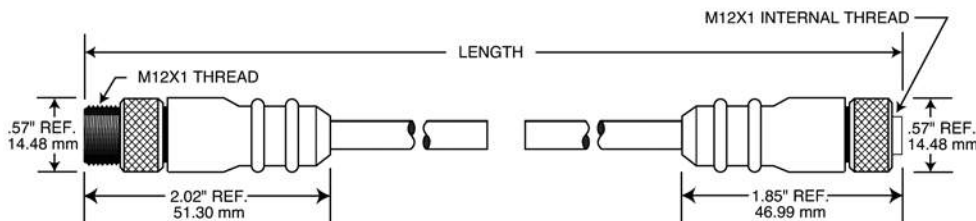DIMENSIONS



Made in the USA

MICRO-SYNC™ - Single Key (DC) Cable Assemblies

Poles	Face View	Rating	Wiring Code	Overall Length (ft./m)	MICRO-SYNC™ DC Female / Male Straight
3	Male 	4A 300V	1-Brown 2-N/A 3-Blue 4-Black	6 ft. / 1.8 m	93FMSE2G
	12 ft. / 3.6 m			93FMSE4G	
	20 ft. / 6.1 m			93FMSE5G	
4	Male 	4A 300V	1-Brown 2-White 3-Blue 4-Black	6 ft. / 1.8 m	94FMSE2G
	12 ft. / 3.6 m			94FMSE4G	
	20 ft. / 6.1 m			94FMSE5G	
5	Male 	4A 300V	1-Brown 2-White 3-Blue 4-Black 5-Grey	6 ft. / 1.8 m	95FMSE2G
	12 ft. / 3.6 m			95FMSE4G	
	20 ft. / 6.1 m			95FMSE5G	



SPECIFICATIONS

MATERIALS

Insert Material: Zytel ST801
O-Ring: Nitrile Rubber
Contact: Brass, Gold Plated over Nickel
Shell: Machine Aluminum, Black Anodized
Lock Nut: Plated Steel
Wire: #22 AWG PVC Insulated 26 x #36 stranding, 80°C

ELECTRICAL

Voltage Rating: 300 VAC
Current Rating: #22 AWG 2- 4A,
 #18 AWG - 5A
Contact Resistance: <5mΩ

ENVIRONMENTAL

Protection: IP68, NEMA 6P
 Operating Temp: -20°C to 80°C

CERTIFICATIONS




OPTIONS

#18 AWG (PVC) Leads
 Stainless Steel Shells
 Not available on back panel mount styles


DIMENSIONS

Male Receptacles

1/2" NPT

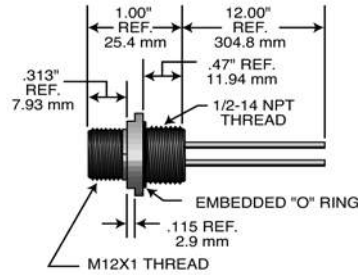


M14 x 1



Female Receptacles







1/4" NPT



Back Panel Mount



MICRO-SYNC™ - Single Key (DC) Receptacles

Poles	Face View	Rating	Wiring Code	Overall Length (ft./m)	MICRO-SYNC™ DC Male 1/2" NPT	MICRO-SYNC™ DC Male M14 x 1	MICRO-SYNC™ DC Female 1/4" NPT	MICRO-SYNC™ DC Female Back Panel
3	Male  Female 	4A 300V	1-Brown 2-N/A 3-Blue 4-Black	12 inches	93MRK2	93MRK4	93FRK1	93FRK3
4	Male  Female 	4A 300V	1-Brown 2-White	12 inches	94MRK2	94MRK4	94FRK1	94FRK3
5	Male  Female 	4A 300V	1-Brown 2-White 3-Blue 4-Black 5-Grey	12 inches	95MRK2	95MRK4	95FRK1	95FRK3



SPECIFICATIONS

MATERIALS

Body: PVC
O-Ring: Nitrile Rubber
Contact Carrier: Zytel ST801
Contact: Brass, Gold Plated over Nickel
Coupling Nut: Machined Aluminum, Clear Anodized
Cable: #22 AWG PVC 26 x #36 stranding, 105°C,
 Or #18 AWG PVC 41 x #34 stranding, 105°C,
 UL Recognized, CSA Certified
 Cable Diameters: #22 AWG PVC w/o braid, 2/C-.17",
 3/C-.18", 4/C-.19", 5/C-.21", 6/C-.22"

ELECTRICAL

Voltage Rating: 300 VAC
Current Rating: #22 AWG 2 to 5 Pole – 4A,
 6 Pole – 3A, #18 AWG – 5A
 Contact Resistance: <5mΩ

ENVIRONMENTAL

Protection: IP68, NEMA 6P
Operating Temp: -20°C to 105°C

CERTIFICATIONS





OPTIONS

#18 AWG (PVC) Plug Assemblies (2-5) Poles
 Stainless Steel Couplers
 Plastic Couplers



Consult the factory for custom wire length and a full range of wire management product accessories

DIMENSIONS



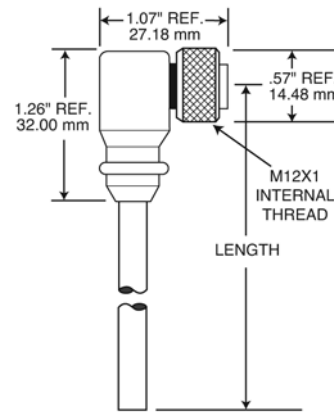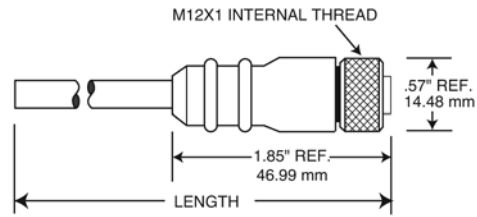


Female Plugs

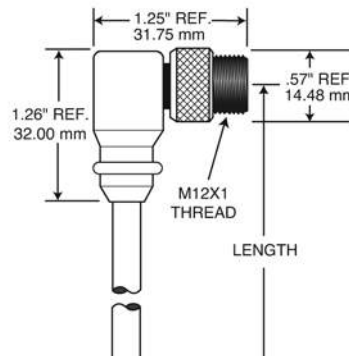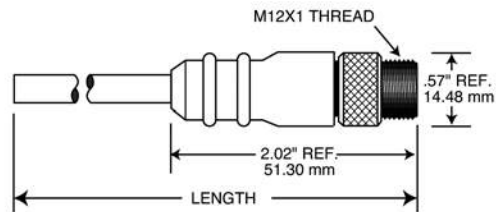

Male Plugs



MICRO-SYNC™ - Dual Key (AC) Male & Female - Straight & 90°

Poles	Face View	Rating	Wiring Code	Overall Length (ft./m)	MICRO-SYNC™ Male Straight	MICRO-SYNC™ Male 90°	MICRO-SYNC™ Female Straight	MICRO-SYNC™ Female 90°
2	Male 	4A 300V	1-Brown 2-Blue	6 ft. / 1.8 m	72MSE006F	72M9E006F	72FS006F	72F9006F
	12 ft. / 3.6 m			72MSE012F	72M9E012F	72FS012F	72F9012F	
	20 ft. / 6.1 m			72MSE020F	72M9E020F	72FS020F	72F9020F	
3	Male 	4A 300V	1-Brown 2-Red/Black 3-Red/White	6 ft. / 1.8 m	73MSE006F	73M9E006F	73FS006F	73F9006F
	12 ft. / 3.6 m			73MSE012F	73M9E012F	73FS012F	73F9012F	
	20 ft. / 6.1 m			73MSE020F	73M9E020F	73FS020F	73F9020F	
4	Male 	4A 300V	1-Red/Black 2-Red/White 3-Red 4-Green	6 ft. / 1.8 m	74MSE006F	74M9E006F	74FS006F	74F9006F
	12 ft. / 3.6 m			74MSE012F	74M9E012F	74FS012F	74F9012F	
	20 ft. / 6.1 m			74MSE020F	74M9E020F	74FS020F	74F9020F	
5	Male 	4A 300V	1-Red/White 2-Red 3-Green 4-Red/Yellow 5-Red/Black	6 ft. / 1.8 m	75MSE006F	75M9E006F	75FS006F	75F9006F
	12 ft. / 3.6 m			75MSE012F	75M9E012F	75FS012F	75F9012F	
	20 ft. / 6.1 m			75MSE020F	75M9E020F	75FS020F	75F9020F	
6	Male 	4A 300V	1-Red/White 2-Red 3-Green 4-Red/Yellow 5-Red/Black 6-Red/Blue	6 ft. / 1.8 m	76MSE006F	76M9E006F	76FS006F	76F9006F
	12 ft. / 3.6 m			76MSE012F	76M9E012F	76FS012F	76F9012F	
	20 ft. / 6.1 m			76MSE020F	76M9E020F	76FS020F	76F9020F	



SPECIFICATIONS

MATERIALS

Body: PVC
O-Ring: Nitrile Rubber
Contact Carrier: Zytel ST801
Contact: Brass, Gold Plated over Nickel
Coupling Nut: Machined Aluminum, Clear Anodized
Cable: #22 AWG PVC 26 x #36 stranding, 105°C, Or #18 AWG PVC 41 x #34 stranding, 105°C, UL Recognized, CSA Certified
Cable Diameters: #22 AWG PVC w/o braid, 2/C-.17", 3/C-.18", 4/C-.19", 5/C-.21", 6/C-.22"

ELECTRICAL

Voltage Rating: 300 VAC
Current Rating: #22 AWG 2 to 5 Pole – 4A, 6 Pole – 3A, #18 AWG – 5A
Contact Resistance: <5mΩ

ENVIRONMENTAL

Protection: IP68, NEMA 6P
Operating Temp: -20°C to 105°C

CERTIFICATIONS




OPTIONS








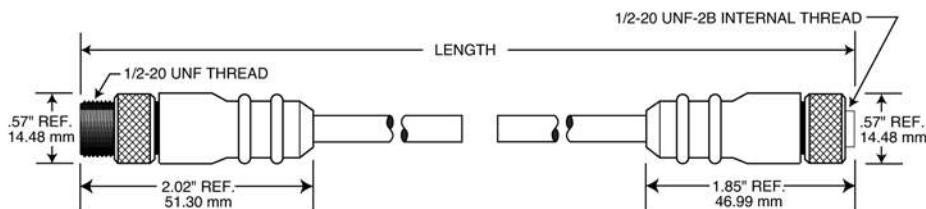


#18 AWG (PVC) Plug Assemblies (2-5) Poles
 Stainless Steel Couplers
 Plastic Couplers

Consult the factory for custom wire length and a full range of wire management product accessories

DIMENSIONS



MICRO-SYNC™ - Dual Key (AC) Cable Assemblies

Poles	Face View	Rating	Wiring Code	Overall Length (ft./m)	MICRO-SYNC™ AC Female / Male Straight
2	Male 	4A 300V	1-Brown 2-Blue	6 ft. / 1.8 m	72FMSE006F
	Female 			12 ft. / 3.6 m	72FMSE012F
				20 ft. / 6.1 m	72FMSE020F
3	Male 	4A 300V	1-Brown 2-N/A 3-Blue 4-Black	6 ft. / 1.8 m	73FMSE006F
	Female 			12 ft. / 3.6 m	73FMSE012F
				20 ft. / 6.1 m	73FMSE020F
4	Male 	4A 300V	1-Brown 2-White 3-Blue 4-Black	6 ft. / 1.8 m	74FMSE006F
	Female 			12 ft. / 3.6 m	74FMSE012F
				20 ft. / 6.1 m	74FMSE020F
5	Male 	4A 300V	1-Brown 2-White 3-Blue 4-Black 5-Grey	6 ft. / 1.8 m	75FMSE006F
	Female 			12 ft. / 3.6 m	75FMSE012F
				20 ft. / 6.1 m	75FMSE020F
6	Male 	4A 300V	1-Red/White 2-Red 3-Green 4-Red/Yellow 5-Red/Black 6-Red/Blue	6 ft. / 1.8 m	76FMSE006F
	Female 			12 ft. / 3.6 m	76FMSE012F
				20 ft. / 6.1 m	76FMSE020F



SPECIFICATIONS

MATERIALS

Insert Material: Zytel ST801
O-Ring: Nitrile Rubber
Contact: Brass, Gold Plated over Nickel
Shell: Machine Aluminum, Clear Anodized
Lock Nut: Plated Steel
Wire: #22 AWG PVC Insulated 26 x #36 stranding, 80°C

ELECTRICAL

Voltage Rating: 300 VAC
Current Rating: #22 AWG – 2 to 5 Pole – 4A, 6 Pole – 3A / #18 AWG – 5A
Contact Resistance: <5mΩ

ENVIRONMENTAL

Protection: IP68, NEMA 6P
Operating Temp: -20°C to 80°C

CERTIFICATIONS




OPTIONS

#18 AWG (PVC) Leads
 Stainless Steel Shells


DIMENSIONS

Male Receptacles

1/4" NPT




1/2" NPT




Female Receptacles








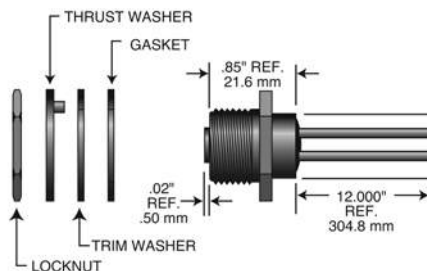


1/4" NPT



Back Panel Mount




Made in the USA

Poles	Face View	Rating	Wiring Code	Overall Length (ft./m)	MICRO-SYNC™ AC Male 1/2" NPT	MICRO-SYNC™ AC Male 1/4" NPT	MICRO-SYNC™ AC Female 1/4" NPT	MICRO-SYNC™ AC Female Back Panel
2	Male  Female 	4A 300V	1-Brown 2-Blue	12 inches	72MRK2	72MRK1	72FRK1	72FRK3
3	Male  Female 	4A 300V	1-Brown 2-Red/Black 3-Red/White	12 inches	73MRK2	73MRK1	73FRK1	73FRK3
4	Male  Female 	4A 300V	1-Red/Black 2-Red/White 3-Red 4-Green	12 inches	74MRK2	74MRK1	74FRK1	74FRK3
5	Male  Female 	4A 300V	1-Red/White 2-Red 3-Green 4-Red/Yellow 5-Red/Black	12 inches	75MRK2	75MRK1	75FRK1	75FRK3
6	Male  Female 	4A 300V	1-Red/White 2-Red 3-Green 4-Red/Yellow 5-Red/Black 6-Red/Blue	12 inches	76MRK2	76MRK1	76FRK1	N/A


Wire Management Accessories

Closure Caps for Plugs and Receptacles With Internal Threads

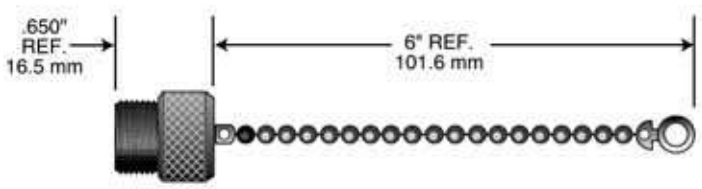

Single Key (M12)	Dual Key (1/2-20)
9ETSKCC	7ETDKCC

Closure Caps for Plugs and Receptacles With External Threads

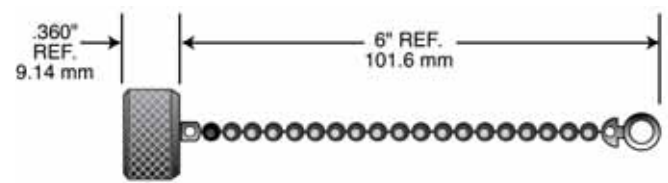


Single Key (M12)	Dual Key (1/2-20)
9ITSKCC	7ITDKCC





Application: Ericson XG2 inline GFCI in the mud.



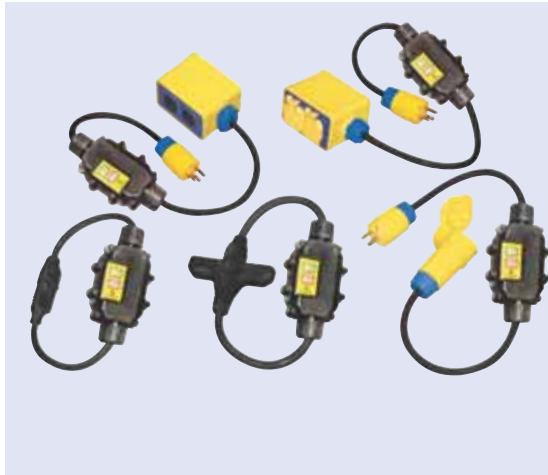

XG2 Series - Inline GFCI

- cULus Listed
- Heavy duty, industrial, portable GFCI
- Indoor/outdoor use: superior design provides increased resistance to impact, heat, UV exposure, and is water tight
- Buttons are easy to operate and provide enhanced tactile feel and audible feedback
- Circuit conforms to the *NEW* UL 943 standard for safety governing GFCIs
 - Corrosion test ensures greater immunity to damp, corrosive environments
- Many configurations to choose from



1075 Panel Mount GFCI

- cULus recognized to UL943 - 2003
- Quick and easy field installation into temporary panels and workboxes
- Compact and portable, this unit is easy to use, store and transport
- NEMA 3R rain rated face
- Meets NEC & OSHA construction site requirements
- Fast response trip time; less than .025 seconds
- Manual & automatic power-up models available
- Test and Reset Buttons are clearly marked for easy identification and each is protected from accidental activation




1060 Series Multiple Outlet GFCI

- Polycarbonate, impact resistant enclosure retains its properties under the most extreme environmental conditions
- Unit comes standard with extra hard usage #12/3 SOOW cable
- Meets OSHA construction site requirements
- Fast response trip time; less than .025 seconds
- High intensity NEON indicator lamp glows bright when power is on for easy identification of power status




How a Ground Fault Circuit Interrupter (GFCI) works...

A GFCI is a fast acting circuit opening or breaking device that stops the flow of dangerous current in the event of electrical shock. The GFCI uses precise electronic circuitry to sense the imbalance of the load from the hot and neutral lines. In other words, the GFCI monitors the current flow leaving and coming on both the hot and neutral lines of the circuit. In the event of an imbalance, the GFCI immediately releases the holding relay and breaks both the hot and neutral lines simultaneously thereby stopping the current flow and preventing human injury. The GFCI is not a circuit breaker in that it does not sense the overall load and disconnect in the event of full or excess balanced current flow. The imbalance in current flow can be very small to "trip" a GFCI. Whenever the current flow "going" and "returning" differs more than 5 mA (+/- 1 mA), the GFCI opens the relay stopping the current flow.

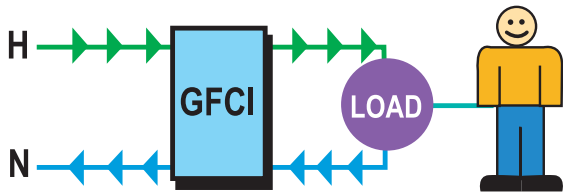

Normal balanced current
No ground fault

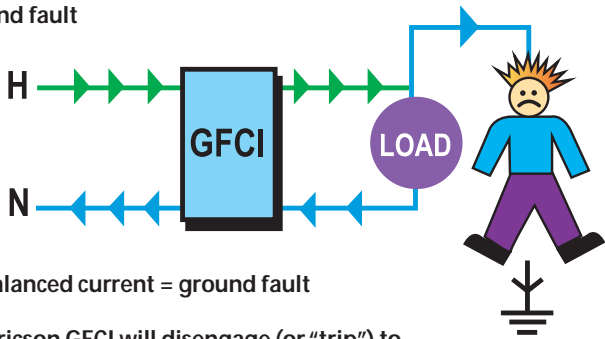

Imbalanced current = ground fault

An Ericson GFCI will disengage (or "trip") to stop all current flow eliminating this hazard

Beware of "Open Neutrals" and "Reverse Phasing"...

Normally, GFCI receptacles (like those found in your bathroom) can sense ground-faults. However, if the line-side neutral conductor is opened or lifted at a panel, the circuitry in the GFCI receptacles will not have the necessary complete circuit path from which to operate. That means that GFCI is no longer capable of sensing and disengaging. This is called an "open neutral." Anyone using the receptacles protected by the disabled GFCI will not have GFCI protection. And if a faulted tool is connected to the now-unprotected receptacle, the user will be exposed to a shock or electrocution hazard.

Agency Safety Testing (UL) for Portable Temporary GFCIs and Residential GFCIs is different...

UL 943 is the test standard for GFCIs. However, there is a difference in the requirements for temporary Jobsite GFCIs and the standard residential duplex wall mounted GFCI receptacle. These duplex receptacles are not designed for temporary jobsite power and personnel protection under OSHA, NEC or Canadian C22.2 safety workplace rules. The

residential GFCI duplex can still operate with an open neutral condition due to the unlikely condition that the neutral line in a residential permanently wired home will not be loose or removed at the panel. The likelihood of a temporary panel on a jobsite having an incomplete neutral system is more likely and therefore jobsite portable GFCIs need to be able to handle reverse wiring and open neutral conditions.

SAFE CURRENT VALUES

Milliamperes - 1 or less	Effect on Average Human
	Causes no sensation - not felt, is at threshold of perception.
1 to 8	Sensation of shock. Not painful. Individual can let go at will, as muscular control is not lost. (5mA is accepted as maximum harmless current intensity.)


UNSAFE CURRENT VALUES

Milliamperes - 8 to 15	Effect on Average Human
	Painful shock. Individual can let go at will, as muscular control is not lost.
16 to 20	Painful shock. Muscular control of adjacent muscles lost. Cannot let go.
21 to 99	Painful. Severe muscular contractions. Breathing is difficult.
100 to 200	Ventricular fibrillation. (A heart condition that may result) Disrupts or changes rhythm of the heart.
200 & over	Severe burns. Severe muscular contractions - so severe that chest muscles clamp heart and stop it during duration of shock. (This prevents ventricular fibrillation.)

How a Ground Fault Circuit Interrupter Works

Where and How to properly use a GFCI...

GFCIs only sense an imbalance on the load side of the circuit. If the imbalance or path to ground occurs BEFORE the GFCI, then the sensing circuit will not release the relay stopping the current. Because of this fact, you should always place the GFCI as close as possible to the voltage source. Ericson encourages the placement of any GFCI on a cordset to within 1 foot of the primary power plug. This way, there is little cord exposed to damage and not being sensed by the GFCI.

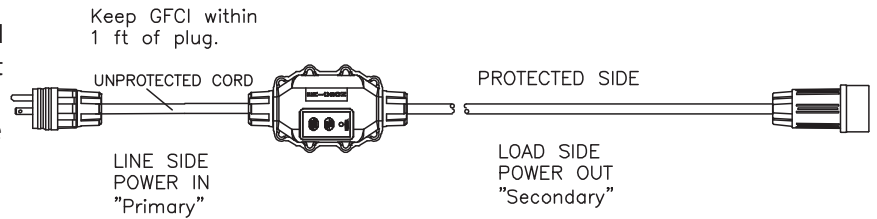

OSHA and the NEC call for the use of GFCIs in all 125 volt 15,20 and 30 amp circuits. Consult your local safety codes for additional GFCI use regulations.

What is the difference between AUTO and MANUAL GFCIs?

The GFCI terms “auto” and “manual” have been in the electrical industry for years. These simple terms refer to the operation of the GFCI when first plugged into a voltage source. These terms have nothing to do with the “tripping and subsequent resetting” of the GFCI. Separate the two main events for a GFCI: (1) Power up mode and (2) Trip and Reset Mode. Power up mode is the condition of the GFCI after being plugged into a correct voltage source.

AUTO - The “auto” GFCI will immediately energize the relay and allow protected voltage to be available at the “load” side of the GFCI. The GFCI has automatically powered up and is ready for use without the assistance of the human pressing any buttons. Think plug-n-play.

MANUAL - On the “manual” GFCI, the RESET button has a dual role in functionality. ⁽¹⁾Powering up the unit and ⁽²⁾resetting after a fault. The “manual” GFCI operates slightly different in that it requires the human to press the “RESET” (which is operating as a power up button on this unit) so the GFCI can close the relay and operate as required.

RESET - After a “trip” situation, both styles of GFCI require the pressing of the reset button to re-start the GFCI. **CAUTION:** Only reset a GFCI after an investigation as to the fault cause has been identified and repaired. GFCIs cannot, nor are ever designed to reset themselves automatically.



Metal Gang Box Danger


The “traditional” metal gang box on the end of a cord has been a danger for many years.


There are several reasons for the danger:

- Metal boxes are designed for permanently wired installations, not portable temp power.
- No weatherproofing except for outdoor location FS types.
- HOT box danger. (See below)
- Hand Hazard with sharp edges

The GFCI False Sense of Security

As the diagram shows, the metal gang box can have a common situation in which the earth ground is poor or not connected. There can be a hot short to the metal box in which you now have a “hot” box. The short will not trip the circuit breaker nor will the GFCI trip. The GFCI sensor only watches the “load” side of the receptacle, not the line side. The GFCI is worthless in this situation.

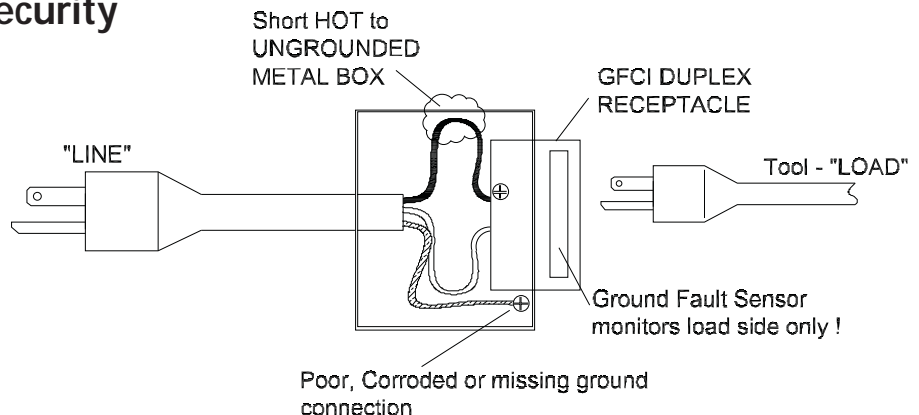

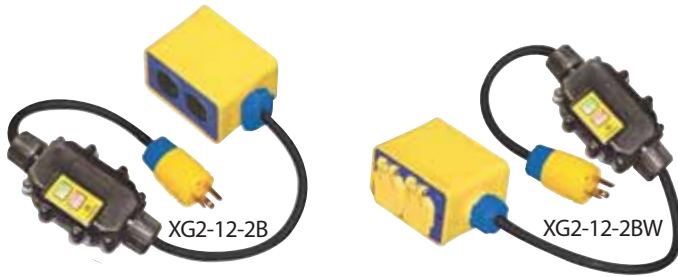

XG2-12-2B

XG2-12-2BW



XG2-12-2W



XG2-12-2TT



XG2-14-2S

NEMA TYPE 4X & 6P Enclosure:

- Excels in demanding outdoor & in-plant environments
- Provides added protection against ground fault shock hazards in high-risk areas
- Resists hose-directed water

Custom configurations are available for your jobsite or OEM applications. Contact your nearest representative or the factory today!

FEATURES:






- cULus Listed
- Meets NEC & OSHA construction site requirements
- Fully sealed, NEMA type 4X and 6P submersible GFCI body
- 4X and 6P submersible configurations available with Perma-Tite® 2 plug/connector
- Circuit conforms to the UL 943 standard for safety governing GFCIs
- A more stringent voltage surge test ensures the GFCI can handle higher surge current
- Corrosion test ensures greater immunity to damp, corrosive environments
- Enhanced immunity to conducted radio frequency noise reduces nuisance trips
- Works on two-wire or three-wire circuits
- Available in 15A & 20A models
- Up to 1.5 horse-power switch rating
- Available with factory-wired & molded-on devices
- Engineered strain relief protects cord from excessive bending & pulling
- Test & Reset buttons clearly marked for easy identification & recessed to prevent accidental activation
- Automatic & manual power-up models are available
- A wide variety of outlets are available; from molded-on single connector & Tri-Tap™ to Perma-Tite2® devices & Ericson outlet boxes
- Oversized test & reset buttons are easier to operate and provide enhanced tactile feel & audible feedback



XG2 Series Selection Guide

Cat. Number	POWER UP TYPE	LENGTH	PLUG	CONNECTOR	AMPS	WATTS
With Molded-On Plug & Connector						
XG2-14-2S	AUTO	2	MLD 5-15	MLD 5-15	15	1875
XG2-14-25S		25		MLD 5-15		
XG2-12-2TT		2		MLD 5-15 TRI		
XG2-12-50TT		50		MLD 5-15 TRI		
With Factory-Wired Perma-Grip™ Plug & Connector or Molded Plug						
XG2-12-2G	AUTO	2	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-2G-15	AUTO	2	MLD 5-15	5-15 1610-CG	15	1875
XG2-12-2G-MR-15	MANUAL	2	MLD 5-15	5-15 1610-CG	15	1875
XG2-12-2G-LKG	AUTO	2	5-20 2310-PG	5-20 2410-CG	20	2500
XG2-12-2G-MR-LKG	MANUAL	2	5-20 2310-PG	5-20 2410-CG	20	2500
XG2-12-2G-MR	MANUAL	2	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-10G	AUTO	10	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-10G-MR	MANUAL	10	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-25G	AUTO	25	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-25G-15	AUTO	25	MLD 5-15	5-15 1610-CG	15	1875
XG2-12-25G-MR-15	MANUAL	25	MLD 5-15	5-15 1610-CG	15	1875
XG2-12-25G-LKG	AUTO	25	5-20 2310-PG	5-20 2410-CG	20	2500
XG2-12-25G-MR-LKG	MANUAL	25	5-20 2310-PG	5-20 2410-CG	20	2500
XG2-12-25G-MR	MANUAL	25	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-50G	AUTO	50	5-20 1512-PG	5-20 1612-CG	20	2500
With Factory-Wired Perma-Tite® Plug & Connector						
XG2-12-2W	AUTO	2	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-2W-15	AUTO	2	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-2W-MR-15	MANUAL	2	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-2W-LKG	AUTO	2	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-2W-MR-LKG	MANUAL	2	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-2W-MR	MANUAL	2	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-10W	AUTO	10	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-10W-MR	MANUAL	10	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-10W-MR-15	MANUAL	10	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-10W-LKG	AUTO	10	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-10W-MR-LKG	MANUAL	10	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-25W	AUTO	25	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-25W-15	AUTO	25	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-25W-MR-15	MANUAL	25	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-25W-LKG	AUTO	25	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-25W-MR-LKG	MANUAL	25	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-25W-MR	MANUAL	25	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-50W	AUTO	50	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-50W-MR	MANUAL	50	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-50W-LKG	AUTO	50	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-50W-MR-LKG	MANUAL	50	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500

Notes: 1. All cord is SJT. 2. All product is rated 120 volts.



6P
SUBMERSIBLE

**All "W" Models
Have Perma-Tite®
Water Tight
Plugs & Connectors**




FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.

XG2 Series Selection Guide

Cat. Number	POWER UP TYPE	LENGTH	PLUG	CONNECTOR	AMPS	WATTS
With Molded-On Plug & Connector						
With Factory-Wired 6000 Box, Two Duplex Receptacles & Perma-Grip™ Plug or Molded Plug						
XG2-12-2B	AUTO	2	5-20 1512-PG	(2) 5-20 DUPLX	20	2500
XG2-12-2B-15	AUTO	2	MLD 5-15	(2) 5-15 DUPLX	15	1875
XG2-12-2B-MR-15	MANUAL	2	MLD 5-15	(2) 5-15 DUPLX	15	1875
XG2-12-2B-MR	MANUAL	2	5-20 1512-PG	(2) 5-20 DUPLX	20	2500
XG2-12-10B	AUTO	10	5-20 1512-PG	(2) 5-20 DUPLX	20	2500
XG2-12-10B-MR	MANUAL	10	5-20 1512-PG	(2) 5-20 DUPLX	20	2500
XG2-12-25B	AUTO	25	5-20 1512-PG	(2) 5-20 DUPLX	20	2500
XG2-12-25B-15	AUTO	25	MLD 5-15	(2) 5-15 DUPLX	15	1875
XG2-12-25B-MR-15	MANUAL	25	MLD 5-15	(2) 5-15 DUPLX	15	1875
XG2-12-25B-MR	MANUAL	25	5-20 1512-PG	(2) 5-20 DUPLX	20	2500
XG2-12-50B	AUTO	50	5-20 1512-PG	(2) 5-20 DUPLX	20	2500
XG2-12-50B-MR	MANUAL	50	5-20 1512-PG	(2) 5-20 DUPLX	20	2500
XG2-12-50B-15	AUTO	50	MLD 5-15	(2) 5-15 DUPLX	15	1875
XG2-12-50B-MR-15	MANUAL	50	MLD 5-15	(2) 5-15 DUPLX	15	1875
With Factory-Wired 6100 Box, Two Duplex Receptacles & Perma-Tite® Plug						
XG2-12-2BW	AUTO	2	5-20 1512-PW6P	(2) 5-20 DUPLX	20	2500
XG2-12-2BW-15	AUTO	2	5-15 1510-PW6P	(2) 5-15 DUPLX	15	1875
XG2-12-2BW-MR-15	MANUAL	2	5-15 1510-PW6P	(2) 5-15 DUPLX	15	1875
XG2-12-2BW-MR	MANUAL	2	5-20 1512-PW6P	(2) 5-20 DUPLX	20	2500
XG2-12-10BW	AUTO	10	5-20 1512-PW6P	(2) 5-20 DUPLX	20	2500
XG2-12-10BW-MR	MANUAL	10	5-20 1512-PW6P	(2) 5-20 DUPLX	20	2500
XG2-12-25BW	AUTO	25	5-20 1512-PW6P	(2) 5-20 DUPLX	20	2500
XG2-12-25BW-15	AUTO	25	5-15 1510-PW6P	(2) 5-15 DUPLX	15	1875
XG2-12-25BW-MR-15	MANUAL	25	5-15 1510-PW6P	(2) 5-15 DUPLX	15	1875
XG2-12-25BW-MR	MANUAL	25	5-20 1512-PW6P	(2) 5-20 DUPLX	20	2500
XG2-12-50BW	AUTO	50	5-20 1512-PW6P	(2) 5-20 DUPLX	20	2500
XG2-12-50BW-MR	MANUAL	50	5-20 1512-PW6P	(2) 5-20 DUPLX	20	2500
XG2-12-50BW-15	AUTO	50	5-15 1510-PW6P	(2) 5-15 DUPLX	15	1875
XG2-12-50BW-MR-15	MANUAL	50	5-15 1510-PW6P	(2) 5-15 DUPLX	15	1875
Molded Plug with blunt end for equipment wiring						
XG2R-12-2BS-15		2				
XG2R-12-10BS-15		10				
XG2R-12-25BS-15	AUTO	25	MLD5-15	BLUNT	15*	1875
XG2R-12-50BS-15		50			*Due to plug rating Plug can be removed. Unit rated for 20A max.	

NOTES: XG2 models with blunt end are UL & cUL recognized.

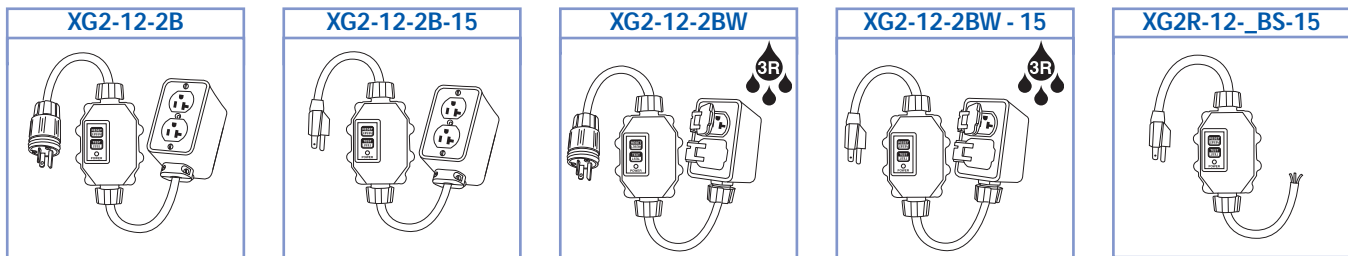



Safety Note: Although receptacle GFCIs appear to provide full-protection, they do not protect against open-neutral hazards! When the line-side neutral is open (which is not an unusual occurrence in temporary wiring installations) receptacle GFCI contacts are mechanically closed and the "hot" wire is still conducting electricity through the load side, which means you risk serious injury. Ericson's panel mount GFCIs DO protect against open neutral hazards, which is why they - and ALL Ericson GFCIs - meet UL, NEC and OSHA requirements.

FEATURES:

- UL & cUL recognized
- Quick and easy field installation into temporary panels and workboxes
- Compact & portable, this unit is easy to use, store and transport
- Works on two or three wire circuits
- Meets OSHA construction site requirements
- Fast response trip time; less than .025 seconds
- Molded polycarbonate enclosure is corrosion and impact resistant, and stands up to the toughest jobsite conditions
- Manual & automatic power-up models available
- Test and Reset Buttons are clearly marked for easy identification and each is protected from accidental activation
- High intensity NEON indicator lamp glows bright when power is on for easy identification of power status

Specifications:

Material

- Enclosure: UV rated Polycarbonate

Electrical

- Power-up type: Manual or automatic
- Trip level: 4-6mA
- Trip time: less than 25ms (0.025 seconds)
- Leakage current in 93% relative humidity: Zero
- Operating voltage: 120VAC nominal rating (85% to 110% of rated voltage: 102V-132V)
- Low voltage let go: 40% rated voltage
- Grounded neutral detection: 2 ohms or less
- Frequency: 60Hz
- Overload current: 120Amps, inductive 50% Power factor, 1 second
- Radio frequency noise susceptibility: Operates normally with 0.5 VRMS, 10-450Mhz, injected on power lines
- Voltage surge withstand: 6KV impulse, 0.5 microsecond rise time, 100Khz ringing frequency with 40% decay per cycle
- Dielectric voltage withstand:
 - 1500 VRMS between line & load (across contacts)
 - 2500 VRMS between current carrying conductors and ground conductor
 - 4000 VRMS between current carrying conductors and enclosure

Mechanical

- Color: Black Enclosure
- Power Status Indicator: Lighted NEON
- Contact Size: 0.200" dia.
- Contact Latching: Electro-mechanical

Environmental


- Operating Temperature Range: -35 °C to +66 °C
- UL94 5V flammability

Selection Guide

Catalog Number	Type*	Description	Volts	Amps	Watts
1075-MR	Manual	Panel mount GFCI	120V	20A	2400
1075-AR	Auto	Panel mount GFCI			

*Power up mode

TYPICAL PANEL CUTOUT.

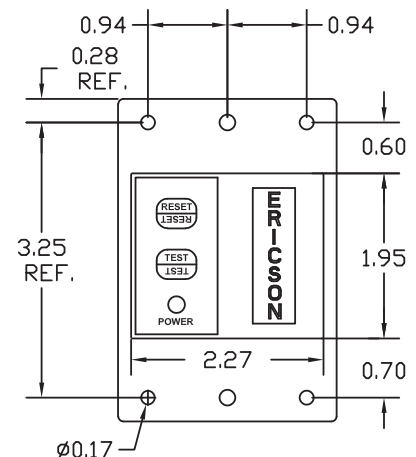

FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

1 GFCI & 2 Duplexes



1060 Series



FEATURES:

- Polycarbonate, Impact resistant enclosure retains its properties under the most extreme environmental conditions
- Spring-loaded flip lids protect outlets from jobsite contaminants when not in use
- Unit comes standard with extra hard usage #12/3 SOOW cable
- Meets OSHA construction site requirements
- Fast response trip time; less than .025 seconds
- Test and Reset Buttons are clearly marked for easy identification and each is protected from accidental activation
- High intensity NEON indicator lamp glows bright when power is on for easy identification of power status
- Class A with open neutral protection
- Rugged 600 V SOOW cord
- Tamper proof enclosure
- Call factory for custom configuration

Selection Guide

Catalog Number	Type	Outlets	Primary Cord		Plug	Volts	Amps	Watts
			Length	Type				
1060	Auto	(4) NEMA 5-15 15A, 120Volt Straight Blade	6'	#12/3 SOOW	5-15	120	15	1800
1061	Auto	(4) NEMA L5-15 15A, 120Volt Locking	6'	#12/3 SOOW	L5-15	120	15	1800
1062	Auto	(4) NEMA 5-20 20A, 120Volt Straight Blade	6'	#12/3 SOOW	5-20	120	20	2400

Note: 1. Contact customer service if manual power-up is required.





FEATURES:

- Fully sealed, NEMA 6P submersible body
- All-weather pushbuttons
- Many options available
- Pick your NEMA configuration
- Custom lengths available

XG2 Customizing

BODY

- Custom stamped
- Color

SECONDARY SIDE

- Cord length (some restrictions apply)
- Connector or Box
- Lights not recommended for GFCI circuits



Primary Side

- Plug type
- Cord Lengths over 1 ft. are not available
- Plug color





Application: Ericson 5000 Series reels and 6102 weather resistant portable power boxes in use at a lumber yard.

24/7 Emergency Assistance Hotline
1-877-OSCAR99 (672-2799)



2900 Series - Light Duty Cord Reels

- Light duty bright yellow cord reel with steel housing
- Ideal for use in machine shops, automotive garages and commercial and light industrial workshops
- Reel mounts to wall or ceiling
- 2 ft. primary cord with molded-on NEMA 5-15 plug provides wide reach to plug in to nearest receptacle



3000 Series - Light Duty Reels

- Commercial duty black cord reel
- High impact, corrosion resistant non-metallic housing
- Ideal for use in commercial/industrial workshops, auto garage & machine shops
- Reel mounts to wall or ceiling
- Reel swivels 180° to cover wide range work area
- Compact size allows mounting in tight spaces- Only 6" wide x 11" diameter
- Available with NEMA 5-15 Tri-Tap™ outlets or fluorescent handlamp



4000 Series - Industrial

- UL Listed & CSA certified
- Ideal for Indoor and Outdoor Use - NEMA 4 Rated
- Compact Size (12.75" H x 7.75" W - 18 lbs. less cable)
- Heavy Formed Steel Stand (5/16" - thick)
- Available in 3 and 4 Conductors (incl. dedicated ground)
- All-Steel Pawl and Ratchet with 4 Locking Positions
- Automatic Locking Ratchet With lockout Lever Option



5000 Series - Large Cable Cord Reels

- UL Listed & CSA certified
- Ideal for Indoor and Outdoor use (wet or dry)
- Weatherproof NEMA 4X Slip Ring Enclosure
- Heavy All-Steel Construction
- Formed Steel Stand with Multiple Mounting Holes
- 35 Amp/600 Volt Slip Ring
- Available in Welding & Grounding Reel Version
- Supplied with Type SOW or SOOW Cable installed



6000/7000 Series - Extra Long Cord Reels

- Built to NEMA 4 Standards/CSA certified
- Excellent performance in industrial indoor and outdoor applications (wet or dry)
- Standard two-piece roller-guide design for maintainability, with a 345° mounting range
- Reels are sized to handle Type SOW, Type W or Type G cable
- Add an extra 7 feet of cable for hookup/safety wrap, as well as an extra 10% of total travel length for stretch applications



8000 Series - Hazardous Location Reels

- UL Listed
- Enclosures are designed to comply with requirements for Class I, Div 1 - Groups C & D and Class II, Groups F & G
- Built to NEC standards
- Indoor or outdoor use
- Rugged fabricated steel and cast aluminum construction
- 30 Amp / 600 Volt advanced slip ring assembly





FEATURES:

- Light duty bright yellow cord reel with steel housing
- Ideal for use in machine shops, automotive garages and commercial and light industrial workshops
- Reel mounts to wall or ceiling
- 2 ft. primary cord with molded-on NEMA 5-15 plug provides wide reach to plug in to nearest receptacle
- Reel comes with incandescent or fluorescent handlamp
- Ratchet lock holds cord at desired position

2900 Series Selection Guide

Cord GA., #Cond. & Type	Length		
#16/3 SJT	30'	2900	
#18/2 SJT	40'		2910
Specifications:			
Volts		120	120
Amps		10	7
Handlamp:			
Wattage		100 watt	13 watt
Switch		Yes	Yes
Side Outlet		Yes	



3163-50-AL



3143-50-TT






3123-40-TT

FEATURES:

- Commercial duty black cord reel
- High impact, corrosion resistant non-metallic housing
- Ideal for use in commercial/industrial workshops, automotive garage & machine shops
- Reel mounts to wall or ceiling
- Reel swivels 180° to cover wide range work area
- Compact size allows mounting in tight spaces- Only 6" wide x 11" diameter
- Ratchet lock holds cord at desired position
- Available with NEMA 5-15 Tri-Tap™ outlets or fluorescent handlamp
- Installation kit comes complete with instruction sheet, mounting bracket and all the hardware needed for a complete installation
- Circuit breaker to prevent overload

3000 Series Cord Reel Selection Guide

	Angle Light	Tri-Tap Outlet	Tri-Tap Outlet
			
Non-metallic Housing with:			
With 50-ft. of cable	3163-50-AL	3143-50-TT	3123-40-TT
SPECIFICATIONS:			
Cord Size	#16/3	#14/3	#12/3
Cord Type	SJT	SJTW	SJTW
Circuit Breaker	8 Amps	13 Amps	15 Amps
Cord Outlets	N/A	(3) NEMA 5-15	(3) NEMA 5-15
Primary: Cord Length	2 ft.	2 ft.	2 ft.
Power Switch in Handlamp Handle	Yes	—	—
Side Outlet in Handlamp Handle	(1) NEMA 5-15	—	—
Bulb Wattage	26 watt	—	—
Bulb Included	Yes	—	—
Ballast Location	Handle	—	—





FEATURES:

- Built-in, Tangle-free Operation
- Simple One Tug Retraction
- (3) Grounded Outlets
- Resettable Circuit Breaker Protection
- 30' Length, Fully Retractable
- Heavy Duty 14/3 Cord
- Wall or Ceiling Mount
- Metal Construction
- Powder Coated Surfaces
- General Purpose 16/3 Option

Ericson’s 3200 Series of Light Duty Cord Reels provide quick, convenient access to facility power in an easy to wall or ceiling mount configuration. The built-in tangle free operation reduces trip hazards and simplifies clean-up with a quick tug of the cord.

Flexible power cord options provide a customizable approach based on specific facility demands and work-site requirements. Multiple grounded outlets, combined with easily resettable circuit breaker protection, supports multiple tool operation while delivering safe operation.

The 3200 Series is ideal for a wide range of applications including:

- Industrial Workshops
- Trade Schools
- Automotive Repair


3200 Series Cord Reel Selection Guide

Model Number	3210-30-TT
Cord Type	SJTW
Guage	14/3
Cord Length	30 feet
Total Maximum Rating	1625 W, 13A, 125V
Maximum Power	1625W
Maximum Current	13A
Maximum Voltage	125V
Number of Outlets	3 NEMA 5-15R
Master Pack	4
Master Pack Weight	38.2 Lbs.



4000 Series

5000 Series

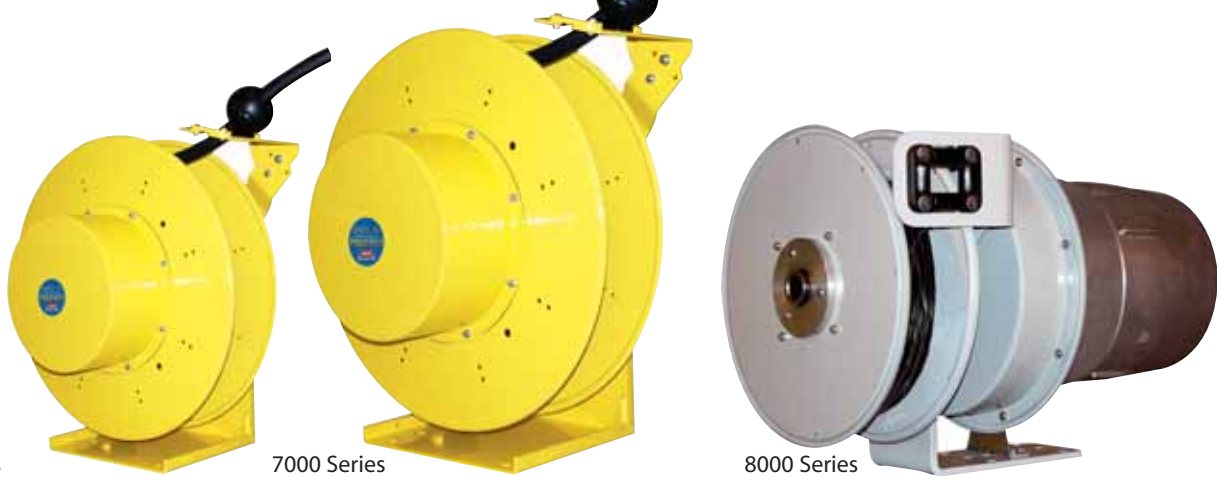

6000 Series

7000 Series

8000 Series

Selection Guide

Standard Reel Offering	4000	5000	6000	7000	8000
Certification	UL/CSA	UL/CSA	CSA	CSA	UL
Lift/Drag Application	Standard	Standard	Standard	Standard	Standard
Ball Stop included	Yes	Yes	Yes	Yes	Yes
Ratchet Installed	Yes	Yes	Yes	Yes	Yes
Primary Power Cord & Plug attached to Reel	Yes - Molded plug matches amp rating of cord/reel	No - must run conduit and hardwire	No - must run conduit and hardwire	No - must run conduit and hardwire	No - must run conduit and hardwire
SJ Cord Type	Standard	Not available	Not available	Not available	Not available
SO Cord Type	By part number designation only -SO	Standard	Standard	Standard	Standard - XP locations must have SO cable per NEC
Blunt Secondary	Standard	Standard	Standard	Standard	Standard
Add-ons installed - Lights - Power Boxes - Single Connectors	Per part number & cord size limitations	Per part number & cord size limitations	Per part number & cord size limitations	Per part number & cord size limitations	XP Type only - Per part number & cord size limitations
Stretch/Retrieve No Ball Stop No Ratchet installed	Not available	Custom RFQ Only	Custom RFQ Only	Custom RFQ Only	Custom RFQ Only
Cord Type - Standard	#16/3 SJOW to #12/4	#16/3 SOW to #10/6	#16/3 SOW #10/4	#16/4 SOW to #10/4	#16/3 SOW to #14/4
Electrical Rating (Amps @ 120V)	10A to 20A	5A to 25A	8A to 25A	12A to 25A	8A to 20A
Lengths Available	25 to 50 Ft	20 to 70 ft	70 to 150 ft	125 to 150 Ft	20 to 50 ft

Note: 1. Consult factory for listings/certification status when priced with outlet, plug or light accessories.





- Ideal for Indoor and Outdoor Use - NEMA 2 rating noted below
- Compact Size (12.75" H x 7.75"W - 18 lbs. less cable)
- Heavy Formed Steel Stand (5/16" - thick)
- Available in 3 and 4 Conductors (incl. dedicated ground)
- All-Steel Pawl and Ratchet with 4 Locking Positions
- Automatic Locking Ratchet With lockout Lever Option
- Adjustable / Removable Steel Cable Guide (3/16" - thick)
- Low-Friction, 4-roller cable guide
- Adjustable Ball Stop Included
- 6' Feeder Cord (Note: Molded plug included on all 3 conductor cables, 4 conductor cable supplied without plug)
- Slip Ring: 30 Amps, 600 Volts
- Available with and without handlamps or receptacle box pre-installed
- Add ratchet and ball stop included

USE WITH LED, CFL OR INCANDESCENT BULBS



Use up to 150W bulbs



4000 Series Cord Reel Selection Guide

12 Gauge = SJ00W 14 Gauge = SJE0W 16 Gauge = SOW Only	Reel w/ Cable Only		944-RS Handlamp	744-RS Handlamp	900 Handlamp
	See Table	SOW Cable			
Reels with 3-Conductor Cable					
with 25-ft. of #16/3 AWG	4163-25	4163-25SO		4163-25-HS	
with 35-ft. of #16/3 AWG	4163-35	4163-35SO		4163-35-HS	
with 50-ft. of #16/3 AWG	4163-50	4163-50SO		4163-50-HS	
with 30-ft. of #14/3 AWG	4143-30	4143-30SO	4143-30-HSS	4143-30-HS	4143-30-F
with 40-ft. of #14/3 AWG	4143-40	4143-40SO	4143-40-HSS	4143-40-HS	4143-40-F
with 50-ft. of #14/3 AWG	4143-50	See 5000 Series Reels	4143-50-HSS	4143-50-HS	4143-50-F
with 25-ft. of #12/3 AWG	4123-25	4123-30SO (30')	4123-25-HSS	4123-25-HS	4123-25-F
with 50-ft. of #12/3 AWG	4123-50		4123-50-HSS	4123-50-HS	4123-50-F
Reels with 4-Conductor Cable					
with 35-ft. of #16/4 AWG	4164-35	4164-35SO			
with 50-ft. of #16/4 AWG	4164-50	4164-50SO			
with 35-ft. of #14/4 AWG	4144-35				
with 25-ft. of #12/4 AWG	4124-25	4124-25SO			
with 35-ft. of #12/4 AWG	4124-35				
SPECIFICATIONS:					
Electrical Ratings	300V	600V			
Reels with AWG #16/3, #16/4	10A, 8A	10A, 8A	125v/10A	125v/10A	125v/2A
Reels with AWG #14/3, #14/4	15A, 12A	15A, 12A	125v/15A	125v/15A	125v/2A
Reels with AWG #12/3, #12/4	20A, 16A	20A, 16A	125v/20A	125v/20A	125v/2A
Cord Type	SJOW	SOW	SJOW	SJOW	SJOW
Power Switch in Handlamp Handle	-	-	Yes	Yes	Yes
Side Outlet in Handlamp Handle	-	-	Yes	No	No
Guard Material	-	-	Zinc Plated Steel	Zinc Plated Steel	Non-Metallic
Handle Material	-	-	Vinyl Nitrile Rubber	Vinyl Nitrile Rubber	Vinyl Nitrile Rubber
Bulb Wattage	-	-	Compatible with LED, CFL & Incandescent		13 Watt
Bulb Included	-	-			Fluorescent

Orange = NEMA 2

Green = NEMA 4

Note: 1. Consult factory for listings/certification status when priced with outlet, plug or light accessories.



6000 Outlet Box (2) NEMA 5-15 Duplex Receptacles (Non-GFCI)	6000 Outlet Box (2) NEMA 5-20R Duplex Receptacles (Non-GFCI)	6029 Extra-Deep Outlet Box (1) NEMA 5-15 Duplex Recpt. & (1) NEMA 5-15 GFCI duplex Recpt.	NEMA 5-15C Connector Perma-Link®	NEMA 5-20C Connector Perma-Grip™
4143-30-B		4143-30-BG	4143-30-1610	
4143-40-B		4143-40-BG	4143-40-1610	
4143-50-B		4143-50-BG	4143-50-1610	
4123-25-B	4123-25-B20	4123-25-BG	4123-25-1610	4123-25-1612CG
4123-30S0-B				
4123-50-B	4123-50-B20	4123-50-BG	4123-50-1610	4123-50-1612CG
125v/10A 125v/15A 125v/20A SJOW - - - - -		125v/10A 125v/15A 125v/20A SJOW - - - - -	125v/10A 125v/15A 125v/20A SJOW - - - - -	



5000 Series

FEATURES:

- Ideal for indoor and outdoor use
- Weatherproof NEMA 4X slip ring enclosure
- Heavy all-steel construction
- Numbered terminal blocks for simplified hookup
- Formed steel stand with multiple mounting holes
- Guide arm (4-roller, adjustable to 12 positions for efficient cable storage)
- Ratchet - positive lock including constant tension feature
- 35 Amp/600 volt slip ring
- Available in welding & grounding reel version
- Supplied with Type SOOW cable installed
- Primary feeder cord with watertight cable gland supplied with reel
- Ratchet & ball stop included

5000 Series Cord Reels Selection Guide

SOW Cable Gauge & Conductors - 600V

	Amp Rating	20'	30'	40'	50'	60'
16/3	10A	5163-20	5163-30	5163-40	5163-50	5163-60
16/4	8A	5164-20	5164-30	5164-40	5164-50	5164-60
16/6	8A	5166-20	5166-30	5166-40	5166-50	
16/8	7A	5168-20	5168-30	5168-40	5168-50	
16/10	5A	51610-20	51610-30	51610-40		
16/12	5A	51612-20	51612-30	51612-40		
14/3	15A	5143-20	5143-30	5143-40	5143-50	5143-60
14/4	12A	5144-20	5144-30	5144-40	5144-50	5144-60
14/6	12A	5146-20	5146-30	5146-40	5146-50	
14/8	10.5A	5148-20	5148-30			
14/10	7.5A	51410-20				
12/3	20A	5123-20	5123-30	5123-40	5123-50	5123-60
12/4	16A	5124-20	5124-30	5124-40	5124-50	
12/6	16A	5126-20	5126-30			
12/8	14A	5128-20				
10/3	25A	5103-20	5103-30	5103-40	5103-50	
10/4	20A	5104-20	5104-30	5104-40	5104-50	
10/6	20A	5106-20	5106-30			

For Reel Dimensions, refer to the end of this section.

Add-Ons - Add to Base Part Number (Call for Details)

-BG-20

Not for #16 AWG



-1612-PWDX

20 Amp
5-20R
Slot 1612-PWDX
(Not for #16 AWG)



-HSS

Handlamp for
any 3-wire cord
(Not for #16 AWG)



-F

13 watt
Fluorescent
Handlamp



FEATURES:

- Excellent performance in industrial indoor and outdoor applications (wet or dry)
- Built to NEMA 4 Standards
- Heavy all-steel construction
- Standard two-piece roller-guide design for maintainability, with a 345° mounting range
- Safety-sealed, lifetime lubricated spring motor canister
- Generously sized slip ring housing with fully articulating brushes for flawless contact in adverse conditions
- Variety of ring amp ratings from 35-150 Amps
- Reels are sized to handle Type SOW, Type W or Type G cable
- Add an extra 7 feet of cable for hookup/safety wrap, as well as an extra 10% of total travel length for stretch applications
- Primary power conductors supplied with reel
- Ratchet & ball stop included

6000 & 7000 Series Cord Reels Selection Guide

SOW Cable Gauge & Conductors

	Amp Rating	70'	80'	90'	100'	125'	150'
16/3	10	6163-70	6163-80	6163-90	6163-100	6163-125	6163-150
16/4	8	6164-70	6164-80	6164-90	6164-100	6164-125	7164-150
14/3	15	6143-70	6143-80	6143-90	6143-100	6143-125	7143-150
14/4	12	6144-70	6144-80	6144-90	6144-100	7144-125	7144-150
12/3	20	6123-70	6123-80	6123-90	6123-100	7123-125	7123-150
12/4	16	6124-70	6124-80	6124-90	6124-100	7124-125	
10/3	25	6103-70	6103-80	6103-90	6103-100	7103-125	
10/4	20	6104-70	6104-80	6104-90	6104-100	7104-125	

Note: 1. Consult factory for listings/certification status when priced with outlet, plug or light accessories.
2. For Reel Dimensions, refer to the end of this section.

Add-Ons - Add to Base Part Number (Call for Details)

-1612-PWDX
(not for #16 AWG)



1612-PWDX
NEMA 5-20 T Slot

-B



6000 Box

-BG20

(not for #16 AWG)



6000 Box
GFCI

-HSS



944-RS

-F



900



USE WITH LED, CFL OR INCANDESCENT BULBS



Use up to 150W bulbs

Add a Hazardous Handlamp for a Complete System




FEATURES:

- Enclosures are designed to comply with requirements for Class I, Div 1 - Groups C & D and Class II, Groups F & G
- Built to NEC standards
- Indoor or outdoor use
- Rugged fabricated steel and cast aluminum construction
- 30 Amp / 600 Volt advanced slip ring assembly
- Threaded junction box and slip ring enclosure
- SOW-A cable on factory assembled models
- Spring activated ratchet
- 4-roller adjustable cable guide
- Maximum dimensions: 14 1/2" H x 14 1/2" W x 17" D
- Note: 5 additional feet of cable required for safety wrap and hookup

8000 Series Hazardous Duty Reel Selection Guide

SOW Cable Gauge & Conductors	Length of Cable	Reel with Cable Only	Reel w/ Hazardous Duty Handlamp	
			2600	2500
16/3	20'	8163-20	8163-20-XPI	8163-20-XPF
16/3	40'	8163-40	8163-40-XPI	8163-40-XPF
16/3	50'	8163-50	8163-50-XPI	8163-50-XPF
16/4	20'	8164-20		
16/4	40'	8164-40		
16/4	50'	8164-50		
14/3	20'	8143-20	8143-20-XPI	8143-20-XPF
14/3	40'	8143-40	8143-40-XPI	8143-40-XPF
14/3	50'	8143-50	8143-50-XPI	8143-50-XPF
14/4	20'	8144-20		
14/4	40'	8144-40		
14/4	50'	8144-50		

Note: 1. Consult factory for listings/certification status when priced with outlet, plug or light accessories.

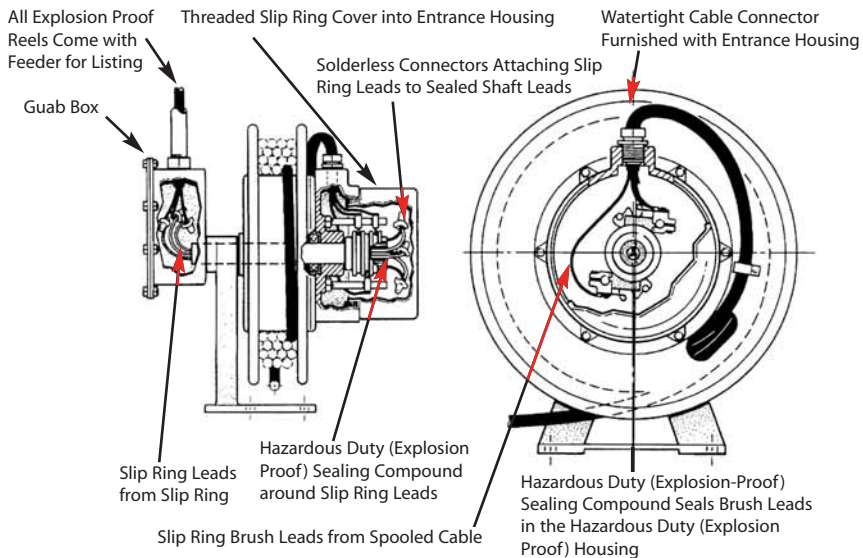



FEATURES:

- Built to NEC Standards
- For indoor use only
- Rugged all steel construction
- Compact Design
- Mounts in any position
- Red epoxy coated finish
- Feet are unpainted for maximum electrical contact
- Resistance not exceeding 0.3 OHMS
- Aircraft type cable: 3/32" diameter standard steel
- 100 Amp grounding clamp
- Automatic locking ratchet with lockout feature for constant tension
- Refueling grounding

Static discharge reels are used to ground equipment operating in hazardous atmospheres, such as fuel trucks or carts transferring flammable materials. When properly clamped to ground, the static discharge reel dissipates static electrical buildup, reduces chances of sparking and the potential for explosion.

Selection Guide

Cable Length	Resistance (ohms)	Description	Catalog Number
50 ft.	0.3	Single Cable	SDR-50



FEATURES:

- Ericson 5000 Series Reels are now available for grounding applications where longer cables are needed
- Ball stop included
- 4-roller guide adjustable cable guide
- Auto locking ratchet for constant tension
- 100 amp grounding clamp included
- Resistance not exceeding 2 Ohms
- Handles static charges safely
- Coated cable

Selection Guide

Cable Length	Description	Catalog Number
100 ft.	Single Cable with orange nylon jacket	SDR-100

Reel Accessories

345° Pivot Base



PB-45

FEATURES:


- Use our pivot base to customize your reel mounting for your specific application
- All steel base
- Lifetime bearing (never needs lubrication)
- Swing can be restricted to 90°, 180°, and 270°
- Anodized clear finish

The Pivot Base allows reels to rotate up to 345 degrees left to right. The unit bolts to the base of the reel in the field.

Selection Guide

Catalog Number	Reels
PB-45	4000-5000
PB-67	6000-7000

Ball Stops

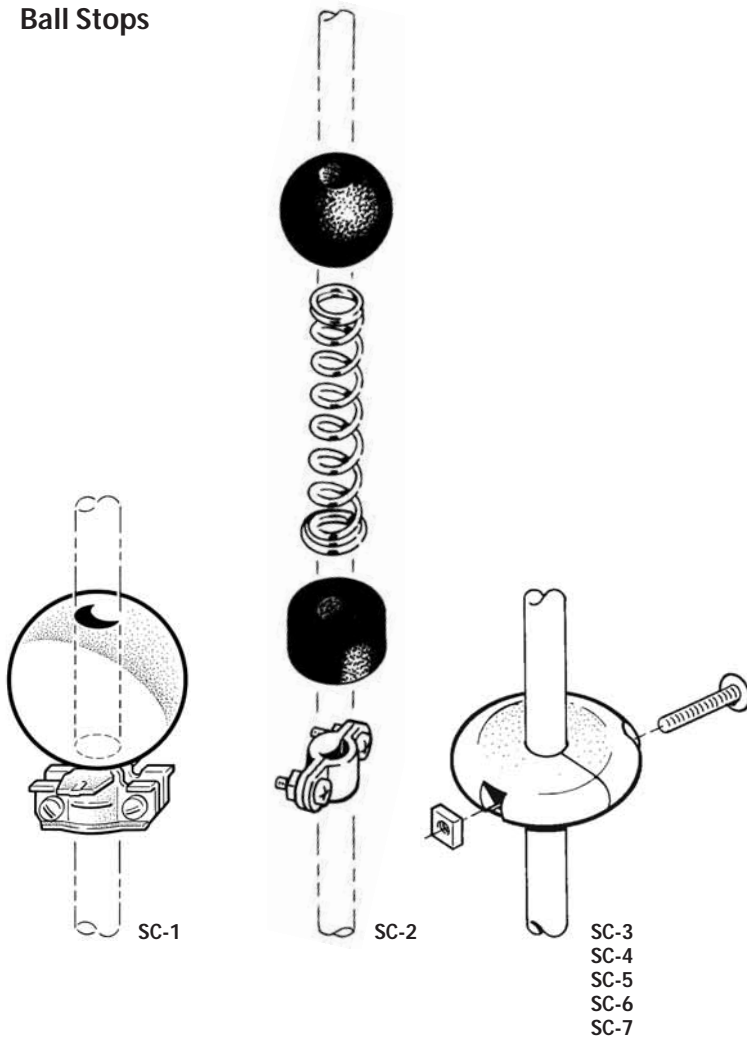



FEATURES:

- Also referred to as “cable stops,” “bumper stops,” or “hose stops”
- Generally used for manually operated lift and drag applications to govern retraction length. Stops are required when accessories such as handlamps and receptacle boxes are installed on cable reels.
- Suitable for all Ericson Cable reels



Selection Guide

Catalog Number	Description
SC-1	For cable O.D. ranges 0.188” to 0.438”
SC-2	For cable O.D. ranges 0.188” to 0.438” with shock absorbing spring bumper
SC-3	For cable ranges 0.438” to 0.624”
SC-4	For cable ranges 0.625” to 0.749”
SC-5	.75” to 1.05”
SC-6	1.06” to 1.38”
SC-7	1.39” to 1.55”


345° Pivot Base

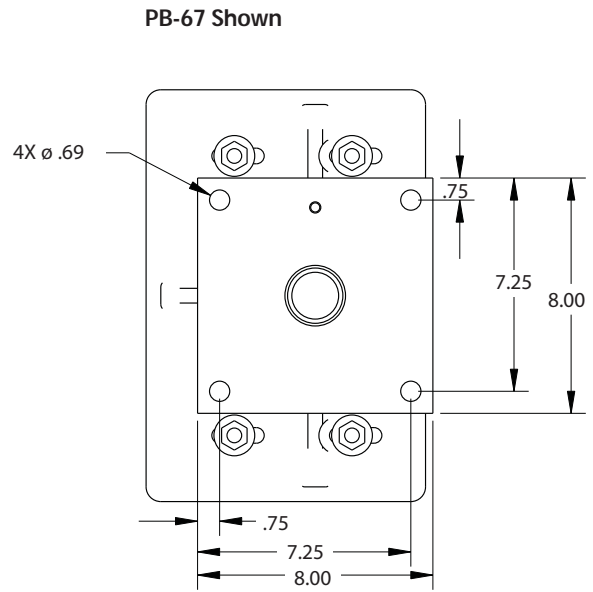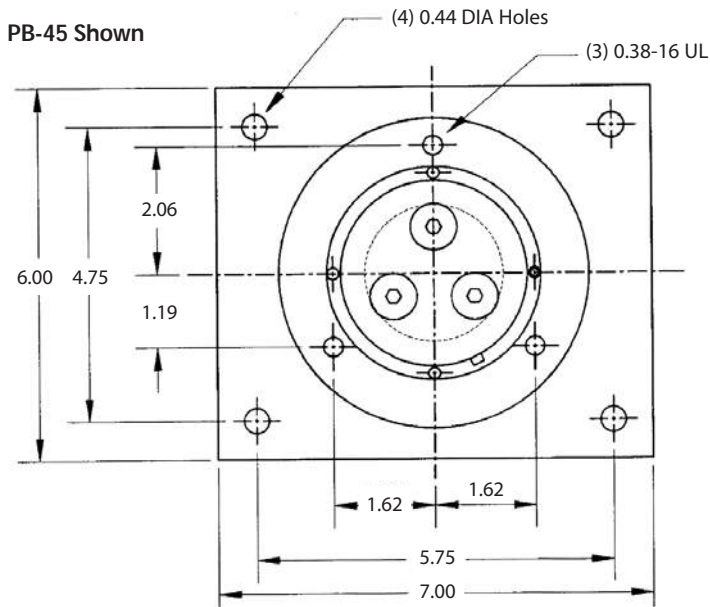

4000 Series

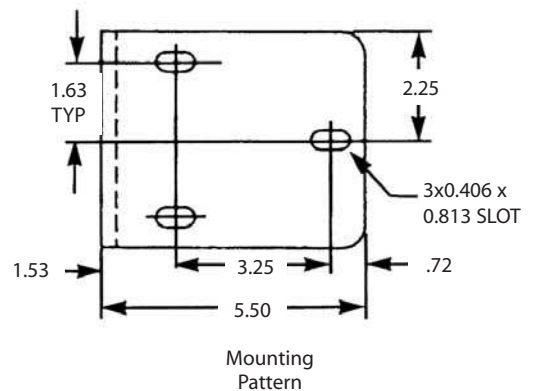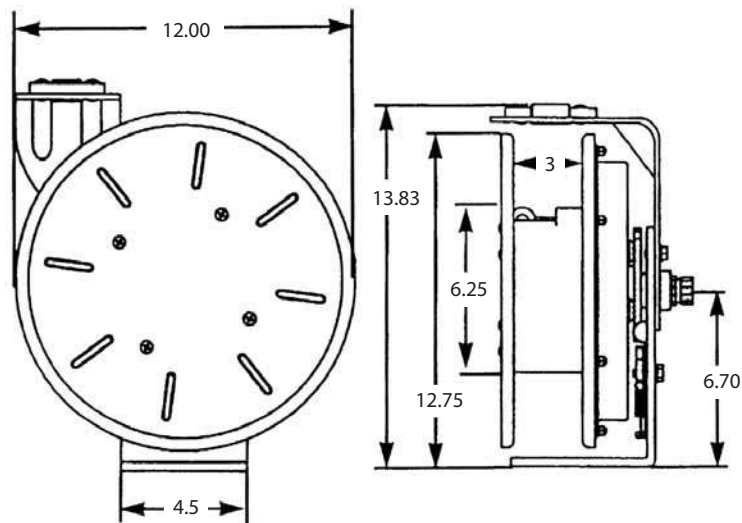


5000 Series

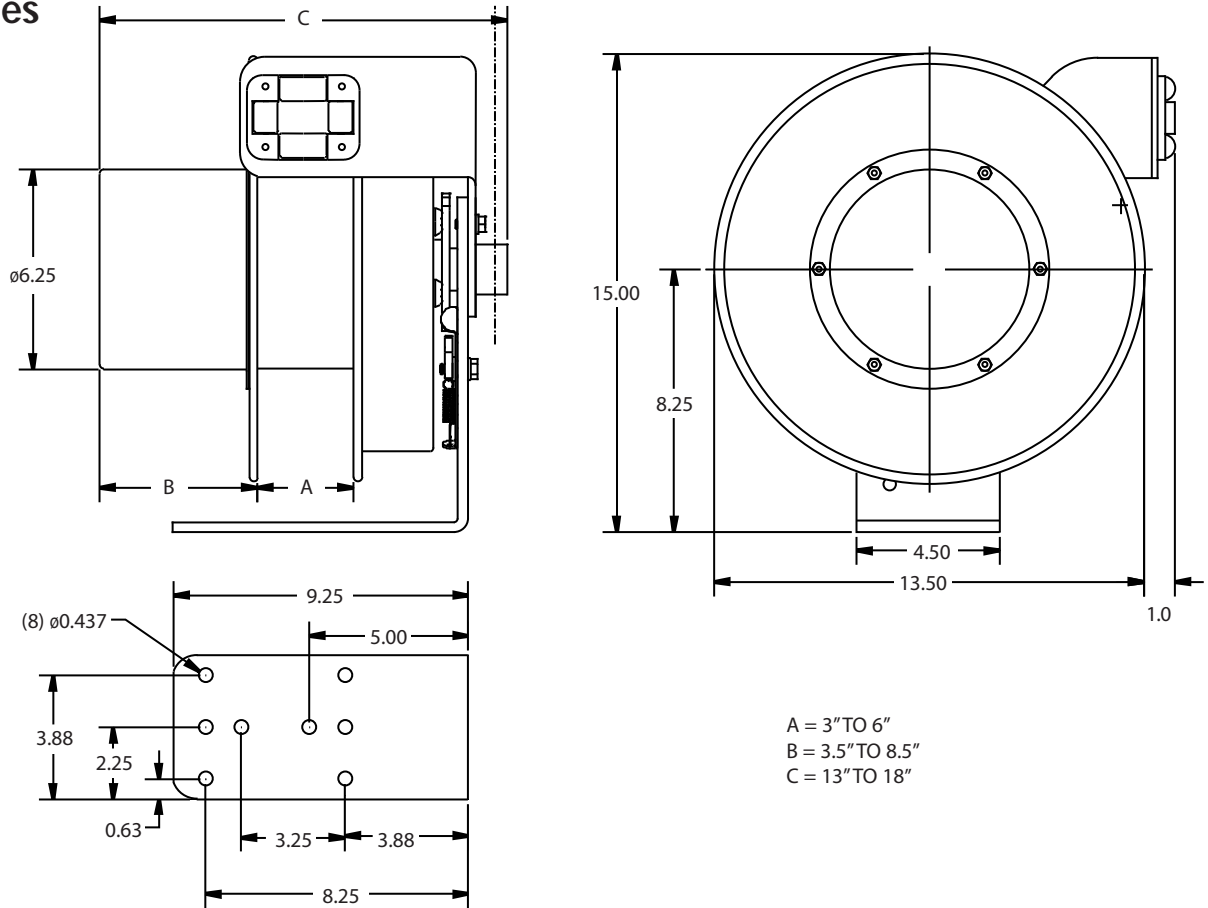

6000 Series


3 AND 4 CONDUCTOR REELS HAVE THE SMALLEST DIMENSIONS

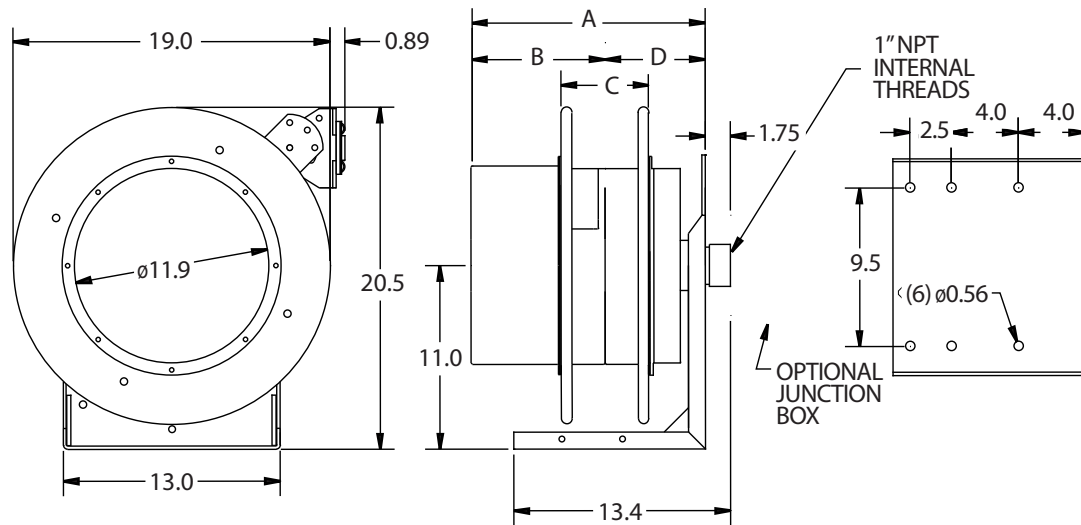

$A = 15.7 \text{ TO } 26.7$
 $B = 8 \text{ TO } 17.8$
 $C = 5.5 \text{ OR } 7.9$
 $D = 6 \text{ OR } 7.3$
 JUNCTION BOX DEPTH = 2.25 TO 5.25


7000 Series

3 AND 4 CONDUCTOR REELS HAVE THE SMALLEST DIMENSIONS

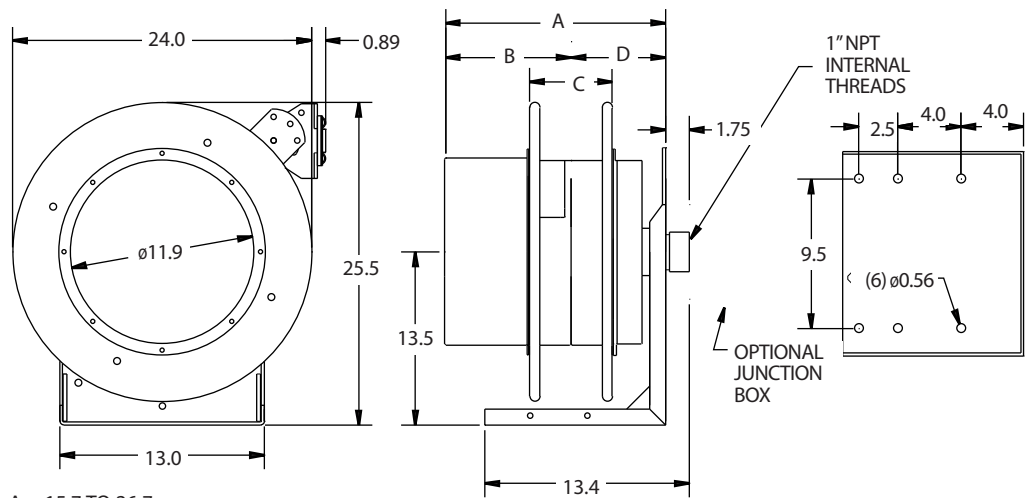

A = 15.7 TO 26.7
 B = 8 TO 17.8
 C = 5.5 OR 7.9
 D = 6 OR 7.3
 JUNCTION BOX DEPTH = 2.25 TO 5.25

8000 Series

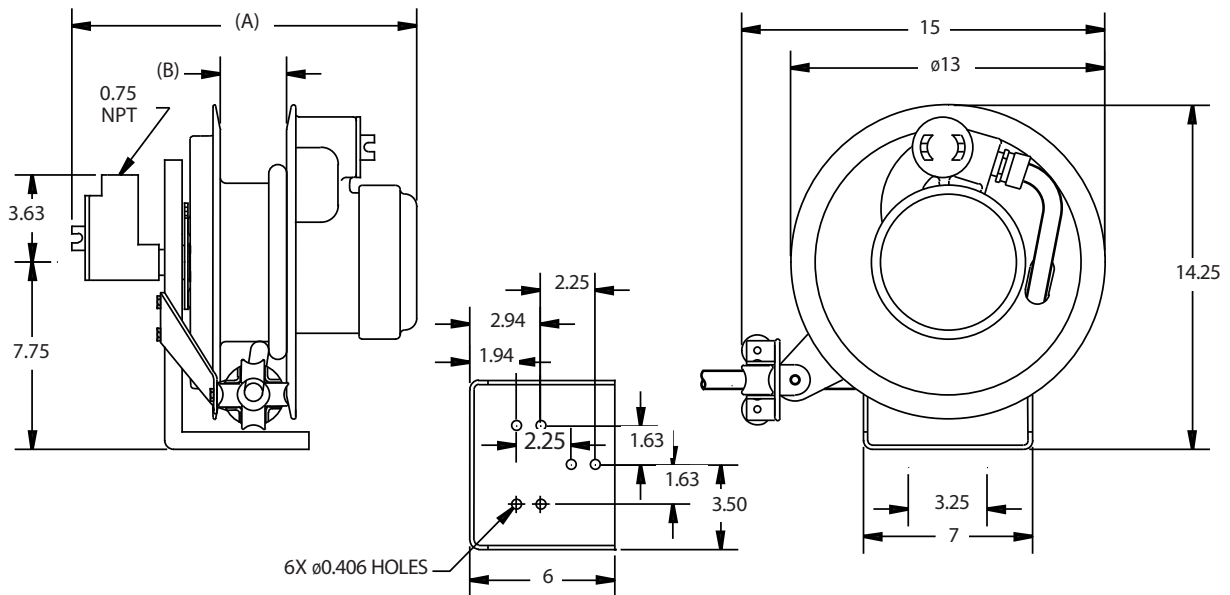

DIM. A = 14.27 TO 16.95
 DIM. B = 2.73 TO 4.92



24/7 Emergency Assistance Hotline
1-877-OSCAR99 (672-2799)





5500 Series General Duty

- NEMA TYPES 1, 3, 4, 4X and 12
- IP65 suitability enclosure ratings
- Available in 2 to 12 button configurations
- Single- and two-speed models
- Neoprene boots surround buttons to seal out dirt and moisture
- Two-piece enclosure simplifies field wiring
- Contacts rated at 5A/120VAC and 5A/240VAC
- 2 Amps at 12V/24DC
- Double insulated 2500V withstand voltage
- 100 g shock resistance
- Ambient temperature rated 5°F to 160° F (-15° to 70°C) operation



5502 PG Series Compact Pistol Grip

- Single speed 5A, 125V max contact block
- Compact, lightweight, ergonomic design
- Weighs only 10 ounces
- Less than 2" wide
- Made of high impact ABS resin
- High visibility safety yellow color
- Internal button seals



5503 - Pistol Grip Style with E-Stop Features

- Compact design, ergonomically designed with operators comfort in mind.
- Available with 1, 2, or 3, speed buttons
- High impact ABS resin, safety yellow, NEMA 4 enclosure
- Multi-diameter cable busing inlet
- Equipped with interior and exterior anchor for either internal or external strain relief wire
- Contacts rated at 5A/240VAC
- Uses 5503 style switches only
- Contacts rated at 5A at 240V





5502/5500-PG Series Compact Pistol Grip Pendant Station

Applications Include simple ON & OFF operations. Normally "opposite" operations are used with this type. Any operation can be performed as wired correctly. UP, Down, Left, Right, Start, Stop, MIX, POUR are all examples of opposite operations.

- Two button and two button with E-Stop
- Nema 4 rated
- Not food grade or hose down rated
- Not rated for hazardous location or refueling use
- Internal seals on buttons
- Button covers pop off to change legend labels
- Lightweight and economy priced simple switching
- 1 year limited warranty

5500 Series Single, Dual & Variable Speed Pendant Stations

The 5500 Series uses sets of two buttons to build ever increasing sized stations. From 2 button to 12 button pendants, this series is the work horse of the 5500 Series. The design is more rugged than the 5500-PG series with rubber button boots and housing seals. NEMA 4X rated, these pendants can be used outdoors with confidence. With a wide variety of switches and controls that can be installed, this series is the best of rugged design and economically priced pendants.



- Rubber booting buttons keeps out rain, dirt and debris
- Large choice of switches
- EZ to repair and replace switches
- Sealed housings with gasket and stainless steel fasteners
- Can be customized with indicators, lights and warning horn button
- Not rated for hazardous locations or refueling use
- Bright yellow enclosure ensures visible recognition
- Tough electrical contacts rated for thousands of operations
- Button cover legends are easy to change
- Each unit comes complete with:
 - o Two cable glands for popular sized cables
 - o Complete legend sheet with all popular operations
 - o Electrical ring crimp terminals for wire connection to switches
- 1 year limited warranty



Assembled
in the USA

5502 PG Series Compact Pistol Grip Pendant Station

Ericson's pistol grip pendant stations are ideal for controlling industrial cranes and hoists and for remote jog operation of industrial machines.



5502-PG

- Single speed 5A, 125V max contact block
- Compact, lightweight, ergonomic design
- Weighs only 10 ounces
- Less than 2" wide
- Made of high impact ABS resin
- High visibility safety yellow color
- Internal button seals
- NEMA TYPE 4 waterproof rating
- Internal and external strain relief
- Variable diameter cable bushing with clamp accommodates a wide range of cable sizes
- Easy-to-push pressure switches
- 50 g shock resistance
- Ambient temp 5°F to 160°F (-15°C to +50°C)



5503 - Pistol Grip Style with E-Stop Features:



5503-PG

- Compact design, ergonomically designed with operators comfort in mind.
- Available with 1, 2, or 3, speed buttons
- High impact ABS resin, safety yellow, NEMA 4 enclosure
- Multi-diameter cable busing inlet
- Equipped with interior and exterior anchor for either internal or external strain relief wire
- Contacts rated at 5A/240VAC
- Uses 5503 style switches only
- Contacts rated at 5A at 240V

General Specifications

Standards	
Ambient Temperature	-15° C - +50°C
Enclosure	ABS Safety Yellow
Vibration Resistance	10g From 10-55 Hz
Shock Resistance	50g
Environmental Protection	NEMA Type 4
Mechanical Life	AC15 2A & 110V-500,000 Operations
Electrical Rating	General Purpose, 120V, 5A
Pilot Rating	UL Pilot Duty B150
Insulation Withstand	2500VAC/1 Min.
Contact Resistance	Less Than 100 Milli-OHM
Weight	10 oz.
Legends	Standard Up/Down. Others Available
Push Button Force	2 Lbs.

Part #	Switch Positions		
	1	2	3
5502-PG	1 NO mom	1NO mom	
	Interlocked		
5503-PG	1 NC maint	1 NO mom	1NO mom
	e-stop button	Interlocked	
Switch #	55S26	55S08	
5503-PG-2	1 NC maint	2 NO 2 SPD mom	2 NO mom
	e-stop button	Interlocked	
Switch #	55S26	55S15	
5503-PG-3	1 NC maint	1 NC + 3 NO 3 SPD mom	1 NC + 3NO mom
	e-stop button	Interlocked	
Switch #	55S26	55S17	



Assembled in the USA



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

5500 Series Single, Dual & Variable Speed Pendant Stations

- NEMA TYPEs 1, 3, 4, 4X and 12
- IP65 suitability enclosure ratings
- Available in 2 to 12 button configurations
- Single- and two-speed models
- Neoprene boots surround buttons to seal out dirt and moisture
- Two-piece enclosure simplifies field wiring
- Soft pressure and positive indent switches provide optimum tactile feedback so you can feel when switch has been engaged
- Contacts rated at 5A/120VAC and 5A/240VAC
- 2 Amps at 12V/24DC
- Double insulated 2500V withstand voltage
- 100 g shock resistance
- Ambient temperature rated 5°F to 160° F (-15° to 70°C) operation



Pilot Light & Horn Switch
Knock-out holes in .47 in (12mm) dia. and .75 in. (19mm) dia. are available for a pilot light and horn switch on 6 through 12 button pendants. 5506 model & up

Buttons
Neoprene booted buttons. Seals out dirt & moisture. Available in red, green, and black.

Jumpers
Included with preassembled pendants only.

Cable Packing Gland
Furnished with bushing insures water tight seal.

Cable Bushings
Available in 8 sizes from .30 in. to 1.16 in. (7.5 mm to 29.5 mm)


Bushing Collar
Two sizes for cable diameters from .30 in to 1.16 in. (7.5mm to 29.5 mm)

Hanger Ring ('S' Hook)
For external strain relief connection. 'S' hook is available for strain relief cable connection.


Enclosure
Ergonomic design, visible safety yellow, shock and vibration resistant, rugged polycarbonate. 2 thru 12 button. Regular or deep style. Two piece enclosure simplifies field wiring.

Fasteners
Self-captive stainless steel hardware and threaded inserts in housing to prevent thread stripping.

Button Legends
Button legends are included. Vertical legends are available. Easy to read.

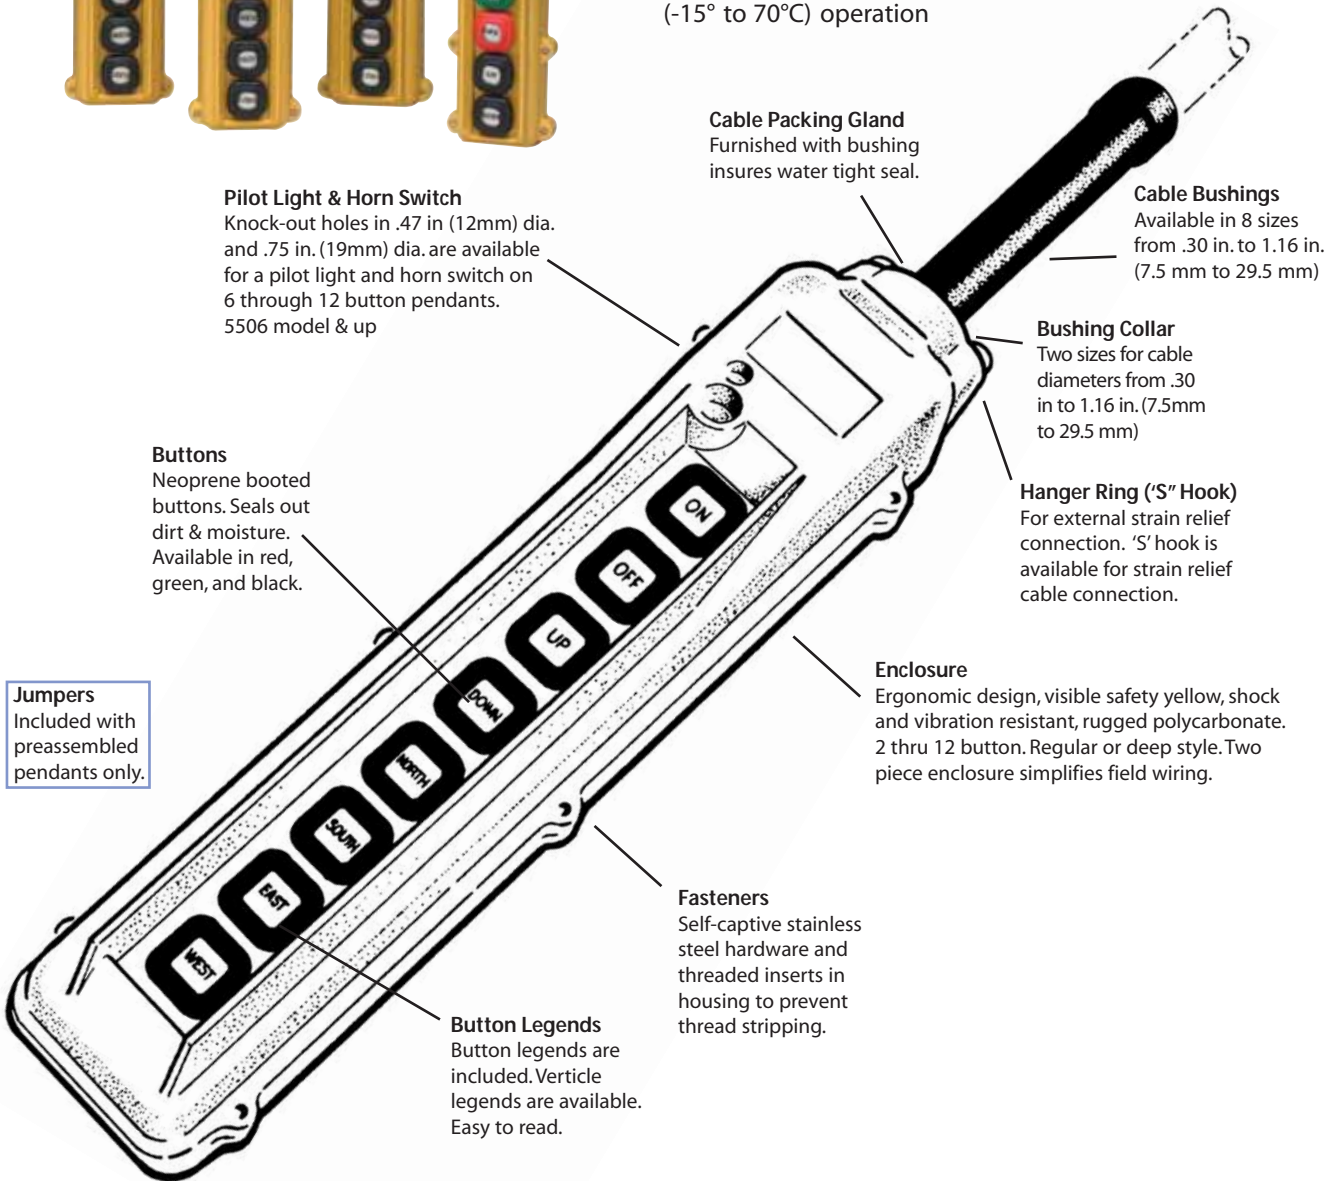

5500 Series Complete Pendants

Part #	POSITIONS											8	9	10	11	12		
	1	2	3	4	5	6	7											
5502	1 NO mom	1 NO mom	This chart shows the common complete ready-to-use 5500 pendant stations. The switches and their actions (mechanical and electrical) are shown with each button position. Use this chart to select full pendants. Use the custom pendant page for building your own pendant.					 <p>Complete pendants come with all items shown</p>										
	Interlocked 55S08																	
	2 NO 25PD mom	2 NO mom																
5502-2	Interlocked 55S15																	
	1 NO mom	1NO mom	1 NO mom	1NO mom														
	Interlocked 55S08		Interlocked 55S08															
5504-A	1 NO Start maint	Stop mom	1 NO+1NC mom	1 NO+1NC mom														
	Interlocked 55S01		Interlocked 55S09															
	1 NC maint	blank	1 NO+1NC mom	1 NO+1NC mom														
5504-E	e-stop button 55S26		Interlocked 55S09															
	1 NO Start maint	Stop mom	1 NO mom	1NO mom	1 NO mom	1NO mom												
	Interlocked 55S01		Interlocked 55S08		Interlocked 55S08													
5506-A	1 NO Start maint	Stop mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom												
	Interlocked 55S01		Interlocked 55S09		Interlocked 55S09													
	1 NC maint	blank	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom												
5506-E	e-stop button 55S26		Interlocked 55S09		Interlocked 55S09													
	1 NO Start maint	Stop mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom										
	Interlocked 55S01		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08											
5508-A	1 NO Start maint	Stop mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom									
	Interlocked 55S01		Interlocked 55S09		Interlocked 55S09		Interlocked 55S09		Interlocked 55S09									
	1 NC maint	blank	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom	1 NO+1NC mom									
5508-E	e-stop button 55S26		Interlocked 55S09		Interlocked 55S09		Interlocked 55S09		Interlocked 55S09									
	1 NO Start maint	Stop mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom								
	Interlocked 55S01		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08									
5510	1 NO Start maint	Stop mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom								
	Interlocked 55S01		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08									
	1 NO Start maint	Stop mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom								
5512	Interlocked 55S01		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08									
	1 NO Start maint	Stop mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom	1 NO mom	1NO mom								
	Interlocked 55S01		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08		Interlocked 55S08									

Bushing Sizes

Pendant Part #	Bushing Part#	Cable Diameter.
5502	55CG1	0.30 - 0.41
5502-2	55CG1	0.30 - 0.41
5504	55CG2	0.30 - 0.41
5504-A	55CG2	0.41 - 0.53
5504-E	55CG2	0.41 - 0.53
5506	55CG3	0.52 - 0.65
5506-A	55CG3	0.52 - 0.65
5506-E	55CG3	0.52 - 0.65
5508	55CG3	0.52 - 0.65
5508-A	55CG3	0.52 - .065
5508-E	55CG4	0.64 - 0.77
5510	55CG4	0.64 - 0.77
5512	55CG4	0.64 - 0.77

Note: Please refer to the following page for more bushing sizes




EMC Pn#	Buttons	Contact Config	Speed	Action	2 Button Interlock	Electrical Contact Schematic
55S01	2	1 NO / OFF	1	MAINT	YES	
55S02	2	1 NC + 1 NO / OFF	1	MAINT	YES	
55S03	2	1 NO / 1 NC	1	MOM	NO	
55S04	2	1 NO / 1 NO	1	MOM	NO	
55S05	2	1 NC + 1 NO / 1 NC + 1 NO	1	MOM	NO	
55S06	2	2 NO / 2 NO	1	MOM	YES	
55S07	2	2 NC + 2 NO / 2 NC + 2 NO	1	MOM	YES	
55S08	2	1 NO / 1 NO	1	MOM	YES	
55S09	2	1 NC + 1 NO / 1 NC + 1 NO	1	MOM	YES	
55S10	1	1 NC	1	MOM		
55S11	1	1 NO	1	MOM		
55S12	1	1 NC + 1 NO	1	MOM		



55S08



55S01



EMC Pn#	Buttons	Contact Config	Speed	Action	2 Button Interlock	Electrical Contact Schematic
55S13	1	2 NC	1	MOM		
55S14	1	2 NO	1	MOM		
55S15	2	2 NO 2 SPD / 2NO	2	MOM	YES	
55S16	2	2 NO + 2 NC 2 SPD / 2 NO + 2 NC	2	MOM	YES	
55S17	2	1NC + 3 NO 3 SPD / 1NC + 3 NO	3	MOM	YES	
55S18	SELECTOR	1 NC 2 POS		MAINT SELECT		
55S19	SELECTOR	1 NO 2 POS		MAINT SELECT		
55S20	SELECTOR	1 NO + 1 NC 2 POS		MAINT SELECT		
55S21	SELECTOR	2 NO 2 POS		MAINT SELECT		
55S22	SELECTOR	2 NC 3 POS CNTR OFF		MAINT SELECT		
55S23	SELECTOR	2 NO 3 POS CNTR OFF		MAINT SELECT		
55S24	SELECTOR	2 NC 2 POS		MAINT SELECT		

55S08



55S01



EMC Pn#	Buttons	Contact Config	Speed	Action	Electrical Contact Schematic
55S25	SELECTOR	1 NO 1 NC 3 POS CNTR OFF		MAINT SELECT	
55S26	e-STOP	1 NC		PUSH LOCK - Twist Release	
55S27	e-STOP	1 NO		PUSH LOCK - Twist Release	
55S28	e-STOP	1 NO + 1 NC		PUSH LOCK - Twist Release	
55S29	e-STOP	2 NC		PUSH LOCK - Twist Release	
55S30	e-STOP	2 NO		PUSH LOCK - Twist Release	
55S31	VAR POT RES	1K OHMS		VARIABLE TURN	
55S32	VAR POT RES	2K OHMS		VARIABLE TURN	
55S33	BLANK	BLANK PLATE			

E-Stop



55S26

Variable Pot Iometer



55S31

Blank Plate



55S33

5500 Electrical Jumpers

EMC CATALOG P/N	DESCRIPTION
55J1	80-1 Small jumper for use with 34294 & 34295 - connects 1 to 5
55J2	80-2 Speed switch common jumper - used to connect commons between 1, 2, 3 spd and on/off switches
55J3	80-3 2 Speed jumper - used on 2 spd switches to connect 6 to 4 and 14 to 16
55J4	80-4 3 Speed jumper - used on 3 spd switches to connect term 18 of two adjacent
55J5	80-12 2 Speed common jumper - used to connect 5 to 15 on 2 spd switches



55J1




55J2

5500 Glands & Bushing Kits

EMC CATALOG P/N	DESCRIPTION
55CG1	CABLE GLAND .34 - .41*
55CG2	CABLE GLAND .41 - .53*
55CG3	CABLE GLAND .52 - .65*
55CG4	CABLE GLAND .64 - .77*
55CG5	CABLE GLAND .76 - .89**
55CG6	CABLE GLAND .88 - 1.0**
55CG7	CABLE GLAND 1.0 - 1.12**
55CG8	CABLE GLAND 1.11 - 1.16**

*For use with type "A" enclosures

**For use with type "D" enclosures

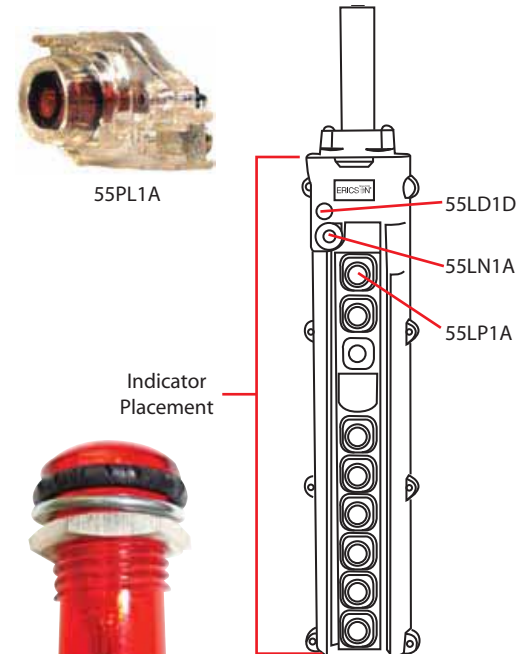

55LN1A

5500 Lights

EMC CATALOG P/N	DESCRIPTION
	<i>For small location 1</i>
55LD1D	SM RED LED PILOT 12MM 12VDC
	<i>For larger location 2 - not button location</i>
55LN1A	SM RED NEON PILOT 19MM 110VAC
55LN2A	SM RED NEON PILOT 19MM 220VAC
55LN1D	SM RED NEON PILOT 19MM 12VDC
55LN2D	SM RED NEON PILOT 19MM 24VDC
	<i>Button Location style*</i>
55PL1A	LG RED LED PILOT 110VAC
55PL2A	LG RED LED PILOT 220VAC
55PL1D	LG RED LED PILOT 12VDC
55PL2D	LG RED LED PILOT 24VDC
	* fits in 1 button space only


5500 Legend Sheets

EMC CATALOG P/N	DESCRIPTION
LS1	55 Series Push Button Legend sheet
LS2	55 Series Selector Sw Legend Sheet*
LS3	55 Series Vertical Legend Sheet

*Vertical sheet - not under button cover



LS1

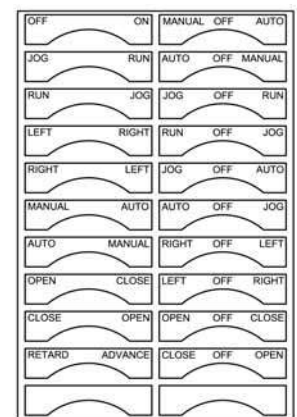

LS2

Replacement Button Boots & Label Cover




5500 black boots
55BLACK

5500 red boots
55RED

5500 green boots
55GREEN

Clear Button Label Cover
55LC

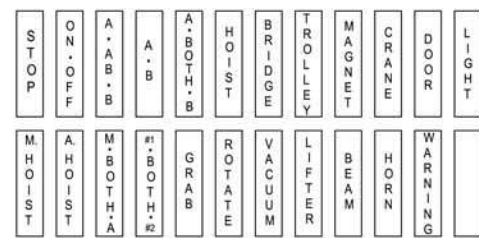


LS3

5500 Glands & Bushing Kits

EMC CATALOG P/N	DESCRIPTION
55CG1	CABLE GLAND .34 - .41*
55CG2	CABLE GLAND .41 - .53*
55CG3	CABLE GLAND .52 - .65*
55CG4	CABLE GLAND .64 - .77*
55CG5	CABLE GLAND .76 - .89**
55CG6	CABLE GLAND .88 - 1.0**
55CG7	CABLE GLAND 1.0 - 1.12**
55CG8	CABLE GLAND 1.11 - 1.16**

*For use with type "A" enclosures

**For use with type "D" enclosures

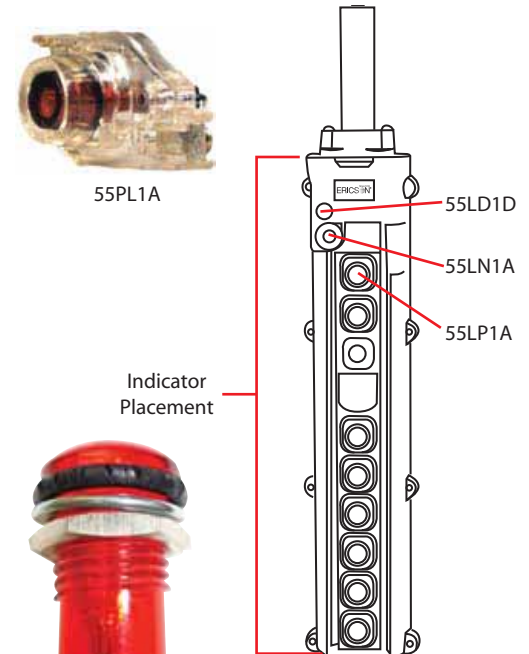


5500 Lights

EMC CATALOG P/N	DESCRIPTION
	<i>For small location 1</i>
55LD1D	SM RED LED PILOT 12MM 12VDC
	<i>For larger location 2 - not button location</i>
55LN1A	SM RED NEON PILOT 19MM 110VAC
55LN2A	SM RED NEON PILOT 19MM 220VAC
55LN1D	SM RED NEON PILOT 19MM 12VDC
55LN2D	SM RED NEON PILOT 19MM 24VDC
	<i>Button Location style*</i>
55PL1A	LG RED LED PILOT 110VAC
55PL2A	LG RED LED PILOT 220VAC
55PL1D	LG RED LED PILOT 12VDC
55PL2D	LG RED LED PILOT 24VDC
	* fits in 1 button space only


5500 Legend Sheets

EMC CATALOG P/N	DESCRIPTION
LS1	55 Series Push Button Legend sheet
LS2	55 Series Selector Sw Legend Sheet*
LS3	55 Series Vertical Legend Sheet


*Vertical sheet - not under button cover

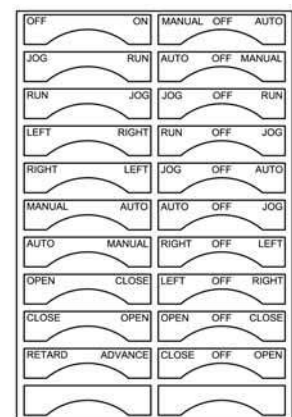

Replacement Button Boots & Label Cover

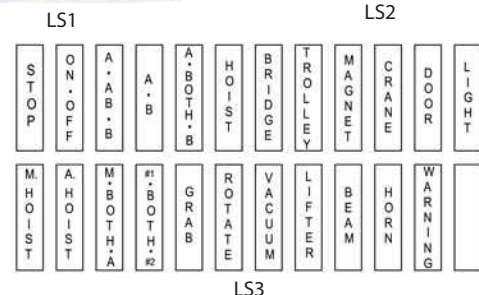


5500 General Duty

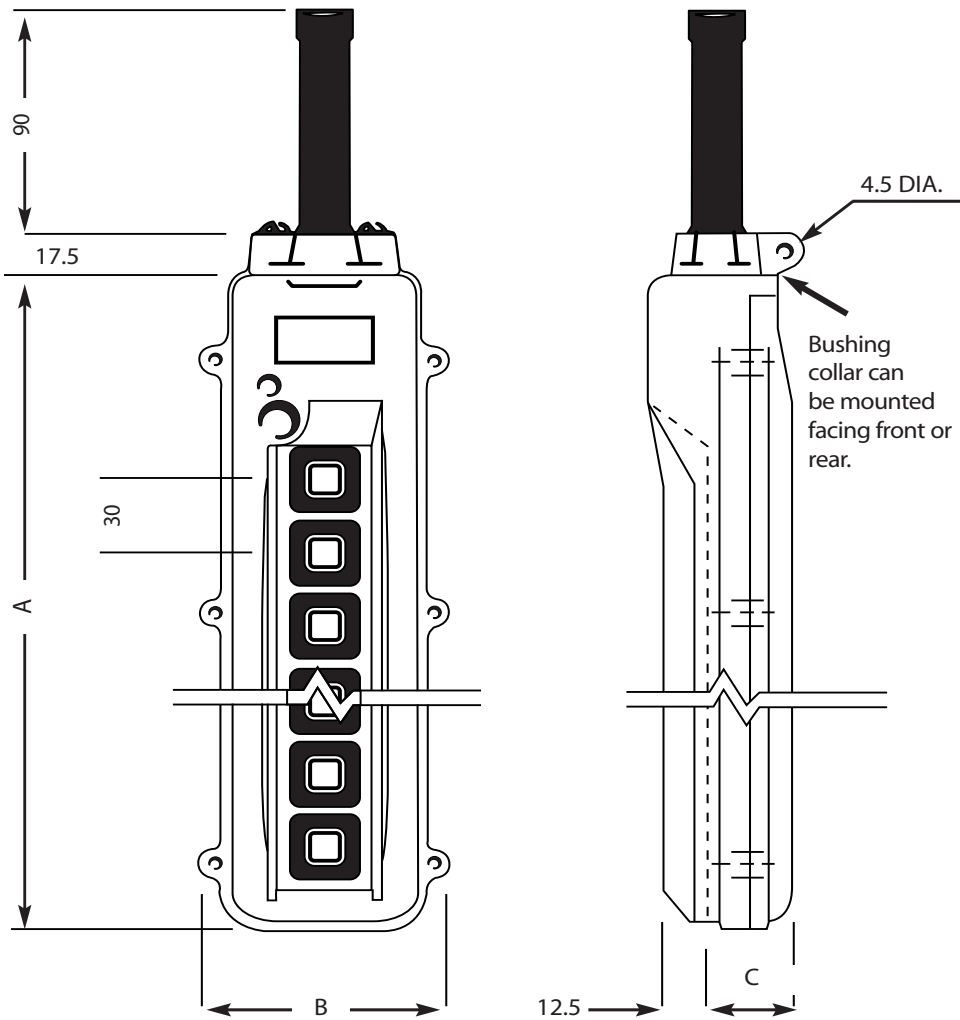


Number of Positions	A Dim.	B Dim.	C Dim.
2	4.49 in. (114 mm)	3.07 in. (78 mm)	1.46 in. (37 mm)
4	7.09 in. (180 mm)	3.07 in. (78 mm)	1.46 in. (37 mm)
6	10.31 in. (262 mm)	3.07 in. (82 mm)	1.48 in. (37.5 mm)
8	12.68 in. (322 mm)	3.23 in. (82 mm)	1.48 in. (37.5 mm)
10	15.24 in. (387 mm)	3.43 in. (87 mm)	1.48 in. (37.5 mm)
12	17.60 in. (447 mm)	3.43 in. (87 mm)	1.48 in. (37.5 mm)

5502 Pistol Grip

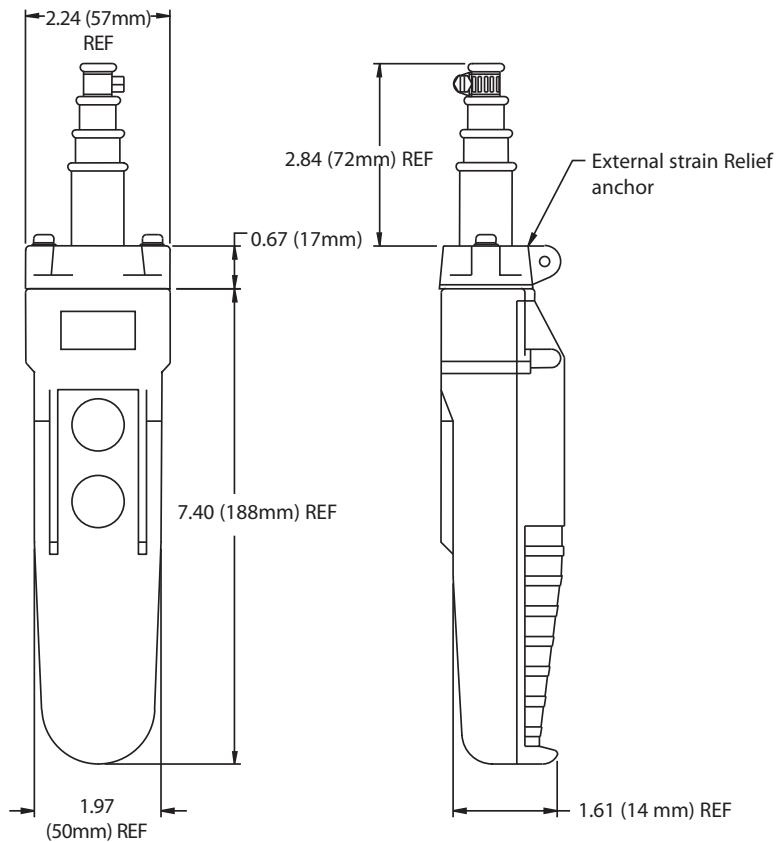

5503 Pistol Grip with Emergency Stop

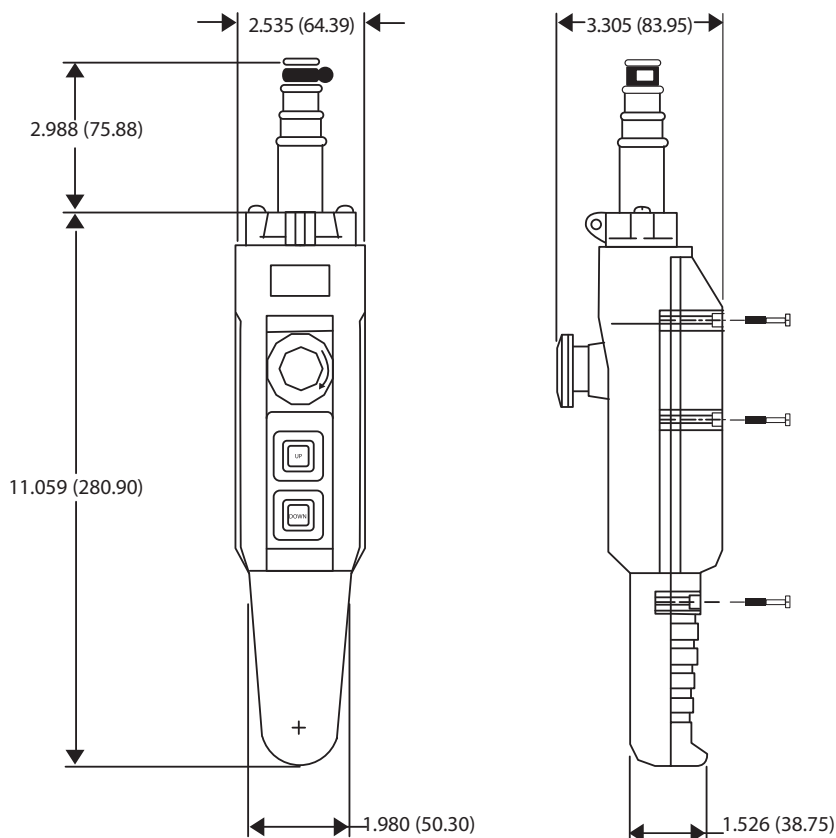

① Number of switches (button holes) required (Round up to even #)

② List switches inserts & lamp/horn inserts as needed by Part. No. below.

③ List number of conductors per switch

④ Cable O.D.:
Bushing and Cable Gland Part No.

2

4

6

8

10

12

of "Commons" Req'd:

Total No. of conductors required (sum of above)

HOW TO REQUEST A CUSTOM PENDANT STATION:

1. Determine your electrical needs and circuits.
2. Determine your number of conductors and conductor size.
3. Select your switches by part number that will operate your circuits.
 - a. Remember that most switches required two button locations in the housing
4. Fill in the form areas 1 through 5
5. Fax or scan/email the completed form to your local distributor or Ericson Factory

⑤ Button Legend Sheet

A downloadable copy of this form is located at: www.ericson.com/technical-resource.html

Request Date: _____

Company: _____

Name: _____

Title: _____

Phone: _____

Fax: _____

E-mail: _____

Delivery Date Needed: _____


24/7 Emergency Assistance Hotline:

**1-877-OSCAR99
(672-2799)**




Application: Ericson e-grips on the job.



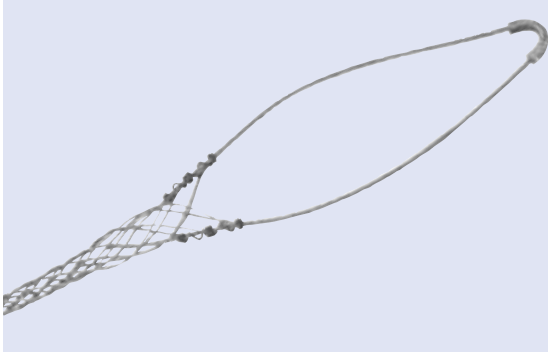


Support Grips

To hold and support cables, metal rods and tubing in vertical, sloped or horizontal position to prevent cable pull-out by supporting the weight of the cable.

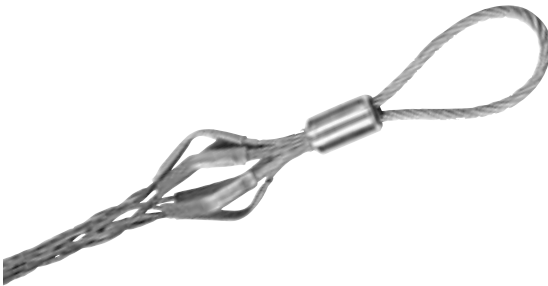

Pulling Grips

Reusable pulling tool for heavy to light cable.

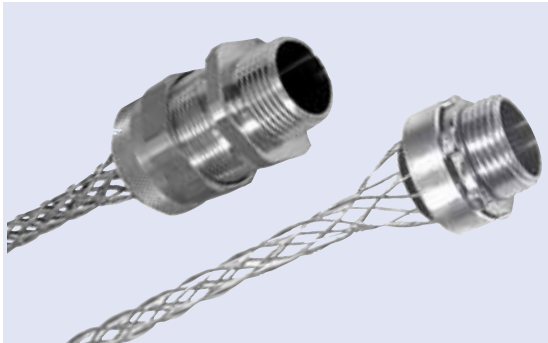


Strain Relief and Deluxe Support Grips

Prevents cable pull out and prevents tension from being transmitted to joints reducing stress and strain on conductors at the point of wire termination caused by pulling or bending the cable.



Cord Grips

For use where cable is exposed to moisture or submersion. Eliminated fatigue points. indoor/outdoor use, prevents cord pull-out.

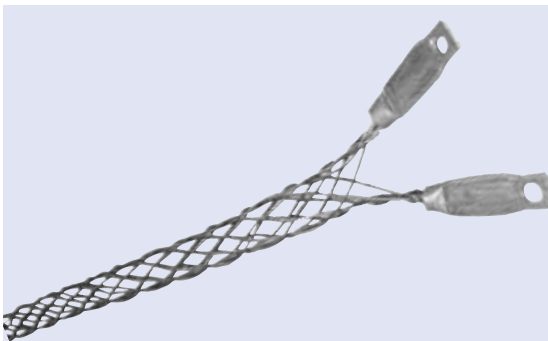

I-Grips

Grips are easy to attach, will control cable-arc-of-bend, and provide heavy duty strain relief for plugs and connectors used on portable equipment where abnormal high strain abuse occurs.



Introduction To E-Grips

E-Grips (wire mesh grips) are braided wire tubes that aid in the installation and support of electrical cables as well as non-electrical tubing and hose. E-Grips are used to eliminate direct tension on terminations. Gripping action increases in proportion to the tension applied.

E-Grips are used for pulling overhead or underground cable, stringing service or communications lines, pulling wire through conduit and for general underground construction use. E-grips are reusable and prevent wire damage by creating a uniform tension during wire pulling. E-grips are easy to install as well as remove and do not require any tools.

- Industrial Plants
- Construction Sites
- Maintenance & Repair Operations
- Automation
- Lighting
- Utilities
- Transportation
- OEM
- Maintenance Repair Operations
- Renewable Energy

Support Grips:

To hold and support cables, metal rods and tubing in verticle , sloped or horizontal position to prevent cable pull-out by supporting the weight of the cable.

Pulling Grips:

Reusable pulling tool for heavy to light cable.

Strain Relief & Deluxe Strain Relief Grips:


Prevents cable pull out and prevents tension from being transmitted to joints reducing stress and strain on conductors at the point of wire termination caused by pulling or bending the cable.

Cord Grips:

For use where cable is exposed to moisture or submersion. Eliminated fatigue points. indoor/outdoor use, prevents cord pull-out.

I-Grips:

Grips are easy to attach, will control cable-arc-of bend, and provide heavy duty strain relief for plugs and connectors used on portable equipment where abnormal high strain abuse occurs.

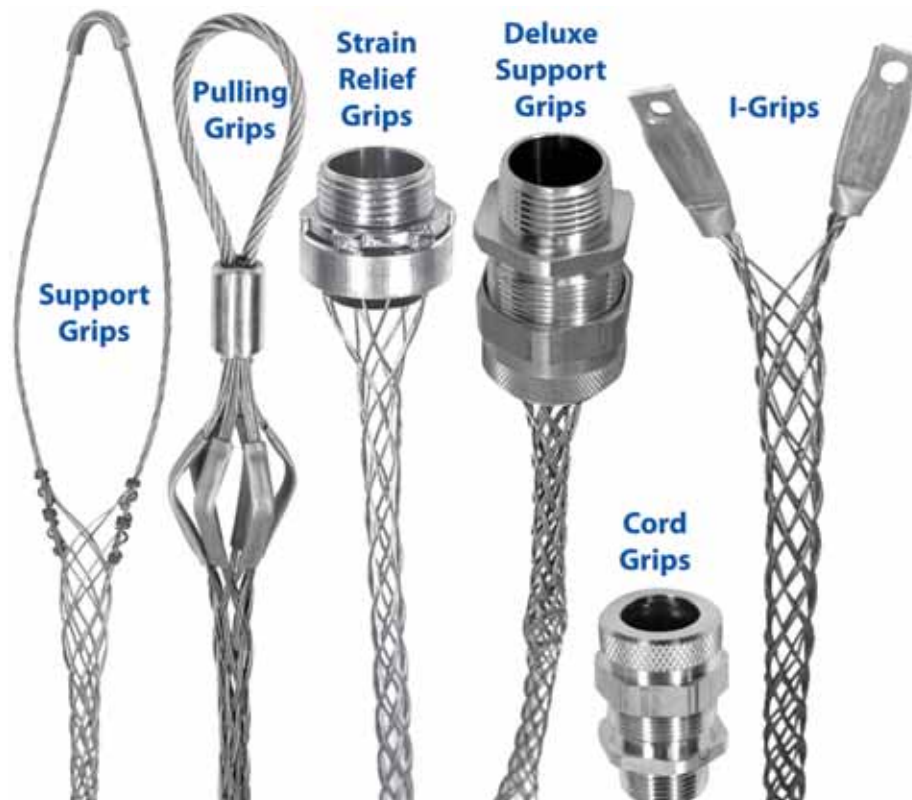

Made in the USA

Solid eye assemblies provide superior reinforcement designed to hold the weight for electrical cables as it hangs in vertical, sloping, or horizontal positions.

EYE STYLE:

Four different eye styles are available per your method of utilizing the support grip. Single, Double (shown), Offset, and Universal Bale.




Flag label shows catalog number, full description containing diameter range, barcode, mfg date, and MADE IN USA!

Ericson E-Grip Support Grips are designed to hold the weight of cable in a vertical, horizontal, or sloping position. Support grips serve an important function as electrical cables must be supported or their dead weight can cause excessive strain or pullout at the connections resulting in a power failure. Ericson E-Grips are used within any application that requires the mechanical support of cable, metal rods, hose, and tubing. Specific applications include buildings, utility poles, excavations, mine shafts, towers, elevators, terminators, or other structures.

MESH STYLE:

Three different mesh styles of nonmagnetic tinned bronze are available for anything from light to heavy duty supporting requirements. Closed Mesh are for fitting over a cable end when exposed and a Split Mesh (Lace or Rod) is utilized when the cable end is not exposed.

An endless mesh weave provides installation ease onto the cable, allows for adjustments, and provides a reusable support grip without the need for special skills or tools. Conforms to shape of cable or object being supported and permits cable to expand and contract without loss of holding action.

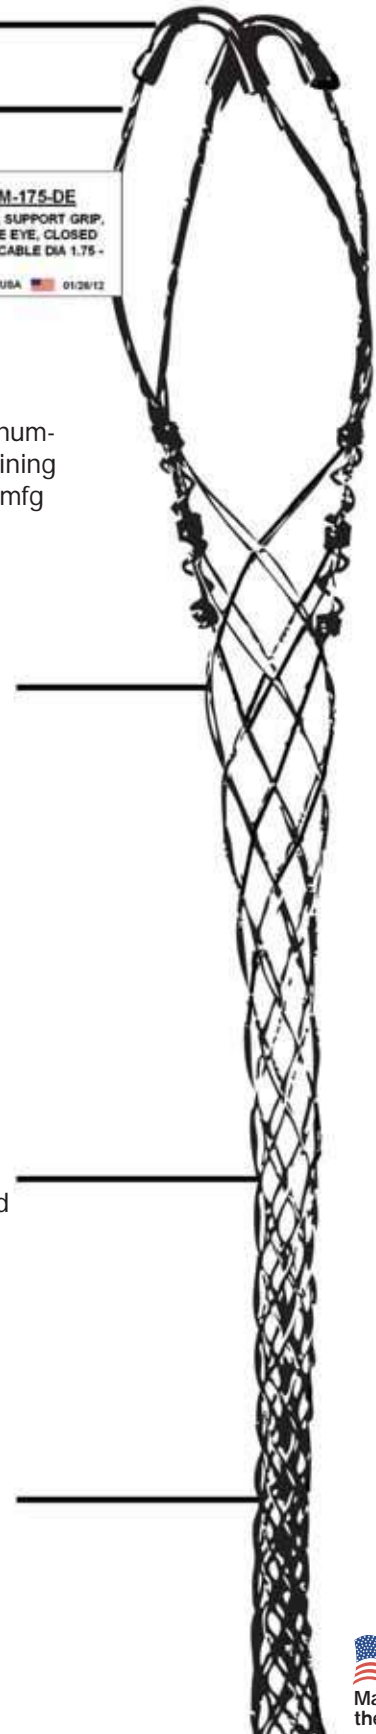


Selecting The Correct Support Grip

How to Select the Correct Support Grip

- Step 1** Refer to the chart below to determine the Support Grip style that is best suited for your application.
- Step 2** Where available, select an Eye style that is best suited for your supporting application.
- Step 3** Determine your cable outside diameter. Refer to Technical Reference section.
- Step 4** Find the mesh grip size that encompasses your cable diameter.
- Step 5** Select a Mesh style from chart below. Whenever possible, use a closed mesh that assembles over the cable end. If the cable end is not available, use a split mesh such as Lace or Rod Closing.
- Step 6** IMPORTANT! Estimate the tension to be put on the grip, establish the working load you require and compare this to the listed approximate breaking strength of the grip to insure that the grip will be strong enough. For Support Grips, use a Safety Factor of 10. Refer to Technical Reference section for safety and working load considerations.

Universal Bale

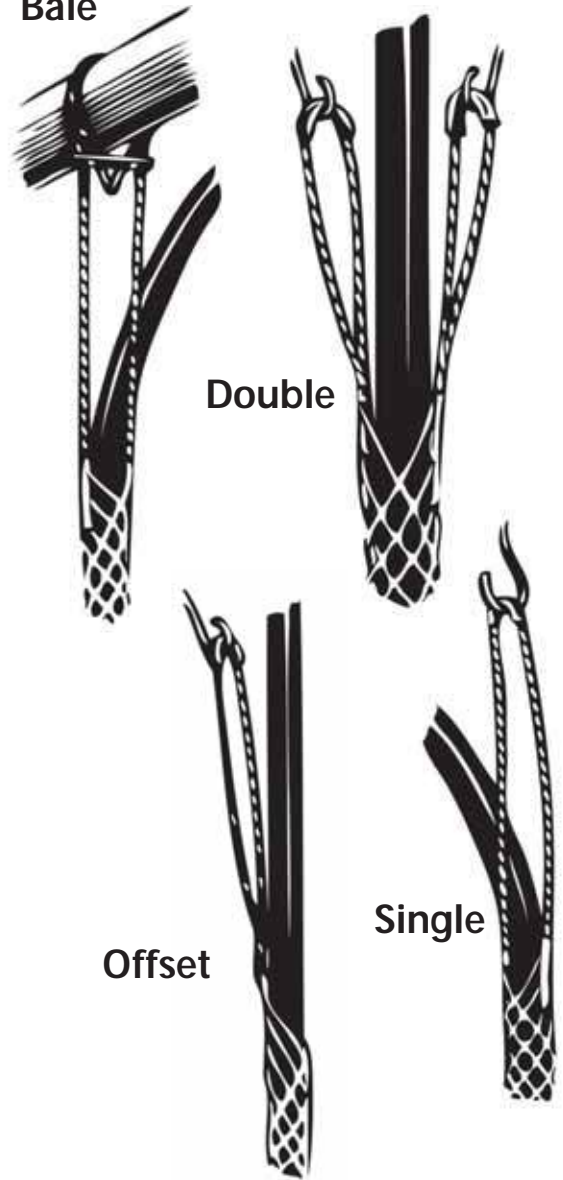


Eye Styles

Support Grip Styles	
Standard Support Grips	Support Vertical Runs to 99 ft. Loads to 600lbs. Electrical cables must be supported or their dead weight can cause excessive strain or pullout at the connections resulting in a power failure. (Diameter Range = .5 to 3.99" and Breaking Strength Range = 500 to 4900 lbs.)
Heavy Duty Grips	Support Vertical Runs over 100 ft. Loads Over 600lbs. Electrical cables must be supported or their dead weight can cause excessive strain or pullout at the connections resulting in a power failure. (Diameter Range = .75 to 4.49" and Breaking Strength Range = 2820 to 12070 lbs.)
Service Drop	Light Duty to Support Service Entrance Cable in sloping, vertical, or horizontal positions. (Diameter Range = .23 to 1.25" and Breaking Strength Range = 290 to 1790 lbs.)
Bus Drop	Light Duty Support, Indoors Only, On Bus Drop Cable that relieves tension and absorbs vibration which protects the cable. Safety Springs can be used in conjunction to relieve sudden strain on cord or cable overhead systems. (Diameter Range = .22 to 1.25" and Breaking Strength Range = 350 to 1800 lbs.)
Conduit Riser	Support Cable Runs in Rigid (Sched. 40) Conduit. (Diameter Range = .50 to 3.99" and Breaking Strength Range = 290 to 5380 lbs.)




Selecting The Correct Support Grip


Eye Styles	
Single	For use when cable is vertical and for applications where cable bends or for where a single attachment is more advantageous for positioning.
Double	For use when cable is vertical and extends through the grip without bending. Eyes may be fastened to open hooks, but should not be more than 15 degrees from the axis of the vertical cable. When the eyes are supported equally, this attachment provides a fully balanced load.
Offset	Similar to single eye applications, but for use when offset positioning is required.
Universal Bale	Adjustable and self-locking, this attachment fits around a beam, pipe, or other continuous structural object. The bale wraps around the object and is securely anchored in the bar.

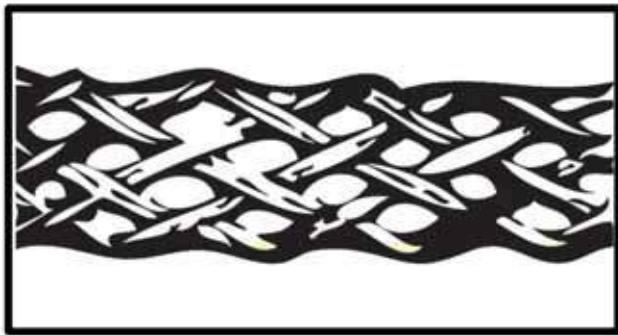

Closed

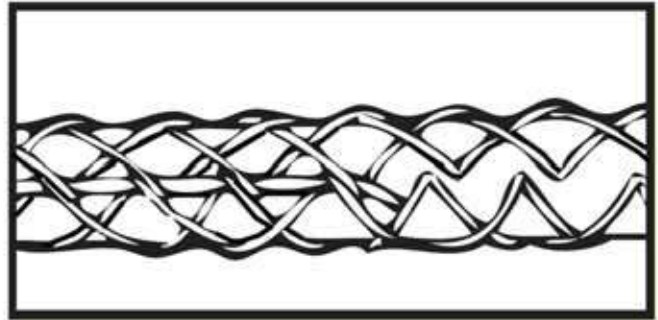

Split Rod

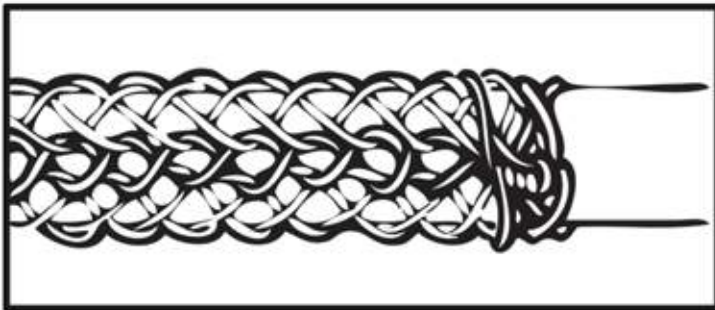

Split Lace


Mesh Styles

Mesh Styles	
Closed	Permanent support when cable end is available for support grip installation.
Split Lace Closing	Permanent support when cable end is not available for support grip installation.
Split Rod Closing	Temporary support when cable end is not available for support grip installation.




Support Grips - Standard Duty - Double Eye


- Stranded tinned bronze wire.

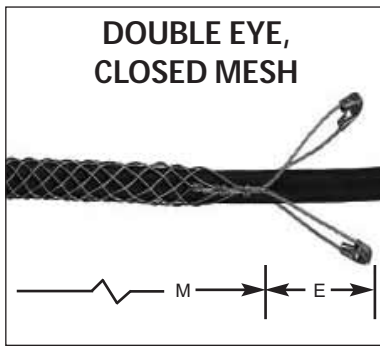

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-CM-050-DE	.50-.62	530 LBS.	4	10
SG-CM-062-DE	.63-.74	790 LBS.	4	10
SG-CM-075-DE	.75-.99	1020 LBS.	4	13
SG-CM-100-DE	1.00-1.24	1610 LBS.	5	14
SG-CM-125-DE	1.25-1.49	1610 LBS.	5	15
SG-CM-150-DE	1.50-1.74	1610 LBS.	5	17
SG-CM-175-DE	1.75-1.99	2150 LBS.	6	19
SG-CM-200-DE	2.00-2.49	3260 LBS.	6	21
SG-CM-250-DE	2.50-2.99	3260 LBS.	6	23
SG-CM-300-DE	3.00-3.49	4900 LBS.	8	25
SG-CM-350-DE	3.50-3.99	4900 LBS.	8	27

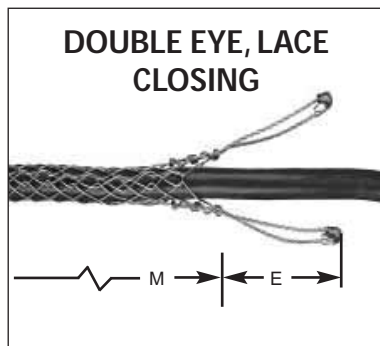

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-LC-050-DE	.50-.62	530 LBS.	4	10
SG-LC-062-DE	.63-.74	790 LBS.	4	10
SG-LC-075-DE	.75-.99	1020 LBS.	4	13
SG-LC-100-DE	1.00-1.24	1610 LBS.	5	14
SG-LC-125-DE	1.25-1.49	1610 LBS.	5	15
SG-LC-150-DE	1.50-1.74	1610 LBS.	5	17
SG-LC-175-DE	1.75-1.99	2150 LBS.	6	19
SG-LC-200-DE	2.00-2.49	3260 LBS.	6	21
SG-LC-250-DE	2.50-2.99	3260 LBS.	6	23
SG-LC-300-DE	3.00-3.49	4900 LBS.	8	25
SG-LC-350-DE	3.50-3.99	4900 LBS.	8	27

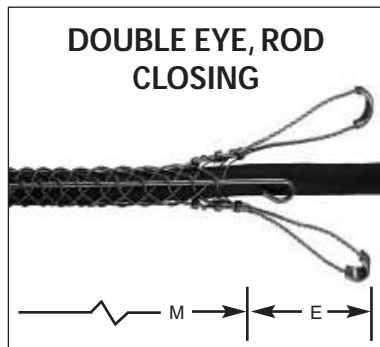

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-RC-050-DE	.50-.62	530LBS.	4	10
SG-RC-062-DE	.63-.74	790LBS.	4	10
SG-RC-075-DE	.75-.99	1020LBS.	4	13
SG-RC-100-DE	1.00-1.24	1610LBS.	5	14
SG-RC-125-DE	1.25-1.49	1610LBS.	5	15
SG-RC-150-DE	1.50-1.74	1610LBS.	5	17
SG-RC-175-DE	1.75-1.99	2150LBS.	6	19
SG-RC-200-DE	2.00-2.49	3260LBS.	6	21
SG-RC-250-DE	2.50-2.99	3260LBS.	6	23
SG-RC-300-DE	3.00-3.49	4900LBS.	8	25
SG-RC-350-DE	3.50-3.99	4900LBS.	8	27

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)

Support Grip Number Structure


Product Type	-	Mesh	-	Mesh Diameter	-	Eye Style
SG = Support Grips		CM = Closed Mesh		Lower Diameter		DE = Double Eye
SGHD = Support Grips Heavy Duty (Double Weave)		LC = Lace Closing		Range of Mesh		SE = Single Eye
		RC = Rod Closing				OFS = Offset Eye
						UB = Universal Bale

Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.




Support Grips - Standard Duty - Single Eye


- Stranded tinned bronze wire.

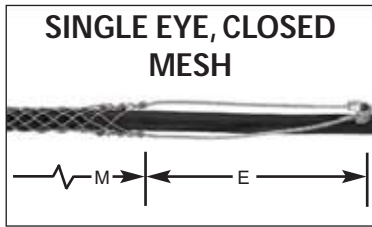

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-CM-050-SE	.50-.62	530LBS.	7	10
SG-CM-062-SE	.63-.74	790LBS.	8	10
SG-CM-075-SE	.75-.99	1020LBS.	8	13
SG-CM-100-SE	1.00-1.24	1610LBS.	9	14
SG-CM-125-SE	1.25-1.49	1610LBS.	10	15
SG-CM-150-SE	1.50-1.74	1610LBS.	12	17
SG-CM-175-SE	1.75-1.99	2150LBS.	14	19
SG-CM-200-SE	2.00-2.49	3260LBS.	16	21
SG-CM-250-SE	2.50-2.99	3260LBS.	18	23
SG-CM-300-SE	3.00-3.49	4900LBS.	21	25
SG-CM-350-SE	3.50-3.99	4900LBS.	24	27

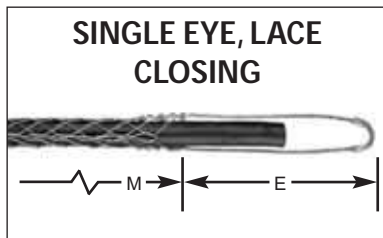

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-LC-050-SE	.50-.62	530LBS.	7	10
SG-LC-062-SE	.63-.74	790LBS.	8	10
SG-LC-075-SE	.75-.99	1020LBS.	8	13
SG-LC-100-SE	1.00-1.24	1610LBS.	9	14
SG-LC-125-SE	1.25-1.49	1610LBS.	10	15
SG-LC-150-SE	1.50-1.74	1610LBS.	12	17
SG-LC-175-SE	1.75-1.99	2150LBS.	14	19
SG-LC-200-SE	2.00-2.49	3260LBS.	16	21
SG-LC-250-SE	2.50-2.99	3260LBS.	18	23
SG-LC-300-SE	3.00-3.49	4900LBS.	21	25
SG-LC-350-SE	3.50-3.99	4900 LBS.	24	27

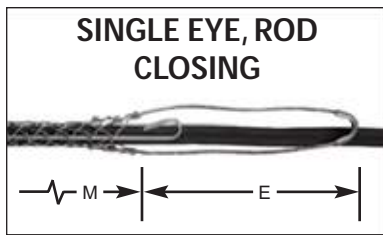

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-RC-050-SE	.50-.62	530LBS.	7	10
SG-RC-062-SE	.63-.74	790LBS.	8	10
SG-RC-075-SE	.75-.99	1020LBS.	8	13
SG-RC-100-SE	1.00-1.24	1610LBS.	9	14
SG-RC-125-SE	1.25-1.49	1610LBS.	10	15
SG-RC-150-SE	1.50-1.74	1610LBS.	12	17
SG-RC-175-SE	1.75-1.99	2150LBS.	14	19
SG-RC-200-SE	2.00-2.49	3260LBS.	16	21
SG-RC-250-SE	2.50-2.99	3260LBS.	18	23
SG-RC-300-SE	3.00-3.49	4900LBS.	21	25
SG-RC-350-SE	3.50-3.99	4900LBS.	24	27

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)

Support Grip Number Structure

Product Type	Mesh	Mesh Diameter	Eye Style
SG = Support Grips	CM = Closed	Lower Diameter Range of Mesh	DE = Double Eye
SGHD = Support Grips Heavy Duty (Double Weave)	Mesh LC = Lace Closing		SE = Single Eye
	RC = Rod Closing		OFS = Offset Eye
			UB = Universal Bale


Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.




FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

Support Grips - Standard Duty - Offset Eye


- Stranded tinned bronze wire.

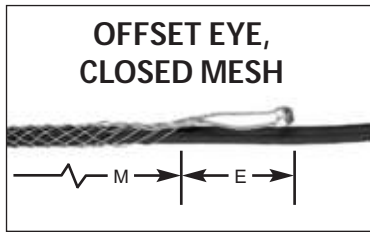

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-CM-050-OFS	.50-.62	500LBS.	4	10
SG-CM-062-OFS	.63-.74	750LBS.	4	10
SG-CM-075-OFS	.75-.99	950LBS.	4	13
SG-CM-100-OFS	1.00-1.24	1500LBS.	5	14
SG-CM-125-OFS	1.25-1.49	1500LBS.	5	15
SG-CM-150-OFS	1.50-1.74	1500LBS.	5	17
SG-CM-175-OFS	1.75-1.99	2000LBS.	6	19
SG-CM-200-OFS	2.00-2.49	3100LBS.	6	21
SG-CM-250-OFS	2.50-2.99	3100LBS.	6	23
SG-CM-300-OFS	3.00-3.49	3800LBS.	9	25
SG-CM-350-OFS	3.50-3.99	3800LBS.	9	27

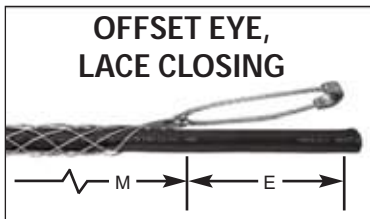

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-LC-050-OFS	.50-.62	500LBS.	4	10
SG-LC-062-OFS	.63-.74	750LBS.	4	10
SG-LC-075-OFS	.75-.99	950LBS.	4	13
SG-LC-100-OFS	1.00-1.24	1500LBS.	5	14
SG-LC-125-OFS	1.25-1.49	1500LBS.	5	15
SG-LC-150-OFS	1.50-1.74	1500LBS.	5	17
SG-LC-175-OFS	1.75-1.99	2000LBS.	6	19
SG-LC-200-OFS	2.00-2.49	3100LBS.	6	21
SG-LC-250-OFS	2.50-2.99	3100LBS.	6	23
SG-LC-300-OFS	3.00-3.49	3800LBS.	9	25
SG-LC-350-OFS	3.50-3.99	3800LBS.	9	27

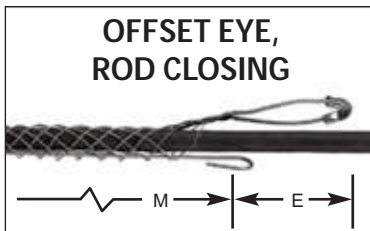

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-RC-050-OFS	.50-.62	500LBS.	4	10
SG-RC-062-OFS	.63-.74	750LBS.	4	10
SG-RC-075-OFS	.75-.99	950LBS.	4	13
SG-RC-100-OFS	1.00-1.24	1500LBS.	5	14
SG-RC-125-OFS	1.25-1.49	1500LBS.	5	15
SG-RC-150-OFS	1.50-1.74	1500LBS.	5	17
SG-RC-175-OFS	1.75-1.99	2000LBS.	6	19
SG-RC-200-OFS	2.00-2.49	3100LBS.	6	21
SG-RC-250-OFS	2.50-2.99	3100LBS.	6	23
SG-RC-300-OFS	3.00-3.49	3800LBS.	9	25
SG-RC-350-OFS	3.50-3.99	3800LBS.	9	27

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)

Support Grip Number Structure



Product Type	-	Mesh	-	Mesh Diameter	-	Eye Style
SG = Support Grips		CM = Closed Mesh		Lower Diameter		DE = Double Eye
SGHD = Support Grips Heavy Duty (Double Weave)		LC = Lace Closing		Range of Mesh		SE = Single Eye
		RC = Rod Closing				OFS = Offset Eye
						UB = Universal Bale



Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.

Support Grips - Standard Duty - Universal

• Stranded tinned bronze wire.



CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-CM-050-UB	.50-.62	530LBS.	18	10
SG-CM-062-UB	.63-.74	790LBS.	18	10
SG-CM-075-UB	.75-.99	1020LBS.	18	13
SG-CM-100-UB	1.00-1.24	1610LBS.	18	14
SG-CM-125-UB	1.25-1.49	1610LBS.	18	15
SG-CM-150-UB	1.50-1.74	1610LBS.	18	17
SG-CM-175-UB	1.75-1.99	2150LBS.	18	19
SG-CM-200-UB	2.00-2.49	3260LBS.	18	21
SG-CM-250-UB	2.50-2.99	3260LBS.	18	23
SG-CM-300-UB	3.00-3.49	4900LBS.	18	25
SG-CM-350-UB	3.50-3.99	4900LBS.	18	27

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-LC-050-UB	.50-.62	530LBS.	18	10
SG-LC-062-UB	.63-.74	790LBS.	18	10
SG-LC-075-UB	.75-.99	1020LBS.	18	13
SG-LC-100-UB	1.00-1.24	1610LBS.	18	14
SG-LC-125-UB	1.25-1.49	1610LBS.	18	15
SG-LC-150-UB	1.50-1.74	1610LBS.	18	17
SG-LC-175-UB	1.75-1.99	2150LBS.	18	19
SG-LC-200-UB	2.00-2.49	3260LBS.	18	21
SG-LC-250-UB	2.50-2.99	3260LBS.	18	23
SG-LC-300-UB	3.00-3.49	4900LBS.	18	25
SG-LC-350-UB	3.50-3.99	4900LBS.	18	27

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SG-RC-050-UB	.50-.62	530LBS.	18	10
SG-RC-062-UB	.63-.74	790LBS.	18	10
SG-RC-075-UB	.75-.99	1020LBS.	18	13
SG-RC-100-UB	1.00-1.24	1610LBS.	18	14
SG-RC-125-UB	1.25-1.49	1610LBS.	18	15
SG-RC-150-UB	1.50-1.74	1610LBS.	18	17
SG-RC-175-UB	1.75-1.99	2150LBS.	18	19
SG-RC-200-UB	2.00-2.49	3260LBS.	18	21
SG-RC-250-UB	2.50-2.99	3260LBS.	18	23
SG-RC-300-UB	3.00-3.49	4900LBS.	18	25
SG-RC-350-UB	3.50-3.99	4900LBS.	18	27

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)

Support Grip Number Structure

Product Type	-	Mesh	-	Mesh Diameter	-	Eye Style
SG = Support Grips		CM = Closed Mesh		Lower Diameter Range of Mesh		DE = Double Eye
SGHD = Support Grips Heavy Duty (Double Weave)		LC = Lace Closing				SE = Single Eye
		RC = Rod Closing				OFS = Offset Eye
						UB = Universal Bale


Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.




FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

Support Grips - Heavy Duty

- Ericson Heavy Duty Support Grips are designed to withstand greater loads and increased stress
- Stranded tinned bronze wire.

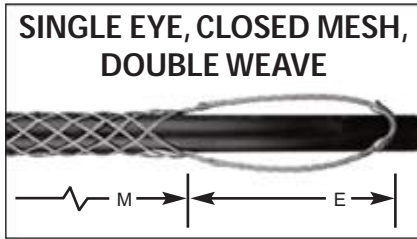

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SGHD-CM-075-SE	.75-.99	2820LBS.	10	25
SGHD-CM-100-SE	1.00-1.24	4280LBS.	10	28
SGHD-CM-125-SE	1.25-1.49	4280LBS.	10	30
SGHD-CM-150-SE	1.50-1.99	4280LBS.	10	34

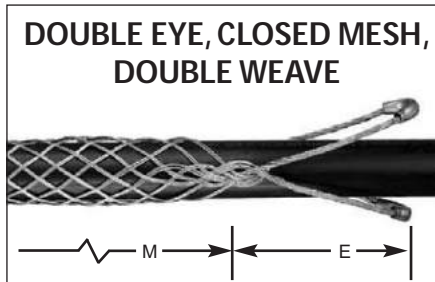

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SGHD-CM-075-DE	.75-.99	2820LBS.	10	25
SGHD-CM-100-DE	1.00-1.24	4280LBS.	10	28
SGHD-CM-125-DE	1.25-1.49	4280LBS.	10	30
SGHD-CM-150-DE	1.50-1.99	4280LBS.	10	34
SGHD-CM-200-DE	2.00-2.49	8050LBS.	10	36
SGHD-CM-250-DE	2.50-2.99	8050LBS.	10	38
SGHD-CM-300-DE	3.00-3.49	10060LBS.	10	40
SGHD-CM-350-DE	3.50-3.99	12070LBS.	10	44
SGHD-CM-400-DE	4.00-4.49	12070LBS.	10	46

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)

Support Grip Number Structure


Product Type	Mesh	Mesh Diameter	Eye Style
SG = Support Grips	CM = Closed Mesh	Lower Diameter	DE = Double Eye
SGHD = Support Grips Heavy Duty (Double Weave)	LC = Lace Closing	Range of Mesh	SE = Single Eye
	RC = Rod Closing		OFS = Offset Eye
			UB = Universal Bale




Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.

Support Grips - Light Duty Service Drops


- Ericson Service Drop Grips are used in a wide variety of light duty electrical applications such as service entrance, cable tv, telephone, fiber optics, etc., in sloping, vertical, or horizontal positions.
- High grade non-magnetic tin coated bronze wire.

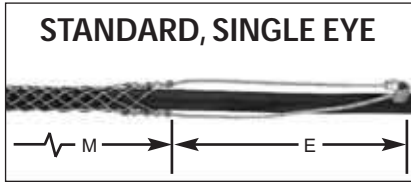

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SD-23-SE	.23-.31	290LBS.	4	3
SD-32-SE	.32-.43	290LBS.	4	4
SD-43-SE	.43-.56	380LBS.	6	5
SD-56-SE	.56-.73	600LBS.	7	6
SD-73-SE	.73-.85	790LBS.	7	6
SD-85-SE	.85-1.00	1020LBS.	8	8
SD-100-SE	1.00-1.25	1020LBS.	9	9

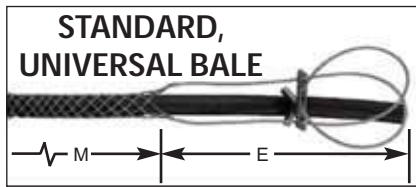

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SD-23-UB	.23-.31	290LBS.	8	3
SD-32-UB	.32-.43	290LBS.	10	4
SD-43-UB	.43-.56	380LBS.	12	5
SD-56-UB	.56-.73	600LBS.	13	6
SD-73-UB	.73-.85	790LBS.	14	6
SD-85-UB	.85-1.00	1020LBS.	14	8
SD-100-UB	1.00-1.25	1020LBS.	15	9

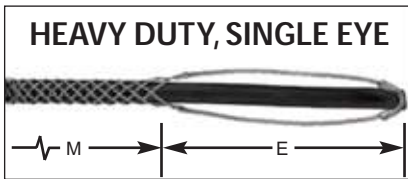

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SDHD-23-SE	.23-.31	500LBS.	5	5
SDHD-32-SE	.32-.43	500LBS.	6	6
SDHD-43-SE	.43-.56	870LBS.	6	8
SDHD-56-SE	.56-.73	1050LBS.	7	9
SDHD-73-SE	.73-.85	1390LBS.	8	10
SDHD-85-SE	.85-1.00	1790LBS.	8	12
SDHD-100-SE	1.00-1.25	1790LBS.	9	14



CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
SDHD-23-UB	.23-.31	500LBS.	9	5
SDHD-32-UB	.32-.43	500LBS.	10	6
SDHD-43-UB	.43-.56	870LBS.	12	8
SDHD-56-UB	.56-.73	1050LBS.	13	9
SDHD-73-UB	.73-.85	1390LBS.	14	10
SDHD-85-UB	.85-1.00	1790LBS.	14	12
SDHD-100-UB	1.00-1.25	1790LBS.	15	14

Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)

Bus Drops & Service Drops Number Structure

Product Type	-	Mesh Diameter	-	Eye Style
SD = Service Drops		Lower Diameter		SE = Single Eye
SDHD = Service Drops Heavy Duty (Double Weave)		Range of Mesh		UB = Universal Bale



Support Grips - Conduit Riser Grips

For permanent support when cable end is available to be installed through the grip.

CABLE SIZE INCHES		.50-.62	.63-.74	.75-.99	1.00-1.24	1.25-1.49
LENGTH		8"	9"	10"	11"	12"
CONDUIT SIZE	APX. BRK. STR. LBS.	530 290	790 435	1030 560	1610 890	1610 890
	3/4"	CAT. NO.	CRG-C.75-CM-050			
1"	CAT. NO.	CRG-C1-CM-050	CRG-C1-CM-062			
1-1/4"	CAT. NO.	CRG-C1.25-CM-050	CRG-C1.25-CM-062	CRG-C1.25-CM-075		
1-1/2"	CAT. NO.	CRG-C1.50-CM-050	CRG-C1.50-CM-062	CRG-C1.50-CM-075	CRG-C1.50-CM-100	
2"	CAT. NO.	CRG-C2-CM-050	CRG-C2-CM-062	CRG-C2-CM-075	CRG-C2-CM-100	CRG-C2-CM-125
2-1/2"	CAT. NO.	CRG-C2.50-CM-050	CRG-C2.50-CM-062	CRG-C2.50-CM-075	CRG-C2.50-CM-100	CRG-C2.50-CM-125
3"	CAT. NO.	CRG-C3-CM-050	CRG-C3-CM-062	CRG-C3-CM-075	CRG-C3-CM-100	CRG-C3-CM-125
3-1/2"	CAT. NO.		CRG-C3.50-CM-062	CRG-C3.50-CM-075	CRG-C3.50-CM-100	CRG-C3.50-CM-125
4"	CAT. NO.		CRG-C4-CM-062	CRG-C4-CM-075	CRG-C4-CM-100	CRG-C4-CM-125
4-1/2"	CAT. NO.			CRG-C4.50-CM-075	CRG-C4.50-CM-100	CRG-C4.50-CM-125
5"	CAT. NO.			CRG-C5-CM-075	CRG-C5-CM-100	CRG-C5-CM-125
6"	CAT. NO.			CRG-C6-CM-075	CRG-C6-CM-100	CRG-C6-CM-125

CABLE SIZE INCHES		1.50-1.74	1.75-1.99	2.00-2.49
LENGTH		13"	14"	17"
CONDUIT SIZE	APX. BRK. STR. LBS.	1610 890	2150 1180	3260 1795
	3/4"	CAT. NO.		
1"	CAT. NO.			
1-1/4"	CAT. NO.			
1-1/2"	CAT. NO.			
2"	CAT. NO.			
2-1/2"	CAT. NO.	CRG-C2.50-CM-150	CRG-C2.50-CM-175	
3"	CAT. NO.	CRG-C3-CM-150	CRG-C3-CM-175	CRG-C3-CM-200
3-1/2"	CAT. NO.	CRG-C3.50-CM-150	CRG-C3.50-CM-175	CRG-C3.50-CM-200
4"	CAT. NO.	CRG-C4-CM-150	CRG-C4-CM-175	CRG-C4-CM-200
4-1/2"	CAT. NO.	CRG-C4.50-CM-150	CRG-C4.50-CM-175	CRG-C4.50-CM-200
5"	CAT. NO.	CRG-C5-CM-150	CRG-C5-CM-175	CRG-C5-CM-200
6"	CAT. NO.	CRG-C6-CM-150	CRG-C6-CM-175	CRG-C6-CM-200

CABLE SIZE INCHES		2.50-2.99	3.00-3.49	3.50-3.99
LENGTH		18"	20"	21"
CONDUIT SIZE	APX. BRK. STR. LBS.	3260 1795	4080 2245	4080 2245
	3/4"	CAT. NO.		
1"	CAT. NO.			
1-1/4"	CAT. NO.			
1-1/2"	CAT. NO.			
2"	CAT. NO.			
2-1/2"	CAT. NO.			
3"	CAT. NO.			
3-1/2"	CAT. NO.	CRG-C3.50-CM-250		
4"	CAT. NO.	CRG-C4-CM-250	CRG-C4-CM-300	
4-1/2"	CAT. NO.	CRG-C4.50-CM-250	CRG-C4.50-CM-300	CRG-C4.50-CM-350
5"	CAT. NO.	CRG-C5-CM-250	CRG-C5-CM-300	CRG-C5-CM-350
6"	CAT. NO.	CRG-C6-CM-250	CRG-C6-CM-300	CRG-C6-CM-350



- Ericson Conduit Riser Support Grips are used to support cable runs in vertical or sloping standard rigid conduit.
- They are designed to prevent cable creep in conduit and help prevent cable pullouts.
- Ericson Conduit Riser Support Grips install quickly and easily with no damage to electrical cable.
- The mesh is attached to a support ring, which sits on the conduit requiring no extra hardware to attach.
- Fittings, bushings, or couplings may be threaded on the conduit with the grip in place.
- Stranded tinned bronze wire.



Made in the USA

Support Grips - Conduit Riser Grips



- Stranded tinned bronze wire.

For permanent support when cable end is not available.

	CABLE SIZE INCHES	.75-.99	1.00-1.24	1.25-1.49	1.50-1.74	1.75-1.99
	LENGTH	10"	11"	12"	13"	14"
CONDUIT SIZE	APX. BRK. STR. LBS.	1580 870	2040 1125	2040 1125	2040 1125	2730 1500
1-1/4"	CAT. NO.	CRG-C1.25-LC-075				
1-1/2"	CAT. NO.	CRG-C1.5-LC-075	CRG-C1.5-LC-100			
2"	CAT. NO.	CRG-C2-LC-075	CRG-C2-LC-100	CRG-C2-LC-125		
2-1/2"	CAT. NO.	CRG-C2.5-LC-075	CRG-C2.5-LC-100	CRG-C2.5-LC-125	CRG-C2.5-LC-150	CRG-C2.5-LC-175
3"	CAT. NO.	CRG-C3-LC-075	CRG-C3-LC-100	CRG-C3-LC-125	CRG-C3-LC-150	CRG-C3-LC-175
3-1/2"	CAT. NO.	CRG-C3.5-LC-075	CRG-C3.5-LC-100	CRG-C3.5-LC-125	CRG-C3.5-LC-150	CRG-C3.5-LC-175
4"	CAT. NO.	CRG-C4-LC-075	CRG-C4-LC-100	CRG-C4-LC-125	CRG-C4-LC-150	CRG-C4-LC-175
4-1/2"	CAT. NO.	CRG-C4.5-LC-075	CRG-C4.5-LC-100	CRG-C4.5-LC-125	CRG-C4.5-LC-150	CRG-C4.5-LC-175
5"	CAT. NO.	CRG-C5-LC-075	CRG-C5-LC-100	CRG-C5-LC-125	CRG-C5-LC-150	CRG-C5-LC-175
6"	CAT. NO.	CRG-C6-LC-075	CRG-C6-LC-100	CRG-C6-LC-125	CRG-C6-LC-150	CRG-C6-LC-175

	CABLE SIZE INCHES	2.00-2.49	2.50-2.99	3.00-3.49	3.50-3.99
	LENGTH	17"	18"	20"	21"
CONDUIT SIZE	APX. BRK. STR. LBS.	4300 2365	4300 2365	5380 2955	5380 2955
1-1/4"	CAT. NO.				
1-1/2"	CAT. NO.				
2"	CAT. NO.				
2-1/2"	CAT. NO.				
3"	CAT. NO.	CRG-C3-LC-200			
3-1/2"	CAT. NO.	CRG-C3.5-LC-200	CRG-C3.5-LC-250		
4"	CAT. NO.	CRG-C4-LC-200	CRG-C4-LC-250	CRG-C4-LC-300	
4-1/2"	CAT. NO.	CRG-C4.5-LC-200	CRG-C4.5-LC-250	CRG-C4.5-LC-300	CRG-C4.5-LC-350
5"	CAT. NO.	CRG-C5-LC-200	CRG-C5-LC-250	CRG-C5-LC-300	CRG-C5-LC-350
6"	CAT. NO.	CRG-C6-LC-200	CRG-C6-LC-250	CRG-C6-LC-300	CRG-C6-LC-350

Conduit Riser Grips Number Structure

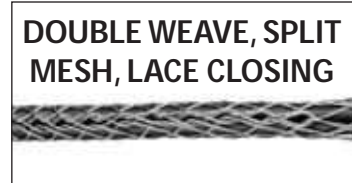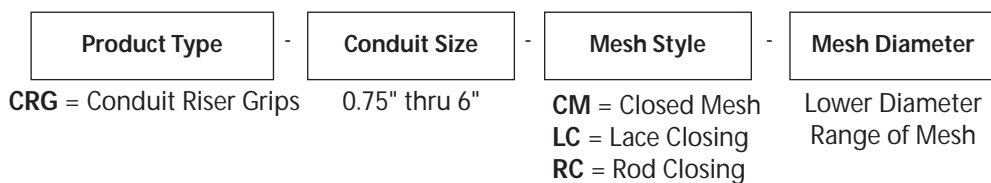

FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

Support Grips - Conduit Riser Grips

• Stranded tinned bronze wire.

For temporary support when cable end is not available.

	CABLE SIZE INCHES	.75-.99	1.00-1.24	1.25-1.49	1.50-1.74	1.75-1.99
	LENGTH	11"	12"	13"	14"	15"
CONDUIT SIZE	APX. BRK. STR. LBS.	1020 560	1610 890	1610 890	1610 890	2150 1180
1-1/4"	CAT. NO.	CRG-C1.25-RC-075				
1-1/2"	CAT. NO.	CRG-C1.5-RC-075	CRG-C1.5-RC-100			
2"	CAT. NO.	CRG-C2-RC-075	CRG-C2-RC-100	CRG-C2-RC-125		
2-1/2"	CAT. NO.	CRG-C2.5-RC-075	CRG-C2.5-RC-100	CRG-C2.5-RC-125	CRG-C2.5-RC-150	CRG-C2.5-RC-175
3"	CAT. NO.	CRG-C3-RC-075	CRG-C3-RC-100	CRG-C3-RC-125	CRG-C3-RC-150	CRG-C3-RC-175
3-1/2"	CAT. NO.	CRG-C3.5-RC-075	CRG-C3.5-RC-100	CRG-C3.5-RC-125	CRG-C3.5-RC-150	CRG-C3.5-RC-175
4"	CAT. NO.	CRG-C4-RC-075	CRG-C4-RC-100	CRG-C4-RC-125	CRG-C4-RC-150	CRG-C4-RC-175
4-1/2"	CAT. NO.	CRG-C4.5-RC-075	CRG-C4.5-RC-100	CRG-C4.5-RC-125	CRG-C4.5-RC-150	CRG-C4.5-RC-175
5"	CAT. NO.	CRG-C5-RC-075	CRG-C5-RC-100	CRG-C5-RC-125	CRG-C5-RC-150	CRG-C5-RC-175
6"	CAT. NO.	CRG-C6-RC-075	CRG-C6-RC-100	CRG-C6-RC-125	CRG-C6-RC-150	CRG-C6-RC-175

	CABLE SIZE INCHES	2.00-2.49	2.50-2.99	3.00-3.49	3.50-3.99
	LENGTH	16"	17"	19"	20"
CONDUIT SIZE	APX. BRK. STR. LBS.	3260 1795	3260 1795	4080 2245	4080 2245
1-1/4"	CAT. NO.				
1-1/2"	CAT. NO.				
2"	CAT. NO.				
2-1/2"	CAT. NO.				
3"	CAT. NO.	CRG-C3-RC-200			
3-1/2"	CAT. NO.	CRG-C3.5-RC-200	CRG-C3.5-RC-250		
4"	CAT. NO.	CRG-C4-RC-200	CRG-C4-RC-250	CRG-C4-RC-300	
4-1/2"	CAT. NO.	CRG-C4.5-RC-200	CRG-C4.5-RC-250	CRG-C4.5-RC-300	CRG-C4.5-RC-350
5"	CAT. NO.	CRG-C5-RC-200	CRG-C5-RC-250	CRG-C5-RC-300	CRG-C5-RC-350
6"	CAT. NO.	CRG-C6-RC-200	CRG-C6-RC-250	CRG-C6-RC-300	CRG-C6-RC-350




Conduit Riser

Conduit Rings

Select Conduit Ring Dimension from chart to the right.

Conduit Rings are cast bronze, zinc plated to resist corrosion

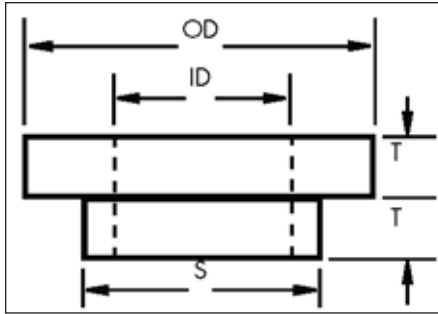

Conduit Ring Dimensions

CONDUIT SIZE	RING NO.	O.D.	I.D.	S	T
3/4"	C-3/4"	.94	.62	-	.19
1"	C-1	1.31	.93	-	.19
1-1/4"	C-1-1/4	1.50	1.03	1.31	.16
1-1/2"	C-1-1/2	1.76	1.23	1.52	.16
2"	C-2	2.23	1.55	1.97	.16
2-1/2"	C-2-1/2	2.67	2.05	2.40	.16
3"	C-3	3.20	2.55	2.97	.22
3-1/2"	C-3-1/2	3.80	3.05	3.47	.22
4"	C-4	4.30	3.55	3.94	.22
4-1/2"	C-4-1/2	4.80	4.03	4.45	.22
5"	C-5	5.30	4.46	4.96	.22
6"	C-6	6.30	5.36	5.96	.25


For Ericson Conduit Riser Grips only use to determine grip size when multiple cables are held in a Single Conduit Riser Grip

- Under "Number of cables in one grip," find diameter of your cable in vertical column.
- Read grip size and grip diameter range to the right.
- If your diameter is the maximum of the range shown, go to the next larger size for split grips, stay with the same size for closed grips.
- Example: 3 cables, each with .85 diameter, for a closed grip select the 1.50 - 1.74 range, for a split grip use 1.75 - 1.99.

For Cables Of Equal Diameters

NUMBER OF EQUAL DIAMETER CABLES IN ONE GRIP							
2	3	4	5	6 and 7	8	9	GRIP DIAM. RANGE
.29-.36	.24-.30	.21-.25	.18-.22	.16-.20	.15-.18	.14-.17	.50-.62
.37-.43	.31-.36	.26-.30	.23-.27	.21-.24	.19-.22	.18-.20	.63-.74
.44-.58	.37-.48	.31-.41	.28-.36	.25-.32	.23-.29	.21-.27	.75-.99
.59-.72	.49-.60	.42-.51	.37-.45	.33-.40	.30-.36	.28-.34	1.00-1.24
.73-.87	.61-.72	.52-.61	.46-.54	.41-.48	.37-.43	.35-.40	1.25-1.49
.88-1.01	.73-.85	.62-.71	.55-.63	.49-.56	.44-.51	.41-.47	1.50-1.74
1.02-1.16	.86-.96	.72-.81	.64-.72	.57-.64	.52-.58	.48-.54	1.75-1.99
1.17-1.44	.97-1.20	.82-1.02	.73-.90	.65-.80	.59-.72	.55-.67	2.00-2.49
1.45-1.73	1.21-1.45	1.03-1.22	.91-1.08	.81-.96	.73-.87	.68-.81	2.50-2.99
1.74-2.02	1.46-1.69	1.23-1.43	1.09-1.26	.97-1.11	.83-1.01	.82-.94	3.00-3.49
2.03-2.31	1.70-1.93	1.44-1.63	1.27-1.44	1.12-1.27	1.02-1.15	.95-1.08	3.50-3.9

Conduit Riser Grips Number Structure

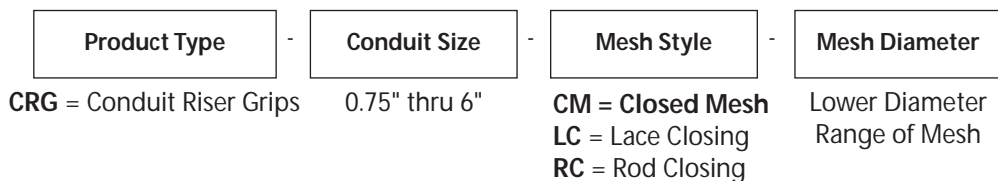


FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

Support Grips - Bus Drop Grips


- High strength galvanized steel strand.
- Ericson Bus Drop Grips are easily installed and absorb tension, vibration, and pull with no damage.
- They support flexible cord or Bus Drop Cable at bus duct or industrial areas.
- Single eye can be used with springs by disassembling draw bar from coil, placing through eye and replacing draw bar.
- Hook eyes available, please consult factory.

SINGLE EYE, WIDE RANGE

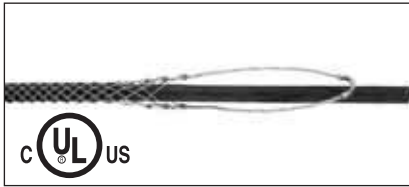


CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E*	M
*BD-022-SE	.22-.32	350LBS.	3	3-1/2**
*BD-030-SE	.30-.43	450LBS.	4	4
*BD-041-SE	.41-.56	550LBS.	6	4-3/4
*BD-053-SE	.53-.73	1000LBS.	7	6
*BD-070-SE	.70-.85	1400LBS.	7	6-3/4
*BD-082-SE	.82-1.00	1400LBS.	8	8
*BD-096-SE	.96-1.25	1500LBS.	9	9-1/2
BD-125-SE	1.25-1.50	1800LBS.	10	12-1/2**

DRY LOCATION ONLY

 *Except Where Noted


UNIVERSAL BALE, WIDE RANGE

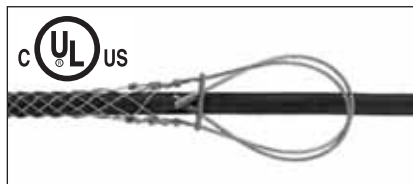

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E*	M
BD-022-UB	.22-.32	350LBS.	9	3-1/2**
*BD-030-UB	.30-.43	450LBS.	10	4
*BD-041-UB	.41-.56	550LBS.	12	4-3/4
*BD-053-UB	.53-.73	1000LBS.	13	6
*BD-070-UB	.70-.85	1400LBS.	13	6-3/4
*BD-082-UB	.82-1.00	1400LBS.	14	8
*BD-096-UB	.96-1.25	1500LBS.	15	9-1/2

DRY LOCATION ONLY

BUS DROP SAFETY SPRINGS



CATALOG NUMBER	MAXIMUM DEFLECTION	APPROX. BREAKING STRENGTH	LENGTH (NO LOAD)	
			L	D
40LB SPRING	2-1/8 @40 LBS.	SPRING	600 LBS.	8-1/4
80LB SPRING	3-1/8 @80 LBS.	SPRING	850 LBS.	8-1/4

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)

* Dim with Bale Fully Extended

** Not UL Listed

Bus Drops & Service Drops Number Structure



BD = Bus Drops Lower Diameter SE = Single Eye
 SD = Service Drops Range of Mesh UB = Universal Bale
 SDHD = Service Drops Heavy Duty (Double Weave)



Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.

Flag label shows catalog number, full description containing diameter range, barcode, mfg date, and MADE IN USA!



Flexible eyes will mate easily with line stringing swivels and links for attachment to pulling lines. They have great strength for trouble free pulling jobs.

When using a Pulling Grip, these shoulder protectors contain the cable inside of the grip and allow for a smooth passage of the grip through conduit bends.

All Ericson Pulling Grips utilize galvanized steel mesh strand that provides superior pulling grip strength and flexibility to follow the cable path of the installation.

Double weave construction is available for added strength with greater mesh contact on the cable to handle longer or heavier pulling requirements.

Closed Mesh weave allows for easy installation onto cable and is designed to be a reusable tool.




FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.

How To Select The Correct Pulling Grip	
Step 1	<p>Choose a pulling grip style that is best suited for your application.</p> <p>Junior Pulling Grips cable diameter range = .25 to 1.25" and Breaking Strength = 450 to 3900 lbs.</p> <p>Light Duty Grips cable diameter range = .50 to 3.99" and Breaking Strength = 2800 to 14700 lbs.</p> <p>Utility Pulling Grips cable diameter range = .50 to 6.99" and Breaking Strength range = 4500 to 48000 lbs.</p>
Step 2	Determine your cable outside diameter. Refer to Technical Reference section.
Step 3	Find the mesh grip size that encompasses your cable diameter.
Step 4	<p>IMPORTANT! Estimate the tension to be put on the grip, establish the working load you require and compare this to the listed approximate breaking strength of the grip to insure that the grip will be strong enough. For Pulling Grips, use a Safety Factor of 5.</p> <p>Refer to Refer to Technical Reference section for safety and working load considerations.</p>




Pulling Grips - Light Duty/Low Tension

- High grade galvanized steel strand.
- They are single weave with a flexible eye for easy attachment to a pulling line.
- Ericson Light Duty Pulling Grips are used in general underground electrical construction where pulling tensions are low.

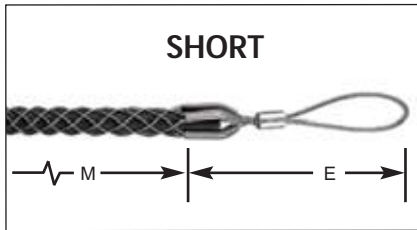


CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
LDPG-050-S	.50-.61	2800LBS.	5	11
LDPG-062-S	.62-.74	2800LBS.	5	11
LDPG-075-S	.75-.99	4000LBS.	6	12
LDPG-100-S	1.00-1.24	5300LBS.	7	13
LDPG-125-S	1.25-1.49	5300LBS.	7	14
LDPG-150-S	1.50-1.74	6800LBS.	8	15
LDPG-175-S	1.75-1.99	8500LBS.	8	17
LDPG-200-S	2.00-2.49	8500LBS.	9	18
LDPG-250-S	2.50-2.99	10600LBS.	9	18
LDPG-300-S	3.00-3.49	14700LBS.	10	20

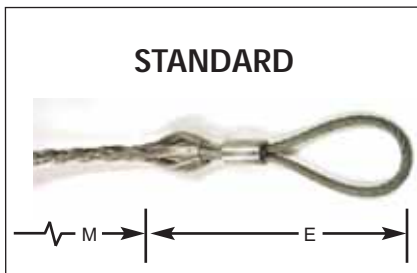

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
LDPG-050	.50-.61	2800LBS.	5	16
LDPG-062	.62-.74	2800LBS.	5	16
LDPG-075	.75-.99	4000LBS.	6	20
LDPG-100	1.00-1.24	6800LBS.	7	20
LDPG-125	1.25-1.49	6800LBS.	7	21
LDPG-150	1.50-1.99	6800LBS.	8	23
LDPG-200	2.00-2.49	8500LBS.	9	25
LDPG-250	2.50-2.99	10600LBS.	9	27
LDPG-300	3.00-3.50	14700LBS.	10	30
LDPG-350	3.50-3.99	14700LBS.	10	32

JUNIOR PULLING
For attaching to a pulling line, fish tape or snake.

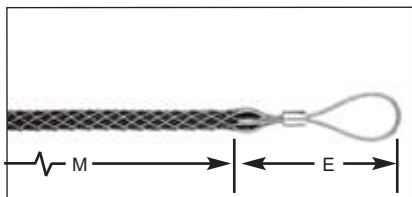

CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
JPG-25	.25-.36	450 LBS.	3-1/4	4-1/4
JPG-37	.37-.49	900 LBS.	3-1/4	7
JPG-50	.50-.61	1300 LBS.	4-1/4	8-1/2
JPG-62	.62-.74	1950 LBS.	5	10
JPG-75	.75-.99	2800 LBS.	5-3/4	10
JPG-100	1.00-1.25	3900 LBS.	6-1/2	11-1/2
JPG-KIT	.25-1.25			
INCLUDES:	JPG-25, JPG-37			
	JPG-50, JPG-62			
	JPG-75, JPG-100			

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)

Pulling Grips Number Structure

Product Type	-	Mesh Diameter	-	Eye Style
LDPG = Light Duty Pulling Grips		Lower Diameter		FE = Flexible Eye
JPG = Junior Pulling Grips		Range of Mesh		S = Short
UPG = Utility Pulling Grips				

Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.

- High strength galvanized steel strand.
- Pulling Grips are double weave for added strength with greater mesh contact on the cable to handle longer or heavier pulling jobs.


Standard, Flexible Eye



CATALOG NUMBER	DIA. RA.	APPROX. BREAKING STRENGTH	LENGTH	
			E	M
UPG-50-FE	.50-.61	4500LBS.	5	16
UPG-62-FE	.62-.74	5600LBS.	5	16
UPG-75-FE	.75-.99	6800LBS.	6	32
UPG-100-FE	1.00-1.49	9600LBS.	7	33
UPG-150-FE	1.50-1.99	16400LBS.	7	34
UPG-200-FE	2.00-2.49	18500LBS.	9	36
UPG-250-FE	2.50-2.99	24500LBS.	10	38
UPG-300-FE	3.00-3.49	24500LBS.	10	39
UPG-350-FE	3.50-3.99	31000LBS.	10	41

For shorter or longer mesh please consult factory.

Pulling Grips Number Structure

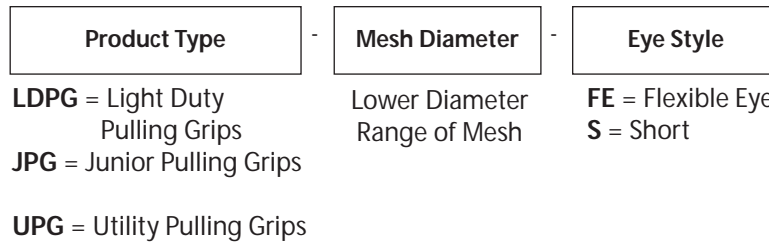

Caution: When selecting a grip, never use to their approximate breaking strength. Refer to Technical Reference section for safety and working load factors.





Wide Range Grips

Cord Grips

Deluxe Cord Grips





I - Grips

Ericson's Strain Relief Grip and Mesh eliminates cable pullout to reduce a loss of service resulting in costly downtime. The endless mesh weave provides easy cable installation that is woven with stainless steel providing corrosion resistance for all applications. A NPT and PG threaded body allows for easy attachment to either a threaded hub or knock-out in box.



How To Select A Strain Relief Grip

How to select a Strain Relief Grip
Step 1 Refer to chart below to determine which Strain Relief Grip style is best suited for your application.
Step 2 Determine outside diameter of cable.
Step 3 Is the application environment indoors or outdoors?
Step 4 Select N.P.T. size and fitting style.

Strain Relief Grip Style	Application	Features
Wide Range Grip 	Indoor use only for wiring of electrical enclosures, portable power tools, bus drop cable systems, etc	Aluminum Body Stainless Steel Mesh Grip Range = .25 to 2.45"
Deluxe Cord Grip 	Outdoors or indoors rated where item are subjected to moisture or splash. Examples are hand tools, pendant drops for cranes and hoists, or pumps and processing equipment.	Aluminum Nut Aluminum Body Neoprene Bushing Stainless Steel Mesh with Aluminum Collars Grip Range = .18 to 3.25"
Cord Grips 	Outdoors or indoors rated where items are subjected to moisture or splash	Aluminum Nut Aluminum Body Neoprene Bushing
I - Grips 	Provides additional strain relief for Plugs and Connectors while controlling the cable arc of bend. For indoor use only.	High Strength Galvanized Strand Grip Range = .30 to 1.25"



Strain Relief Grips - Wide Range

- Ericson Strain Relief Grips are wide range mesh construction with single weave, galvanized steel mesh.
- The one piece design is easy to install.
- Ericson Strain Relief Grips are used to connect flexible cord or bus drop cable to electrical enclosures, also prevents cord or cable pullout.
- Insulating bushing available for non-insulated aluminum fittings.
- Available with locknut and pvc gasket for a dirt and dust free seal.
- Dry locations only.

SR SERIES Non-Insulated Wide Range Strain Relief



CATALOG NUMBER	DIA. RA.	THREAD SIZE NPT (INCHES)	LENGTH @ NOM DIA. (IN.)
SR-022	.24-.32	1/2	3-1/4
SR-030	.32-.43	1/2	3-3/4
SR-040	.43-.54	1/2	4-3/4
SR-052	.54-.73	3/4	6-1/2
SR-070	.73-.97	1	7
SR-094	.97-1.25	1-1/4	9

DRY LOCATION ONLY

SRP SERIES Insulated Wide Range Strain Relief with Insulating Bushing



CATALOG NUMBER	DIA. RA.	THREAD SIZE NPT (INCHES)	LENGTH @ NOM DIA. (IN.)	DIM. A (INCHES)
SRI-022	.24-.32	1/2 N.P.S.	3-1/4	1
SRI-030	.32-.43	1/2 N.P.S.	3-3/4	1
SRI-040	.43-.54	1/2 N.P.S.	4-3/4	1
SRI-052	.54-.73	3/4 N.P.S.	6-1/2	1
SRI-070	.73-.97	1 N.P.S.	7	1-3/16
SRI-094	.97-1.25	1-1/4 N.P.S.	9	1-3/16
SRI-120	1.25-1.50	1-1/2 N.P.T.	11-3/4	1-3/16
SRI-140	1.50-1.70	2 N.P.T.	13-1/4	1-3/8
SRI-162	1.70-2.00	2-1/2 N.P.T.	13-1/2	1-1/2
SRI-200	2.00-2.45	2-1/2 N.P.T.	13-3/4	1-1/2

DRY LOCATION ONLY


Strain Relief Number Structure



SR = Strain Relief Lower Diameter
 SRI = Strain Relief Insulated Range of Mesh



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

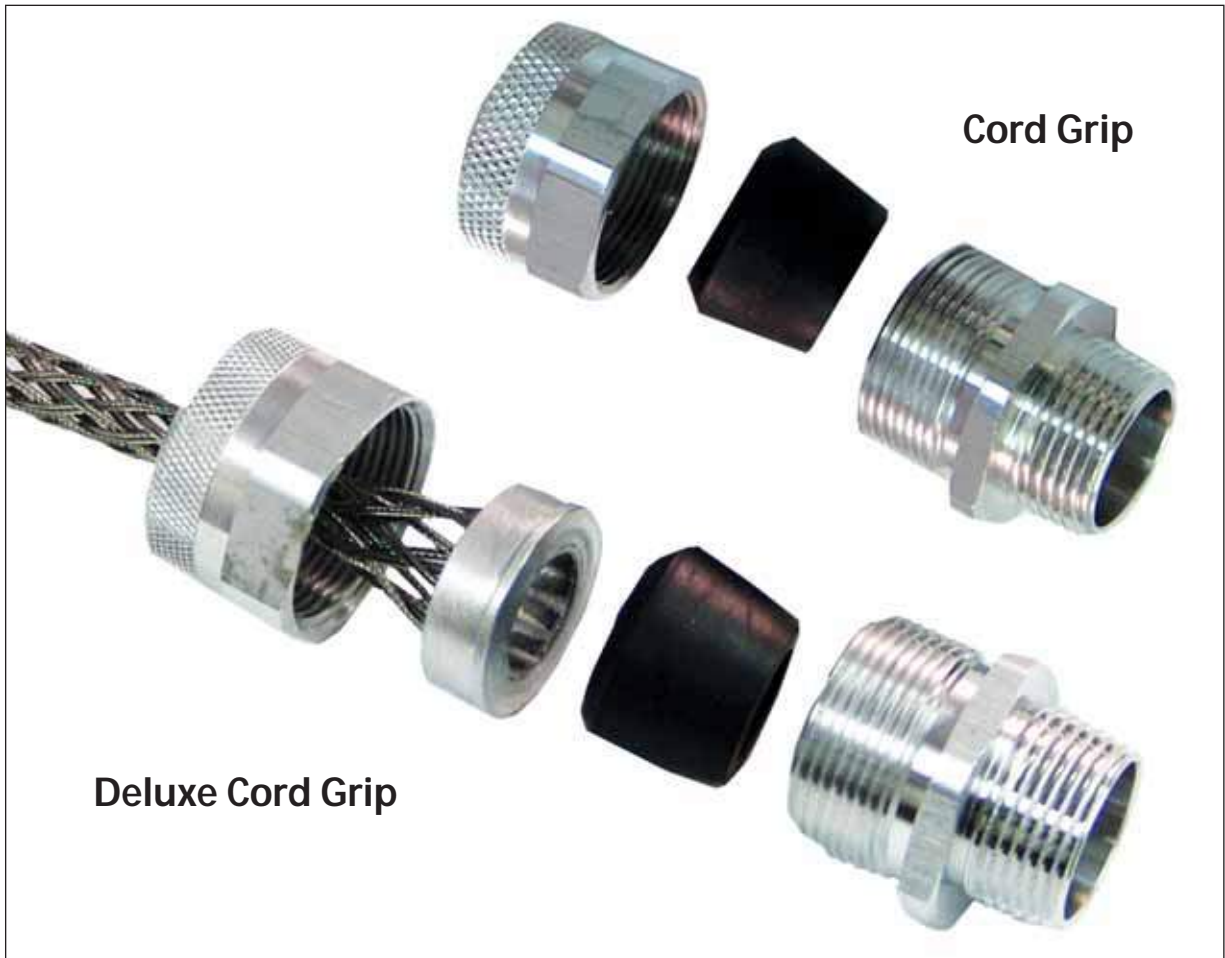

Cord Grip

Deluxe Cord Grip

Features

- Indoor and outdoor use
- Prevents cord pull-out
- For use where cable is exposed to moisture or submersion
- Eliminates fatigue points
- Control cable arc-of-bend

Cord Grip Materials

- Aluminum Nut
- Aluminum Body
- Neoprene Bushing

Deluxe Cord Grip Materials

- Aluminum Nut
- Aluminum Body
- Neoprene Bushing
- SST Mesh with aluminum collars

Applications

- Wiring Enclosures
- Pumps
- Compressors
- Construction
- Hand Tools
- Processing Equipment
- Material Handling Equipment
- Motors & Machine Tools

COMPLIANCES:

National Electrical Code
Articles 400-10 and 400-14
NEMA standards FB1-1983
Fed. Spec. W-C-586c
Mil Spec 100 and 130

Available upon request

- Metal Clad Sealing "O" Ring
- Locknut

Suitable for use in hazardous locations under NEC Sec 501-4(b), 502-4(a)(2), and 503-2(a). For Class 1, Div 2; Class II, Div 1 and 2; and Class III, Div 1 and 2.



Made in the USA

STRAIGHT CORD CONNECTORS Machined Aluminum



MACHINED ALUMINUM			
NPT HUB SIZE	DIAMETER RANGE	FORM SIZE	CATALOG NUMBER
	INCHES		
3/8"	.062-.125	F1	CG-12-F1
	.125-.187		CG-18-F1
	.187-.250		CG-25-F1
	.250-.312		CG-31-F1
	.312-.375		CG-37-F1
	.375-.437		CG-43-F1
1/2"	.062-.125	F2	CG-12-F2
	.125-.187		CG-18-F2
	.187-.250		CG-25-F2
	.250-.375		CG-37-F2
	.312-.437		CG-43-F2
	.375-.500		CG-50-F2
3/4"	.375-.500	F3	CG-50-F3
	.500-.625		CG-62-F3
	.625-.750		CG-75-F3
	.750-.875		CG-87-F3
1"	.375-.500	F4	CG-50-F4
	.500-.625		CG-62-F4
	.625-.750		CG-75-F4
	.750-.875		CG-87-F4
	.875-1.00		CG-100-F4
	1.00-1.12		CG-112-F4
1 1/4"	.750-.875	F5	CG-87-F5
	.875-1.00		CG-100-F5
	1.00-1.125 F5		CG-112-F5
	1.125-1.250		CG-125-F5
	1.250-1.375		CG-137-F5
	1.375-1.437		CG-143-F5
1 1/2"	.750-.875	F6	CG-87-F6
	.875-1.00		CG-100-F6
	1.00-1.125		CG-112-F6
	1.125-1.25		CG-125-F6
	1.25-1.375		CG-137-F6
	1.375-1.437		CG-143-F6



**STRAIGHT CORD
CONNECTORS
CASTINGS**
Cast Aluminum



ALUMINUM 2" -3" NPT			
NPT HUB SIZE	DIAMETER RANGE	FORM SIZE	CATALOG NUMBER
	INCHES		
2"	.250-1.375	F7	CG-137-F7
	1.375-1.500		CG-150-F7
	1.500-1.625		CG-162-F7
	1.625-1.750		CG-175-F7
	1.750-1.875		CG-187-F7
	1.875-1.937		CG-193-F7
	1.937-2.000		CG-200-F7
2 1/2"	1.688-1.812	F8	CG-181-F8
	1.812-1.937		CG-193-F8
	1.937-2.062		CG-206-F8
	2.062-2.188		CG-218-F8
	2.188-2.312		CG-231-F8
	2.312-2.437		CG-243-F8
3"	2.437-2.625	F9	CG-262-F9
	2.625-2.812		CG-281-F9
	2.812-3.000		CG-300-F9
	3.000-3.250		CG-325-F9



90° MALE CORD CONNECTORS



MACHINED ALUMINUM			
NPT HUB SIZE	DIAMETER RANGE	FORM SIZE	CATALOG NUMBER
	INCHES		
3/8"	.062-.125	F1	CG-12-F1-90
	.125-.187		CG-18-F1-90
	.187-.250		CG-25-F1-90
	.250-.312		CG-31-F1-90
	.312-.375		CG-37-F1-90
	.375-.437		CG-43-F1-90
1/2"	.062-.125	F2	CG-12-F2-90
	.125-.187		CG-18-F2-90
	.187-.250		CG-25-F2-90
	.250-.375		CG-37-F2-90
	.312-.437		CG-43F-2-90
	.375-.500		CG-50-F2-90*
3/4"	.500-.625	F3	CG-62-F2-90*
	.375-.500		CG-50-F3-90
	.625-.750		CG-62-F3-90
	.750-.875		CG-75-F3-90*
1"	.750-.875	F4	CG-87-F3-90*
	.375-.500		CG-50-F4-90
	.500-.625		CG-62-F4-90
	.625-.750		CG-75-F4-90
	.750-.875		CG-87-F4-90
	.875-1.000		CG-100-F4-90*
1 1/4"	1.00-1.125	F5	CG-112-F4-90*
	.750-.875		CG-87-F5-90
	.875-1.000		CG-100-F5-90
	1000-1.125		CG-112-F5-90
	1.125-1.250		CG-125-F5-90*
	1.250-1.375		CG-137-F5-90*
1 1/2"	1.375-1.437	F6	CG-143-F5-90*
	.750-.875		CG-87-F6-90
	.875-1.000		CG-100-F6-90
	1.000-1.125		CG-112-F6-90
	1.125-1.250		CG-125-F6-90
	1.250-1.375		CG-137-F6-90
2"	1.375-1.437	F7	CG-143-F6-90
	1.250-1.375		CG-137-F7-90
	1.375-1.500		CG-150-F7-90
	1.500-1.625		CG-162-F7-90
	1.625-1.150		CG-175-F7-90
	1.750-1.875		CG-187-F7-90
	1.875-1.937		CG-193-F7-90
1.937-2.000	CG-200-F7-90*		

*Cable jacket may have to be stripped to pass through connector.



Strain Relief Grips - Deluxe Cord Grips

- Ericson Deluxe Cord Grips are used whenever cable or cord must withstand extreme applications and environmental conditions.
- Widely used with switch boxes, power duct cut-outs, drop stations, power hand tools, moving catalogs of machinery, pumps, compressors, and bus drop installations.
- Endless weave provides smooth cable-hugging ends for construction free installation.



THREAD SIZE N.P.T.	GRIP DIAM. RANGE INCHES	MALE THREAD DESCRIPTION	90° MALE THREAD DESCRIPTION	45° MALE THREAD DESCRIPTION	FEMALE THREAD DESCRIPTION
3/8"	.18-.25	DCG-25-F1	DCG-25-F1-90	DCG-25-F1-45	DCG-25-F1-F
	.25-.37	DCG-37-F1	DCG-37-F1-90	DCG-37-F1-45	DCG-37-F1-F
	.37-.43	DCG-43-F1	DCG-43-F1-90	DCG-43-F1-45	DCG-43-F1-F
1/2"	.18-.25	DCG-25-F2	DCG-25-F2-90	DCG-25-F2-45	DCG-25-F2-F
	.25-.37	DCG-37-F2	DCG-37-F2-90	DCG-37-F2-45	DCG-37-F2-F
	.31-.43	DCG-43-F2	DCG-43-F2-90	DCG-43-F2-45	DCG-43-F2-F
	.37-.50	DCG-50-F2	DCG-50-F2-90	DCG-50-F2-45	DCG-50-F2-F
	.50-.62	DCG-62-F2	DCG-62-F2-90	DCG-62-F2-45	DCG-62-F2-F
3/4"	.18-.25	DCG-25-F3	DCG-25-F3-90	DCG-25-F2-45	DCG-25-F3-F
	.25-.37	DCG-37-F3	DCG-37-F3-90	DCG-37-F2-45	DCG-37-F3-F
	.37-.50	DCG-50-F3	DCG-50-F3-90	DCG-50-F2-45	DCG-50-F3-F
	.50-.62	DCG-62-F3	DCG-62-F3-90	DCG-62-F2-45	DCG-62-F3-F
	.62-.75	DCG-75-F3	DCG-75-F3-90	DCG-75-F2-45	DCG-75-F3-F
1"	.37-.50	DCG-50-F4	DCG-50-F4-90	DCG-50-F2-45	DCG-50-F4-F
	.50-.62	DCG-62-F4	DCG-62-F4-90	DCG-62-F2-45	DCG-62-F4-F
	.62-.75	DCG-75-F4	DCG-75-F4-90	DCG-75-F2-45	DCG-75-F4-F
	.75-.87	DCG-87-F4	DCG-87-F4-90	DCG-87-F4-45	DCG-87-F4-F
	.87-1.00	DCG-100-F4	DCG-100-F4-90	DCG-100-F4-45	DCG-100-F4-F
1-1/4"	.75-.87	DCG-87-F5	DCG-87-F5-90	DCG-87-F5-45	DCG-87-F5-F
	.87-1.00	DCG-100-F5	DCG-100-F5-90	DCG-100-F5-45	DCG-100-F5-F
	1.00-1.125	DCG-112-F5	DCG-112-F5-90	DCG-112-F5-45	DCG-112-F5-F
	1.12-1.25	DCG-125-F5	DCG-125-F5-90	DCG-125-F5-45	DCG-125-F5-F
	1.25-1.37	DCG-137-F5	DCG-137-F5-90	DCG-137-F5-90	DCG-137-F5-F



Made in the USA

Strain Relief Grips - Deluxe Cord Grips



THREAD SIZE N.P.T.	GRIP DIAM. RANGE INCHES	MALE THREAD DESCRIPTION	90° MALE THREAD DESCRIPTION	45° MALE THREAD DESCRIPTION	FEMALE THREAD DESCRIPTION
1 1/2"	.75-.87	DCG-87-F6	DCG-87-F6-90	DCG-87-F6-45	DCG-87-F6-F
	.87-1.00	DCG-100-F6	DCG-100-F6-90	DCG-100-F6-45	DCG-100-F6-F
	1.00-1.125	DCG-112-F6	DCG-112-F6-90	DCG-112-F6-45	DCG-112-F6-F
	1.125-1.25	DCG-125-F6	DCG-125-F6-90	DCG-125-F6-45	DCG-125-F6-F
	1.25 - 1.37	DCG-137-F6	DCG-137-F6-90	DCG-137-F6-45	DCG-137-F6-F
	1.37 - 1.43,	DCG-143-F6	DCG-143-F6-90	DCG-143-F6-90	DCG-143-F6-F
2"	1.20-1.375	DCG-137-F7	DCG-137-F7-90		
	1.375-1.500	DCG-150-F7	DCG-150-F7-90		
	1.500-1.625	DCG-162-F7	DCG-162-F7-90		
	1.625-1.750	DCG-175-F7	DCG-175-F7-90		
	1.750-1.875	DCG-187-F7	DCG-187-F7-90		
	1.875-1.937	DCG-193-F7	DCG-193-F7-90		
2 1/2"	1.937-2.000	DCG-200-F7	DCG-200-F7-90		
	1.687-1.812	DCG-181-F8			
	1.812-1.937	DCG-193-F8			
	1.937-2.062	DCG-206-F8			
	2.062-2.187	DCG-218-F8			
	2.187-2.312	DCG-231-F8			
3"	2.312-2.437	DCG-243-F8			
	2.437-2.625	DCG-262-F9			
	2.625-2.812	DCG-281-F9			
	2.812-3.000	DCG-300-F9			
	3.000-3.250	DCG-325-F9			




FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.


Strain Relief Grips - I-Grips

- Ericson - Grips are easy to attach, will control cable-arc-of bend, and provide heavy duty strain relief for plugs and connectors used on portable equipment where abnormal high strain abuse occurs.
- Ericson- Grips are made of high strength galvanized steel strand and are recommended for indoor use only.


I - GRIPS GALVANIZED

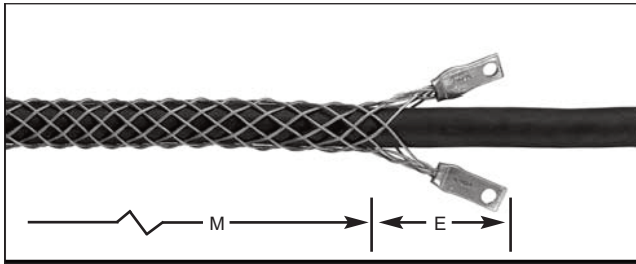

CATALOG NUMBER	CABLE DIAMETER RANGE INCHES	E	M
I-030	.30-.43	1.25	4
I-040	.40-.56	1.25	4-3/4
I-052	.52-.73	1.50	6
I-070	.70-.85	1.50	6-1/2
I-082	.82-1.00	1.50	8
I-094	.94-1.25	1.50	10

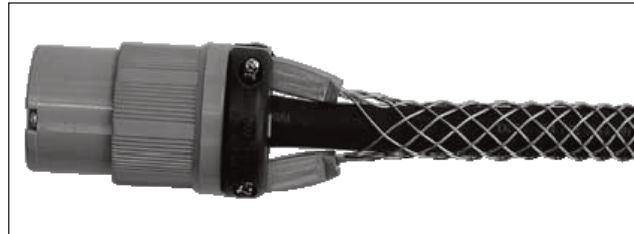

I - GRIPS NYLON COATED

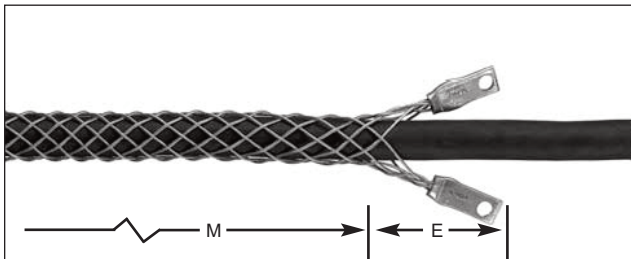

CATALOG NUMBER	CABLE DIAMETER RANGE INCHES	E	M
I-030-NC	.30-.43	1.25	4
I-040-NC	.40-.56	1.25	4-3/4
I-052-NC	.52-.73	1.50	6
I-070-NC	.70-.85	1.50	6-1/2
I-082-NC	.82-1.00	1.50	8
I-094-NC	.94-1.25	1.50	10

E = Eye Length M = Mesh Length at Nominal Diameter (Inches)



The Grips in the catalog have listed approximate Breaking Strength. The approximate breaking strength of an Ericson grip represents an average calculation based on test factors, which have been determined from data established from actual testing performed in our engineering laboratories. The actual testing is performed with new Grips on metal rods, subject to straight longitudinal tensile loads applied at a uniform rate. Normal manufacturing and test factors can produce a variation + or - 20% in the approximate breaking strength values listed.

The broad application of Ericson Grips on a wide variety of objects require that adequate safety factors be used to establish a safe working load. The ratio of the listed approximate breaking strength to the normal working load is the safety factor. As an example, a safety factor of ten (10) would then mean the working load is established by dividing the catalog listed approximate breaking strength by ten (10), or it can be stated that the working load is 1/10 of the catalog listed approximate breaking strength.

To determine the recommended working load safety factor for cable grips, divide the approximate breaking strength by 5 for Pulling Grips and 10 for Support Grips.

Example: For Pulling Grips, 30,000 / 5 Safety Factor = 6000 lbs which is the workload factor.

Example: For Support Grips, 11,000 / 10 Safety Factor = 1100 lbs which is the workload factor.






It is impossible to set a safety factor suitable for all cases as operating conditions are never the same. The load, the speed, the acceleration, the diameter, number of objects gripped, surface of object being gripped, and the attachments used - all of these should be considered, together with the effects of abrasion, corrosion, prior use, or abuse, etc. The user-engineer must consider all the variables of his/her specific application, as well as possible accident consequences, before selecting the safety factor to be applied. Where the conditions of the application are not well defined or where risk of personnel or property damage is high, a greater safety factor should be utilized.

Any warranty as to quality, performance or fitness for use of Grips is always premised on the condition that the published approximate breaking strengths apply only to new, unused grips and that such products are properly stored, handled, used, maintained, and properly inspected from time to time during the period of use.

The factory should be consulted for specific application recommendations where approximate breaking strength and holding power are critical.



- Single weave Grips should be laced with single strand lacing; double weave with double strand.
- Lacing strands should be the same material as the Grip.

	<p style="text-align: center;">1</p> <p>Start the lacing at the lead or anchoring end of all the Grip. Thread the lacings through the first loops of the split and pull through until the lacings are centered at this point. Lace as you would your shoe, crossing the lacings before lacing the next two loops.</p> 	<p style="text-align: center;">2</p> <p>Don't pull lacing too tight. Leave a space between adjoining loops approximately equal to the width of one diamond of the mesh.</p> 	<p style="text-align: center;">3</p> <p>Twist the lacing strands tightly together at the tail end of the Grip.</p> 	<p style="text-align: center;">4</p> <p>Wrap the ends of the lacings once or twice tightly around the tail of the Grip, twisting the ends together securely. Excess lace can be cut off.</p> 
---	--	--	--	---


Split Grips, closed with a rod, eliminate the time and guesswork of on-the-job lacing. The stainless steel rod is a precise built-in feature which makes threading easy and fast. The strands of the mesh pass around the rod and match up with the strands from the opposite direction. The rod does not touch the cable at any point and therefore cannot cut the cable. Rod Closing Grips are salvageable; may be removed and reused as many times as desired.



FAST TO INSTALL
 Wrap the Grip around the cable and thread the rod through the preformed loops with a corkscrew motion, using the curved end of the rod to engage the loops. The action required is a steady push and twist simultaneously. The fingers of the left hand are used to bring the loops together just ahead of the hook on the end of the rod. To remove, simply pull the rod out.



Selecting Proper Sized Pulling and Support Grips

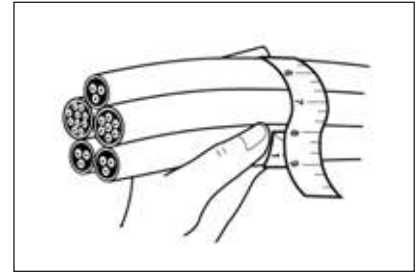

How To Select Proper Grip Size For One Or More Cables Of EQUAL Diameter

Example: For four cables bundled together, each with a diameter of 0.30":

Step 1 Locate "4 Cables" column

Step 2 Read down column to range (0.28" - .031")

Step 3 Read across line to Grip Diameter Range (.062" - .075")

Grip size is based on the outside diameter or circumference of the cable(s). Use Selection Table 1 to determine the Grip Diameter Range for one or more cables of equal diameter.

Grip Selection Table for One or More Cables of Equal Diameter


- 1) Read across top line for number of cables in one grip
- 2) Read down for diameter of each cable
- 3) Read across line to Grip Diameter Range column

Table 1: Decimal and Fractional Inch Cable Diameters — for One or More Cables of Equal Diameter

1 Cable		2 Cables		3 Cables		4 Cables		Grip Diameter Range
0.25–0.37	1/4–3/8	0.16–0.25	1/64–1/4	0.15–0.22	5/32–7/32	0.12–0.20	1/8–13/64	.250–.375
0.37–0.50	3/8–1/2	0.25–0.36	1/4–23/64	0.22–0.33	7/32–21/64	0.20–0.28	13/64–9/32	.375–0.50
0.50–0.62	1/2–5/8	0.27–0.36	17/64–23/64	0.26–0.33	17/64–21/64	0.24–0.28	15/64–9/32	0.50–0.75
0.62–0.75	5/8–3/4	0.36–0.45	23/64–29/64	0.33–0.36	21/64–23/64	0.28–0.31	9/32–5/16	0.62–0.75
0.75–1.00	3/4–1	0.45–0.60	29/64–39/64	0.36–0.49	23/64–31/64	0.31–0.42	5/16–27/64	0.75–1.00
1.00–1.25	1–1 1/4	0.60–0.76	39/64–49/64	0.49–0.63	31/64–5/8	0.42–0.54	27/64–35/64	1.00–1.25
1.25–1.50	1 1/4–1 1/2	0.76–0.91	49/64–29/32	0.63–0.76	5/8–49/64	0.54–0.65	35/64–21/32	1.25–1.50
1.50–1.75	1 1/2–1 3/4	0.91–1.08	29/32–1 5/64	0.76–0.89	49/64–57/64	0.65–0.77	21/32–49/64	1.50–1.75
1.75–2.00	1 3/4–2	1.08–1.23	1 5/64–1 5/64	0.89–1.02	57/64–1 1/64	0.77–0.88	49/64–7/8	1.75–2.00
2.00–2.50	2–2 1/2	1.23–1.54	1 5/64–1 35/64	1.02–1.28	1 1/64–1 9/32	0.88–1.00	7/8–1	2.00–2.50
2.50–3.00	2 1/2–3	1.54–1.84	1 35/64–1 27/32	1.28–1.53	1 9/32–1 17/32	1.10–1.32	1 3/32–1 21/64	2.50–3.00
3.00–3.50	3–3 1/2	1.84–2.15	1 27/32–2 5/32	1.53–1.79	1 17/32–1 51/64	1.32–1.54	1 21/64–1 35/64	3.00–3.50
3.50–4.00	3 1/2–4	2.15–2.45	2 5/32–2 29/64	1.79–2.05	1 51/64–2 3/64	1.54–1.76	1 35/64–1 49/64	3.50–4.00



Selecting Proper Sized Pulling and Support Grips

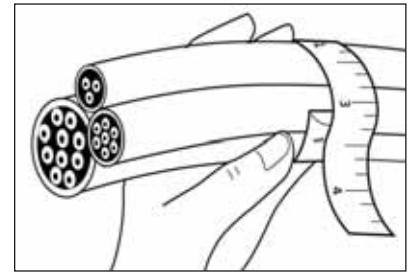

Unequal Diameters

How To Select Proper Grip Size For Cables Of UNEQUAL Diameters

Step 1 Find the Grip Circumference Range by measuring the circumference of the bundle of different diameter cables to be gripped (see Illustration).

Step 2 Divide the bundle of circumference by 3.14 to determine the diameter.

Step 3 Choose a grip offering a range of cable diameters the same as the cable diameter.

Equal Diameters


Table 1: Decimal and Fractional Inch Cable Diameters — for One or More Cables of Equal Diameter

5 Cables		6 & 7 Cables		8 Cables		9 Cables		Grip Diameter Range
0.11-0.14	7/64-9/64	0.10-0.11	3/32-7/64	0.09-0.10	3/32-7/64	0.06-0.09	1/16-3/32	.250-.375
0.14-0.25	9/64-1/4	0.11-0.25	7/64-1/4	0.10-0.20	7/64-13/64	0.09-0.19	3/32-3/16	.375-0.50
0.21-0.25	7/32-1/4	0.19-0.22	3/16-7/32	0.17-0.20	11/64-13/64	0.15-0.19	5/32-3/16	0.50-0.75
0.25-0.29	1/4-19/64	0.22-0.26	7/32-17/64	0.20-0.23	13/64-15/64	0.19-0.22	3/16-7/32	0.62-0.75
0.29-0.38	19/64-3/8	0.26-0.34	17/64-11/32	0.23-0.31	15/64-5/16	0.22-0.31	7/32-5/16	0.75-1.00
0.38-0.48	3/8-31/64	0.34-0.43	11/32-7/16	0.31-0.39	5/16-25/64	0.29-0.36	19/64-23/64	1.00-1.25
0.48-0.58	31/64-37/64	0.43-0.52	7/16-33/64	0.39-0.46	25/64-15/32	0.36-0.43	23/64-7/16	1.25-1.50
0.58-0.67	37/64-43/64	0.52-0.60	33/64-39/64	0.46-0.54	15/32-35/64	0.43-0.49	7/16-31/64	1.50-1.75
0.67-0.77	43/64-49/64	0.60-0.69	39/64-11/16	0.54-0.62	35/64-5/8	0.49-0.57	31/64-37/64	1.75-2.00
0.77-0.96	49/64-31/32	0.69-0.86	11/16-55/64	0.62-0.77	5/8-49/64	0.57-0.72	37/64-23/32	2.00-2.50
0.96-1.16	31/32-1 5/32	0.86-1.03	55/64-1 1/32	0.77-0.93	49/64-15/16	0.72-0.86	23/32-55/64	2.50-3.00
1.16-1.35	1 5/32-1 23/64	1.03-1.20	1 1/32-1 13/64	0.93-1.08	15/16-1 5/64	0.86-1.00	55/64-1	3.00-3.50
1.35-1.54	1 23/64-1 35/64	1.20-1.37	1 13/64-1 3/8	1.08-1.24	1 5/64-1 15/64	1.00-1.14	1-1 9/64	3.50-4.00



ERICSON


ELECTRICAL SPECIALTIES

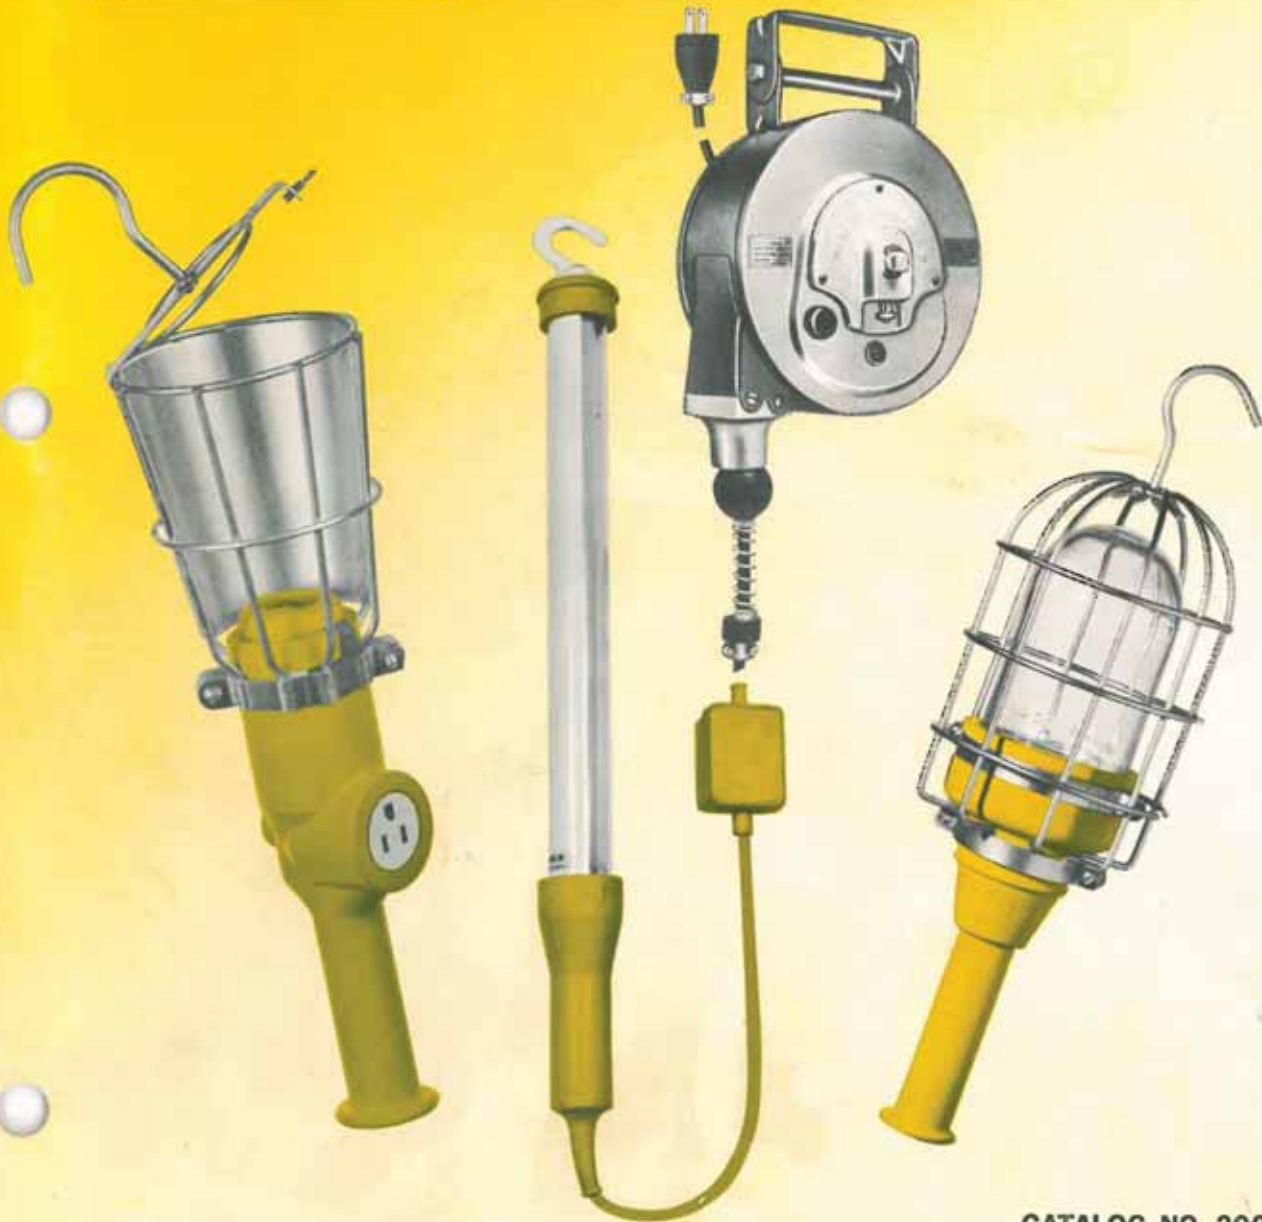

CATALOG NO. 200



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
Note: Products shown on this page may not be listed.

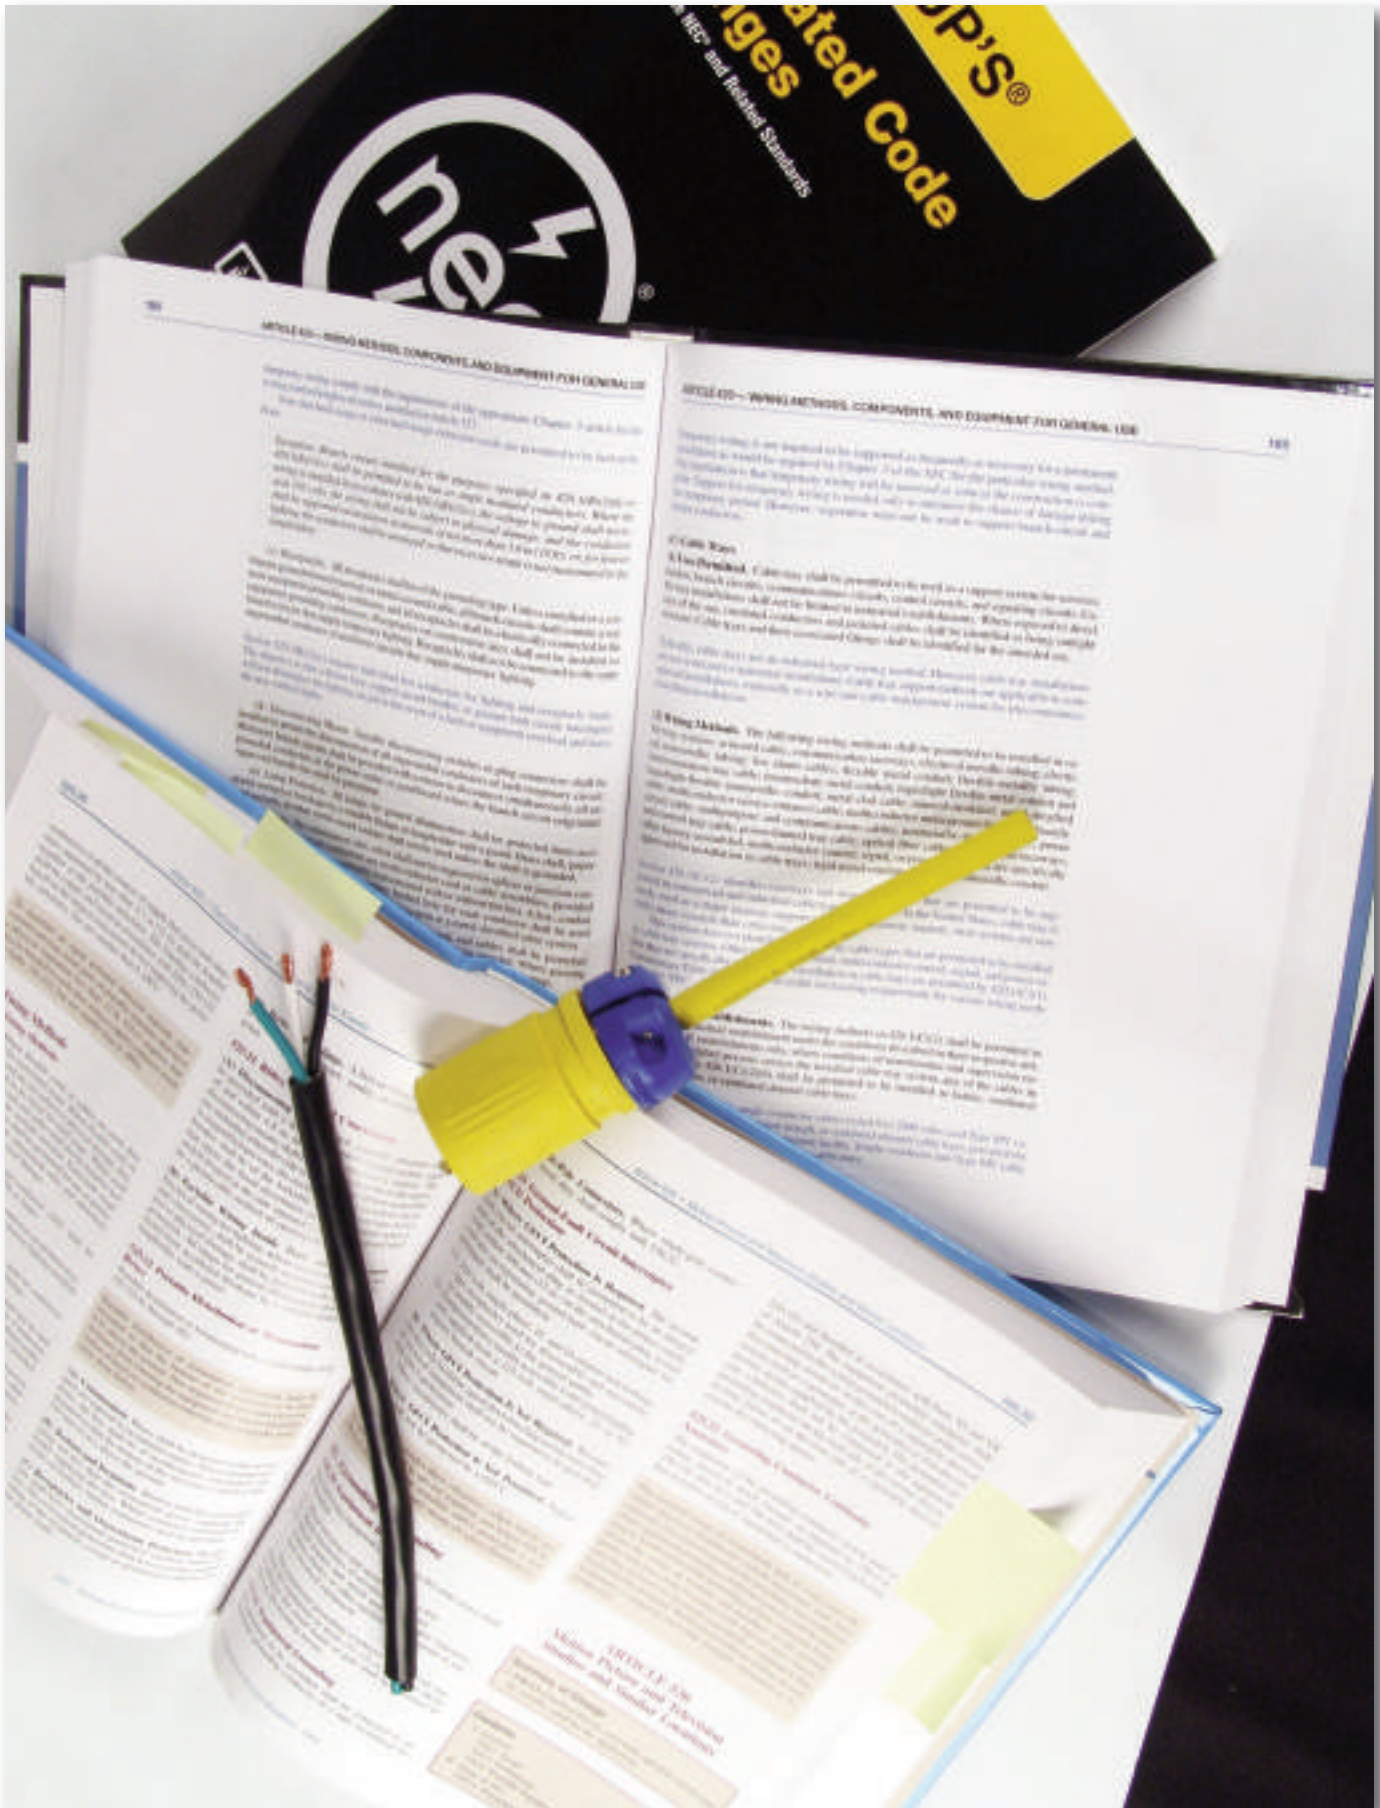

In the following pages you will find useful electrical industry information

- Lamp Comparison Chart
- NEMA Type Designations
- IP Rating System
- Hazardous Locations
- Temperature Conversion
- Metric Conversion Chart
- Electrical Formulas
- Glossary of Terms
- Metal Gang Box Danger
- Industrial Wiring Device Innovations
- OSHA Product Match

24/7 Emergency Assistance Hotline
1-877-OSCAR99 (672-2799)

Need temporary power at a fair or festival? Plug into Ericson's NEC/CEL & OSHA compliant Power products to avoid accidents and costly fines from code violations.

HAZARDOUS CONDITIONS
WRONG WAY

A NEMA 1 Indoor Panel

D Panel Hanging From Tent Pole

B NO GFCI Protection

A NEMA 1 Old Work Permanent Boxes

C Public Access to Panel

E No Protection of Cords

F Grounding Assurance?

SEE NEXT PAGE
For the RIGHT WAY to use temporary power at an outdoor event.

NEC Codes 2011

- A.** 525.22 (A) "...shall be of weatherproof construction..."
- B.** 525.23 (A)(2) GFCI Protection is Required "... readily accessible to the general public..."
- C.** 525.10 (A) "...Equipment shall not be installed...accessible to unqualified persons..."
- D.** 525.10 (B) "Service equipment shall be mounted on solid backing...protected from weather..."
- E.** 525.20 (G) "Flexible cords...accessible to the public...shall be arranged to avoid a tripping hazard..."
- F.** 525.32 Grounding Assurance "...shall be verified each time that portable electrical equipment is connected."

Notes on these NEC codes:

NEMA 1 indoor panels are not suitable for outdoor temp power.
 GFCI protection for personnel and the public is a must. Life saving devices.
 Electrical service panels and temp power distribution should not be accessible by the public attending the event.
 Hanging a panel from a tent pole is a violation. So is using plywood backing as plywood can be water soaked and now conductive.
 Flexible power cords at the local fair are everywhere. They should be covered in walk areas (and not with plywood) to prevent the public touching any cord. Nicks and cuts are common with cords and the public touching a live conductor can happen. Or, in the event of rain, puddles can become live with nicked cords and non-weatherproof connectors.
 Once the temp power is on, a ground check must be performed. However, if that temp power system is disturbed, it should be rechecked.

Power Smart...Ericson's full line of Temp Power Distribution Panels is the answer to your local Festival or Fair. Contact your local Ericson stocking distributor for assistance in designing your temp power needs.

- Code Compliance for Temp Power
- NEMA 3R Rainproof Design
- Designed for Ease of Use
- Built to Last
- Custom Layouts for Your Power Needs
- Temp Power – Cordsets – Cord Management

SAFE SOLUTION RIGHT WAY



BEI-CAMCL3180 shown

Cart Design
Easy to Move

NEMA 3R Rain
Tested Design

Rain Side Flaps
Fold in for Easy
Compact Storage

GFCI
Protection
is Standard

Safety Monitor Device
Gives 24/7
Ground Assurance

Camlock Input
Connections Reduce
Stress on Cord
Connections

All Connections
Under One
Rain Cover

Customer Application:
Application allows safe
routing of cords for the
elimination of trip hazards

**SEE Our
Great Line Up of
Temporary Power**

e-Cart2™



480/120V
600/120V

Big-E



400 Amp

Big E Jr.



200 Amp

Oscar®




50 Amp

Cordsets



12/3

Cable Protection



Cable Protectors

Watertight Connections



1510-PW6P & 1610-CW6P




FEATURES:

- Full Diagnostic Capability
- 24/7 Diagnostic Monitoring
- Super Bright LED Technology
- SmartMonitor™ Module
- Keyed body and cover
- Easy to wire
- Clear internal wiring cover
- Non-slip finger grips
- Color coded terminal screws
- Multiple cord grommets included
- Rubberized outer body
- Safety yellow and blue body
- Compatible with power tools

24/7 Monitoring


- No/Open Ground
- Loss of Ground In Cord
- Hot/Neutral Swap
- Reverse Polarity
- Hot on Ground
- No/Open Neutral

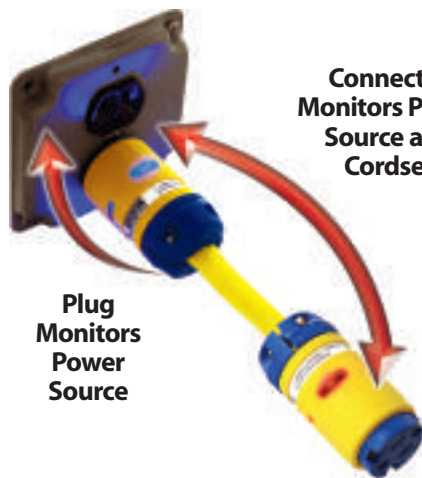


**Connector
Monitors Power
Source and
Cordset**

**Plug
Monitors
Power
Source**

BLUE
OK TO USE



RED
STOP, CALL AN
ELECTRICIAN!



Full Diagnostic Safety Cord Capability



No Error Condition

- Ready For Use

Error Condition: Connector

- Check Cord for Nicks, Cuts
- Check Connector Wiring

Error Condition: Plug


- Check Power Source
- Check Cord for Nicks, Cuts
- Check Plug Wiring
- Check Connector Wiring

Versatile Weather-Resistant Field Conversion

Our Perma-Link® plugs and connectors (as listed below) are designed so they can easily be converted to create weather-resistant connections by interchanging the internal assemblies. Insert the plug body into the connector cover, and the connector body into the plug cover. There are no extra parts to purchase.


Step 1:

Disassemble The Plug & Connector As Shown

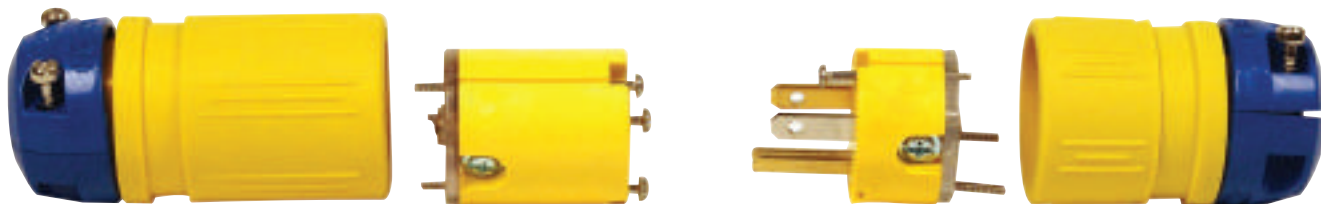


Step 2:

Swap Plug & Connector Assemblies

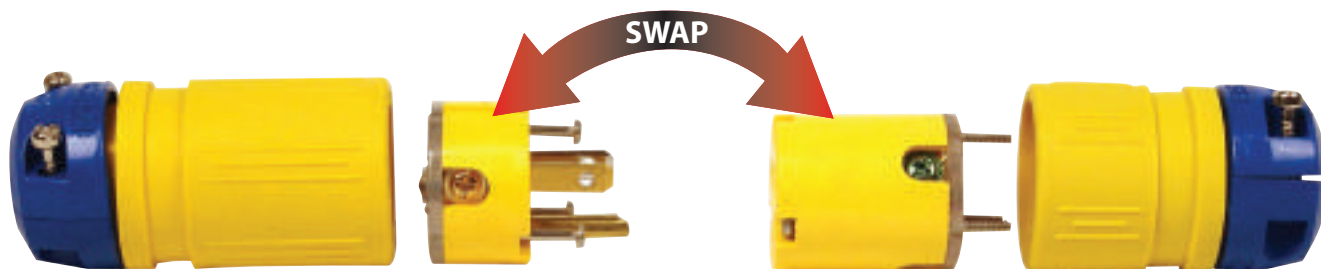

Step 3:

Assemble Cords Per Bag Instructions

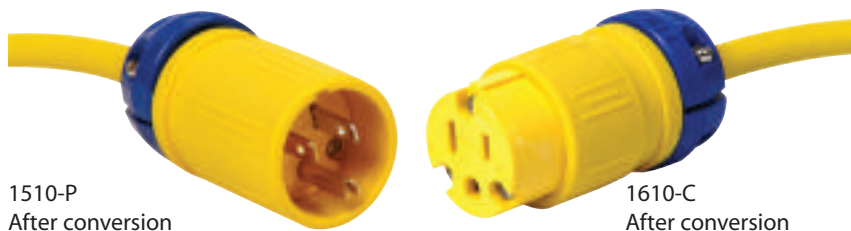

Convertible Parts	
1510-P	1610-C
1512-P	1612-C
1514-P	1614-C




Now Your Perma-Link® Plugs & Connectors Are More Weather Resistant!

Commercial Grade



Commercial Grade

Insert Used	Cord Diameter
Both	Less than .220 - .450"
None	Over .460 - .650"

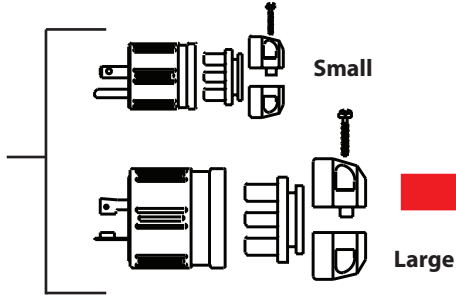


PERMA-LINK® Devices


Self centering cord clamp accommodates cord diameters

Small	.335 - .720"
Med/Large	.360 - 1.0"

PERMA-GRIP™

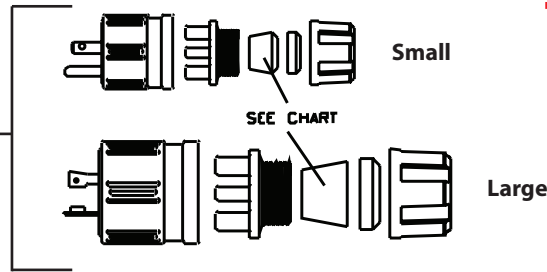

PERMA-TITE® 2

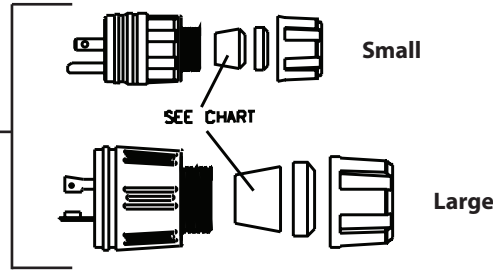


For Grommet Sizing

See Chart Next Page

Strip Lengths

Dimensions in inches
Round Cord Only




UF Cable




3 Wire Round




4 Wire Round



Commercial Grade Only



Perma-Link®, Perma-Grip™ & Perma-Tite® 2



SmartMonitor™ Devices Only

		B10200XX						B10220XX										
		Sm White OVAL # 24	Sm Orange OVAL # 25	Sm Yellow # 21	Sm White # 20	Sm Red # 16	Sm Blue # 18	Lg White # 91	Lg Yellow # 90	Lg Black # 89	Lg Blue # 88	Lg Gray # 87	Lg Red # 86	Lg Orange # 85				
MAX CORD DIA. (inch)		OVAL (UF) .160 x .360	OVAL (UF) .230 x .440	0.370	0.450	0.560	0.610	0.450	0.560	0.630	0.690	0.750	0.830	0.900	WIRE			
	Plug	Connector		Yellow	White*	Red	Blue	White*	Yellow	Black	Blue	Gray	Red	Orange	3	4	3Ø	
1510	1610	✓ Optional **	✓ Optional **	✓	✓	✓	✓							X				
1512	1612			✓	✓	✓	✓									X		
1514	1614			✓	✓	✓	✓									X		
1516	1616			✓	✓	✓	✓									X		
1520	1620			✓	✓	✓	✓									X		
1522	1622			✓	✓	✓	✓									X		
1524	1624			✓	✓	✓	✓									X		
2310	2410							✓	✓	✓	✓			X				
2312	2412							✓	✓	✓	✓			X				
2314	2414							✓	✓	✓	✓			X				
2316	2416							✓	✓	✓	✓			X		X		
2317	2417							✓	✓	✓	✓			X				
2320	2420								✓	✓	✓	✓			X			
2322	2422								✓	✓	✓	✓			X	X		
2324	2424								✓	✓	✓	✓			X	X		
2510	2610							✓	✓	✓	✓			X				
2512	2612							✓	✓	✓	✓			X				
2514	2614							✓	✓	✓	✓			X				
2516	2616							✓	✓	✓	✓			X		X		
2520	2620										✓	✓	✓		X			
2522	2622										✓	✓	✓		X	X		
2524	2624										✓	✓	✓		X	X		
2526	2626										✓	✓	✓		X	X		
2528	2628										✓	✓	✓		X	X		
2530	2630										✓	✓	✓		X	X		

* May also appear as light tan

** May be ordered separately - Call Ericson for details


✓ = Included in package

Diameter Ranges of Portable Electrical Cord In Accordance with UL 62

Type	AWG Size	2 Conductors	3 Conductors	4 Conductors
SJ, SJE, SJOO, SJO, SJEO, SJT, SJTO, SJTOO	18	0.280-0.315	0.300-0.335	0.325-0.365
	16	0.305-0.340	0.325-0.360	0.350-0.395
	14	0.335-0.375	0.360-0.395	0.390-0.435
	12	0.405-0.455	0.425-0.475	0.465-0.520
	10	0.540-0.605	0.565-0.635	0.625-0.700
S, SE, SOO, SO, SEO, ST, STOO, STO	18	0.340-0.385	0.360-0.400	0.385-0.430
	16	0.365-0.410	0.385-0.430	0.410-0.460
	14	0.495-0.550	0.520-0.575	0.560-0.620
	12	0.565-0.625	0.590-0.655	0.640-0.710
	10	0.615-0.685	0.650-0.720	0.700-0.775
	8	0.780-0.880	0.830-0.930	0.925-1.050
	6	0.920-1.050	0.970-1.100	1.050-1.200
	4	1.060-1.210	1.130-1.280	1.250-1.450
2	1.210-1.400	1.300-1.500	1.450-1.650	



Portable Electrical Cord Nomenclature

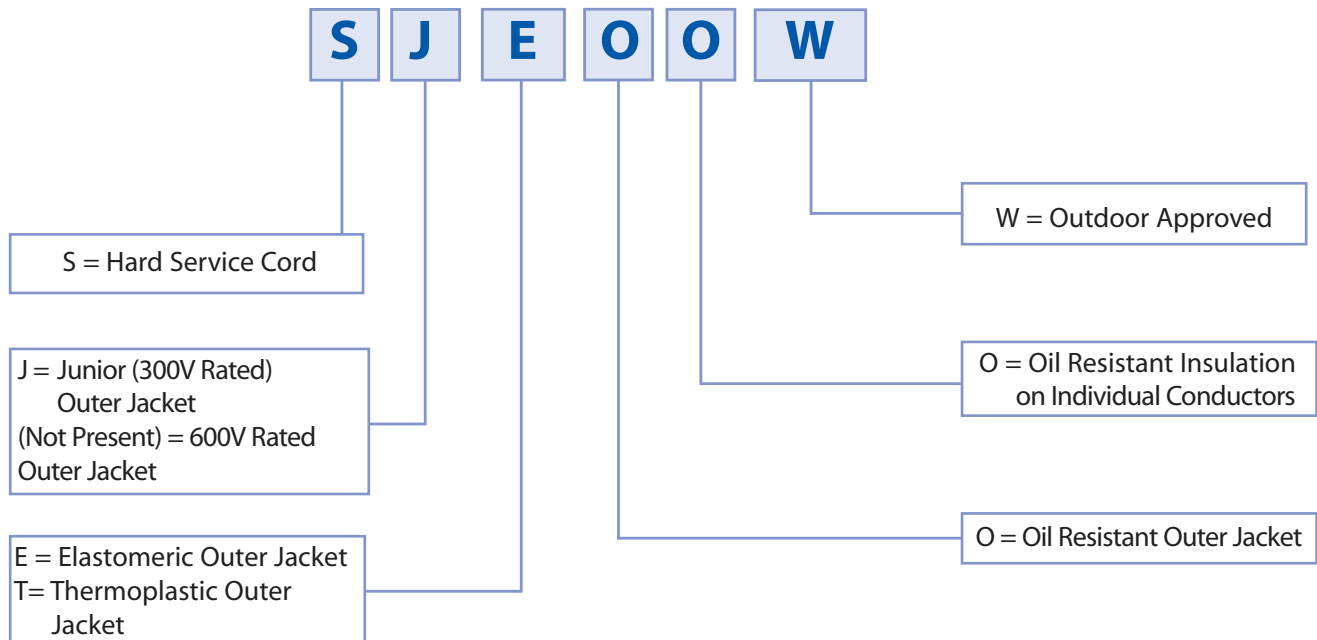

Diameter Ranges of Portable Electrical Cord In Accordance with UL 62

Type	AWG Size	2 Conductors	3 Conductors	4 Conductors
SJ, SJE, SJOO, SJO, SJEO, SJT, SJTO, SJTOO	18	0.280-0.315	0.300-0.335	0.325-0.365
	16	0.305-0.340	0.325-0.360	0.350-0.395
	14	0.335-0.375	0.360-0.395	0.390-0.435
	12	0.405-0.455	0.425-0.475	0.465-0.520
	10	0.540-0.605	0.565-0.635	0.625-0.700
S, SE, SOO, SO SEO, ST, STOO, STO	18	0.340-0.385	0.360-0.400	0.385-0.430
	16	0.365-0.410	0.385-0.430	0.410-0.460
	14	0.495-0.550	0.520-0.575	0.560-0.620
	12	0.565-0.625	0.590-0.655	0.640-0.710
	10	0.615-0.685	0.650-0.720	0.700-0.775
	8	0.780-0.880	0.830-0.930	0.925-1.050
	6	0.920-1.050	0.970-1.100	1.050-1.200
	4	1.060-1.210	1.130-1.280	1.250-1.450
2	1.210-1.400	1.300-1.500	1.450-1.650	



Ericson's Industrial Wiring Device Innovations Revolutionized Electrical Safety

Sixty cents. That's what it would have cost in 1918 to purchase one of the first insulating Rubber Handles for one of your Extension Light, or Drop Lights as they were called in those days. The C & E Universal Safety Handle was molded of a heavy duty rubber compound and was designed for use with either keyed or keyless sockets to protect workers from electrical shocks and to add to the service life of the lights. Many lamp guards up to that point were made of wood which proved too fragile to withstand the many industrial uses to which they were put.

C & E was the forerunner of today's Ericson Manufacturing Co., founded by Edward O. Ericson. Ericson pioneered the development of a variety of important safety electrical devices.

Ericson devoted his attention to industrial applications. There was a great need for safe products for workers using electricity. Simple, molded rubber hand lamp handles (which he had patented in 1918) gave way to more sophisticated designs made of a variety of materials, each providing increasingly better electrical safety, durability and price advantages.

Ericson also pioneered in this area, and in 1927 introduced the first Insulated Hand Lamp Guards. The basic guard included a 1/16-in. thick electrolytically bonded insulation coating of the "toughest kind of rubber" that withstood dielectric tests of more than 4,000 volts. They provided a high degree of electrical safety and added to a lamp's service life under the roughest conditions.

Ericson's invention of the first "Dead-Front, Back-Wired" Electrical Plug in 1929 is perhaps the single most important development in the wiring device industry in the past seventy-plus years. U.S. Patent # 2,061,190 was assigned to it in 1936.

Older plugs and connectors had the wiring come through from the back. They were wired in the front end where the connections were visible and were susceptible to damage from moisture, dirt, tools, etc. (Fiber discs, and later plastic discs, were used to cover these wiring areas, but they often came off during use.) The Ericson "Dead-Front, Back-Wired" design placed the wiring connections at the rear of the plug with the front end closed off by a structural member of the device. The blades were held firmly and permanently in alignment.

There were no rivets to loosen or fiber to warp. Connections on the inside were protected. Cord grips kept tension off the terminals. Flexible shanks took the wear off the cord. They were easy to wire in the field. Newer variations are now even quicker and easier to wire: the stripped wires are inserted in holes, where simple screw tightening secures them in place.

Many products available today reach beyond being simple plugs or connectors. They are all, however, dead-front, back-wired devices. Our Perma-Tite® 2 Plugs and Connectors have unique features to protect the internals from moisture, dust and dirt. And covers using new, high tech materials resist chemicals, acids and oils to provide greater service life in extremely hazardous environments.



Plug into history: Before 1929 (top), plug connections were exposed. The first dead-front, back-wired plug created by Ericson (middle) revolutionized the industry, and eventually led to modern plugs (bottom) with such amenities as built-in ground and continuity monitors.

Ericson's Perma-Watch® Plugs and Connectors have built-in Ground and Continuity Monitor Devices to help workers determine at a glance whether their electrical power source's grounding system is safe. The GCM's have internal LED lamps that glow when the line has ground continuity. These devices also can help cut as much as 90% of the cost of maintaining OSHA required records for extension cord sets and temporary job site receptacles.

Ericson's dead-front, back-wired 1929 design is important: both the National Electrical Code and OSHA still require its use.

Cordset & Power Cable Selection Guide

The capacity of an electrical extension cord to safely extend power is based on two factors:

- **Gauge:** Gauge is a measurement of the thickness / diameter of the wire
- **Length:** Length of the extension cord affects voltage drop

Gauge is how the copper wire is measured and is reported as a number. For example, you may see a No.12 gauge or a No.18 gauge. The smaller the number the thicker the wire, and conversely, the larger the number the thinner the wire.

A No. 18 gauge extension cord may only be rated for 5 to 7 amps of load and a length of up to 25 feet.

A No. 10 gauge extension cord may be rated for 15 amps of load and 100 feet of length.

Length of the extension cord affects voltage drop. Voltage drop is result of the friction or resistance the electricity experiences flowing through a long wire. You want to use the shortest extension cord possible.

The longer the extension cord, the thicker (lower gauge number) the wire.

14 Gauge Extension Cord up to 50 feet handles 10 - 15 amps

10 Gauge Extension Cord up to 100 feet handles 15 amps

Heavier duty extension cord use for power tools and larger appliances of 15 to 10 amps require a three wire grounded extension cord. Use the following table for gauge size and extension cord length.

Cord Length: Up to 25 feet

Gauge Size: No. 14 Gauge

Cord Length: Up to 50 feet


Gauge Size: No. 12 Gauge

Cord Length: Up to 100 feet


Gauge Size: No. 10 Gauge



1940 Series 200VA

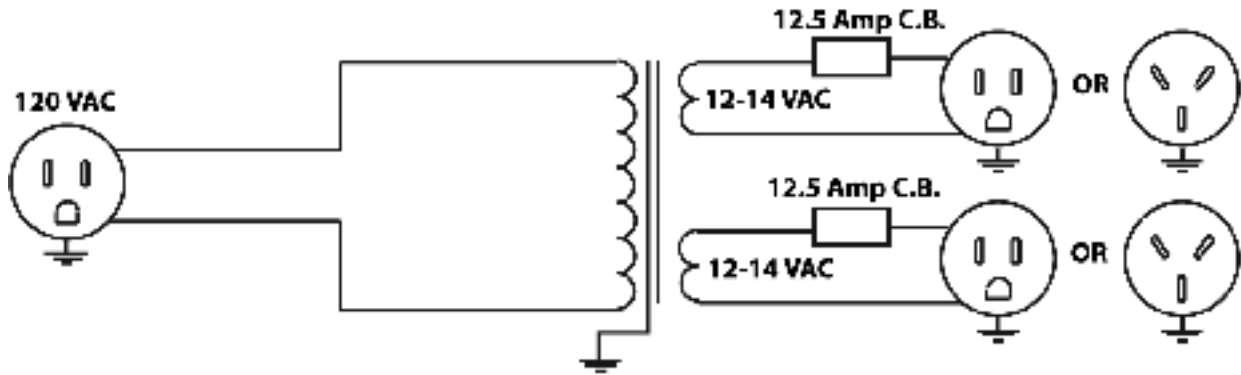

1941 Series 400VA

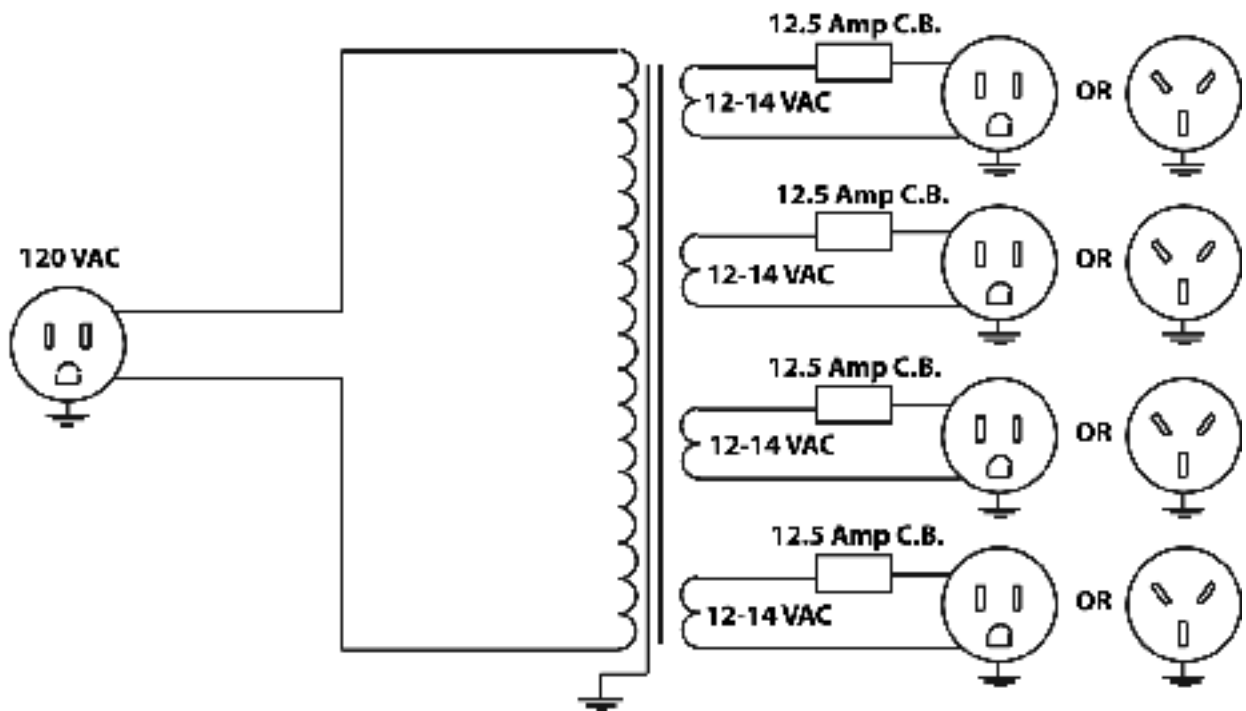


Metal Gang Box Danger



The "traditional" metal gang box on the end of a cord has been a danger for many years.

There are several reasons for the danger:

- Metal boxes are designed for permanently wired installations, not portable temp power.
- No weatherproofing except for outdoor location FS types.
- HOT box danger. (See below)
- Hand Hazard with sharp edges




8000 Series



6102 Series

The GFCI False Sense of Security

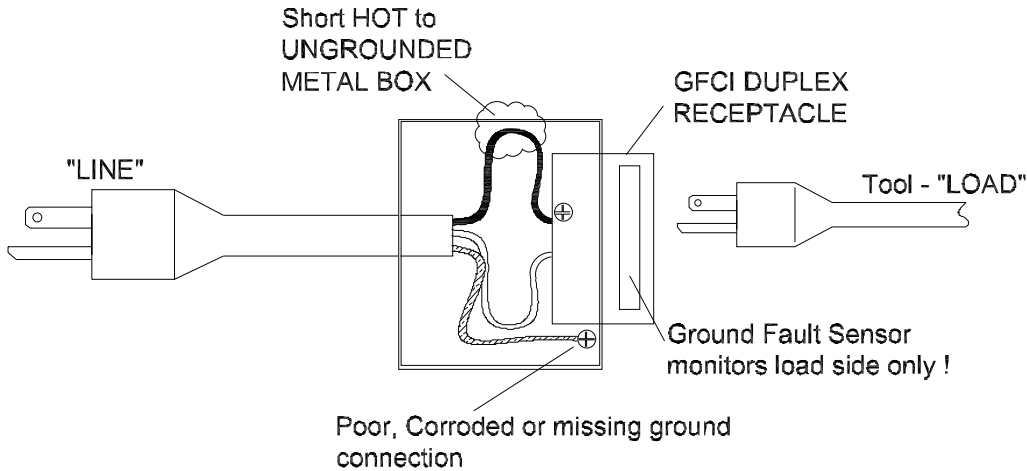

As the diagram shows, the metal gang box can have a common situation in which the earth ground is poor or not connected. There can be a hot short to the metal box in which you now have a "hot" box. The short will not trip the circuit breaker nor will the GFCI trip. The GFCI sensor only watches the "load" side of the receptacle, not the line side. The GFCI is worthless in this situation.




Lamp Comparison Chart

This Chart shows typical light output (lumens) & expected life (hour) of commonly used incandescent & fluorescent bulbs.

WATTAGE	TYPE	LUMENS	AVERAGE LIFE (HOURS)	CRI ⁽²⁾	COLOR ⁽³⁾ TEMP (°K)
7.3	LED E26 (12V)	500	50,000	---	5500
9	LED A19	800	50,000	---	5000
50	LED Flood	5000	50,000	---	6000
18	LED T8	1358	50,000	74	6000
23	LED T8	1735	50,000	74	6000
26	LED T8	2160	50,000	74	6000
40	LED T9 (2X)	3220	50,000	70	6000
60	Incandescent A19	865	1000	100	2800
75	Incandescent A19	1190	750	100	2800
100	Incandescent A19	1710	750	100	2800
13	Compact Fluorescent T4/5 Twin or Quad Tube	825	10,000	82	4100
26	Compact Fluorescent T4/5 Twin or Quad Tube	1710	10,000	82	4100
17	Fluorescent T8	1325	20,000	86	4100
25	Fluorescent T8	2080	20,000	86	4100
32	Fluorescent T8	2950	20,000	86	4100
40	Fluorescent T8	3600	20,000	84	4100
18	F18BX Fluorescent 2G11 Base BIAx	1250	20,000	82	4100
27	F27BX Fluorescent 2 G11 Base BIAx	1800	12,000	82	4100
39	F39BX Fluorescent 2G11 Base BIAx	2850	12,000	82	4100
15	F15T8 CW Fluorescent	825	7,500	60	4100
30	F30T12 CW Fluorescent	2200	18,000	72	4100
40	F40T12 CW Fluorescent	3350	20,000	80	4100
70	HID High Pressure Sodium	6400	24,000 +	22	1900
150	HID High Pressure Sodium	16000	24,000 +	22	2000
70	HID Metal Halide	5600	12,000	70	3200
175	HID Metal Halide	13600	10,000	65	4000
400	HID Metal Halide	36000	20,000	65	4000

Notes:

1. All based on 120V 60Hz input
2. Based on a scale from 1 to 100 where 100 represents sunlight. The higher the number the truer the color appears
3. Sunlight is simulated with a light that is about 5000 K. The higher the number the whiter the light

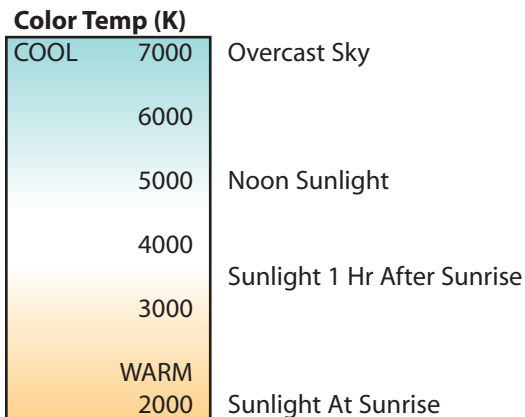

Do's & Don'ts- Temporary Lighting

Do's

- Use enough lighting to comply to Table D-3 OSHA
- Use proper bulb protection per the mfg instructions
- Use 3 wire grounded stringlights with metal bulb guards
- Use MH fixtures properly and not too close to workers
- Use proper lighting fixtures for the environment intended
- Use proper stairwell lighting even during construction

Don'ts

- Operate sites with poor lighting –leads to accidents
- Hang stringlights by the cord – only use mounting tabs
- Use 2 wire stringlights with metal guards – guard must be grounded
- Use MH fixtures with cracked or partial broken bulb – UV A & B can get out
- Use non-hazardous lighting in classified locations
- Use permanent light fixtures in temporary applications


Baylite™ Layout (shown from top)

Note: This layout is typical to ensure minimum OSHA lighting standards, however many variables effect this layout. Use this as a general guide but Ericson makes no absolute claim to compliance.



Circuit Load (20A)

- 120V = 5 units
- 240V = 10 units
- 208V = 12 units
- 277V = 15 units

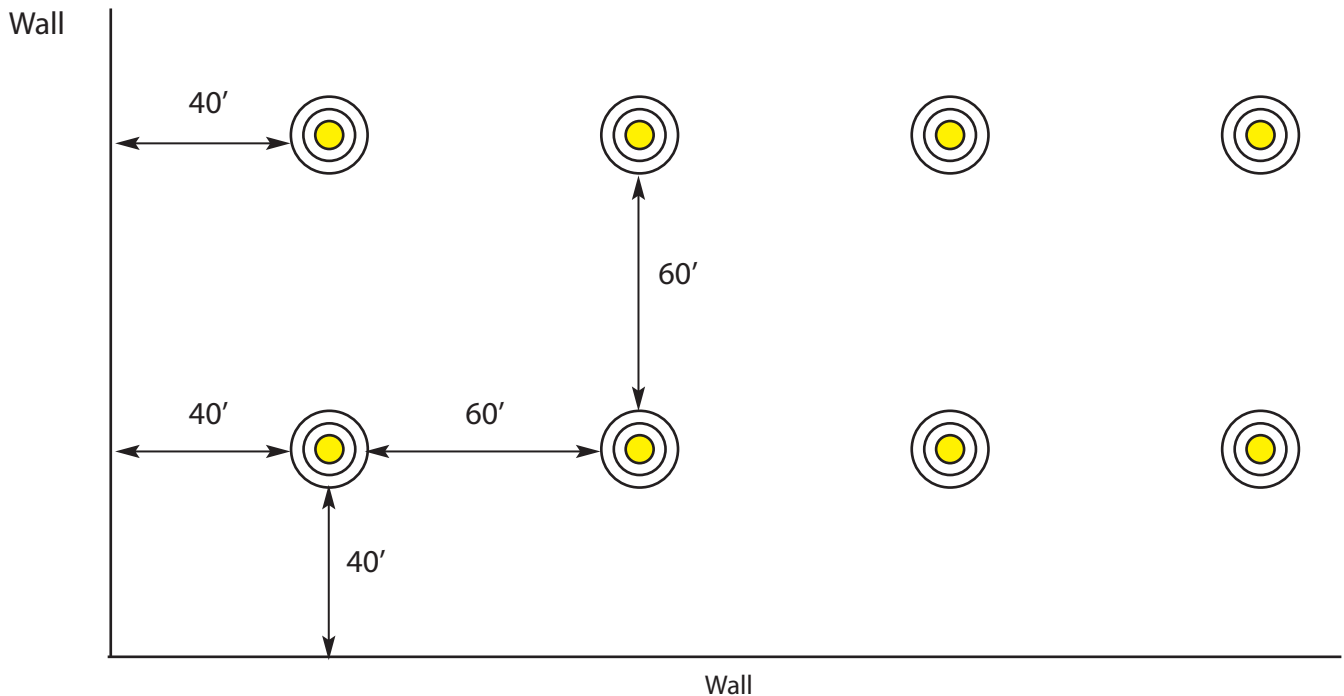

OSHA Regulations

Topic	Regulation	Ericson Product
Lamp Guards on All Lighting	1926.405(a)(2)(ii)(E) All lamps for general illumination shall be protected from accidental contact or breakage. Metal-case sockets shall be grounded.	Ericson Lamp Guards
Temporary Lighting Mounting	1926.405(a)(2)(ii)(F) Temporary lights shall not be suspended by their electric cords unless cords and lights are designed for this means of suspension.	Stringlights
Low Voltage Lighting	1926.405(a)(2)(ii)(G) Portable electric lighting used in wet and/or other conductive locations, as for example, drums, tanks, and vessels, shall be operated at 12 volts or less. However, 120-volt lights may be used if protected by a ground-fault circuit interrupter.	Low Voltage Lighting
Cord Protection	1926.405(a)(2)(ii)(I) Flexible cords and cables shall be protected from damage. Sharp corners and projections shall be avoided. Flexible cords and cables may pass through doorways or other pinch points, if protection is provided to avoid damage.	CP5-36 Cable Protectors
Flexible Cords	1926.405(a)(2)(ii)(J) Extension cord sets used with portable electric tools and appliances shall be of three-wire type and shall be designed for hard or extra-hard usage. Flexible cords used with temporary and portable lights shall be designed for hard or extra-hard usage.	Ericson Temporary Cordsets
	1926.405(g)(2)(iv) Strain relief. Flexible cords shall be connected to devices and fittings so that strain relief is provided which will prevent pull from being directly transmitted to joints or terminal screws.	6000, 7000 and 8000 Series Boxes and Covers



Types of Stringlights:

There are several types of stringlights available. These types differ in construction and the environments for which they are designed to operate. The basic design of a stringlight set is a medium Edison base lamp socket electrically connected to a cord via several methods:

1. Mechanically Attached Sockets – Like our model X-142100, these indoor rated stringlights use lamp sockets with insulation displacement or piercing pins to make the electrical connection through the cord jacket insulation. The socket is then held on with mechanical means and the stringlight is supported by hanger hooks at each socket location. Economically priced, these stringlights are normally used only a few times and then discarded.
2. Molded Sockets – The design of these stringlights varies, but the basic design is a medium Edison base socket that is held in an overmolded material area attached to the cord. The electrical connections and socket are protected from the environments and this reduces corrosion and electrical faults. The cord jacket and the overmold material vary from manufacturer to manufacturer and the durability depends on this material formulation to ensure a watertight bond.

Rules for Use:

There are many rules governing the use of stringlights. These are a few of the more common questions that arise. Consult your local inspection authority before installing stringlights.

1. Length of Time - Stringlights are normally used in *Temporary Use Locations* (defined by NEC Article 590) and the length of time is defined in that article.
2. Article 590.4 of the NEC 2008 states that all lamps will have protection from accidental contact or damage.
3. Two wire stringlights (no ground wire) must use non-conductive lamp guards.
4. Three wire stringlights can use metallic or non-metallic guards, but the metallic guards must be grounded with a continuous ground wire through the stringlight.
5. Depending on your local inspector, stringlights can be “hard wired” to a panel as long as there is no strain on the connection.
6. Stringlights must be held aloft by the hanging tabs located at each lamp socket and not by the cord/conductors unless permission by the manufacturer is given.
7. According to article 590 of the 2008 NEC, lighting circuits and power circuits in temporary locations should not be mixed. You should not protect a stringlight circuit with GFCI protection.

Do's and Don'ts

1. Never use indoor rated stringlights in outdoor situations
2. Never install lamps with wattage greater than the manufacturer's specifications for that stringlight
3. Never operate stringlights without lamp guards in place – replace any broken guards
4. Use hang tabs or a “messenger wire” to suspend stringlights over the work area



Stringlight Assembly Configurator

Name: _____
 Company: _____
 Phone: _____
 e-mail: _____

Easy as 1-2-3

1. Fill in all information
2. Select grade & colors
3. Fax: 1-440-951-1867

or

Scan/e-mail:

info@ericson.com

Stringlight Assembly Configurator

Overall Length: _____

Primary (Lead) Length: _____

Secondary (Tail) Length: _____

Plug (ex: 1510-PW6P): _____

Connector (ex: 1610-CW6P): _____

Cable Size/Type (ex: #12/3 SEO): _____
 (Note: Wire guards require ground wire)

Cable Color: _____

Total Number of Lamp Sockets: _____

Spacing between Sockets: _____

Lamp Guard Type (select from list below):

- | | | | | |
|-------|-----|-------|--------|-------|
| 211 | 214 | 220 | 222-L | 224 |
| 211-P | 212 | 220-P | 222-LP | 224-P |

Grade of Stringlights

- Commercial Grade (STW 600V Cable & E-Lite Sockets)
 Industrial Grade (Heavy Duty Sockets & SEOW 600V Cable)

E-Lite Socket



- 150W Rated
- Medium Duty
- Good All Around Performance
- 1-1/2" Guard Collar Diameter

Heavy Duty Socket



- 200W Rated
- Heavy Duty Rubberized Feel
- Great Low Temp Operation
- 1-3/4" Guard Collar Diameter

Color



E-Lite Style

- Black "T" with Yellow Cord
 Black "T" with Black Cord

Heavy Duty Style

- Yellow "T" With Yellow Cord
 Black "T" With Black Cord
 Yellow "T" With Black Cord
 Black "T" With Black Cord

The drawing below is intended to serve as a reference tool to assist in the specification of your custom assembly.

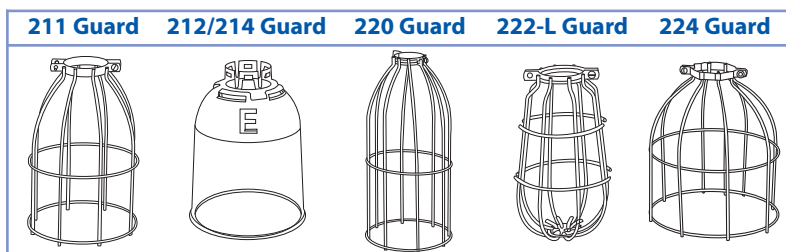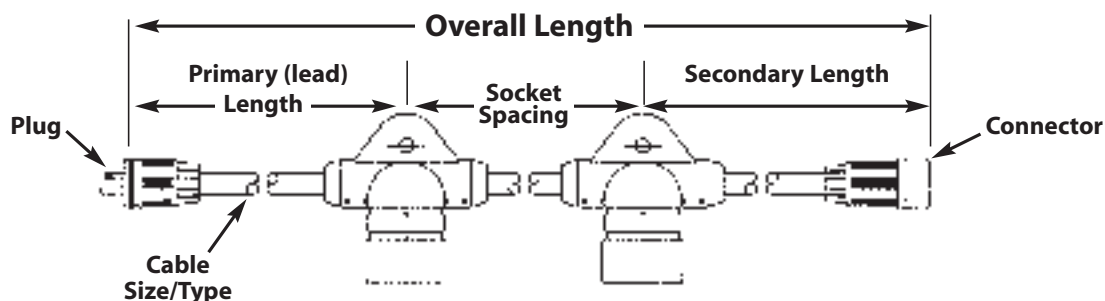

Note: Add "-P" to part number to indicate vinyl coated, grounded wire. 214 has a 1-3/4" diameter collar • 212 has a 1-1/2" diameter collar.

***A complete list of Factory Reps can be found on our website**


Note: NEC 590 does not allow the mixing of power & lighting taps on a single GFCI protected circuit.




How a Ground Fault Circuit Interrupter Works

How a Ground Fault Circuit Interrupter (GFCI) works...

A GFCI is a fast acting circuit opening or breaking device that stops the flow of dangerous current in the event of electrical shock. The GFCI uses precise electronic circuitry to sense the imbalance of the load from the hot and neutral lines. In other words, the GFCI monitors the current flow leaving and coming on both the hot and neutral lines of the circuit. In the event of an imbalance, the GFCI immediately releases the holding relay and breaks both the hot and neutral lines simultaneously thereby stopping the current flow and preventing human injury. The GFCI is not a circuit breaker in that it does not sense the overall load and disconnect in the event of full or excess balanced current flow. The imbalance in current flow can be very small to "trip" a GFCI. Whenever the current flow "going" and "returning" differs more than 5 mA (+/- 1 mA), the GFCI opens the relay stopping the current flow.

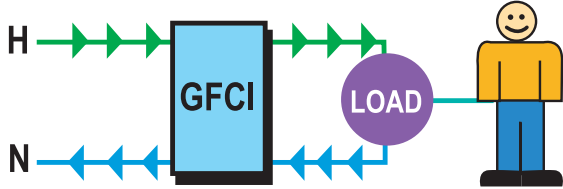

Normal balanced current
No ground fault

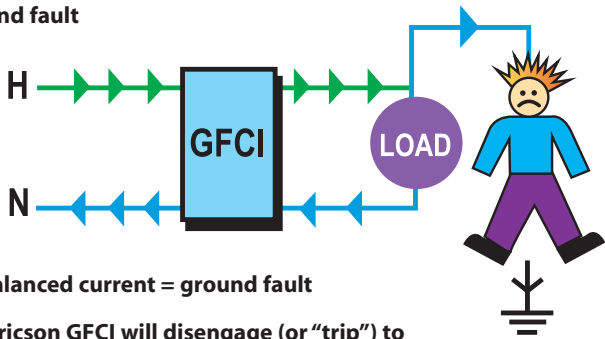

Imbalanced current = ground fault

An Ericson GFCI will disengage (or "trip") to stop all current flow eliminating this hazard

Beware of "Open Neutrals" and "Reverse Phasing"...

Normally, GFCI receptacles (like those found in your bathroom) can sense ground-faults. However, if the line-side neutral conductor is opened or lifted at a panel, the circuitry in the GFCI receptacles will not have the necessary complete circuit path from which to operate. That means that GFCI is no longer capable of sensing and disengaging. This is called an "open neutral." Anyone using the receptacles protected by the disabled GFCI will not have GFCI protection. And if a faulted tool is connected to the now-unprotected receptacle, the user will be exposed to a shock or electrocution hazard.

Agency Safety Testing (UL) for Portable Temporary GFCIs and Residential GFCIs is different...

UL 943 is the test standard for GFCIs. However, there is a difference in the requirements for temporary Jobsite GFCIs and the standard residential duplex wall mounted GFCI receptacle. These duplex receptacles are not designed for temporary jobsite power and personnel protection under OSHA, NEC or Canadian C22.2 safety workplace rules. The

residential GFCI duplex can still operate with an open neutral condition due to the unlikely condition that the neutral line in a residential permanently wired home will not be loose or removed at the panel. The likelihood of a temporary panel on a jobsite having an incomplete neutral system is more likely and therefore jobsite portable GFCIs need to be able to handle reverse wiring and open neutral conditions.

SAFE CURRENT VALUES

Milliamperes - 1 or less	Effect on Average Human
	Causes no sensation - not felt, is at threshold of perception.
1 to 8	Sensation of shock. Not painful. Individual can let go at will, as muscular control is not lost. (5mA is accepted as maximum harmless current intensity.)

UNSAFE CURRENT VALUES


Milliamperes - 8 to 15	Effect on Average Human
	Painful shock. Individual can let go at will, as muscular control is not lost.
16 to 20	Painful shock. Muscular control of adjacent muscles lost. Cannot let go.
21 to 99	Painful. Severe muscular contractions. Breathing is difficult.
100 to 200	Ventricular fibrillation. (A heart condition that may result) Disrupts or changes rhythm of the heart.
200 & over	Severe burns. Severe muscular contractions - so severe that chest muscles clamp heart and stop it during duration of shock. (This prevents ventricular fibrillation.)



How a Ground Fault Circuit Interrupter Works

Where and How to properly use a GFCI...

GFCIs only sense an imbalance on the load side of the circuit. If the imbalance or path to ground occurs BEFORE the GFCI, then the sensing circuit will not release the relay stopping the current. Because of this fact, you should always place the GFCI as close as possible to the voltage source. Ericson encourages the placement of any GFCI on a cordset to within 1 foot of the primary power plug. This way, there is little cord exposed to damage and not being sensed by the GFCI.

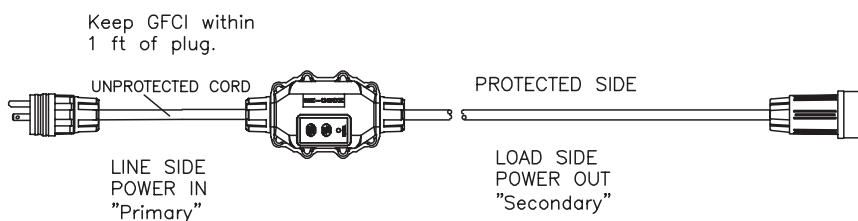

OSHA and the NEC call for the use of GFCIs in all 125 volt 15,20 and 30 amp circuits. Consult your local safety codes for additional GFCI use regulations.

What is the difference between AUTO and MANUAL GFCIs?

The GFCI terms “auto” and “manual” have been in the electrical industry for years. These simple terms refer to the operation of the GFCI when first plugged into a voltage source. These terms have nothing to do with the “tripping and subsequent resetting” of the GFCI. Separate the two main events for a GFCI: (1) Power up mode and (2) Trip and Reset Mode. Power up mode is the condition of the GFCI after being plugged into a correct voltage source.

AUTO - The “auto” GFCI will immediately energize the relay and allow protected voltage to be available at the “load” side of the GFCI. The GFCI has automatically powered up and is ready for use without the assistance of the human pressing any buttons. Think plug-n-play.

MANUAL - On the “manual” GFCI, the RESET button has a dual role in functionality. (1)Powering up the unit and (2)resetting after a fault. The “manual” GFCI operates slightly different in that it requires the human to press the “RESET” (which is operating as a power up button on this unit) so the GFCI can close the relay and operate as required.

RESET - After a “trip” situation, both styles of GFCI require the pressing of the reset button to re-start the GFCI. CAUTION: Only reset a GFCI after an investigation as to the fault cause has been identified and repaired. GFCIs cannot, nor are ever designed to reset themselves automatically.




Metal Gang Box Danger

The “traditional” metal gang box on the end of a cord has been a danger for many years. There are several reasons for the danger:

- Metal boxes are designed for permanently wired installations, not portable temp power.
- No weatherproofing except for outdoor location FS types.
- HOT box danger. (See below)
- Hand Hazard with sharp edges

The GFCI False Sense of Security

As the diagram shows, the metal gang box can have a common situation in which the earth ground is poor or not connected. There can be a hot short to the metal box in which you now have a “hot” box. The short will not trip the circuit breaker nor will the GFCI trip. The GFCI sensor only watches the “load” side of the receptacle, not the line side. The GFCI is worthless in this situation.

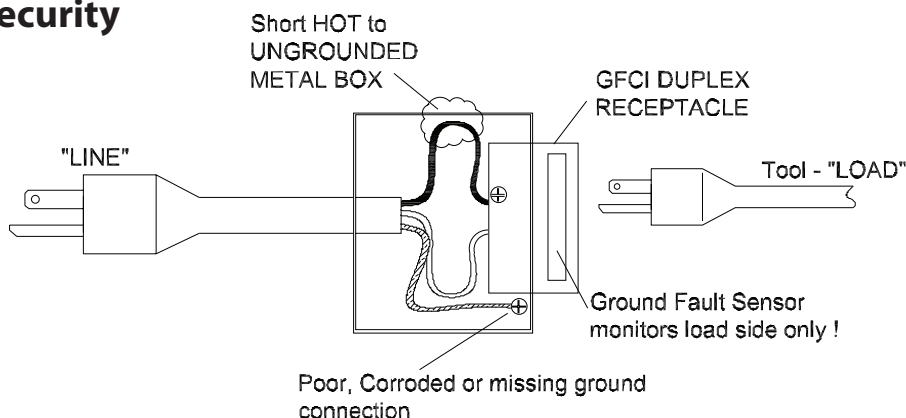

Push Button Pendant Stations - What Are They Used For?




What is a Push Button Pendant Control Station? Pendant Stations or Pendant Controls are a series of simple switches that control much larger electrical loads through various means such as relays, Programmable Logic Controllers (PLCs) or other automation circuitry. These switches are housed in a special weather proof enclosure that attaches to and hangs from the electrical cable which the control signals flow back and forth. These simple switches are described in terms of motion and switching characteristics.

Ericson's Pendant Stations are typically used to control industrial cranes and hoists or the remote control of industrial machines. Pendant control stations are specifically designed for lifting and handling applications, they enable direct control of motors and can be used for direct motor switching.

- Cranes/Hoists
- Mixers/Grinders
- Automation Inputs
- Food Processing
- PLC Inputs
- Conveyors/Sorters
- Motor Control
- Pumps

Terms & Definitions:

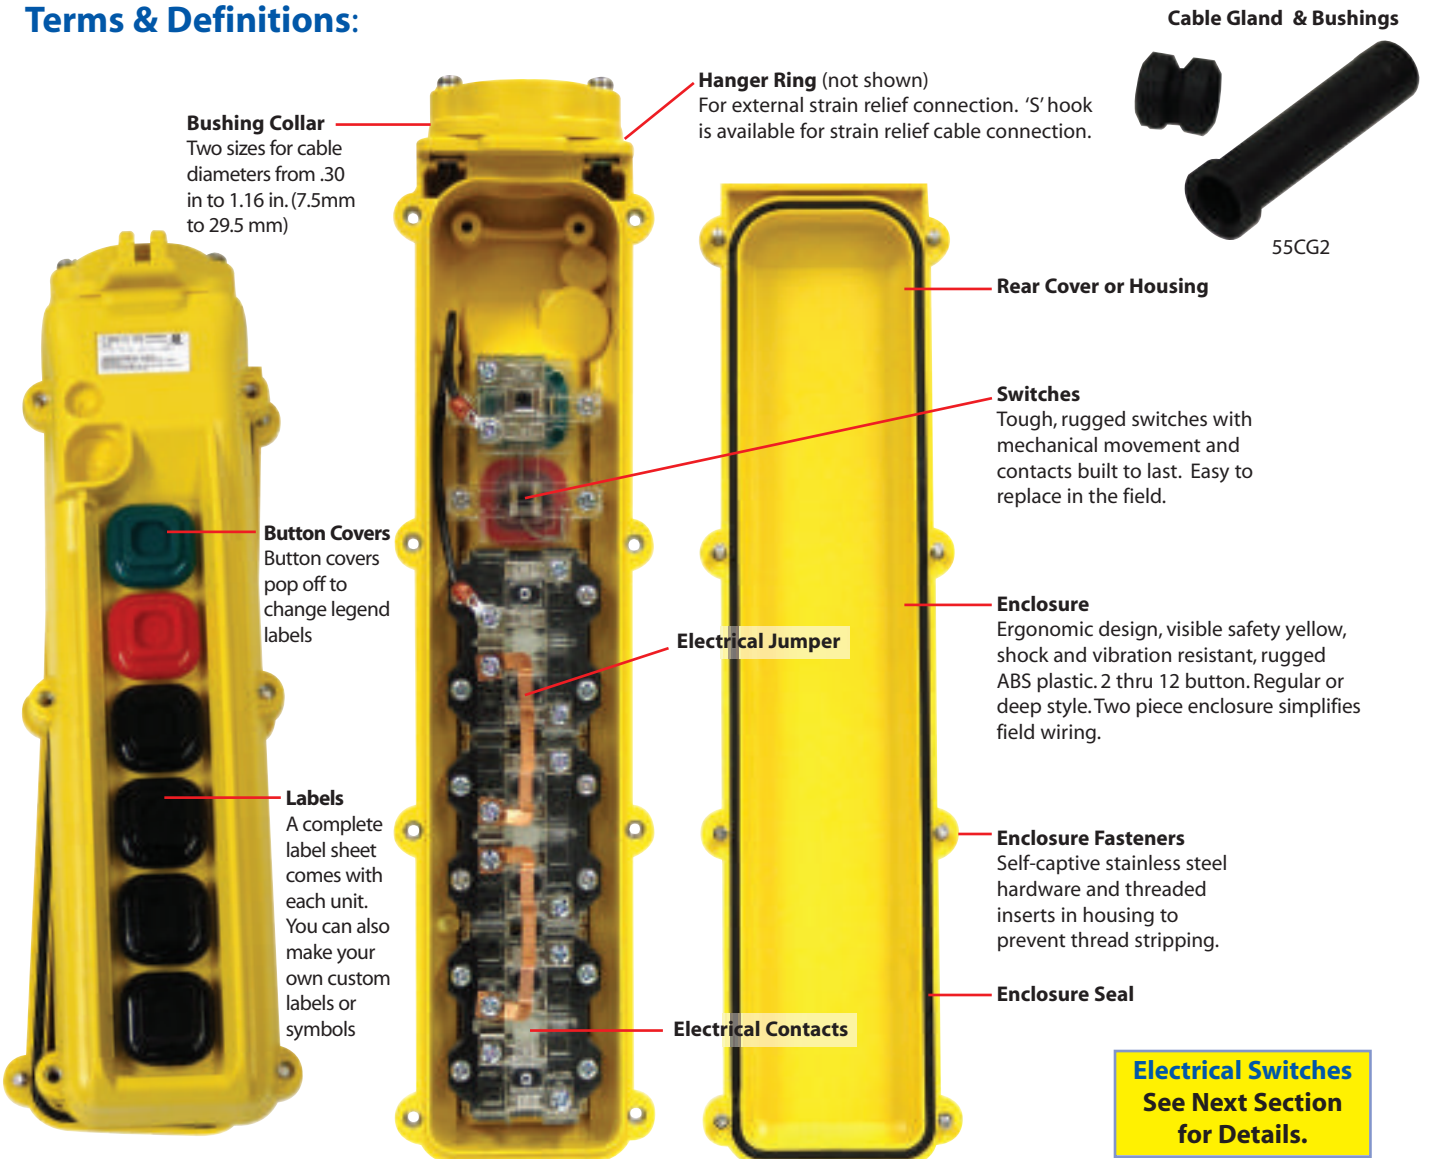


Electrical Switches
See Next Section for Details.

Switch Operations


Basic Switch Operations:

The illustrations shown here demonstrate the difference between **Normally Open (N.O.)** and **Normally Closed (N.C.)** switch contacts. The term “normally” refers to the switch at rest or no physical influence. A closed contact set completes a circuit and an open contact set breaks the circuit. The last illustration shows the main difference between MOM (momentary) and MAINT (maintained). These terms describe the secondary action of the switch **AFTER** the human releases the button. A MOM switch will return to the original position when released, (think spring loaded), and a MAINT switch will remain changed when released until another action (2nd switch or actuator) releases it back to the original position (think latched).

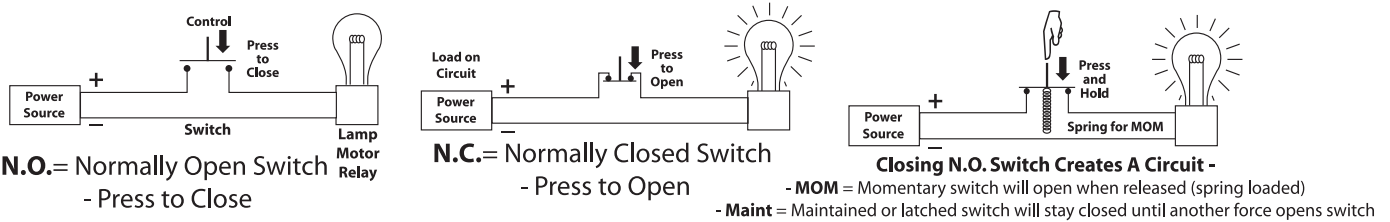


Interlocking Switches

Most switches are actually two buttons together in a single switch body. This illustration shows the definition of **INTERLOCKED** (joined together) or **NON-INTERLOCKED** (independent operation). **INTERLOCKED** switches only allow one of the two switches to be used at a time. Like a playground seesaw, only one can be up or down. This prevents accidents and equipment damage. For example: a motor will not be allowed to turn CCW and CW at the same time or the overhead crane gantry can only move forward then reverse. These **INTERLOCKED** switches can be used in conjunction with other switches to close the cover on a food mixer before allowing the motor to spin the blades.

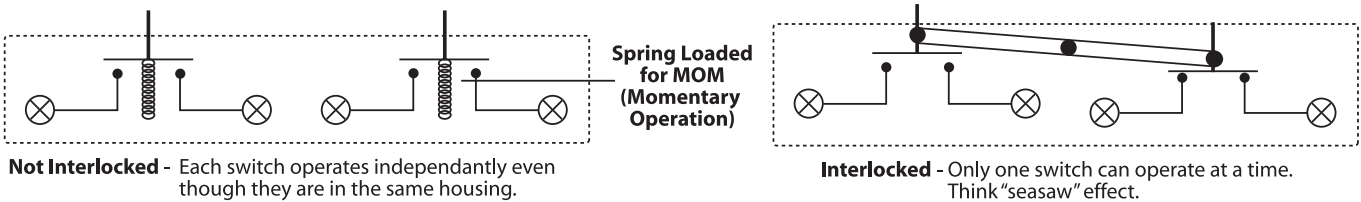

Speed Selection Switches

Some equipment can have more than one action or “speed”. For example, a mixer can mix slow then faster during a process or a crane boom can move very slow and have a faster speed for rapid relocation. Speed switches are “add” type or progressive meaning the N.O. contacts add to each other as shown in this illustration. Pressing the button down to the first “click” closes the first set of N.O. contacts and then pressing further to the 2nd or 3rd click will then close the 2nd and 3rd set of N.O. contacts. 2 speed switches have 2 sets of N.O. contacts and 3 speed have 3 sets.

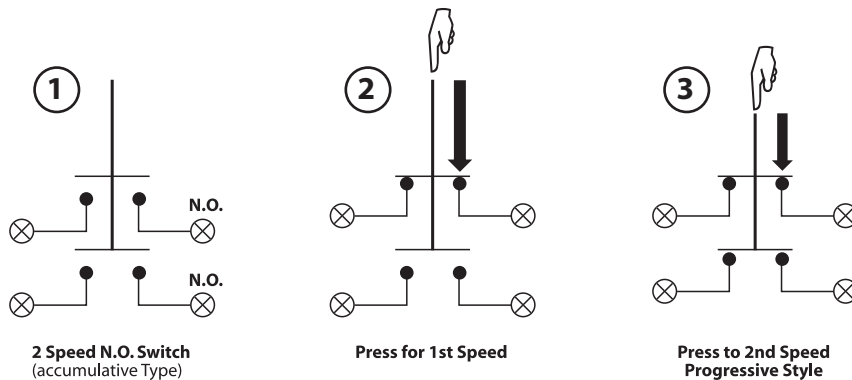

Ampacity Rating of Switches

It is good installation practice to know the amp rating of the equipment you are trying to control and ensure that the switch selected meets or exceeds that rating. This is normally why a pendant control station is used with low voltage (relay or PLC) systems (such as 12, 24 or 48 volt) when controlling large amp or higher voltage circuits.

Reel Construction

Five Basic Parts:


- Base/Stand:** Supports and mounts the reel
- Spring Motor:** Motor which rotates the spool
- Spool:** Composed of a Drum and two Flanges

- Slip Ring:** Transfers power from a stationary source to rotating source
- Roller Guide:** Guides the cable during payout and rewind

Definition of Terms:

- Active Length:** The difference between the minimum and maximum payout of cable
- Safety Wrap:** Cable that stays on the reel at maximum payout (Usually 2 complete wraps)
- Sag Factor:** The effect of gravity on actual travel length during stretch applications (6% - 10%)
- Lift Height:** The distance between where the cable lays to the center line of spool
- Payout:** Pulling cable out of the reel
- Retract or Rewind:** Rewinding cable back into the reel


Components of a Cable Reel

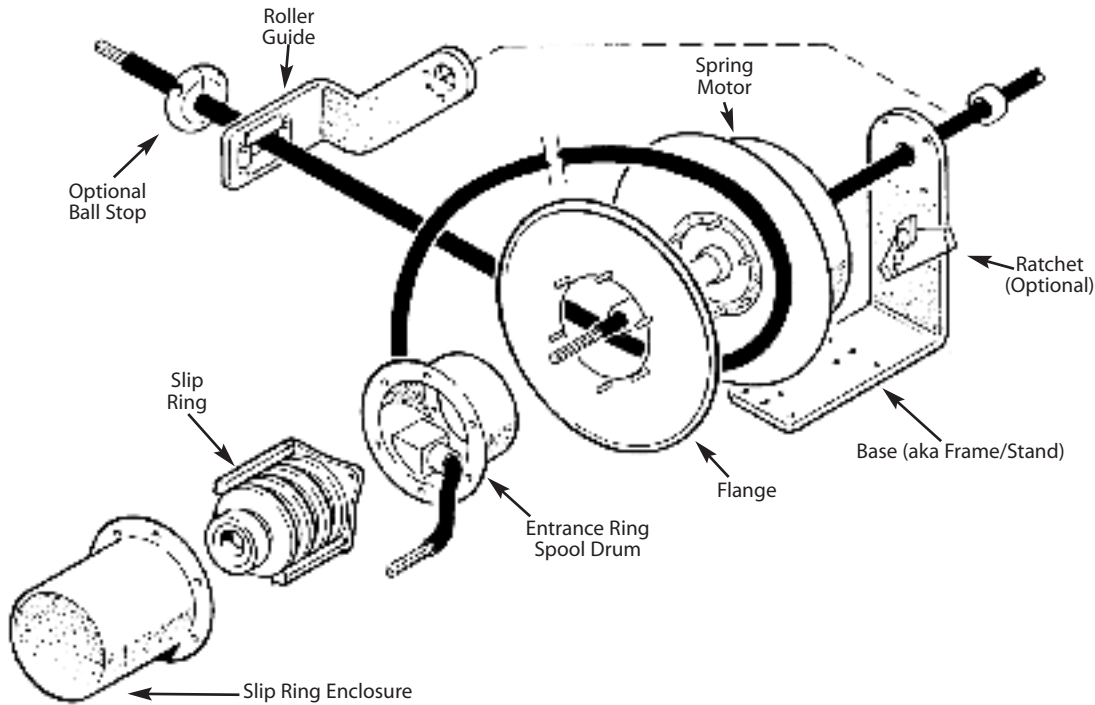

Quick Index & Application Guide

Reel Series	Typical Applications				
	Commercial Facilities	Light Industrial	General Industrial	Heavy-Duty Industrial	Hazardous Locations
3000 Commercial Duty	•				
2900 Light Duty	•				
4000 Industrial Duty	•	•	•		
5000 Industrial Duty	•	•	•	•	
6000 Heavy Duty Industrial	•	•	•	•	
7000 Heavy Duty Industrial	•	•	•	•	
8000 Hazardous Location					•
SDR Grounding Reels	•	•	•	•	

Lift

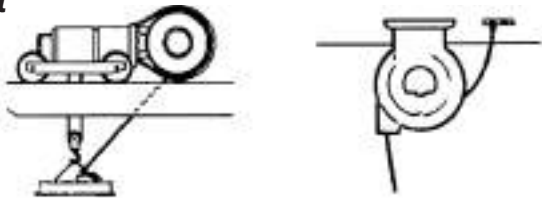

The reel needs to "lift" the cable vertically. The reel is usually stationary. Cable is pulled out of the reel by machine or by hand (as with an overhead light source or a pendant station.)

Drag



The reel needs to "drag" the cable through supports or along the ground horizontally. The reel is usually stationary. Cable can be pulled out by hand or by machine. Note: This application is the hardest on cable life.

Stretch



The cable is "stretched" horizontally and is unsupported. The reel may be stationary mounted or mounted onto moving equipment. Cable is pulled out by machine. An extra 6% -10% in cable beyond active travel is required for cable sag.

Retrieve



The reel needs to pickup ("retrieve") the cable. The reel is mounted on moving equipment. Cable is pulled out by machine.

Follow these three steps to make sure you get the best reel for your application needs. Your local representative or the sales team at our factory are glad to help if you need additional assistance.

Step 1: Mechanical Requirements:

- How will the reel be used? Stretch, Lift, Drag, or Retrieve? (See left for guidance)
- What type of environment will the reel be located in? (Indoors, outdoors, corrosive environment)
- What is the Duty Cycle? (How often will be reel payout and retract?)
- What is the maximum speed of equipment? (Maximum recommended speed is 150 feet per minute)

Step 2: Electrical Requirements:

- How much amperage is the cable expected to handle?
- At what voltage?
- What will the reel be required to handle: power, control, or communication signals?
- How many total conductors are required? (Please include one conductor for dedicated ground)
- What gauge (AWG) cable is required? The amperage and total number of conductors required will determine the gauge

Step 3: Cable Length Requirements:

- ADD: Active Length: The difference between the minimum operating payout
- PLUS: Inactive Length: Cable that always stays out of the reel, even at full retraction
- PLUS: Safety Wrap:* Cable that stays on the reel at maximum payout - See note below for details
- PLUS: Sag Factor - (Stretch Only): Add 10% to Active and Inactive Length total
- Lift Height - (Drag/Retrieve): The distance between where the cable lays up to the spool center line. Max 4'
- Hook up Length: Cable required for termination at both ends - 2-3' Spool End

- * NOTE:
- Series 4000 = 2'
 - Series 5000 = 2'
 - Series 6000 = 5'
 - Series 7000 = 5'
 - Series 8000 = 3'

Environmental ratings for enclosures based on "NEMA" Type designations

"NEMA" Types From UL50 & UL508

Enclosure Type Designation	Intended Use and Description
1	Indoor use primarily to provide a degree of protection against limited amounts of falling dirt.
2	Indoor use primarily to provide a degree of protection against limited amounts of falling dirt and water.
3	Outdoor use primarily to provide a degree of protection against rain, sleet, wind blown dust and damage from external ice formation.
3R	Outdoor use primarily to provide a degree of protection against rain, sleet, and damage from external ice formation.
3S	Outdoor use primarily to provide a degree of protection against rain, sleet, windblown dust and to provide for operation of external mechanisms when ice laden.
4	Indoor or outdoor use primarily to provide a degree of protection against windblown dust and rain, splashing water, hose-directed
4X	Indoor or outdoor use primarily to provide a degree of protection against corrosion, windblown dust and rain, splashing water, hose-directed water, and damage from external ice formation.
5	Indoor use primarily to provide a degree of protection against settling airborne dust, falling dirt, and dripping noncorrosive liquids.
6	Indoor or outdoor use primarily to provide a degree of protection against hose-directed water, and the entry of water during occasional temporary submersion at a limited depth and damage from external ice formation.
6P	Indoor or outdoor use primarily to provide a degree of protection against hose-directed water, the entry of water during prolonged submersion at a limited depth and damage from external ice formation.
7	Indoor use in locations classified as Class I, Division 1, Groups A, B, C or D hazardous locations as defined in the National Electric Code (NFPA 70) (Commonly referred to as explosion-proof).
8	Indoor or outdoor use in locations classified as Class I, Division 2, Groups A, B, C or D hazardous locations as defined in the National Electric Code (NFPA 70) (commonly referred to as oil immersed).
9	Indoor use in locations classified as Class II, Division 1, Groups E, F and G hazardous locations as defined in the National Electric Code (NFPA 70) (commonly referred to as dust-ignition proof).
10	Intended to meet the applicable requirements of the Mine Safety and Health Administration (MSHA).
12 and 12K	Indoor use primarily to provide a degree of protection against circulating dust, falling dirt, and dripping noncorrosive liquids.
13	Indoor use primarily to provide a degree of protection against dust, spraying of water, oil, and noncorrosive coolant.

- a.) ANSI/UL50, Enclosures for Electrical Equipment for Types 1, 2, 3, 3R, 3S, 4, 4X, 5, 6, 6P, 12, 12K and 13.
- b.) ANSI/UL698, Industrial Control Equipment for Use in Hazardous (Classified) Locations and other related standards for Types 7, 8 and 9.
- c.) ANSI/NEMA250, Enclosures for Electrical Equipment (1000 Volts Maximum) for Types 1, 2, 3, 3R, 3S, 4, 4X, 5, 6, 6P, 7, 8, 9, 12, 12K and 13.

Comparison of "NEMA" Type and "IP" Code designations Conversion of "NEMA" Type to "IP" Code designations*

Type Number	IP Designation
1	IP10
2	IP11
3	IP54
3R	IP54
3S	IP54
4 and 4X	IP56
5	IP52
6 and 6P	IP67
12 and 12K	IP52
13	IP54

*Table cannot be used to convert "IP" Codes to "NEMA" Types. See NEMA 250 for additional details.

TABLE 1 - CHARACTERISTICS DEFINED BY THE IEC Per Standard 60529

			Second Digit - Protection against the penetration of liquids								
			IP_0	IP_1	IP_2	IP_3	IP_4	IP_5	IP_6	IP_7	IP_8
Non protected											
First Digit - Protection against persons - touching and ingress of solid foreign objects											
IP 0_		Without protection	IP 00								
IP 1_		Protection against touching with the hand and solid objects greater than 50mm dia.	IP 10	IP 11	IP 12						
IP 2_		Protection against touching with the finger and solid objects greater than 12mm dia.	IP 20	IP 21	IP 22	IP 23					
IP 3_		Protection against touching with tools, wires, etc. more than 2.5mm thick and solid objects greater than 2.5mm dia.	IP 30	IP 31	IP 32	IP 33	IP 34				
IP 4_		Protection against touching with tools, wires, etc. more than 1mm thick and solid objects greater than 1mm dia.	IP 40	IP 41	IP 42	IP 43	IP 44				
IP 5_		Unlimited protection against contact with live parts and damaging deposits of dust	IP 50				IP 54	IP 55			
IP 6_		Unlimited protection against contact with live parts and any penetration of dust	IP 60					IP 65	IP 66	IP 67	IP 68

In some countries a third digit (for mechanical security) is added.



Class I Hazardous Locations

Flammable Gases, Vapor or Liquids

Class I Area Classifications

Division 1:

Where ignitable concentrations of flammable gases, vapors or liquids can exist all of the time or some of the time under normal operating conditions.

Division 2:

Where ignitable concentrations of flammable gases, vapors or liquids are not likely under normal operating conditions.

Zone 0:

Where ignitable concentrations of flammable gases, vapors or liquids are present continuously or for long periods of time under normal operating conditions.

Zone 1:

Where ignitable concentrations of flammable gases, vapors or liquids are likely to exist under normal operating conditions.

Zone 2:

Where ignitable concentrations of flammable gases, vapors or liquids are not likely to exist under normal operating conditions.

Class I Groups

Division 1 and 2

- A (acetylene)
- B (hydrogen)
- C (ethylene)
- D (propane)

Zone 0, 1 and 2

- IIC (acetylene & hydrogen)
- IIB (ethylene)
- IIA (propane)

Class I Temperature Codes

Division 1 and 2

- T1 ($\leq 450^{\circ}\text{C}$)
- T2 ($\leq 300^{\circ}\text{C}$)
- T2A, T2B, T2C, T2D
($\leq 280^{\circ}\text{C}, \leq 260^{\circ}\text{C}, \leq 230^{\circ}\text{C}, \leq 215^{\circ}\text{C}$)
- T3 ($\leq 200^{\circ}\text{C}$)
- T3A, T3B, T3C
($\leq 180^{\circ}\text{C}, \leq 165^{\circ}\text{C}, \leq 160^{\circ}\text{C}$)
- T4 ($\leq 135^{\circ}\text{C}$)
- T4A ($\leq 120^{\circ}\text{C}$)
- T5 ($\leq 100^{\circ}\text{C}$)
- T6 ($\leq 85^{\circ}\text{C}$)

Zone 0,1 and 2

- T1 ($\leq 450^{\circ}\text{C}$)
- T2 ($\leq 300^{\circ}\text{C}$)
-
- T3 ($\leq 200^{\circ}\text{C}$)
-
- T4 ($\leq 135^{\circ}\text{C}$)
-
- T5 ($\leq 100^{\circ}\text{C}$)
- T6 ($\leq 85^{\circ}\text{C}$)

Hazardous location information provided courtesy of UL copyright© 1999 Underwriters Laboratories, Inc.



Class II Hazardous Locations

Combustible Dusts

Class II Area Classifications

Division 1:

Where ignitable concentrations of combustible dusts can exist all of the time or some of the time under normal operating conditions.

Division 2:

Where ignitable concentrations of combustible dusts are not likely to exist under normal operating conditions.

Class II Groups

Division 1 and 2

E (metals--- Div. 1 only)
F (coal)
G (grain)

Class II Temperature Codes

Division 1 and 2

T1 ($\leq 450^{\circ}\text{C}$)
T2 ($\leq 300^{\circ}\text{C}$)
T2A, T2B, T2C, T2D
($\leq 280^{\circ}\text{C}$, $\leq 260^{\circ}\text{C}$, $\leq 230^{\circ}\text{C}$, $\leq 215^{\circ}\text{C}$)
T3 ($\leq 200^{\circ}\text{C}$)
T3A, T3B, T3C
($\leq 180^{\circ}\text{C}$, $\leq 165^{\circ}\text{C}$, $\leq 160^{\circ}\text{C}$)
T4 ($\leq 135^{\circ}\text{C}$)
T4A ($\leq 120^{\circ}\text{C}$)
T5 ($\leq 100^{\circ}\text{C}$)
T6 ($\leq 85^{\circ}\text{C}$)

Hazardous location information provided courtesy of UL copyright© 1999 Underwriters Laboratories, Inc.

Class III Hazardous Locations

Ignitable Fibers & Flyings Class III Area Classifications

Division 1:

Where easily ignitable fibers or materials producing combustible flyings are handled, manufactured or used.

Division 2:

Where easily ignitable fibers are stored or handled.

Class III Temperature Codes

Division 1 and 2

None

Note: Article 503 of the NEC limits the maximum temperature for Class III equipment to 165°C for equipment not subject to overloading and to 120°C for equipment that maybe overloaded.

Class III Groups

Division 1 and 2

None

Hazardous Locations Markings

Class I, II & III Division 1 & 2 (U.S. & Canada) - This marking would include:

Class(es), Division(s), Gas/Dust Group(s), Temperature Code

Example: Class I, Division I, Group C & D, T4A

Class I, Zone 0, 1 & 2 (U.S. & Canada) - This marking would include:

Method A: For Zone Listings based on UL 2279 or the CSA-E79 Series

Class, Zone(s), Ex, Protection Method(s), Gas Group, Temperature Code

Example: Class I, Zone 1, Ex de IIB, T4

Method B: For Zone Listings based on UL or CSA Division Certification Documents

Class, Zone(s), Gas Group, Temperature Code

Example: Class I, Zone 1, Group IIB, T4

Note: For U.S. Zone Listings based on UL 2279, Article 505 of the 1999 NEC requires that the "Ex" element of the marking string shall read "AEx."

Note: For Canadian Zone listings based on the CSA-E79 Series, the "Class" and "Zone" elements of the marking string are optional.

Zone 0, 1 & 2 (IEC only) - This marking would include;

EEx, Protection Method(s), Gas Group, Temperature Code

Example: Ex de IIB T4

Zone 0, 1 & 2 (Europe only) - This marking would include:

EEx, Protection Method(s), Gas Group, Temperature Code

Example: EEx de IIB T4

Hazardous location information provided courtesy of UL copyright© 1999 Underwriters Laboratories, Inc.



Temperature Conversion Chart

1. Locate known temperature in °C/°F column
2. Read converted temperature in °C or °F column

Example: To convert 75 F to Celsius...

Locate 75 in °C/°F column

Read converted temperature in C Column, 23.9 C

°C	°C/°F	°F	°C	°C/°F	°F	°C	°C/°F	°F
-40.0	-40	-40	40.6	105	221	123.9	255	491
-37.2	-35	-31	43.3	110	230	126.7	260	500
-34.4	-30	-22	46.1	115	239	129.4	265	509
-31.7	-25	-13	48.9	120	248	132.2	270	518
-28.9	-20	-4	51.7	125	257	135.0	275	527
-26.1	-15	5	54.4	130	266	137.8	280	536
-23.3	-10	14	57.2	135	275	140.6	285	545
-20.6	-5	23	60.0	140	284	143.3	290	554
-17.8	0	32	62.8	145	293	146.1	295	563
-15.0	5	41	65.6	150	302	148.9	300	572
-12.2	10	50	68.3	155	311	151.7	305	581
-9.4	15	59	71.1	160	320	154.4	310	590
-6.7	20	68	76.7	170	338	157.2	315	599
-3.9	25	77	79.4	175	347	160.0	320	608
-1.1	30	86	82.2	180	356	162.8	325	617
1.7	35	95	85.0	185	365	165.6	330	626
4.4	40	104	87.8	190	374	168.3	335	635
7.2	45	113	90.6	195	383	171.1	340	644
10.0	50	122	93.3	200	392	173.9	345	653
12.8	55	131	96.1	205	401	176.7	350	662
15.6	60	140	98.9	210	410	179.4	355	671
18.3	65	149	101.7	215	419	182.2	360	680
21.1	70	158	104.4	220	428	185.0	365	689
23.9	75	167	107.2	225	437	187.8	370	698
26.7	80	176	110.0	230	446	190.6	375	707
29.4	85	185	112.8	235	455	193.3	380	716
32.2	90	194	115.6	240	464	196.1	385	725
35.0	95	203	118.3	245	473	198.9	390	734
37.8	100	212	121.1	250	482	201.7	395	743

Temperature Conversion Formulas

$$^{\circ}\text{F} = (9/5 \times ^{\circ}\text{C}) + 32$$

$$^{\circ}\text{C} = 5/9 (^{\circ}\text{F} - 32)$$



Metric Conversion Chart

(Fraction Inch to Decimal Inch and Millimeters)

Fraction (In.)	Three Place Decimal (In.)	Three Place Decimal (mm)
1/64	0.016	0.397
1/32	.031	.794
3/64	.047	1.191
1/16	.062	1.588
5/64	.078	1.934
3/32	.094	2.381
7/64	.100	2.778
1/8	.125	3.175
9/64	.141	3.572
5/32	.156	3.969
11/64	.172	4.366
3/16	.188	4.763
13/64	.203	5.159
7/32	.219	5.556
15/64	.234	5.953
1/4	.250	6.350
17/64	.266	6.747
9/32	.281	7.144
19/64	.297	7.541
5/16	.312	7.938
21/64	.328	8.334
11/32	.344	8.731
23/64	.359	9.128
3/8	.375	9.525
25/64	.391	9.922
13/32	.406	10.319
27/64	.422	10.716
7/16	.438	11.113
29/64	.453	11.509
15/32	.469	11.906
31/64	.484	12.303
1/2	.500	12.700

Fraction (In.)	Three Place Decimal (In.)	Three Place Decimal (mm)
33/64	.516	13.097
17/32	.531	13.494
35/64	.547	13.891
9/16	.562	14.288
37/64	.578	14.684
19/32	.594	15.081
39/64	.609	15.478
5/8	.625	15.875
41/64	.641	16.272
21/32	.656	16.669
43/64	.672	17.066
11/16	.688	17.463
45/64	.703	17.859
23/32	.719	18.256
47/64	.734	18.653
3/4	.750	19.050
49/64	.766	19.447
25/32	.781	19.844
51/64	.797	20.241
13/16	.812	20.638
53/64	.828	21.034
27/32	.844	21.431
55/64	.859	21.828
7/8	.875	22.225
57/64	.891	22.622
29/32	.906	23.019
59/64	.922	23.416
15/16	.938	23.813
61/64	.953	24.209
31/32	.969	24.606
63/64	.984	25.003
1	1.000	25.400

Metric Conversion Formulas

To Obtain	Multiply
Millimeters	Inches x 25.4
Inches	Millimeters x 0.0394
Meter	Feet x .3048
Feet	Meters x 3.281
Square Centimeters	Square Inches x 6.45
Square Inches	Square Centimeters x 0.155
Kilograms	Pounds x 0.4536
Pounds	Kilograms x 2.205



Electrical Formulas

OHMS Law

$$\text{Ohms} = \frac{\text{Volts}}{\text{Amperes}} \quad \text{Amperes} = \frac{\text{Volts}}{\text{Ohms}} \quad \text{Volts} = \text{Amperes} \times \text{Ohms}$$

Power

$$\text{Watts} = \text{Amperes} \times \text{Volts} \text{ or } \text{Amps} \times \text{Amps} \times \text{ohms, or } \frac{\text{Volts} \times \text{Volts}}{\text{ohms}}$$

$$\text{Amperes} = \frac{\text{Watts}}{\text{Volts}}$$

$$\text{HP} = \frac{\text{Volts} \times \text{Amps} \times \text{Efficiency}}{746}$$

$$\text{Power Factor} = \frac{\text{Watts}}{\text{Amperes} \times \text{Volts}}$$

$$\text{3-phase Amperes} = \frac{746 \times \text{HP (Horsepower)}}{1.732 \times \text{Volts} \times \text{Efficiency} \times \text{Power Factor}}$$

$$\text{Single-phase Kilowatts} = \frac{\text{Volts} \times \text{Amperes} \times \text{Power Factor}}{1000}$$

$$\text{Single-phase Amperes} = \frac{746 \times \text{HP (Horsepower)}}{\text{Volts} \times \text{Efficiency} \times \text{Power Factor}}$$

Approximate Voltage Drop for Various Extension Cord Gauges, Lengths, and Amps

Cord Length, feet	Current flowing through cord			
	10A	15A	20A	30A
Cord Size = #16 gauge wire				
10	1.0 V (0.8%)			
20	2.0 V (1.7%)			
30	2.9 V (2.4%)			
40	3.9 V (3.3%)			
50	4.9 V (4.1%)			
100	9.8 V (8.2%)			
Cord Size = #14 gauge wire				
10	0.6 V (0.5%)	0.9 V (0.8%)		
20	1.2 V (1.0%)	1.8 V (1.5%)		
30	1.8 V (1.5%)	2.7 V (2.3%)		
40	2.4 V (2.0%)	3.6 V (3.0%)		
50	3.0 V (2.5%)	4.6 V (3.8%)		
100	6.1 V (5.1%)	9.1 V (7.6%)		
Cord Size = #12 gauge wire				
10	0.4 V (0.3%)	0.6 V (0.5%)	0.8 V (1.7%)	
20	0.8 V (0.7%)	1.1 V (0.9%)	1.5 V (1.3%)	
30	1.1 V (0.9%)	1.7 V (1.4%)	2.3 V (1.9%)	
40	1.5 V (1.3%)	2.3 V (1.9%)	3.1 V (2.6%)	
50	1.9 V (1.6%)	2.9 V (2.4%)	3.8 V (3.2%)	
100	3.8 V (3.2%)	5.7 V (4.8%)	7.7 V (6.4%)	
Cord Size = #10 gauge wire				
10	0.2 V (0.2%)	0.4 V (0.3%)	0.5 V (0.4%)	0.7 V (0.6%)
20	0.5 V (0.4%)	0.7 V (0.6%)	1.0 V (0.8%)	1.4 V (1.2%)
30	0.7 V (0.6%)	1.1 V (0.9%)	1.4 V (1.2%)	2.2 V (1.8%)
40	1.0 V (0.8%)	1.4 V (1.2%)	1.9 V (1.6%)	2.9 V (2.4%)
50	1.2 V (1.0%)	1.8 V (1.5%)	2.4 V (2.0%)	3.6 V (3.0%)
100	2.4 V (2.0%)	3.6 V (3.0%)	4.8 V (4.0%)	7.2 V (6.0%)

Note 1: Numbers are rounded to the nearest 0.1V and 0.1%.

Note 2: Voltage drops shown are the same for any single-phase supply voltage. Voltage drop depends only on amps.

Note 3: Values are approximate, as they are affected by factors such as temperature.

Note 4: For a given cord size and amps, voltage drop is uniform over a length of cord, so for example, a 40 ft cord has twice the voltage drop as a 20 ft cord. That means the numbers in the voltage drop columns can be added together. For example, the voltage drop for a 70 ft cord can be found by adding together the voltage drops for a 30 ft cord and a 40 ft cord.



OSHA Product Match

Topic	Regulation	Ericson Product
General Wiring	1926.404(a)(2) Polarity of connections. No grounded conductor shall be attached to any terminal or lead so as to reverse designated polarity.	Plugs and Connectors
Wiring Devices	1926.404(a)(3) Use of grounding terminals and devices. A grounding terminal or grounding-type device on a receptacle, cord connector, or attachment plug shall not be used for purposes other than grounding.	
Ground Fault Protection	1926.404(b)(1)(i) General. The employer shall use either ground fault circuit interrupters as specified in paragraph (b)(1)(ii) of this section or an assured equipment grounding conductor program as specified in paragraph (b)(1)(iii) of this section to protect employees on construction sites. These requirements are in addition to any other requirements for equipment grounding conductors.	GFCI
	1926.404(b)(1)(ii) Ground-fault circuit interrupters. All 120-volt, single-phase 15- and 20-ampere receptacle outlets on construction sites, which are not a part of the permanent wiring of the building or structure and which are in use by employees, shall have approved ground-fault circuit interrupters for personnel protection. Receptacles on a two-wire, single-phase portable or vehicle-mounted generator rated not more than 5kW, where the circuit conductors of the generator are insulated from the generator frame and all other grounded surfaces, need not be protected with ground-fault circuit interrupters.	
Assured Equipment Grounding Conductor Program	1926.404(b)(1)(iii) Assured equipment grounding conductor program. The employer shall establish and implement an assured equipment grounding conductor program on construction sites covering all cord sets, receptacles which are not a part of the building or structure, and equipment connected by cord and plug which are available for use or used by employees. This program shall comply with the following minimum requirements:	GFCI Oscars® Smart Monitor Plugs/Connectors
	1926.404(b)(1)(iii)(A) A written description of the program, including the specific procedures adopted by the employer, shall be available at the jobsite for inspection and copying by the Assistant Secretary and any affected employee.	
	1926.404(b)(1)(iii)(B) The employer shall designate one or more competent persons (as defined in 1926.32(f)) to implement the program.	
	1926.404(b)(1)(iii)(C) Each cord set, attachment cap, plug and receptacle of cord sets, and any equipment connected by cord and plug, except cord sets and receptacles which are fixed and not exposed to damage, shall be visually inspected before each day's use for external defects, such as deformed or missing pins or insulation damage, and for indications of possible internal damage. Equipment found damaged or defective shall not be used until repaired.	
	1926.404(b)(1)(iii)(D) The following tests shall be performed on all cord sets, receptacles which are not a part of the permanent wiring of the building or structure, and cord- and plug-connected equipment required to be grounded:	
	1926.404(b)(1)(iii)(D)(1) All equipment grounding conductors shall be tested for continuity and shall be electrically continuous.	
	1926.404(b)(1)(iii)(D)(2) Each receptacle and attachment cap or plug shall be tested for correct attachment of the equipment grounding conductor. The equipment grounding conductor shall be connected to its proper terminal.	
	1926.404(b)(1)(iii)(E) All required tests shall be performed:	
	1926.404(b)(1)(iii)(E)(1) Before first use	
	1926.404(b)(1)(iii)(E)(2) Before equipment is returned to service following any repairs	
	1926.404(b)(1)(iii)(E)(3) Before equipment is used after any incident which can be reasonably suspected to have caused damage (for example, when a cord set is run over) and	
	1926.404(b)(1)(iii)(E)(4) At intervals not to exceed 3 months, except that cord sets and receptacles which are fixed and not exposed to damage shall be tested at intervals not exceeding 6 months.	
	1926.404(b)(1)(iii)(F) The employer shall not make available or permit the use by employees of any equipment which has not met the requirements of this paragraph (b)(1)(iii) of this section.	
1926.404(b)(1)(iii)(G) Tests performed as required in this paragraph shall be recorded. This test record shall identify each receptacle, cord set, and cord- and plug-connected equipment that passed the test and shall indicate the last date it was tested or the interval for which it was tested. This record shall be kept by means of logs, color coding, or other effective means and shall be maintained until replaced by a more current record. The record shall be made available on the jobsite for inspection by the Assistant Secretary and any affected employee.		



Topic	Regulation	Ericson Product
Electrical Grounding Safety for Generator or Transformer Derived Power	1926.404(f)(2) Separately derived systems. Where paragraph (f)(1) of this section requires grounding of wiring systems whose power is derived from generator, transformer, or converter windings and has no direct electrical connection, including a solidly connected grounded circuit conductor, to supply conductors originating in another system, paragraph (f)(5) of this section shall also apply.	e-Cart™2 e-Cart™ Jr
	1926.404(f)(3)(iii) Neutral conductor bonding. A neutral conductor shall be bonded to the generator frame if the generator is a component of a separately derived system. No other conductor need be bonded to the generator frame.	
	1926.404(f)(5)(i) Grounded system. For a grounded system, a grounding electrode conductor shall be used to connect both the equipment grounding conductor and the grounded circuit conductor to the grounding electrode. Both the equipment grounding conductor and the grounding electrode conductor shall be connected to the grounded circuit conductor on the supply side of the service disconnecting means, or on the supply side of the system disconnecting means or overcurrent devices if the system is separately derived.	

Topic	Regulation	Ericson Product
Cord Connected Equipment	1926.404(f)(7)(iv) Equipment connected by cord and plug. Under any of the conditions described in paragraphs (f)(7)(iv)(A) through (f)(7)(iv)(C) of this section, exposed non-current-carrying metal parts of cord- and plug-connected equipment which may become energized shall be grounded:	e-Cart™, Oscar® Series
	1926.404(f)(7)(iv)(A) If in a hazardous (classified) location (see 1926.407).	Hazardous Location Lighting
	1926.404(f)(7)(iv)(B) If operated at over 150 volts to ground, except for guarded motors and metal frames of electrically heated appliances if the appliance frames are permanently and effectively insulated from ground.	Ericson Temporary Cordsets and Wiring Devices
	1926.404(f)(7)(iv)(C)(1) Hand held motor-operated tools	
	1926.404(f)(7)(iv)(C)(2) Cord- and plug-connected equipment used in damp or wet locations or by employees standing on the ground or on metal floors or working inside of metal tanks or boilers	
	1926.404(f)(7)(iv)(C)(4) Tools likely to be used in wet and/or conductive locations	Ericson Temporary Lighting Products
	1926.404(f)(7)(iv)(C)(5) Portable hand lamps.	
1926.404(f)(7)(iv)(C)(6) Tools likely to be used in wet and/or conductive locations need not be grounded if supplied through an isolating transformer with an ungrounded secondary of not over 50 volts. Listed or labeled portable tools and appliances protected by a system of double insulation, or its equivalent, need not be grounded. If such a system is employed, the equipment shall be distinctively marked to indicate that the tool or appliance utilizes a system of double insulation.	Low Voltage Lighting Products	



Topic	Regulation	Ericson Product
Temporary Wiring	1926.405(a)(2)(i) Scope. The provisions of paragraph (a)(2) of this section apply to temporary electrical power and lighting wiring methods which may be of a class less than would be required for a permanent installation. Except as specifically modified in paragraph (a)(2) of this section, all other requirements of this subpart for permanent wiring shall apply to temporary wiring installations. Temporary wiring shall be removed immediately upon completion of construction or the purpose for which the wiring was installed.	Stringlights and Cordsets
	1926.405(a)(2)(ii)(B) Branch circuits shall originate in a power outlet or panelboard. Conductors shall be run as multiconductor cord or cable assemblies or open conductors, or shall be run in raceways. All conductors shall be protected by overcurrent devices at their ampacity. Runs of open conductors shall be located where the conductors will not be subject to physical damage, and the conductors shall be fastened at intervals not exceeding 10 feet (3.05 m). No branch-circuit conductors shall be laid on the floor. Each branch circuit that supplies receptacles or fixed equipment shall contain a separate equipment grounding conductor if the branch circuit is run as open conductors.	e-Cart™ and Oscar™ Series
	1926.405(a)(2)(ii)(C) Receptacles shall be of the grounding type. Unless installed in a complete metallic raceway, each branch circuit shall contain a separate equipment grounding conductor, and all receptacles shall be electrically connected to the grounding conductor. Receptacles for uses other than temporary lighting shall not be installed on branch circuits which supply temporary lighting. Receptacles shall not be connected to the same ungrounded conductor of multiwire circuits which supply temporary lighting.	e-Cart™ and Oscar® Series
	1926.405(a)(2)(ii)(D) Disconnecting switches or plug connectors shall be installed to permit the disconnection of all ungrounded conductors of each temporary circuit.	Ericson Wiring Devices
Lamp Guards on All Lighting	1926.405(a)(2)(ii)(E) All lamps for general illumination shall be protected from accidental contact or breakage. Metal-case sockets shall be grounded.	Ericson Lamp Guards
Temporary Lighting Mounting	1926.405(a)(2)(ii)(F) Temporary lights shall not be suspended by their electric cords unless cords and lights are designed for this means of suspension.	Stringlights
Low Voltage Lighting	1926.405(a)(2)(ii)(G) Portable electric lighting used in wet and/or other conductive locations, as for example, drums, tanks, and vessels, shall be operated at 12 volts or less. However, 120-volt lights may be used if protected by a ground-fault circuit interrupter.	Low Voltage Lighting
Cord Protection	1926.405(a)(2)(ii)(I) Flexible cords and cables shall be protected from damage. Sharp corners and projections shall be avoided. Flexible cords and cables may pass through doorways or other pinch points, if protection is provided to avoid damage.	CP5-36 Cable Protectors
Flexible Cords	1926.405(a)(2)(ii)(J) Extension cord sets used with portable electric tools and appliances shall be of three-wire type and shall be designed for hard or extra-hard usage. Flexible cords used with temporary and portable lights shall be designed for hard or extra-hard usage.	Ericson Temporary Cordsets
	1926.405(g)(2)(iv) Strain relief. Flexible cords shall be connected to devices and fittings so that strain relief is provided which will prevent pull from being directly transmitted to joints or terminal screws.	6000, 7000 and 8000 Series Boxes and Covers



Topic	Regulation	Ericson Product
Portable Lighting	1926.405(j)(1)(iii) Portable lamps. Portable lamps shall be wired with flexible cord and an attachment plug of the polarized or grounding type. If the portable lamp uses an Edison-based lampholder, the grounded conductor shall be identified and attached to the screw shell and the identified blade of the attachment plug. In addition, portable handlamps shall comply with the following:	Ericson Lighting Products and Wiring Devices
Handlamps	1926.405(j)(1)(iii)(B) Handlamps shall be equipped with a handle of molded composition or other insulating material	Ericson Lighting Products
	1926.405(j)(1)(iii)(C) Handlamps shall be equipped with a substantial guard attached to the lampholder or handle	
Metal Guards on Stringlights	1926.405(j)(1)(iii)(D) Metallic guards shall be grounded by the means of an equipment grounding conductor run within the power supply cord.	Ericson Lighting Products
Weather Proof Lampholders	1926.405(j)(1)(iv) Lampholders. Lampholders of the screw-shell type shall be installed for use as lampholders only. Lampholders installed in wet or damp locations shall be of the weatherproof type.	
Lighting Fixtures in Wet Locations	1926.405(j)(1)(v) Fixtures. Fixtures installed in wet or damp locations shall be identified for the purpose and shall be installed so that water cannot enter or accumulate in wireways, lampholders, or other electrical parts.	
Plugs / Connectors	1926.405(j)(2)(i) Configuration. Receptacles, cord connectors, and attachment plugs shall be constructed so that no receptacle or cord connector will accept an attachment plug with a different voltage or current rating than that for which the device is intended. However, a 20-ampere T-slot receptacle or cord connector may accept a 15-ampere attachment plug of the same voltage rating. Receptacles connected to circuits having different voltages, frequencies, or types of current (ac or dc) on the same premises shall be of such design that the attachment plugs used on these circuits are not interchangeable.	Ericson Wiring Devices
Wet Locations for Receptacles	1926.405(j)(2)(ii) Damp and wet locations. A receptacle installed in a wet or damp location shall be designed for the location.	FS Flip Covers

1926.56(a)

General. Construction areas, ramps, runways, corridors, offices, shops, and storage areas shall be lighted to not less than the minimum illumination intensities listed in Table D-3 while any work is in progress:

TABLE D-3 - MINIMUM ILLUMINATION INTENSITIES IN FOOT-CANDLES

Foot-Candles	Area of Operation
5.....	General construction area lighting.
3.....	General construction areas, concrete placement, excavation and waste areas, access ways, active storage areas, loading platforms, refueling, and field maintenance areas.
5.....	Indoors: warehouses, corridors, hallways, and exitways.
5.....	Tunnels, shafts, and general underground work areas: (Exception: minimum of 10 foot-candles is required at tunnel and shaft heading during drilling, mucking, and scaling. Bureau of Mines approved cap lights shall be acceptable for use in the tunnel heading)
10.....	General construction plant and shops (e.g., batch plants, screening plants, mechanical and electrical equipment rooms, carpenter shops, rigging lofts and active store rooms, mess halls, and indoor toilets and workrooms.)
30.....	First aid stations, infirmaries, and offices.



AC (Alternating Current) - An electrical current that reverses direction in a circuit at regular intervals, such as normal household current.

Adapter - Device that adapts one form or size of connection to another.

ALCI - Appliance Leakage Current Interrupter. An ALCI is a device intended to be used in conjunction with an electrical appliance whose function is to interrupt both conductors of the electric circuit to a load when a fault current to ground exceeds 4-6 mA and is less than that required to operate the overcurrent protection device of the circuit. The ALCI is intended to be used only in a circuit that has a solidly grounded neutral conductor, and is required. ALCIs are considered "personal protection" devices and contain the following features: a) Can function either line polarity, and b) Other features may or may not be provided.

Ambient Temperature - The temperature of a medium (gas or liquid) surrounding an object.

Ampacity - The current in amperes that a conductor can carry continuously under the conditions of use without exceeding its temperature rating.

Ampere - The unit of current. One ampere is the current flowing through one ohm of resistance at one volt potential.

Attachment Plug - Male contact device for the readily detachable connection of a flexible cord or cable to receptacles, connectors, flanged equipment power outlets, etc.

Auto Reset - GFCI that powers-up automatically upon plug-in and after power loss. User must press the reset button in the event of a ground fault to restore power.

AWG - American Wire Gauge. A relative system for the designation of wire diameter.

Braid - A fibrous or metallic group of filaments interwoven in cylindrical form to form a covering over one or more wires. Typically used to add mechanical strength & abrasion resistance to flexible cord.

Circuit (Electric) - The complete path of an electrical current. When the continuity is broken, it is called an open circuit; when continuity is maintained, it is called a closed circuit.

Collector Ring - A collector ring is an assembly of slip rings for transferring electrical energy from a stationary to a rotating member.

Conductor - An uninsulated wire suitable for carrying electrical current.

Confined Space ⁽¹⁾ - OSHA defines a confined space as an area that: (1) is large enough and so configured that an employee can bodily enter and perform assigned work; and (2) has limited or restricted means for entry or exit (for example, tanks, vessels, silos, storage bins, hoppers, vaults, and pits are spaces that may have limited means of entry); and (3) is not designed for continuous employee occupancy ¹.

Contacts - The parts of the connector that actually carry the electrical current, and are touched together or separated to control the flow.

Continuity Check - A test to determine whether electrical current flows continuously throughout the length of a single wire or individual wires in a cable.

Cord - A flexible insulated cable.

Cord Connector - Female contact device used in making a detachable connection to an attachment plug or a flanged equipment power inlet.

Cord Grip - Means by which the flexible cord entering a device is gripped in order to relieve stress on the terminals from tension applied to the cord.

CSA - Canadian Standards Association. This is a nonprofit, independent organization that operates a listing service for electronic materials and equipment. The Canadian counterpart of the Underwriters Laboratories.

Current Carrying Capacity - The maximum current an insulated conductor can safely carry without exceeding its insulation and jacket temperature limitations.

1. Source OSHA web site www.osha.gov



Glossary of Terms

DC (Direct Current) - An electric current that flows only in one direction through a circuit, such as battery power.

Damp location - Partially protected locations under canopies, marquees, roofed open porches, and like locations, and interior locations subject to moderate degrees of moisture, such as some basements.

Dead Front - Without live parts exposed to a person on the operating side of the equipment.

Dielectric Strength - The voltage that an insulation can withstand before breakdown occurs. Usually expressed as a voltage gradient (such as volts per mil).

Dry Location - A location not normally subject to dampness or wetness. A location classified as dry may be temporarily subject to dampness or wetness, as in the case of a building under construction.

Dustproof - So constructed or protected that dust will not interfere with its successful operation.

EMI - Abbreviation for electromagnetic interference.

Elastomer - Macromolecular material that at room temperature returns rapidly to approximately its initial dimensions and shape after substantial deformation by a weak stress and release of that stress.

ELCI - Equipment Leakage Current Interrupter. The ELCI is a device intended to provide leakage current protection in appliances and utilization equipment whose function is to interrupt all ungrounded conductors of the supply circuit to electrical equipment in the event a current, in excess of the trip current, occurs between live parts and the grounded enclosure of other grounded parts. An ELCI is not intended to be used in place of a GFCI, ALCI, or IDCI and may have any trip current value greater than **6 mA**. The use of an ELCI is not intended to replace or supersede the overcurrent protection requirements concerning trip current and time. ELCIs are considered "equipment protection" devices, not personal protection devices.

Flame Resistance - The ability of a material not to propagate flame once the heat source is removed.

Gauge - A term used to denote the physical size of a wire. See AWG.

GFCI - Ground Fault Circuit Interrupter, also known as a GFI. A device intended for the protection of personnel as well as equipment. It de-energizes a circuit within an established period of time (25 ms) when a current to ground exceeds some pre-determined value (4-6 mA, for a Class A GFCI) that is less than that required to operate the overcurrent protective device of the supply circuit.

GFCI - (Class A) - Denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 mA or more.

Ground - An electrical term meaning to connect to the earth or other large conducting body to serve as an earth, thus making a complete electrical circuit.

Ground Fault - An unintentional electrical path between a part operating normally at some potential to ground, and ground.

Grounded Neutral - GFCI will automatically trip if the neutral conductor is grounded on the load side of the device (after sensor). If the load side neutral is shorted to ground and also a ground fault occurred simultaneously, some of the fault current would flow through the neutral wire to the sensor and some would flow through the inadvertent ground path. If such a ground connection occurred, it would be possible for a person to contact a hot wire and ground, having the ground fault current flow through the inadvertent neutral ground and the neutral to the service entrance. Under this condition, there may not be enough imbalance in current through the sensor to cause the GFCI to trip.

Hospital Grade - A device constructed to meet performance requirements of high abuse areas found in hospital locations, tested to "Hospital Grade" requirements of Underwriters' Laboratories Standard UL 498.

Incandescent - Method for producing light by heating a thin filament.

Manual Reset - GFCI that requires the user to press the reset button upon plug-in, after power loss to prevent accidental equipment start-up and in the event of a ground fault to restore power.

Motor - Circuit Switch - A switch, rated in horsepower, capable of interrupting the maximum operating overload current of a motor of the same horsepower rating as the switch at the rated voltage.

NEMA - National Electrical Manufacturers Association.

NEMA 4X - An enclosure rating per UL50 and UL508 indicating that the product is intended for indoor or outdoor use primarily to provide a degree of protection against corrosion, windblown dust and rain, splashing water, hose-directed water, and damage from external ice formation.

NFPA - National Fire Protection Association.

Nuisance Trip - Tripping caused by conditions other than those for which the device is intended to respond.

Open Neutral Protection - GFCI will automatically trip when the neutral connection is lost. When the neutral connection is open, this creates an unsafe condition where the available current has lost its normal flow path, thus increasing the potential for the current to flow elsewhere.

OSHA - Occupational Safety and Health Act. Specifically the Williams-Steiger Law passed in 1970 covering all factors relating to safety in places of employment.

Overcurrent - Any current in excess of the rated current of equipment or the ampacity of a conductor. It may result from overload (see definition), short circuit, or ground fault. A current in excess of rating may be accommodated by certain equipment and conductors for a given set of conditions. Hence the rules for overcurrent protection are specific for particular situations.

Overload - Operation of equipment in excess of normal, full load rating, or of a conductor in excess of rated ampacity which, when it persists for a sufficient length of time, would cause damage or dangerous overheating. A fault, such as a short circuit or ground fault, is not an overload (See "Overcurrent").

Primary - The line (Power source) side of a device.

PVC - Polyvinyl Chloride. Compound used in thermoplastic (SJTW - STW) cords.

Rated Voltage - The maximum voltage at which an electrical component can operate for extended periods without undue degradation or safety hazard.

RFI - Abbreviation for radio frequency interference.

Reverse Polarity - Condition where the Hot and Neutral connections are switched.

Secondary - The load (equipment) side of a device.

SEOW - Extra Hard Service cord. 600v, oil resistant thermoplastic elastomer outer jacket. Weather resistant for outdoor use.

SJEOW - Junior hard service cord. 300v, oil resistant thermoplastic elastomer outer jacket. Weather resistant for outdoor use.

SJTW - Hard Service cord. 300v thermoplastic outer jacket. Weather resistant for outdoor use.

SOW - Hard service cord. 600v rubber outer jacket. Weather resistant for outdoor use.

SPT-1 - Thermoplastic constructed, parallel jacketed. 300 volt 2 or 3 conductor, 18 gauge.

SPT-2 - Same as SPT-1 but heavier construction. 18-16 gauge.

SPT-3 - Same as SPT-2 but heavier construction. 18-10 gauge.

STW - Extra Hard Service cord. 600v thermoplastic outer jacket. Weather resistant for outdoor use.

SVT - Vacuum cleaner service cord. All plastic construction, 2 or 3 conductors.

Thermoplastic - A material that softens when heated and becomes firm on cooling.



Glossary of Terms

Thermoset - A material that hardens or sets when heat is applied and that, once set, cannot be resoftened by heating. The application of heat is called "curing."

TPE - Abbreviation for thermoplastic elastomer. A compound used in Portable/flexible cords (SEOW, SJEOW).

Trip - Denotes automatic interruption by the GFCI of the electrical circuit to load.

Trip Time - The elapsed interval between the time when the ground fault current is first applied and the time when the circuit is interrupted.

UL - Abbreviation for Underwriters Laboratories, a non-profit independent organization that operates a listing service for electrical and electronic materials and equipment.

UL Listed - Indicates an item has been tested and approved to the safety standards established by Underwriters' Laboratories.

UL Recognized - Refers to products that have been tested and approved to the safety standards established by Underwriters' Laboratories & are typically used as components of a final assembly.

VRMS - Voltage (root mean square).

Voltage - The term most often used in place of electromotive force, potential, potential difference, or voltage drop to designate the electrical pressure that exists between two points and is capable of producing a current when a closed circuit is connected between two points.

Weatherproof - So constructed or protected that exposure to the weather will not interfere with successful operation. Rainproof, raintight, or watertight equipment can fulfill the requirements for weatherproof where varying weather conditions other than wetness, such as snow, ice dust, or temperature extremes, are not a factor.

Wet location - Installations underground or in concrete slabs or masonry in direct contact with the earth, and locations subject to saturation with water or other liquids, such as locations exposed to weather and unprotected.




Temporary Power Add On Options - IPDM and VMM

Input Power Diagnostic Module (IPDM)


Adjacent to power inlet, the IPDM unit provides visual indication of supply power status - easy to read chart for quick reference.

Advanced circuitry monitors and indicates (through LEDs) many common connection and safety issues with Temporary Power. Safety earth ground and mis-connection issues are easily corrected to ensure compliance to electrical codes.

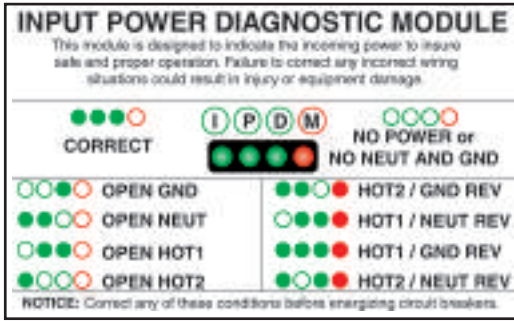

Exclusive Voltage Monitor Modules (VMM)

Continuously monitors voltage - if supply voltage falls outside of safe operating range VMM disconnects power to GFCIs/ outlets.

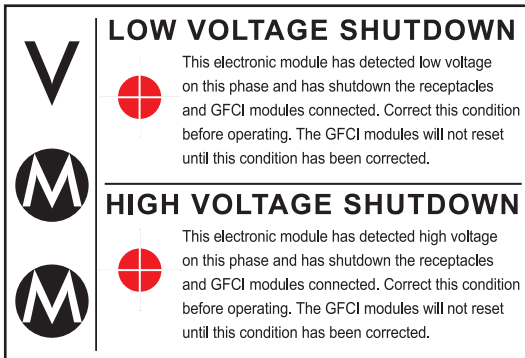

Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
7	89	1448	104	2314	135	2529	104
9	89	1449	104	2314	249	2530	135
79	89	1507	135	2316	135	2530	249
104	88	1510	134	2316	249	2534	104
107	88	1510	135	2317	135	2547	104
118	88	1510	249	2317	249	2550	97
119	88	1512	134	2320	135	2600	98
150	88	1512	135	2320	249	2601	99
211	63	1512	249	2322	135	2602	99
212	64	1514	135	2322	249	2603	99
214	63,64	1514	249	2324	135	2604	99
215	64	1516	135	2324	249	2605	99
216	63,64	1516	249	2410	249	2606	99
220	64	1520	135	2412	249	2607	99
224	64	1520	249	2414	249	2610	249
226	64	1522	135	2416	249	2612	249
702	90	1522	249	2417	249	2614	249
703	90	1524	135	2420	249	2616	249
704	90	1524	249	2422	249	2620	249
707	90	1533	104	2424	249	2622	249
708	90	1547	104	2434	104	2624	249
710	89	1548	104	2447	104	2625	98
712	90	1549	104	2449	104	2626	249
718	87	1610	249	2500	97	2628	249
744	87	1612	249	2510	135	2630	249
825	80	1614	249	2510	249	2647	104
832	80	1616	249	2512	135	2648	104
840	80	1620	249	2512	249	2649	104
918	87	1622	249	2514	135	2650	98
944	87	1624	249	2514	249	2747	104
1000	72	1705	115	2516	135	2748	104
1060	172	1712	115	2516	249	2749	104
1061	172	1740	115	2520	135	2900	176
1062	172	1744	115	2520	249	2910	176
1066	29	2000	71	2522	135	2925	85
1066	33	2200	96	2522	249	2950	85
1067	29	2225	96	2524	135	3769	125
1067	29	2250	96	2524	249	3771	125
1067	37	2310	134	2525	97	3775	125
1068	29	2310	135	2526	135	3777	125
1068	39	2310	249	2526	249	4000	179
1433	104	2312	135	2528	135	5000	179
1447	104	2312	249	2528	249	5502	195



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
5504	195	8010	48	1514-P	104	2705-20	121
5506	195	8034	48	1516-P	104	2705-20A	121
5508	195	8200	48	1520-P	104	2705-L142	121
5510	195	8201	48	1522-P	104	2705-L15	121
5512	195	8202	48	1524-P	104	2705-L15A	121
6000	50	8203	48	1532-PHC	124	2705-L162	121
6000	179	8204	48	15PW-AM	107	2820-FS10	121
6002	50	8205	48	1610-C	104	2900-FS	121
6005	50	8206	48	1610-CMGL	109	3762-C	125
6006	50	8207	48	1610-CML	109	3764-C	125
6010	50	8208	48	1610-CW6PL	109	3765-P	125
6011	50	9425	87	1612-C	104	5266-EL	114
6029	51	9450	87	1612-CMGL	109	5269-EL	114
6030	51	9825	87	1612-CML	109	6212NFD	118
6031	51	9850	87	1612-CW6PL	109	6212NFS	118
6032	51	26100	98	1612-PWDX	117	6212NFT	118
6033	51	61001	136	1614-C	104	6212WFD	118
6034	51	61025	136	1614-PWDX	117	6234FD	118
6035	51	61050	136	1616-C	104	6234FT	118
6100	52	61101	136	1616-PWDX	117	6234NFD	118
6102	52	61125	136	1620-C	104	6234NFS	118
6105	52	61150	136	1620-PWDX	117	6234NFT	118
6106	52	61201	136	1622-C	104	6234WFS	118
6110	52	61225	136	1622-PWDX	117	6234WFT	118
6111	52	61250	136	1624-C	104	7764-C(1)	125
7000	132	82005	48	1624-PWDX	117	7765-P(1)	125
7000	179	82010	48	1630-CHC	124	82F90038	143
7002	132	82010	118	1632-CHC	124	82F9006A	143
7004	132	82034	48	16CW-AM	107	82FS006A	143
7008	132	82034	118	2310-PMGL	109	82M9006A	143
7010	132	142100	57	2310-PML	109	82MS006A	143
7020	132	142100	59	2310-PW6PL	109	CG-325-F9	232
7022	132	14012201	69	2410-C	104	CS6360-C	125
7024	132	14012202	69	2410-CMGL	109	CS6361-P	125
7379	125	14012204	69	2410-CML	109	CS6365-P	125
7425	87	123-15P20C	115	2412-C	104	CS8165-P	125
7450	87	1510-PMGL	109	2414-C	104	CS8264-C	125
7717	125	1510-PML	109	2416-C	104	CS8265-P	125
7825	87	1510-PW6PL	109	24CW	111	CS8269	125
7850	87	1512-P	104	24CW-AM	107	CS8275	125
7958	125	1512-PMGL	109	26CW	111	CS8465-P	125
8000	179	1512-PML	109	2705-15	121	SRI-200	229
8005	48	1512-PW6PL	109	2705-15A	121	1000-25	72



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
1000-50	72	1067-ALC	29	1140-50	83	12350CFLXPI-1	66
1000F	73	1067-ALC	35	1140-50F	83	12350CFLXPI-BL	66
1000F-25	73	1067-ALCNF	29	1140-50F-LED	83	12350LEDXPI-1	66
1000F-50	73	1067-B	29	1140-50-LED	83	12350LEDXPI-BL	66
1000F-EMBT	74	1067-B	29	1142-25	83	12350STWY-1C	61
1000F-EMBT-25	74	1067-B	37	1142-25F	83	12350STWY-1L	61
1000F-EMBT-50	74	1067-BLC	29	1142-25F-LED	83	12350STWY-1W	61
1000F-R	73	1067-BLC	29	1142-25-LED	83	12350XPI-1	66
1000F-R25	73	1067-BLC	35	1145-25	83	12350XPI-3	66
1000F-R50	73	1067-BLCNF	29	1145-25F	83	12350XPI-BL	66
1000LED-25F	79	1067-C	29	1145-4	83	12350Y-1	63
1000LED-6	79	1067-C	29	1145-4F	83	12350Y-3	63
1000LED-6F	79	1067-C	37	1145-50	83	12365XPI-1-LP	66
1000LED-6FS	79	1067-CLC	29	1145-50F	83	1239-25	83
1000LED-6S	79	1067-CLC	29	1147-25	83	1239-25F	83
1000-MH	77	1067-CLC	35	1147-25F	83	1239-4	83
1000-R	72	1067-CLCNF	29	118-I	88	1239-4F	83
1000-R25	72	1067LC	35	118-R	88	1239-50	83
1000-R50	72	1067-LC	29	119-R	88	1239-50F	83
1000-RG	72	1067-LC	29	122100STW	57	123B	133
1000-RG25	72	1067-LCNF	29	122100STW	59	123B-TT	133
1000-RG50	72	1068-1	29	122100STW-C	57	123D	133
1002-MHX-LPS	67	1068-1	39	122100STW-C	59	123D-TT	133
1002-MHXPS	67	1068-1A	29	1223100STWY-1W	57	123Y	130
1003-HPS	77	1068-1A	39	123100CFLXPI-1	66	123YL	130
1004-MHX-50PS	67	1068-1C	29	123100CFLXPI-BL	66	124100Y-4	63
1004-MHX-BG	67	1068-1C	39	123100LEDXPI-1	66	12460Y-4	63
1004-MHX-G	67	1068-A	29	123100LEDXPI-BL	66	12560Y-5	63
1004-MHX-LPS	67	1068-A	39	123100STWY-1C	57	12590Y-5	63
1004-MHXPS	67	1068-C	29	123100STWY-1C	61	143100STWY-1C	57
104-I	88	1068-C	39	123100STWY-1L	57	143100STWY-1C	61
104-R	88	1075-AR	171	123100STWY-1L	61	143100STWY-1L	57
104-R	100	1075-MR	171	123100STWY-1W	61	143100STWY-1L	61
1066-B	29	107-I	88	123100XPI-1	66	143100STWY-1W	57
1066-B	33	107-R	88	123100XPI-3	66	143100STWY-1W	61
1066-BFS	29	1140-25	83	123100XPI-BL	66	143100Y-1	57
1066-BFS	33	1140-25F	83	123100Y-1	57	143100Y-1	63
1066F	33	1140-25F-LED	83	123100Y-1	63	143100Y-2	57
1066FS	29	1140-25-LED	83	123100Y-2	57	143100Y-2	63
1067-A	29	1140-4	83	123100Y-2	63	14350STWY-1C	61
1067-A	29	1140-4F	83	123100Y-3	57	14350STWY-1L	61
1067-A	37	1140-4F-LED	83	123100Y-3	63	14350STWY-1W	61
1067-ALC	29	1140-4-LED	83	12345XPI-1-LP	66	14350Y-1	63



Numeric Listing

NUMERIC LISTING

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
14350Y-2	63	1935-12	90	2700-F5	121	4123-25	180
150-I	88	1935-12	99	2705-15	120	4123-25-1610	181
1510-P	104	1940-12	76	2705-15A	120	4123-25-1612CG	181
1510-P	247	1940-12CF	76	2705-L142	120	4123-25-B	181
1510-PW6P	118	1941-12	76	2705-L15	120	4123-25-B20	181
1512-P	247	1941-12CF	76	2705-L20	120	4123-25-BG	181
1512-PW6P	118	1948-12	90	2705-L20	121	4123-25-F	180
1514-P	247	1948-12CF	90	2715-FS07	121	4123-25-HS	180
1514-PW6P	118	1948-12CFR	90	2715-FS10	121	4123-25-HSS	180
1516-PW6P	118	1950 Series	84	2715-FS12	121	4123-30S0 (30')	180
1520-PW6P	118	1950-12	75	2715-FS14	121	4123-30S0-B	181
1522-PW6P	118	1950-12 CF	75	2715-FS16	121	4123-50	180
1524-PW6P	118	2000FS	71	2715-FS20	121	4123-50-1610	181
1530-PH	124	2000L	71	2715-FS22	121	4123-50-1612CG	181
1530-PHC	124	2000M	71	2715-FS24	121	4123-50-B	181
1532-PH	124	2000T	71	2800 Series	122	4123-50-B20	181
15PW	111	211-P	63	2800-F5	121	4123-50-BG	181
1610-C	247	2200 Series	84	2820-FS12	121	4123-50-F	180
1610-PWDX	117	220-P	64	2820-FS14	121	4123-50-HS	180
1610-PWDX	118	222-L	64	2820-FS16	121	4123-50-HSS	180
1612-C	247	222-LP	64	2820-FS17	121	4124-25	180
1612-PWDX	118	224-P	64	2830-FS10	121	4124-25SO	180
1614-C	247	2310-P	104	2830-FS12	121	4124-35	180
1614-PWDX	118	2312-P	104	2830-FS14	121	4143-30	180
1616-PWDX	118	2314-P	104	2830-FS16	121	4143-30-1610	181
1620-PWDX	118	2316-P	104	2900 Series	84	4143-30-B	181
1622-PWDX	118	2410-CW6PL	109	2900 Series	122	4143-30-BG	181
1624-PWDX	118	2500 Series	84	2920-FS20	121	4143-30-F	180
1630-CH	124	2600 Series	84	2920-FS22	121	4143-30-HS	180
1632-CH	124	2600-CFL	98	2920-FS24	121	4143-30-HSS	180
16CW	111	2600-LED	98	2930-FS20	121	4143-30SO	180
1917 Series	84	2600-LED-L	98	2930-FS22	121	4143-40	180
1917-12	93	26100-CFL	98	2930-FS24	121	4143-40-1610	181
1917-12S	93	26100-LED	98	2930-FS26	121	4143-40-B	181
1918 Series	84	26100-LED-L	98	2930-FS28	121	4143-40-BG	181
1918-12	93	2625-CFL	98	2930-FS30	121	4143-40-F	180
1918-12S	93	2625-LED	98	3143-50-TT	177	4143-40-HS	180
1924 Series	84	2625-LED-L	98	3163-50-AL	177	4143-40-HSS	180
1924-12A	94	2650-CFL	98	3200-30-TT	178	4143-40SO	180
1924-12B	94	2650-LED	98	3210-30-TT	178	4143-50	180
1926 Series	84	2650-LED-L	98	3763-P	125	4143-50-1610	181
1926-12A	94	26CW-AM	107	400 Series Angle	84	4143-50-B	181
1926-12B	94	2700 Series	122	40LB Spring	222	4143-50-BG	181



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
4143-50-F	180	5106-20	182	5164-20	182	55CG7	201
4143-50-HS	180	5106-30	182	5164-30	182	55CG8	201
4143-50-HSS	180	510-RR	125	5164-40	182	55EN02	200
4144-35	180	5123-20	182	5164-50	182	55EN04	200
4163-25	180	5123-30	182	5164-60	182	55EN06	200
4163-25-HS	180	5123-40	182	5166-20	182	55EN06D	200
4163-25SO	180	5123-50	182	5166-30	182	55EN06H	200
4163-35	180	5123-60	182	5166-40	182	55EN06HD	200
4163-35-HS	180	5124-20	182	5166-50	182	55EN08	200
4163-35SO	180	5124-30	182	5168-20	182	55EN08D	200
4163-50	180	5124-40	182	5168-30	182	55EN08H	200
4163-50-HS	180	5124-50	182	5168-40	182	55EN08HD	200
4163-50SO	180	5126-20	182	5168-50	182	55EN10	200
4164-35	180	5126-30	182	5502-2	195	55EN10D	200
4164-35SO	180	5128-20	182	5502-PG	193	55EN10H	200
4164-50	180	51410-20	182	5503-PG	193	55EN10HD	200
4164-50SO	180	5143-20	182	5503-PG-2	193	55EN12	200
44-W	89	5143-30	182	5503-PG-3	193	55EN12D	200
44-W	90	5143-40	182	5504-A	195	55EN12H	200
45BSO	39	5143-50	182	5504-E	195	55EN12HD	200
45BSO	129	5143-60	182	5506-A	195	55J1	199
45BSOM	129	5144-20	182	5506-E	195	55J2	199
45BSOMPGTL	129	5144-30	182	5508-A	195	55J3	199
45DSO	39	5144-40	182	5508-E	195	55J4	199
45DSO	129	5144-50	182	55CG1	195	55J5	199
45DSOM	129	5144-60	182	55CG1	195	55LD1D	201
45MIL PGTL-100	129	5146-20	182	55CG1	201	55LN1A	201
45MIL PGTL-50	129	5146-30	182	55CG2	195	55LN1D	201
45PGTL-100	39	5146-40	182	55CG2	195	55LN2A	201
45PGTL-100	129	5146-50	182	55CG2	195	55LN2D	201
45PGTL-25	39	5148-20	182	55CG2	201	55PL1A	201
45PGTL-25	129	5148-30	182	55CG3	195	55PL1D	201
45PGTL-50	39	51610-20	182	55CG3	195	55PL2A	201
45PGTL-50	129	51610-30	182	55CG3	195	55PL2D	201
500 Series Pivot	84	51610-40	182	55CG3	195	55S01	196
5103-20	182	51612-20	182	55CG3	195	55S02	196
5103-30	182	51612-30	182	55CG3	201	55S03	196
5103-40	182	51612-40	182	55CG4	195	55S04	196
5103-50	182	5163-20	182	55CG4	195	55S05	196
5104-20	182	5163-30	182	55CG4	195	55S06	196
5104-30	182	5163-40	182	55CG4	201	55S07	196
5104-40	182	5163-50	182	55CG5	201	55S08	193, 195, 196
5104-50	182	5163-60	182	55CG6	201	55S09	195, 196



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
55S10	196	6101-1	136	6144-70	183	6212FS	118
55S11	196	6101-2	136	6144-80	183	6212FS	119
55S12	196	6102B	52	6144-90	183	6212FSF	119
55S12	197	6102B-F	52	6163-100	183	6212FSK	122
55S13	197	6102-F	52	6163-125	183	6212FT	119
55S14	197	6103-100	183	6163-150	183	6212FTF	119
55S15	193, 195, 197	6103-70	183	6163-70	183	6212NFD	119
55S16	197	6103-80	183	6163-80	183	6212NPDF	119
55S17	196, 197	6103-90	183	6163-90	183	6212NFDK	122
55S18	197	6104-100	183	6164-100	183	6212NFS	119
55S19	197	6104-70	183	6164-125	183	6212NFSF	119
55S20	197	6104-8	183	6164-70	183	6212NFSK	122
55S21	197	6104-90	183	6164-80	183	6212NFT	119
55S22	197	6105-F	52	6164-90	183	6212NFTF	119
55S23	197	6106-143A2	136	6210FD	119	6212WFD	119
55S24	197	6106-143B2	136	6210FDF	119	6212WFDF	119
55S25	198	6106-143C2	136	6210FDK	122	6212WFDK	122
55S26	193, 195, 198	6106-2	136	6210FS	119	6212WFS	119
55S27	198	6106-F	52	6210FSF	119	6212WFSF	119
55S28	198	6110-F	52	6210FSK	122	6212WFSK	122
55S29	198	6111-123A3	136	6210FT	119	6212WFT	119
55S30	198	6111-123A4	136	6210FTF	119	6212WFTF	119
55S31	198	6111-123B3	136	6210NFD	119	6234FD	119
55S32	198	6111-123B4	136	6210NPDF	119	6234FDF	119
55S33	198	6111-123C3	136	6210NFDK	122	6234FDK	122
6000-F	50	6111-123C4	136	6210NFS	119	6234FS	119
6002-F	50	6111-3	136	6210NFSF	119	6234FSF	119
6006-F	50	6111-4	136	6210NFSK	122	6234FSK	122
6010-F	50	6111-F	52	6210NFT	119	6234FT	119
6011-F	50	6123-100	183	6210NFTF	119	6234FTF	119
6030B	51	6123-70	183	6210NFTK	122	6234NFD	119
6031B	51	6123-80	183	6210WFD	119	6234NPDF	119
6032B	51	6123-90	183	6210WFDF	119	6234NFDK	122
6033B	51	6124-100	183	6210WFDK	122	6234NFS	119
6034B	51	6124-70	183	6210WFS	119	6234NFSF	119
6035B	51	6124-80	183	6210WFSF	119	6234NFSK	122
6050 -105F8	137	6124-90	183	6210WFSK	122	6234NFT	119
6050 -105G8	137	6143-100	183	6210WFT	119	6234NFTF	119
6050 -125F8	137	6143-125	183	6210WFTF	119	6234WFD	119
6050 -125G8	137	6143-70	183	6210WFTK	122	6234WFDF	119
6100B	52	6143-80	183	6212FD	119	6234WFDK	122
6100B-F	52	6143-90	183	6212FDF	119	6234WFS	119
6100-F	52	6144-100	183	6212FDK	122	6234WFSF	119



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
6234WFSK	122	7010-25-2	132	72FMSE012F	161	7450-R	87
6234WFT	119	7010-50-2	132	72FMSE020F	161	7450-RS	87
6234WFTF	119	7020-25-2	132	72FRK1	163	7450-S	87
6260WK	118	7020-25-2GF	132	72FRK3	163	74F9006F	159
63BS0	33	7020-50-2	132	72FS006F	159	74F9012F	159
63BS0	35	7020-50-2GF	132	72FS012F	159	74F9020F	159
63BS0	37	7022-25-2	132	72FS020F	159	74FMSE006F	161
63BS0	129	7022-50-2	132	72M9E006F	159	74FMSE012F	161
63DS0	33	7024-25-2	132	72M9E012F	159	74FMSE020F	161
63DS0	35	7024-50-2	132	72M9E020F	159	74FRK1	163
63DS0	37	70-NG	90	72MRK1	163	74FRK3	163
63DS0	129	70-NG Series	84	72MRK2	163	74FS006F	159
63PGTLSO-100	129	70-NG100	90	72MSE006F	159	74FS012F	159
63PGTLSO-50	129	70-NG25	90	72MSE012F	159	74FS020F	159
63YSTW	37	70-NG50	90	72MSE020F	159	74M9E006F	159
63YSTW	129	70-NGQL	90	73F9006F	159	74M9E012F	159
65BS0	39	70-NGQL100	90	73F9012F	159	74M9E020F	159
65BS0	129	70-NGQL25	90	73F9020F	159	74MRK1	163
65BSOM	42	70-NGQL50	90	73FMSE006F	161	74MRK2	163
65BSOM	129	70-NGR	90	73FMSE012F	161	74MSE006F	159
65DS0	39	70-NGR100	90	73FMSE020F	161	74MSE012F	159
65DS0	129	70-NGR25	90	73FRK1	163	74MSE020F	159
65DSOM	42	70-NGR50	90	73FRK3	163	75F9006F	159
65DSOM	129	70-NI	90	73FS006F	159	75F9012F	159
65MIL PGTL	42	70-NI25	90	73FS012F	159	75F9020F	159
65MIL PGTL-100	129	70-NI50	90	73FS020F	159	75FMSE006F	161
65MIL PGTL-50	129	7103-125	183	73M9E006F	159	75FMSE012F	161
65MIL PIGTAIL	129	7104-125	183	73M9E012F	159	75FMSE020F	161
65PGTL-100	39	7123-125	183	73M9E020F	159	75FRK1	163
65PGTL-100	129	7123-150	183	73MRK1	163	75FRK3	163
65PGTL-50	39	7124-125	183	73MRK2	163	75FS006F	159
65PGTL-50	129	7143-150	183	73MSE006F	159	75FS012F	159
7 Series	84	7144-125	183	73MSE012F	159	75FS020F	159
7000-25-2	132	7144-150	183	73MSE020F	159	75M9E006F	159
7000-50-2	132	7164-150	183	7425-I	87	75M9E012F	159
7002-25-2	132	718-I	87	7425-R	87	75M9E020F	159
7002-25-2GF	132	718-R	87	7425-RS	87	75MRK1	163
7002-50-2	132	718-RS	87	7425-S	87	75MRK2	163
7002-50-2GF	132	718-S	87	744-I	87	75MSE006F	159
7004-25-2	132	72F9006F	159	744-R	87	75MSE012F	159
7004-50-2	132	72F9012F	159	744-RS	87	75MSE020F	159
7008-25-2	132	72F9020F	159	744-S	87	76F9006F	159
7008-50-2	132	72FMSE006F	161	7450-I	87	76F9012F	159



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
76F9020F	159	810F9012A	145	8143-20-XPF	184	8207FS	48
76FMSE006F	161	810F9015A	145	8143-20-XPI	184	8208FS	48
76FMSE012F	161	810F9020A	145	8143-40	184	825-25	81
76FMSE020F	161	810FRC	149	8143-40-XPF	184	825-25	81
76FRK1	163	810FS003A	145	8143-40-XPI	184	825-25F-LED	81
76FS006F	159	810FS006A	145	8143-50	184	825-25FS-LED	81
76FS012F	159	810FS012A	145	8143-50-XPF	184	825-25-LED	81
76FS020F	159	810FS015A	145	8143-50-XPI	184	825-25S-LED	81
76M9E006F	159	810FS020A	145	8144-20	184	825-4F-LED	81
76M9E012F	159	810M9003A	145	8144-40	184	825-50	81
76M9E020F	159	810M9006A	145	8144-50	184	825-50	81
76MRK1	163	810M9012A	145	8163-20	184	825-50F-LED	81
76MRK2	163	810M9015A	145	8163-20-XPF	184	825-50FS-LED	81
76MSE006F	159	810M9020A	145	8163-20-XPI	184	825-50-LED	81
76MSE012F	159	810MRC	149	8163-40	184	825-50S-LED	81
76MSE020F	159	810MS003A	145	8163-40-XPF	184	826AETCC	151
7788-CR	125	810MS006A	145	8163-40-XPI	184	826AITCC	151
7825-I	87	810MS012A	145	8163-50	184	826AJAD	151
7825-R	87	810MS015A	145	8163-50-XPF	184	82F9006A	143
7825-RS	87	810MS020A	145	8163-50-XPI	184	82F9012A	143
7825-S	87	812F9003A	145	8164-20	184	82F9015A	143
7850-I	87	812F9006A	145	8164-40	184	82F9020A	143
7850-R	87	812F9012A	145	8164-50	184	82F9M9003A	151
7850-RS	87	812F9015A	145	817-25	81	82F9M9006A	151
7850-S	87	812F9020A	145	817-25F	81	82F9M9012A	151
7-A	89	812FRC	149	817-50	81	82F9M9015A	151
7-A25	88	812FS003A	145	817-50F	81	82F9M9020A	151
7-A50	88	812FS006A	145	82005W	48	82F9MS003A	151
7ETDKCC	163	812FS012A	145	82005W	118	82F9MS006A	151
7ITDKCC	163	812FS015A	145	82005W WIRE MESH	49	82F9MS012A	151
7-S	89	812FS020A	145	82005W-1 WIRE MESH	49	82F9MS015A	151
7-SA	89	812M9003A	145	82010W	48	82F9MS020A	151
7-SA25	88	812M9006A	145	82010W	118	82FMS003A	151
7-SA50	88	812M9012A	145	82010W WIRE MESH	49	82FMS006A	151
800 Mini-Lite Fluorescent	84	812M9015A	145	8201FS	48	82FMS012A	151
8005F	48	812M9020A	145	82034W	48	82FMS015A	151
8010F	48	812MRC	149	82034W	118	82FMS020A	151
801-25	85	812MS003A	145	82034W WIRE MESH	49	82FRC	147
802005W	118	812MS006A	145	82034W-1	118	82FS003A	143
8034F	48	812MS012A	145	82034W-1 WIRE MESH	49	82FS006A	143
80LB SPRING	222	812MS015A	145	8203FS	48	82FS012A	143
810F9003A	145	812MS020A	145	8204FS	48	82FS015A	143
810F9006A	145	8143-20	184	8206FS	48	82FS020A	143



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
82M9003	143	83FMS003A	151	84F9020A	143	85F9M9003A	151
82M9006A	143	83FMS006A	151	84F9M9003A	151	85F9M9006A	151
82M9015A	143	83FMS012A	151	84F9M9006A	151	85F9M9012A	151
82M9020A	143	83FMS015A	151	84F9M9012A	151	85F9M9015A	151
82M9FS003A	151	83FMS020A	151	84F9M9015A	151	85F9M9020A	151
82M9FS006A	151	83FRC	147	84F9M9020A	151	85F9MS003A	151
82M9FS012A	151	83FS003A	143	84F9MS003A	151	85F9MS006A	151
82M9FS015A	151	83FS006A	143	84F9MS006A	151	85F9MS012A	151
82M9FS020A	151	83FS012A	143	84F9MS012A	151	85F9MS015A	151
82MRC	147	83FS015A	143	84F9MS015A	151	85F9MS020A	151
82MS003A	143	83FS020A	143	84F9MS020A	151	85F9MS020A	151
82MS006A	143	83M9003A	143	84FMS003A	151	85FMS003A	151
82MS012A	143	83M9006A	143	84FMS006A	151	85FMS006A	151
82MS015A	143	83M9012A	143	84FMS012A	151	85FMS012A	151
82MS020A	143	83M9015A	143	84FMS015A	151	85FMS015A	151
832-25	81	83M9020A	143	84FMS020A	151	85FMS020A	151
832-25F	81	83M9FS003A	151	84FRC	147	85FRC	147
832-25F-LED	81	83M9FS006A	151	84FS003A	143	85FS003A	143
832-25FS-LED	81	83M9FS012A	151	84FS006A	143	85FS006A	143
832-25-LED	81	83M9FS015A	151	84FS012A	143	85FS012A	143
832-25S-LED	81	83M9FS020A	151	84FS015A	143	85FS015A	143
832-4F-LED	81	83MRC	147	84FS020A	143	85FS020A	143
832-50	81	83MS003A	143	84M9003A	143	85M9003A	143
832-50F	81	83MS006A	143	84M9006A	143	85M9006A	143
832-50F-LED	81	83MS012A	143	84M9012A	143	85M9012A	143
832-50FS-LED	81	83MS015A	143	84M9015A	143	85M9015A	143
832-50-LED	81	83MS020A	143	84M9020A	143	85M9020A	143
832-50S-LED	81	840-25	81	84M9FS003A	151	85M9FS003A	151
83F9003A	143	840-25F	81	84M9FS006A	151	85M9FS006A	151
83F9006A	143	840-25F-LED	81	84M9FS012A	151	85M9FS012A	151
83F9012A	143	840-25FS-LED	81	84M9FS015A	151	85M9FS015A	151
83F9015A	143	840-25-LED	81	84M9FS020A	151	85M9FS020A	151
83F9020A	143	840-25S-LED	81	84MRC	147	85MRC	147
83F9M9003A	151	840-50	81	84MS003A	143	85MS003A	143
83F9M9006A	151	840-50F	81	84MS006A	143	85MS006A	143
83F9M9012A	151	840-50F-LED	81	84MS012A	143	85MS012A	143
83F9M9015A	151	840-50FS-LED	81	84MS015A	143	85MS015A	143
83F9M9020A	151	840-50-LED	81	84MS020A	143	85MS020A	143
83F9MS003A	151	840-50S-LED	81	85F9003A	143	86B8ETCC	151
83F9MS006A	151	84F9003A	143	85F9006A	143	86B8ITCC	151
83F9MS012A	151	84F9006A	143	85F9012A	143	86B8JAD	151
83F9MS015A	151	84F9012A	143	85F9015A	143	86BF9003A	145
83F9MS020A	151	84F9015A	143	85F9020A	143	86BF9006A	145



Numeric Listing

NUMERIC LISTING

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
86BF9012A	145	86FS015A	143	88FRC	149	8V2123SJB6G2	131
86BF9015A	145	86FS020A	143	88FS003A	145	8V2123SJB6GA	131
86BF9020A	145	86M9003A	143	88FS006A	145	8V2123SJB6GB	131
86BFRC	149	86M9006A	143	88FS012A	145	8V3103SE6G2	131
86BFS003A	145	86M9012A	143	88FS015A	145	8V3103SE6GA	131
86BFS006A	145	86M9015A	143	88FS020A	145	8V3103SE6GB	131
86BFS012A	145	86M9015A	145	88FS020A	145	8V3103SE6GD	131
86BFS020A	145	86M9020A	143	88M9003A	145	8Z2124SE8G2	131
86BM9003A	145	86M9FS003A	151	88M9006A	145	8Z2124SE8GA	131
86BM9006A	145	86M9FS006A	151	88M9006A	145	8Z2124SE8GB	131
86BM9012A	145	86M9FS012A	151	88M9012A	145	8Z3104SO8G2	131
86BM9020A	145	86M9FS015A	151	88M9015A	145	8Z3104SO8GA	131
86BMRC	149	86M9FS020A	151	88M9020A	145	8Z3104SO8GB	131
86BMS003A	145	86MRC	147	88MRC	149	8Z3104SO8GD	131
86BMS006A	145	86MS003A	143	88MS003A	145	9 Series	84
86BMS012A	145	86MS006A	143	88MS012A	145	900 Series Fluorescent	84
86BMS015A	145	86MS012A	143	88MS015A	145	900-25	91
86BMS020A	145	86MS015A	143	88MS020A	145	900-25S	91
86F9003A	143	86MS020A	143	8912ETCC	151	900-50	91
86F9006A	143	87F9003A	145	8912ITCC	151	900-50S	91
86F9012A	143	87F9006A	145	8912JAD	151	900-L0	91
86F9015A	143	87F9012A	145	89F9003A	145	900-L0S	91
86F9020A	143	87F9012A	145	89F9006A	145	918-I	87
86F9M9003A	151	87F9020A	145	89F9012A	145	918-R	87
86F9M9006A	151	87FS003A	145	89F9015A	145	918-RS	87
86F9M9012A	151	87FS006A	145	89F9020A	145	918-S	87
86F9M9015A	151	87FS012A	145	89FRC	149	926 Series Fluorescent	84
86F9M9020A	151	87FS015A	145	89FS003A	145	926-25	91
86F9MS003A	151	87FS020A	145	89FS006A	145	926-25LV	92
86F9MS006A	151	87M9003A	145	89FS012A	145	926-50	91
86F9MS012A	151	87M9006A	145	89FS015A	145	926-50LV	92
86F9MS015A	151	87M9012A	145	89FS020A	145	926-L0	91
86F9MS020A	151	87M9015A	145	89M9003A	145	926-L0	91
86FBS015A	145	87M9020A	145	89M9006A	145	93F92G	153
86FMS003A	151	87MS003A	145	89M9012A	145	93F94G	153
86FMS006A	151	87MS006A	145	89M9015A	145	93F95G	153
86FMS012A	151	87MS012A	145	89M9020A	145	93FMSE2G	155
86FMS015A	151	87MS015A	145	89MRC	149	93FMSE4G	155
86FMS020A	151	87MS020A	145	89MS003A	145	93FMSE5G	155
86FRC	147	88F9003A	145	89MS006A	145	93FRK1	157
86FS003A	143	88F9006A	145	89MS012A	145	93FRK3	157
86FS006A	143	88F9012A	145	89MS015A	145	93FS2G	153
86FS012A	143	88F9015A	145	89MS020A	145	93FS4G	153



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
93FS4G	153	95FMSE2G	155	BD-082-SE	222	BP49	99
93M9E2G	153	95FMSE4G	155	BD-082-UB	222	CG-143-F6	231
93M9E4G	153	95FMSE5G	155	BD-096-SE	222	CG-100-F4	231
93M9E5G	153	95FRK1	157	BD-096-UB	222	CG-100-F4-90	233
93MRK2	157	95FRK3	157	BD-125-SE	222	CG-100-F5	231
93MRK4	157	95FS2G	153	BE1-CAM2CL1063	25	CG-100-F5-90	233
93MSE2G	153	95FS4G	153	BE1-CAM2CL1120	25	CG-100-F6	231
93MSE4G	153	95FS5G	153	BE1-CAM2CL1180	25	CG-100-F6-90	233
93MSE5G	153	95M9E2G	153	BE1-CAM2CL3006	25	CG-112-F4	231
9425-I	87	95M9E4G	153	BE1-CAM2CL3063	25	CG-112-F4-90	233
9425-R	87	95M9E5G	153	BE1-CAM2CL3120	25	CG-112-F5	231
9425-RS	87	95MRK2	157	BE1-CAM2CL3180	25	CG-112-F5-90	233
9425-S	87	95MRK4	157	BE1-CAMCL1061	25	CG-112-F6	231
944-I	87	95MSE2G	153	BE1-CAMCL1062	25	CG-112-F6-90	233
944-R	87	95MSE4G	153	BE1-CAMCL1120	25	CG-125-F5	231
944-RS	87	95MSE5G	153	BE1-CAMCL1180	25	CG-125-F5-90	233
944-S	87	9825-I	87	BE1-CAMCL3003	25	CG-125-F6	231
9450-I	87	9825-R	87	BE1-CAMCL3006	25	CG-125-F6-90	233
9450-R	87	9825-RS	87	BE1-CAMCL3060L	25	CG-12-F1	231
9450-RS	87	9825-S	87	BE1-CAMCL3061	25	CG-12-F1-90	233
9450-S	87	9850-I	87	BE1-CAMCL3062	25	CG-12-F2	231
94F92G	153	9850-R	87	BE1-CAMCL3063	25	CG-12-F2-90	233
94F94G	153	9850-RS	87	BE1-CAMCL3120	25	CG-137-F5	231
94F95G	153	9850-S	87	BE1-CAMCL3180	25	CG-137-F5-90	233
94FMSE2G	155	9-A	89	BE1-T50CM10801	25	CG-137-F6	231
94FMSE4G	155	9-A25	88	BE4-480CAM2CL3002C	27	CG-137-F6-90	233
94FMSE5G	155	9-A50	88	BE4-480CAMCL3004C	27	CG-137-F7	232
94FRK1	157	9ETSKCC	163	BE4-480CAMCL3004I	27	CG-137-F7-90	233
94FRK3	157	9ITSKCC	163	BE4-600CAM2CL1004C	27	CG-143-F5	231
94FS2G	153	9-S	89	BE4-600CAM2CL3004C	27	CG-143-F5-90	233
94FS4G	153	9-SA	89	BE4-600CAMCL3004C	27	CG-143-F6-90	233
94FS5G	153	9-SA25	88	BE4-CAM2CL3062CL	27	CG-150-F7	232
94M9E2G	153	9-SA50	88	BE4-CAM2CL3122C	27	CG-150-F7-90	233
94M9E4G	153	BD-022-SE	222	BE4-CAMCL1008T	27	CG-162-F7	232
94M9E5G	153	BD-022-UB	222	BE4-CAMCL3004C	27	CG-162-F7-90	233
94MRK2	157	BD-030-SE	222	BE4-CAMCL3062CL	27	CG-175-F7	232
94MRK4	157	BD-030-UB	222	BE4-CAMCL3122C	27	CG-175-F7-90	233
94MSE2G	153	BD-041-SE	222	BL500	100	CG-181-F8	232
94MSE4G	153	BD-041-UB	222	BL500-G	100	CG-187-F7	232
94MSE5G	153	BD-053-SE	222	BL500-L	100	CG-187-F7-90	233
95F92G	153	BD-053-UB	222	BL500M	100	CG-18-F1	231
95F94G	153	BD-070-SE	222	BL500-MAG	100	CG-18-F1-90	233
95F95G	153	BD-070-UB	222	BL500S	100	CG-18-F2	231



Numeric Listing

NUMERIC LISTING

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
CG-18-F2-90	233	CG-87-F3-90	233	CRG-C1.25-CM-075	218	CRG-C3.50-CM-100	218
CG-193-F7	232	CG-87-F4	231	CRG-C1.25-LC-075	219	CRG-C3.50-CM-125	218
CG-193-F7-90	233	CG-87-F4-90	233	CRG-C1.25-RC-075	220	CRG-C3.50-CM-150	218
CG-193-F8	232	CG-87-F5	231	CRG-C1.50-CM-050	218	CRG-C3.50-CM-175	218
CG-200-F7	232	CG-87-F5-90	233	CRG-C1.50-CM-062	218	CRG-C3.50-CM-200	218
CG-200-F7-90	233	CG-87-F6	231	CRG-C1.50-CM-075	218	CRG-C3.50-CM-250	218
CG-206-F8	232	CG-87-F6-90	233	CRG-C1.50-CM-100	218	CRG-C3.5-LC-075	219
CG-218-F8	232	CL1041	19	CRG-C1.5-LC-075	219	CRG-C3.5-LC-100	219
CG-231-F8	232	CL1042	19	CRG-C1.5-LC-100	219	CRG-C3.5-LC-125	219
CG-243-F8	232	CL1043	19	CRG-C1.5-RC-075	220	CRG-C3.5-LC-150	219
CG-25-F1	231	CL1100	19	CRG-C1.5-RC-100	220	CRG-C3.5-LC-175	219
CG-25-F1-90	233	CL1101	19	CRG-C1-CM-050	218	CRG-C3.5-LC-200	219
CG-25-F2	231	CL1102	19	CRG-C1-CM-062	218	CRG-C3.5-LC-250	219
CG-25-F2-90	233	CL1121	19	CRG-C2.50-CM-050	218	CRG-C3.5-RC-075	220
CG-262-F9	232	CL1140	19	CRG-C2.50-CM-062	218	CRG-C3.5-RC-100	220
CG-281-F9	232	CL1180	19	CRG-C2.50-CM-075	218	CRG-C3.5-RC-125	220
CG-300-F9	232	CL3031	18	CRG-C2.50-CM-100	218	CRG-C3.5-RC-150	220
CG-31-F1-90	233	CL3032	18	CRG-C2.50-CM-125	218	CRG-C3.5-RC-175	220
CG-37-F1	231	CL3063	18	CRG-C2.50-CM-150	218	CRG-C3.5-RC-200	220
CG-37-F1-90	233	CL3120	18	CRG-C2.50-CM-175	218	CRG-C3.5-RC-250	220
CG-37-F2	231	CL3121	18	CRG-C2.5-LC-075	219	CRG-C3-CM-050	218
CG-37-F2-90	233	CL3122	18	CRG-C2.5-LC-100	219	CRG-C3-CM-062	218
CG-31-F1	231	CL3180	18	CRG-C2.5-LC-125	219	CRG-C3-CM-075	218
CG-43-F1	231	CM1041	19	CRG-C2.5-LC-150	219	CRG-C3-CM-100	218
CG-43-F1-90	233	CM1042	19	CRG-C2.5-LC-175	219	CRG-C3-CM-125	218
CG-43-F2	231	CM1043	19	CRG-C2.5-RC-075	220	CRG-C3-CM-150	218
CG-43F-2-90	233	CM1061	19	CRG-C2.5-RC-100	220	CRG-C3-CM-175	218
CG-50-F2	231	CM1062	19	CRG-C2.5-RC-125	220	CRG-C3-CM-200	218
CG-50-F2-90	233	CM1100	19	CRG-C2.5-RC-150	220	CRG-C3-LC-075	219
CG-50-F3	231	CM1120	19	CRG-C2.5-RC-175	220	CRG-C3-LC-100	219
CG-50-F3-90	233	CM3031	18	CRG-C2-CM-050	218	CRG-C3-LC-125	219
CG-50-F4	231	CM3032	18	CRG-C2-CM-062	218	CRG-C3-LC-150	219
CG-50-F4-90	233	CM3061	18	CRG-C2-CM-075	218	CRG-C3-LC-175	219
CG-62-F2-90	233	CM3062	18	CRG-C2-CM-100	218	CRG-C3-LC-200	219
CG-62-F3	231	CM3120	18	CRG-C2-CM-125	218	CRG-C3-RC-075	220
CG-62-F3-90	233	CP4-36-ED	13, 139	CRG-C2-LC-075	219	CRG-C3-RC-100	220
CG-62-F4	231	CP5-36-ED	13, 139	CRG-C2-LC-100	219	CRG-C3-RC-125	220
CG-62-F4-90	233	CP5-36-ID	13, 139	CRG-C2-LC-125	219	CRG-C3-RC-150	220
CG-75-F3	231	CP5-45Y-ID	13, 139	CRG-C2-RC-075	220	CRG-C3-RC-175	220
CG-75-F3-90	233	CP5-ECP-ID	13, 139	CRG-C2-RC-100	220	CRG-C3-RC-200	220
CG-75-F4	231	CRG-C.75-CM-050	218	CRG-C2-RC-125	220	CRG-C4.50-CM-075	218
CG-75-F4-90	233	CRG-C1.25-CM-050	218	CRG-C3.50-CM-062	218	CRG-C4.50-CM-100	218
CG-87-F3	231	CRG-C1.25-CM-062	218	CRG-C3.50-CM-075	218	CRG-C4.50-CM-125	218



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
CRG-C4.50-CM-150	218	CRG-C4-RC-125	220	CRG-C6-LC-100	219	DCG-112-F6-90	235
CRG-C4.50-CM-175	218	CRG-C4-RC-150	220	CRG-C6-LC-125	219	DCG-112-F6-F	235
CRG-C4.50-CM-200	218	CRG-C4-RC-175	220	CRG-C6-LC-150	219	DCG-125-F5	234
CRG-C4.50-CM-250	218	CRG-C4-RC-200	220	CRG-C6-LC-175	219	DCG-125-F5-45	234
CRG-C4.50-CM-300	218	CRG-C4-RC-250	220	CRG-C6-LC-200	219	DCG-125-F5-90	234
CRG-C4.50-CM-350	218	CRG-C4-RC-300	220	CRG-C6-LC-250	219	DCG-125-F5-F	234
CRG-C4.5-LC-075	219	CRG-C5-CM-075	218	CRG-C6-LC-300	219	DCG-125-F6	235
CRG-C4.5-LC-100	219	CRG-C5-CM-100	218	CRG-C6-LC-350	219	DCG-125-F6-45	235
CRG-C4.5-LC-125	219	CRG-C5-CM-125	218	CRG-C6-RC-075	220	DCG-125-F6-90	235
CRG-C4.5-LC-150	219	CRG-C5-CM-150	218	CRG-C6-RC-100	220	DCG-125-F6-F	235
CRG-C4.5-LC-175	219	CRG-C5-CM-175	218	CRG-C6-RC-125	220	DCG-137-F5	234
CRG-C4.5-LC-200	219	CRG-C5-CM-200	218	CRG-C6-RC-150	220	DCG-137-F5-90	234
CRG-C4.5-LC-250	219	CRG-C5-CM-250	218	CRG-C6-RC-175	220	DCG-137-F5-90	234
CRG-C4.5-LC-300	219	CRG-C5-CM-300	218	CRG-C6-RC-200	220	DCG-137-F5-F	234
CRG-C4.5-LC-350	219	CRG-C5-CM-350	218	CRG-C6-RC-250	220	DCG-137-F6	235
CRG-C4.5-RC-075	220	CRG-C5-LC-075	219	CRG-C6-RC-300	220	DCG-137-F6-45	235
CRG-C4.5-RC-100	220	CRG-C5-LC-100	219	CRG-C6-RC-350	220	DCG-137-F6-90	235
CRG-C4.5-RC-125	220	CRG-C5-LC-125	219	CS6364-P	125	DCG-137-F6-F	235
CRG-C4.5-RC-150	220	CRG-C5-LC-150	219	CS6369	125	DCG-137-F7	235
CRG-C4.5-RC-175	220	CRG-C5-LC-175	219	CS6375	125	DCG-137-F7-90	235
CRG-C4.5-RC-200	220	CRG-C5-LC-200	219	CS6375-F	125	DCG-143-F6	235
CRG-C4.5-RC-250	220	CRG-C5-LC-250	219	CS8165-C	125	DCG-143-F6-90	235
CRG-C4.5-RC-300	220	CRG-C5-LC-300	219	CS8169	125	DCG-143-F6-90	235
CRG-C4.5-RC-350	220	CRG-C5-LC-350	219	CS8175	125	DCG-143-F6-F	235
CRG-C4-CM-062	218	CRG-C5-RC-075	220	CS8469	125	DCG-150-F7	235
CRG-C4-CM-075	218	CRG-C5-RC-100	220	DCG-100-F4	234	DCG-150-F7-90	235
CRG-C4-CM-100	218	CRG-C5-RC-125	220	DCG-100-F4-45	234	DCG-162-F7	235
CRG-C4-CM-125	218	CRG-C5-RC-150	220	DCG-100-F4-90	234	DCG-162-F7-90	235
CRG-C4-CM-150	218	CRG-C5-RC-175	220	DCG-100-F4-F	234	DCG-175-F7	235
CRG-C4-CM-175	218	CRG-C5-RC-200	220	DCG-100-F5	234	DCG-175-F7-90	235
CRG-C4-CM-200	218	CRG-C5-RC-250	220	DCG-100-F5-45	234	DCG-181-F8	235
CRG-C4-CM-250	218	CRG-C5-RC-300	220	DCG-100-F5-90	234	DCG-187-F7	235
CRG-C4-CM-300	218	CRG-C5-RC-350	220	DCG-100-F5-F	234	DCG-187-F7-90	235
CRG-C4-LC-075	219	CRG-C6-CM-075	218	DCG-100-F6	235	DCG-193-F7	235
CRG-C4-LC-100	219	CRG-C6-CM-100	218	DCG-100-F6-45	235	DCG-193-F7-90	235
CRG-C4-LC-125	219	CRG-C6-CM-125	218	DCG-100-F6-90	235	DCG-193-F8	235
CRG-C4-LC-150	219	CRG-C6-CM-150	218	DCG-100-F6-F	235	DCG-200-F7	235
CRG-C4-LC-175	219	CRG-C6-CM-175	218	DCG-112-F5	234	DCG-200-F7-90	235
CRG-C4-LC-200	219	CRG-C6-CM-200	218	DCG-112-F5-45	234	DCG-206-F8	235
CRG-C4-LC-250	219	CRG-C6-CM-250	218	DCG-112-F5-90	234	DCG-218-F8	235
CRG-C4-LC-300	219	CRG-C6-CM-300	218	DCG-112-F5-F	234	DCG-231-F8	235
CRG-C4-RC-075	220	CRG-C6-CM-350	218	DCG-112-F6	235	DCG-243-F8	235
CRG-C4-RC-100	220	CRG-C6-LC-075	219	DCG-112-F6-45	235	DCG-25-F1	234



Numeric Listing

NUMERIC LISTING

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
DCG-25-F1-45	234	DCG-50-F3-F	234	EJR4315CM3010-UL	15	LDPG-200	225
DCG-25-F1-90	234	DCG-50-F4	234	EJR4315CM30310	15	LDPG-200-S	225
DCG-25-F1-F	234	DCG-50-F4-90	234	EJR4315CM3061	15	LDPG-250	225
DCG-25-F2	234	DCG-50-F4-F	234	EJR4315CM3061-UL	15	LDPG-250-S	225
DCG-25-F2-45	234	DCG-62-F2	234	EJR4315CM31200	15	LDPG-300	225
DCG-25-F2-45	234	DCG-62-F2-45	234	EJR4315CM31200-UL	15	LDPG-300-S	225
DCG-25-F2-90	234	DCG-62-F2-45	234	EJR4315PL30600	15	LDPG-350	225
DCG-25-F2-F	234	DCG-62-F2-45	234	EJR4315PL3060L	15	LS1	201
DCG-25-F3	234	DCG-62-F2-90	234	EJR4315PM30310	15	LS2	201
DCG-25-F3-90	234	DCG-62-F2-F	234	EJR4315PM3120	15	LS3	201
DCG-25-F3-F	234	DCG-62-F3	234	EJR4315PM3120L	15	LVT-12-STCF	75
DCG-262-F9	235	DCG-62-F3-90	234	I-030	236	MPB-A007	31
DCG-281-F9	235	DCG-62-F3-F	234	I-030-NC	236	MPB-A008	31
DCG-300-F9	235	DCG-62-F4	234	I-040	236	MPB-A014	31
DCG-325-F9	235	DCG-62-F4-90	234	I-040-NC	236	MPB-B003	31
DCG-37-F1	234	DCG-62-F4-F	234	I-052	236	MPB-B004	31
DCG-37-F1-45	234	DCG-75-F2-45	234	I-052-NC	236	OPC -01-120-200-LBLN-14150250-C	45
DCG-37-F1-90	234	DCG-75-F2-45	234	I-070	236	OPC -01-120-200-LBLN-14150250-U	45
DCG-37-F1-F	234	DCG-75-F3	234	I-070-NC	236	OPC-01-120-100-LSLN-1615-C	45
DCG-37-F2	234	DCG-75-F3-90	234	I-082	236	OPC-01-120-100-LSLN-1615-U	45
DCG-37-F2-45	234	DCG-75-F3-F	234	I-082-NC	236	OPC-01-120-100-LSLN-2015-C	45
DCG-37-F2-45	234	DCG-75-F4	234	I-094	236	OPC-01-120-100-LSLN-2015-U	45
DCG-37-F2-90	234	DCG-75-F4-90	234	I-094-NC	236	OPC-01-120-200-LBLN-121502300250-C	45
DCG-37-F2-F	234	DCG-75-F4-F	234	JPG-100	225	OPC-01-120-200-LBLN-121502300250-U	45
DCG-37-F3	234	DCG-87-F4	234	JPG-25	225	OPC-03-208-100-LSLN-09150330-C	45
DCG-37-F3-90	234	DCG-87-F4-45	234	JPG-37	225	OPC-03-208-100-LSLN-09150330-U	45
DCG-37-F3-F	234	DCG-87-F4-90	234	JPG-50	225	OPC-03-208-100-LSLN-1515-C	45
DCG-43-F1	234	DCG-87-F4-F	234	JPG-62	225	OPC-03-208-100-LSLN-1515-U	45
DCG-43-F1-45	234	DCG-87-F5	234	JPG-75	225	OPC-03-208-200-LBLN-101503300350-C	45
DCG-43-F1-90	234	DCG-87-F5-45	234	JPG-KIT	225	OPC-03-208-200-LBLN-101503300350-U	45
DCG-43-F1-F	234	DCG-87-F5-90	234	LDPG-050	225	OPC-03-208-200-LBLN-12150350-C	45
DCG-43-F2	234	DCG-87-F5-F	234	LDPG-050-S	225	OPC-03-208-200-LBLN-12150350-U	45
DCG-43-F2-45	234	DCG-87-F6	235	LDPG-062	225	OS2T-LK*	42
DCG-43-F2-90	234	DCG-87-F6-45	235	LDPG-062-S	225	OS2T-LK* Full	42
DCG-43-F2-F	234	DCG-87-F6-90	235	LDPG-075	225	OS2T-SB*	42
DCG-50-F2	234	DCG-87-F6-F	235	LDPG-075-S	225	OS2T-SB* Full	42
DCG-50-F2-45	234	EJR4115CL10600	15	LDPG-100	225	P/N 104-R	100
DCG-50-F2-45	234	EJR4115CL10600-UL	15	LDPG-100-S	225	PB-45	186
DCG-50-F2-45	234	EJR4115CM1061	15	LDPG-125	225	PB-67	186
DCG-50-F2-90	234	EJR4115CM1061-UL	15	LDPG-125-S	225	PC2MF100-C	128
DCG-50-F2-F	234	EJR4115PL10600	15	LDPG-150	225	PC2MF25-C	128
DCG-50-F3	234	EJR4315CL30600	15	LDPG-150-S	225	PC2MF50-C	128
DCG-50-F3-90	234	EJR4315CL30600-UL	15	LDPG-175-S	225	PC4MF100-C	128



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
PC4MF25-C	128	SG-CM-062-DE	212	SGHD-CM-100-SE	216	SG-LC-250-OFS	214
PC4MF50-C	128	SG-CM-062-OFS	214	SGHD-CM-125-DE	216	SG-LC-250-SE	213
SC-1	186	SG-CM-062-SE	213	SGHD-CM-125-SE	216	SG-LC-250-UB	215
SC-2	186	SG-CM-062-UB	215	SGHD-CM-150-DE	216	SG-LC-300-DE	212
SC-3	186	SG-CM-075-DE	212	SGHD-CM-150-SE	216	SG-LC-300-OFS	214
SC-4	186	SG-CM-075-OFS	214	SGHD-CM-200-DE	216	SG-LC-300-SE	213
SC-5	186	SG-CM-075-SE	213	SGHD-CM-250-DE	216	SG-LC-300-UB	215
SC-6	186	SG-CM-075-UB	215	SGHD-CM-300-DE	216	SG-LC-350-DE	212
SC-7	186	SG-CM-100-DE	212	SGHD-CM-350-DE	216	SG-LC-350-OFS	214
SD-100-SE	217	SG-CM-100-OFS	214	SGHD-CM-400-DE	216	SG-LC-350-SE	213
SD-100-UB	217	SG-CM-100-SE	213	SG-LC-050-DE	212	SG-LC-350-UB	215
SD-23-SE	217	SG-CM-100-UB	215	SG-LC-050-OFS	214	SG-RC-050-DE	212
SD-23-UB	217	SG-CM-125-DE	212	SG-LC-050-SE	213	SG-RC-050-OFS	214
SD-32-SE	217	SG-CM-125-OFS	214	SG-LC-050-UB	215	SG-RC-050-SE	213
SD-32-UB	217	SG-CM-125-SE	213	SG-LC-062-DE	212	SG-RC-050-UB	215
SD-43-SE	217	SG-CM-125-UB	215	SG-LC-062-OFS	214	SG-RC-062-DE	212
SD-43-UB	217	SG-CM-150-DE	212	SG-LC-062-SE	213	SG-RC-062-OFS	214
SD-56-SE	217	SG-CM-150-OFS	214	SG-LC-062-UB	215	SG-RC-062-SE	213
SD-56-UB	217	SG-CM-150-SE	213	SG-LC-075-DE	212	SG-RC-062-UB	215
SD-73-SE	217	SG-CM-150-UB	215	SG-LC-075-OFS	214	SG-RC-075-DE	212
SD-73-UB	217	SG-CM-175-DE	212	SG-LC-075-SE	213	SG-RC-075-OFS	214
SD-85-SE	217	SG-CM-175-OFS	214	SG-LC-075-UB	215	SG-RC-075-SE	213
SD-85-UB	217	SG-CM-175-SE	213	SG-LC-100-DE	212	SG-RC-075-UB	215
SDHD-100-S	217	SG-CM-175-UB	215	SG-LC-100-OFS	214	SG-RC-100-DE	212
SDHD-100-UB	217	SG-CM-200-DE	212	SG-LC-100-SE	213	SG-RC-100-OFS	214
SDHD-23-SE	217	SG-CM-200-OFS	214	SG-LC-100-UB	215	SG-RC-100-SE	213
SDHD-23-UB	217	SG-CM-200-SE	213	SG-LC-125-DE	212	SG-RC-100-UB	215
SDHD-32-SE	217	SG-CM-200-UB	215	SG-LC-125-OFS	214	SG-RC-125-DE	212
SDHD-32-UB	217	SG-CM-250-DE	212	SG-LC-125-SE	213	SG-RC-125-OFS	214
SDHD-43-SE	217	SG-CM-250-OFS	214	SG-LC-125-UB	215	SG-RC-125-SE	213
SDHD-43-UB	217	SG-CM-250-SE	213	SG-LC-150-DE	212	SG-RC-125-UB	215
SDHD-56-SE	217	SG-CM-250-UB	215	SG-LC-150-OFS	214	SG-RC-150-DE	212
SDHD-56-UB	217	SG-CM-300-DE	212	SG-LC-150-SE	213	SG-RC-150-OFS	214
SDHD-73-SE	217	SG-CM-300-OFS	214	SG-LC-150-UB	215	SG-RC-150-SE	213
SDHD-73-UB	217	SG-CM-300-SE	213	SG-LC-175-DE	212	SG-RC-150-UB	215
SDHD-85-SE	217	SG-CM-300-UB	215	SG-LC-175-OFS	214	SG-RC-175-DE	212
SDHD-85-UB	217	SG-CM-350-DE	212	SG-LC-175-SE	213	SG-RC-175-OFS	214
SDR-100	185	SG-CM-350-OFS	214	SG-LC-175-UB	215	SG-RC-175-SE	213
SDR-50	185	SG-CM-350-SE	213	SG-LC-200-DE	212	SG-RC-175-UB	215
SG-CM-050-DE	212	SG-CM-350-UB	215	SG-LC-200-OFS	214	SG-RC-200-DE	212
SG-CM-050-OFS	214	SGHD-CM-075-DE	216	SG-LC-200-SE	213	SG-RC-200-OFS	214
SG-CM-050-SE	213	SGHD-CM-075-SE	216	SG-LC-200-UB	215	SG-RC-200-SE	213
SG-CM-050-UB	215	SGHD-CM-100-DE	216	SG-LC-250-DE	212	SG-RC-200-UB	215



Numeric Listing

NUMERIC LISTING

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
SG-RC-250-DE	212	UPG-50-FE	226	XG2-12-2BW-15	170		
SG-RC-250-OFS	214	UPG-62-FE	226	XG2-12-2BW-15	170		
SG-RC-250-SE	213	UPG-75-FE	226	XG2-12-2BW-MR	170		
SG-RC-250-UB	215	X-142100	57	XG2-12-2BW-MR-15	170		
SG-RC-300-DE	212	XG2-12-10B	170	XG2-12-2G	169		
SG-RC-300-OFS	214	XG2-12-10B-MR	170	XG2-12-2G	169		
SG-RC-300-SE	213	XG2-12-10BW	170	XG2-12-2G-15	169		
SG-RC-300-UB	215	XG2-12-10BW-MR	170	XG2-12-2G-15	169		
SG-RC-350-DE	212	XG2-12-10G	169	XG2-12-2G-LKG	169		
SG-RC-350-OFS	214	XG2-12-10G-MR	169	XG2-12-2G-MR	169		
SG-RC-350-SE	213	XG2-12-10W	169	XG2-12-2G-MR-15	169		
SG-RC-350-UB	215	XG2-12-10W-LKG	169	XG2-12-2G-MR-LKG	169		
SLBLED	99	XG2-12-10W-MR	169	XG2-12-2TT	169		
SLHK-01	59	XG2-12-10W-MR-15	169	XG2-12-2TT	169		
SR-022	229	XG2-12-10W-MR-LKG	169	XG2-12-2W	169		
SR-030	229	XG2-12-25B	170	XG2-12-2W	169		
SR-040	229	XG2-12-25B-15	170	XG2-12-2W-15	169		
SR-052	229	XG2-12-25B-MR	170	XG2-12-2W-LKG	169		
SR-070	229	XG2-12-25B-MR-15	170	XG2-12-2W-MR	169		
SR-094	229	XG2-12-25BW	170	XG2-12-2W-MR-15	169		
SR50	33	XG2-12-25BW-15	170	XG2-12-2W-MR-LKG	169		
SR50	35	XG2-12-25BW-MR	170	XG2-12-50B	170		
SR50	37	XG2-12-25BW-MR-15	170	XG2-12-50B-15	170		
SRI-022	229	XG2-12-25G	169	XG2-12-50B-MR	170		
SRI-030	229	XG2-12-25G-15	169	XG2-12-50B-MR-15	170		
SRI-040	229	XG2-12-25G-LKG	169	XG2-12-50BW	170		
SRI-052	229	XG2-12-25G-MR	169	XG2-12-50BW-15	170		
SRI-070	229	XG2-12-25G-MR-15	169	XG2-12-50BW-MR	170		
SRI-094	229	XG2-12-25G-MR-LKG	169	XG2-12-50BW-MR-15	170		
SRI-120	229	XG2-12-25W	169	XG2-12-50G	169		
SRI-140	229	XG2-12-25W-15	169	XG2-12-50TT	169		
SRI-162	229	XG2-12-25W-LKG	169	XG2-12-50W	169		
SS-E-LITE	65	XG2-12-25W-MR	169	XG2-12-50W-LKG	169		
SS-HD	65	XG2-12-25W-MR-15	169	XG2-12-50W-MR	169		
T1000	71	XG2-12-25W-MR-LKG	169	XG2-12-50W-MR-LKG	169		
UGP-15231	99	XG2-12-2B	170	XG2-14-25S	169		
UGP-15231MG	99	XG2-12-2B	170	XG2-14-2S	169		
UPG-100-FE	226	XG2-12-2B-15	170	XG2-14-2S	169		
UPG-150-FE	226	XG2-12-2B-15	170	XG2R-12-10BS-15	170		
UPG-200-FE	226	XG2-12-2B-MR	170	XG2R-12-25BS-15	170		
UPG-250-FE	226	XG2-12-2B-MR-15	170	XG2R-12-2BS-15	170		
UPG-300-FE	226	XG2-12-2BW	170	XG2R-12-50BS-15	170		
UPG-350-FE	226	XG2-12-2BW	170	XG2R-12-BS-15	170		



TABLE 1 - CHARACTERISTICS DEFINED BY THE IEC Per Standard 60529

			Second Digit - Protection against the penetration of liquids											
			IP_0	IP_1	IP_2	IP_3	IP_4	IP_5	IP_6	IP_7	IP_8			
Non protected														
First Digit - Protection against persons - touching and ingress of solid foreign objects														
IP 0_		Without protection	IP 00											
IP 1_		Protection against touching with the hand and solid objects greater than 50mm dia.	IP 10	IP 11	IP 12									
IP 2_		Protection against touching with the finger and solid objects greater than 12mm dia.	IP 20	IP 21	IP 22	IP 23								
IP 3_		Protection against touching with tools, wires, etc. more than 2.5mm thick and solid objects greater than 2.5mm dia.	IP 30	IP 31	IP 32	IP 33	IP 34							
IP 4_		Protection against touching with tools, wires, etc. more than 1mm thick and solid objects greater than 1mm dia.	IP 40	IP 41	IP 42	IP 43	IP 44							
IP 5_		Unlimited protection against contact with live parts and damaging deposits of dust	IP 50				IP 54	IP 55						
IP 6_		Unlimited protection against contact with live parts and any penetration of dust	IP 60					IP 65	IP 66	IP 67	IP 68			

In some countries a third digit (for mechanical security) is added.



Class I Hazardous Locations

Flammable Gases, Vapor or Liquids

Class I Area Classifications

Division 1:
Where ignitable concentrations of flammable gases, vapors or liquids can exist all of the time or some of the time under normal operating conditions.

Division 2:
Where ignitable concentrations of flammable gases, vapors or liquids are not likely under normal operating conditions.

Zone 0:
Where ignitable concentrations of flammable gases, vapors or liquids are present continuously or for long periods of time under normal operating conditions.

Zone 1:
Where ignitable concentrations of flammable gases, vapors or liquids are likely to exist under normal operating conditions.

Zone 2:
Where ignitable concentrations of flammable gases, vapors or liquids are not likely to exist under normal operating conditions.

Class I Groups

Division 1 and 2
A (acetylene)
B (hydrogen)
C (ethylene)
D (propane)

Zone 0, 1 and 2
IIC (acetylene & hydrogen)
IIB (ethylene)
IIA (propane)

Class I Temperature Codes

Division 1 and 2
T1 ($\leq 450^{\circ}\text{C}$)
T2 ($\leq 300^{\circ}\text{C}$)
T2A, T2B, T2C, T2D
($\leq 280^{\circ}\text{C}, \leq 260^{\circ}\text{C}, \leq 230^{\circ}\text{C}, \leq 215^{\circ}\text{C}$)
T3 ($\leq 200^{\circ}\text{C}$)
T3A, T3B, T3C
($\leq 180^{\circ}\text{C}, \leq 165^{\circ}\text{C}, \leq 160^{\circ}\text{C}$)
T4 ($\leq 135^{\circ}\text{C}$)
T4A ($\leq 120^{\circ}\text{C}$)
T5 ($\leq 100^{\circ}\text{C}$)
T6 ($\leq 85^{\circ}\text{C}$)

Zone 0,1 and 2
T1 ($\leq 450^{\circ}\text{C}$)
T2 ($\leq 300^{\circ}\text{C}$)

T3 ($\leq 200^{\circ}\text{C}$)

T4 ($\leq 135^{\circ}\text{C}$)

T5 ($\leq 100^{\circ}\text{C}$)
T6 ($\leq 85^{\circ}\text{C}$)

Hazardous location information provided courtesy of UL copyright© 1999 Underwriters Laboratories, Inc.



Class II Hazardous Locations

Combustible Dusts

Class II Area Classifications

Division 1:

Where ignitable concentrations of combustible dusts can exist all of the time or some of the time under normal operating conditions.

Division 2:

Where ignitable concentrations of combustible dusts are not likely to exist under normal operating conditions.

Class II Groups

Division 1 and 2

E (metals--- Div. 1 only)
F (coal)
G (grain)

Class II Temperature Codes

Division 1 and 2

T1 ($\leq 450^{\circ}\text{C}$)
T2 ($\leq 300^{\circ}\text{C}$)
T2A, T2B, T2C, T2D
($\leq 280^{\circ}\text{C}, \leq 260^{\circ}\text{C}, \leq 230^{\circ}\text{C}, \leq 215^{\circ}\text{C}$)
T3 ($\leq 200^{\circ}\text{C}$)
T3A, T3B, T3C
($\leq 180^{\circ}\text{C}, \leq 165^{\circ}\text{C}, \leq 160^{\circ}\text{C}$)
T4 ($\leq 135^{\circ}\text{C}$)
T4A ($\leq 120^{\circ}\text{C}$)
T5 ($\leq 100^{\circ}\text{C}$)
T6 ($\leq 85^{\circ}\text{C}$)

Hazardous location information provided courtesy of UL copyright© 1999 Underwriters Laboratories, Inc.

Class III Hazardous Locations

Ignitable Fibers & Flyings Class III Area Classifications

Division 1:

Where easily ignitable fibers or materials producing combustible flyings are handled, manufactured or used.

Division 2:

Where easily ignitable fibers are stored or handled.

Class III Temperature Codes

Division 1 and 2

None

Note: Article 503 of the NEC limits the maximum temperature for Class III equipment to 165°C for equipment not subject to overloading and to 120°C for equipment that maybe overloaded.

Class III Groups

Division 1 and 2

None

Hazardous Locations Markings

Class I, II & III Division 1 & 2 (U.S. & Canada) - This marking would include:

Class(es), Division(s), Gas/Dust Group(s), Temperature Code

Example: Class I, Division I, Group C & D, T4A

Class I, Zone 0, 1 & 2 (U.S. & Canada) - This marking would include:

Method A: For Zone Listings based on UL 2279 or the CSA-E79 Series

Class, Zone(s), Ex, Protection Method(s), Gas Group, Temperature Code

Example: Class I, Zone 1, Ex de IIB, T4

Method B: For Zone Listings based on UL or CSA Division Certification Documents

Class, Zone(s), Gas Group, Temperature Code

Example: Class I, Zone 1, Group IIB, T4

Note: For U.S. Zone Listings based on UL 2279, Article 505 of the 1999 NEC requires that the "Ex" element of the marking string shall read "AEx."

Note: For Canadian Zone listings based on the CSA-E79 Series, the "Class" and "Zone" elements of the marking string are optional.

Zone 0, 1 & 2 (IEC only) - This marking would include;

EEx, Protection Method(s), Gas Group, Temperature Code

Example: Ex de IIB T4

Zone 0, 1 & 2 (Europe only) - This marking would include:

EEx, Protection Method(s), Gas Group, Temperature Code

Example: EEx de IIB T4

Hazardous location information provided courtesy of UL copyright© 1999 Underwriters Laboratories, Inc.



Temperature Conversion Chart

1. Locate known temperature in °C/°F column
2. Read converted temperature in °C or °F column

Example: To convert 75 F to Celsius...

Locate 75 in °C/°F column

Read converted temperature in C Column, 23.9 C

°C	°C/°F	°F	°C	°C/°F	°F	°C	°C/°F	°F
-40.0	-40	-40	40.6	105	221	123.9	255	491
-37.2	-35	-31	43.3	110	230	126.7	260	500
-34.4	-30	-22	46.1	115	239	129.4	265	509
-31.7	-25	-13	48.9	120	248	132.2	270	518
-28.9	-20	-4	51.7	125	257	135.0	275	527
-26.1	-15	5	54.4	130	266	137.8	280	536
-23.3	-10	14	57.2	135	275	140.6	285	545
-20.6	-5	23	60.0	140	284	143.3	290	554
-17.8	0	32	62.8	145	293	146.1	295	563
-15.0	5	41	65.6	150	302	148.9	300	572
-12.2	10	50	68.3	155	311	151.7	305	581
-9.4	15	59	71.1	160	320	154.4	310	590
-6.7	20	68	76.7	170	338	157.2	315	599
-3.9	25	77	79.4	175	347	160.0	320	608
-1.1	30	86	82.2	180	356	162.8	325	617
1.7	35	95	85.0	185	365	165.6	330	626
4.4	40	104	87.8	190	374	168.3	335	635
7.2	45	113	90.6	195	383	171.1	340	644
10.0	50	122	93.3	200	392	173.9	345	653
12.8	55	131	96.1	205	401	176.7	350	662
15.6	60	140	98.9	210	410	179.4	355	671
18.3	65	149	101.7	215	419	182.2	360	680
21.1	70	158	104.4	220	428	185.0	365	689
23.9	75	167	107.2	225	437	187.8	370	698
26.7	80	176	110.0	230	446	190.6	375	707
29.4	85	185	112.8	235	455	193.3	380	716
32.2	90	194	115.6	240	464	196.1	385	725
35.0	95	203	118.3	245	473	198.9	390	734
37.8	100	212	121.1	250	482	201.7	395	743

Temperature Conversion Formulas

$$^{\circ}\text{F} = (9/5 \times ^{\circ}\text{C}) + 32$$

$$^{\circ}\text{C} = 5/9 (^{\circ}\text{F} - 32)$$



Metric Conversion Chart

(Fraction Inch to Decimal Inch and Millimeters)

Fraction (In.)	Three Place Decimal (In.)	Three Place Decimal (mm)
1/64	0.016	0.397
1/32	.031	.794
3/64	.047	1.191
1/16	.062	1.588
5/64	.078	1.934
3/32	.094	2.381
7/64	.100	2.778
1/8	.125	3.175
9/64	.141	3.572
5/32	.156	3.969
11/64	.172	4.366
3/16	.188	4.763
13/64	.203	5.159
7/32	.219	5.556
15/64	.234	5.953
1/4	.250	6.350
17/64	.266	6.747
9/32	.281	7.144
19/64	.297	7.541
5/16	.312	7.938
21/64	.328	8.334
11/32	.344	8.731
23/64	.359	9.128
3/8	.375	9.525
25/64	.391	9.922
13/32	.406	10.319
27/64	.422	10.716
7/16	.438	11.113
29/64	.453	11.509
15/32	.469	11.906
31/64	.484	12.303
1/2	.500	12.700

Fraction (In.)	Three Place Decimal (In.)	Three Place Decimal (mm)
33/64	.516	13.097
17/32	.531	13.494
35/64	.547	13.891
9/16	.562	14.288
37/64	.578	14.684
19/32	.594	15.081
39/64	.609	15.478
5/8	.625	15.875
41/64	.641	16.272
21/32	.656	16.669
43/64	.672	17.066
11/16	.688	17.463
45/64	.703	17.859
23/32	.719	18.256
47/64	.734	18.653
3/4	.750	19.050
49/64	.766	19.447
25/32	.781	19.844
51/64	.797	20.241
13/16	.812	20.638
53/64	.828	21.034
27/32	.844	21.431
55/64	.859	21.828
7/8	.875	22.225
57/64	.891	22.622
29/32	.906	23.019
59/64	.922	23.416
15/16	.938	23.813
61/64	.953	24.209
31/32	.969	24.606
63/64	.984	25.003
1	1.000	25.400

Metric Conversion Formulas

To Obtain	Multiply
Millimeters	Inches x 25.4
Inches	Millimeters x 0.0394
Meter	Feet x .3048
Feet	Meters x 3.281
Square Centimeters	Square Inches x 6.45
Square Inches	Square Centimeters x 0.155
Kilograms	Pounds x 0.4536
Pounds	Kilograms x 2.205



Electrical Formulas

OHMS Law

$$\text{Ohms} = \frac{\text{Volts}}{\text{Amperes}} \quad \text{Amperes} = \frac{\text{Volts}}{\text{Ohms}} \quad \text{Volts} = \text{Amperes} \times \text{Ohms}$$

Power

$$\text{Watts} = \text{Amperes} \times \text{Volts} \text{ or } \text{Amps} \times \text{Amps} \times \text{ohms, or } \frac{\text{Volts} \times \text{Volts}}{\text{ohms}}$$

$$\text{Amperes} = \frac{\text{Watts}}{\text{Volts}}$$

$$\text{HP} = \frac{\text{Volts} \times \text{Amps} \times \text{Efficiency}}{746}$$

$$\text{Power Factor} = \frac{\text{Watts}}{\text{Amperes} \times \text{Volts}}$$

$$\text{3-phase Amperes} = \frac{746 \times \text{HP (Horsepower)}}{1.732 \times \text{Volts} \times \text{Efficiency} \times \text{Power Factor}}$$

$$\text{Single-phase Kilowatts} = \frac{\text{Volts} \times \text{Amperes} \times \text{Power Factor}}{1000}$$

$$\text{Single-phase Amperes} = \frac{746 \times \text{HP (Horsepower)}}{\text{Volts} \times \text{Efficiency} \times \text{Power Factor}}$$

Approximate Voltage Drop for Various Extension Cord Gauges, Lengths, and Amps

Cord Length, feet	Current flowing through cord			
	10A	15A	20A	30A
Cord Size = #16 gauge wire				
10	1.0 V (0.8%)			
20	2.0 V (1.7%)			
30	2.9 V (2.4%)			
40	3.9 V (3.3%)			
50	4.9 V (4.1%)			
100	9.8 V (8.2%)			
Cord Size = #14 gauge wire				
10	0.6 V (0.5%)	0.9 V (0.8%)		
20	1.2 V (1.0%)	1.8 V (1.5%)		
30	1.8 V (1.5%)	2.7 V (2.3%)		
40	2.4 V (2.0%)	3.6 V (3.0%)		
50	3.0 V (2.5%)	4.6 V (3.8%)		
100	6.1 V (5.1%)	9.1 V (7.6%)		
Cord Size = #12 gauge wire				
10	0.4 V (0.3%)	0.6 V (0.5%)	0.8 V (1.7%)	
20	0.8 V (0.7%)	1.1 V (0.9%)	1.5 V (1.3%)	
30	1.1 V (0.9%)	1.7 V (1.4%)	2.3 V (1.9%)	
40	1.5 V (1.3%)	2.3 V (1.9%)	3.1 V (2.6%)	
50	1.9 V (1.6%)	2.9 V (2.4%)	3.8 V (3.2%)	
100	3.8 V (3.2%)	5.7 V (4.8%)	7.7 V (6.4%)	
Cord Size = #10 gauge wire				
10	0.2 V (0.2%)	0.4 V (0.3%)	0.5 V (0.4%)	0.7 V (0.6%)
20	0.5 V (0.4%)	0.7 V (0.6%)	1.0 V (0.8%)	1.4 V (1.2%)
30	0.7 V (0.6%)	1.1 V (0.9%)	1.4 V (1.2%)	2.2 V (1.8%)
40	1.0 V (0.8%)	1.4 V (1.2%)	1.9 V (1.6%)	2.9 V (2.4%)
50	1.2 V (1.0%)	1.8 V (1.5%)	2.4 V (2.0%)	3.6 V (3.0%)
100	2.4 V (2.0%)	3.6 V (3.0%)	4.8 V (4.0%)	7.2 V (6.0%)

Note 1: Numbers are rounded to the nearest 0.1V and 0.1%.

Note 2: Voltage drops shown are the same for any single-phase supply voltage. Voltage drop depends only on amps.

Note 3: Values are approximate, as they are affected by factors such as temperature.

Note 4: For a given cord size and amps, voltage drop is uniform over a length of cord, so for example, a 40 ft cord has twice the voltage drop as a 20 ft cord. That means the numbers in the voltage drop columns can be added together. For example, the voltage drop for a 70 ft cord can be found by adding together the voltage drops for a 30 ft cord and a 40 ft cord.



OSHA Product Match

Topic	Regulation	Ericson Product
General Wiring	1926.404(a)(2) Polarity of connections. No grounded conductor shall be attached to any terminal or lead so as to reverse designated polarity.	Plugs and Connectors
Wiring Devices	1926.404(a)(3) Use of grounding terminals and devices. A grounding terminal or grounding-type device on a receptacle, cord connector, or attachment plug shall not be used for purposes other than grounding.	
Ground Fault Protection	1926.404(b)(1)(i) General. The employer shall use either ground fault circuit interrupters as specified in paragraph (b)(1)(ii) of this section or an assured equipment grounding conductor program as specified in paragraph (b)(1)(iii) of this section to protect employees on construction sites. These requirements are in addition to any other requirements for equipment grounding conductors.	GFCI
	1926.404(b)(1)(ii) Ground-fault circuit interrupters. All 120-volt, single-phase 15- and 20-ampere receptacle outlets on construction sites, which are not a part of the permanent wiring of the building or structure and which are in use by employees, shall have approved ground-fault circuit interrupters for personnel protection. Receptacles on a two-wire, single-phase portable or vehicle-mounted generator rated not more than 5kW, where the circuit conductors of the generator are insulated from the generator frame and all other grounded surfaces, need not be protected with ground-fault circuit interrupters.	
Assured Equipment Grounding Conductor Program	1926.404(b)(1)(iii) Assured equipment grounding conductor program. The employer shall establish and implement an assured equipment grounding conductor program on construction sites covering all cord sets, receptacles which are not a part of the building or structure, and equipment connected by cord and plug which are available for use or used by employees. This program shall comply with the following minimum requirements:	GFCI Oscars® Smart Monitor Plugs/Connectors
	1926.404(b)(1)(iii)(A) A written description of the program, including the specific procedures adopted by the employer, shall be available at the jobsite for inspection and copying by the Assistant Secretary and any affected employee.	
	1926.404(b)(1)(iii)(B) The employer shall designate one or more competent persons (as defined in 1926.32(f)) to implement the program.	
	1926.404(b)(1)(iii)(C) Each cord set, attachment cap, plug and receptacle of cord sets, and any equipment connected by cord and plug, except cord sets and receptacles which are fixed and not exposed to damage, shall be visually inspected before each day's use for external defects, such as deformed or missing pins or insulation damage, and for indications of possible internal damage. Equipment found damaged or defective shall not be used until repaired.	
	1926.404(b)(1)(iii)(D) The following tests shall be performed on all cord sets, receptacles which are not a part of the permanent wiring of the building or structure, and cord- and plug-connected equipment required to be grounded:	
	1926.404(b)(1)(iii)(D)(1) All equipment grounding conductors shall be tested for continuity and shall be electrically continuous.	
	1926.404(b)(1)(iii)(D)(2) Each receptacle and attachment cap or plug shall be tested for correct attachment of the equipment grounding conductor. The equipment grounding conductor shall be connected to its proper terminal.	
	1926.404(b)(1)(iii)(E) All required tests shall be performed:	
	1926.404(b)(1)(iii)(E)(1) Before first use	
	1926.404(b)(1)(iii)(E)(2) Before equipment is returned to service following any repairs	
	1926.404(b)(1)(iii)(E)(3) Before equipment is used after any incident which can be reasonably suspected to have caused damage (for example, when a cord set is run over) and	
	1926.404(b)(1)(iii)(E)(4) At intervals not to exceed 3 months, except that cord sets and receptacles which are fixed and not exposed to damage shall be tested at intervals not exceeding 6 months.	
	1926.404(b)(1)(iii)(F) The employer shall not make available or permit the use by employees of any equipment which has not met the requirements of this paragraph (b)(1)(iii) of this section.	
1926.404(b)(1)(iii)(G) Tests performed as required in this paragraph shall be recorded. This test record shall identify each receptacle, cord set, and cord- and plug-connected equipment that passed the test and shall indicate the last date it was tested or the interval for which it was tested. This record shall be kept by means of logs, color coding, or other effective means and shall be maintained until replaced by a more current record. The record shall be made available on the jobsite for inspection by the Assistant Secretary and any affected employee.		



Topic	Regulation	Ericson Product
Electrical Grounding Safety for Generator or Transformer Derived Power	1926.404(f)(2) Separately derived systems. Where paragraph (f)(1) of this section requires grounding of wiring systems whose power is derived from generator, transformer, or converter windings and has no direct electrical connection, including a solidly connected grounded circuit conductor, to supply conductors originating in another system, paragraph (f)(5) of this section shall also apply.	e-Cart™2 e-Cart™ Jr
	1926.404(f)(3)(iii) Neutral conductor bonding. A neutral conductor shall be bonded to the generator frame if the generator is a component of a separately derived system. No other conductor need be bonded to the generator frame.	
	1926.404(f)(5)(i) Grounded system. For a grounded system, a grounding electrode conductor shall be used to connect both the equipment grounding conductor and the grounded circuit conductor to the grounding electrode. Both the equipment grounding conductor and the grounding electrode conductor shall be connected to the grounded circuit conductor on the supply side of the service disconnecting means, or on the supply side of the system disconnecting means or overcurrent devices if the system is separately derived.	

Topic	Regulation	Ericson Product
Cord Connected Equipment	1926.404(f)(7)(iv) Equipment connected by cord and plug. Under any of the conditions described in paragraphs (f)(7)(iv)(A) through (f)(7)(iv)(C) of this section, exposed non-current-carrying metal parts of cord- and plug-connected equipment which may become energized shall be grounded:	e-Cart™, Oscar® Series
	1926.404(f)(7)(iv)(A) If in a hazardous (classified) location (see 1926.407).	Hazardous Location Lighting
	1926.404(f)(7)(iv)(B) If operated at over 150 volts to ground, except for guarded motors and metal frames of electrically heated appliances if the appliance frames are permanently and effectively insulated from ground.	Ericson Temporary Cordsets and Wiring Devices
	1926.404(f)(7)(iv)(C)(1) Hand held motor-operated tools	
	1926.404(f)(7)(iv)(C)(2) Cord- and plug-connected equipment used in damp or wet locations or by employees standing on the ground or on metal floors or working inside of metal tanks or boilers	
	1926.404(f)(7)(iv)(C)(4) Tools likely to be used in wet and/or conductive locations	Ericson Temporary Lighting Products
	1926.404(f)(7)(iv)(C)(5) Portable hand lamps.	
1926.404(f)(7)(iv)(C)(6) Tools likely to be used in wet and/or conductive locations need not be grounded if supplied through an isolating transformer with an ungrounded secondary of not over 50 volts. Listed or labeled portable tools and appliances protected by a system of double insulation, or its equivalent, need not be grounded. If such a system is employed, the equipment shall be distinctively marked to indicate that the tool or appliance utilizes a system of double insulation.	Low Voltage Lighting Products	



Topic	Regulation	Ericson Product
Temporary Wiring	1926.405(a)(2)(i) Scope. The provisions of paragraph (a)(2) of this section apply to temporary electrical power and lighting wiring methods which may be of a class less than would be required for a permanent installation. Except as specifically modified in paragraph (a)(2) of this section, all other requirements of this subpart for permanent wiring shall apply to temporary wiring installations. Temporary wiring shall be removed immediately upon completion of construction or the purpose for which the wiring was installed.	Stringlights and Cordsets
	1926.405(a)(2)(ii)(B) Branch circuits shall originate in a power outlet or panelboard. Conductors shall be run as multiconductor cord or cable assemblies or open conductors, or shall be run in raceways. All conductors shall be protected by overcurrent devices at their ampacity. Runs of open conductors shall be located where the conductors will not be subject to physical damage, and the conductors shall be fastened at intervals not exceeding 10 feet (3.05 m). No branch-circuit conductors shall be laid on the floor. Each branch circuit that supplies receptacles or fixed equipment shall contain a separate equipment grounding conductor if the branch circuit is run as open conductors.	e-Cart™ and Oscar™ Series
	1926.405(a)(2)(ii)(C) Receptacles shall be of the grounding type. Unless installed in a complete metallic raceway, each branch circuit shall contain a separate equipment grounding conductor, and all receptacles shall be electrically connected to the grounding conductor. Receptacles for uses other than temporary lighting shall not be installed on branch circuits which supply temporary lighting. Receptacles shall not be connected to the same ungrounded conductor of multiwire circuits which supply temporary lighting.	e-Cart™ and Oscar® Series
	1926.405(a)(2)(ii)(D) Disconnecting switches or plug connectors shall be installed to permit the disconnection of all ungrounded conductors of each temporary circuit.	Ericson Wiring Devices
Lamp Guards on All Lighting	1926.405(a)(2)(ii)(E) All lamps for general illumination shall be protected from accidental contact or breakage. Metal-case sockets shall be grounded.	Ericson Lamp Guards
Temporary Lighting Mounting	1926.405(a)(2)(ii)(F) Temporary lights shall not be suspended by their electric cords unless cords and lights are designed for this means of suspension.	Stringlights
Low Voltage Lighting	1926.405(a)(2)(ii)(G) Portable electric lighting used in wet and/or other conductive locations, as for example, drums, tanks, and vessels, shall be operated at 12 volts or less. However, 120-volt lights may be used if protected by a ground-fault circuit interrupter.	Low Voltage Lighting
Cord Protection	1926.405(a)(2)(ii)(I) Flexible cords and cables shall be protected from damage. Sharp corners and projections shall be avoided. Flexible cords and cables may pass through doorways or other pinch points, if protection is provided to avoid damage.	CP5-36 Cable Protectors
Flexible Cords	1926.405(a)(2)(ii)(J) Extension cord sets used with portable electric tools and appliances shall be of three-wire type and shall be designed for hard or extra-hard usage. Flexible cords used with temporary and portable lights shall be designed for hard or extra-hard usage.	Ericson Temporary Cordsets
	1926.405(g)(2)(iv) Strain relief. Flexible cords shall be connected to devices and fittings so that strain relief is provided which will prevent pull from being directly transmitted to joints or terminal screws.	6000, 7000 and 8000 Series Boxes and Covers



Topic	Regulation	Ericson Product
Portable Lighting	1926.405(j)(1)(iii) Portable lamps. Portable lamps shall be wired with flexible cord and an attachment plug of the polarized or grounding type. If the portable lamp uses an Edison-based lampholder, the grounded conductor shall be identified and attached to the screw shell and the identified blade of the attachment plug. In addition, portable handlamps shall comply with the following:	Ericson Lighting Products and Wiring Devices
Handlamps	1926.405(j)(1)(iii)(B) Handlamps shall be equipped with a handle of molded composition or other insulating material	Ericson Lighting Products
	1926.405(j)(1)(iii)(C) Handlamps shall be equipped with a substantial guard attached to the lampholder or handle	
Metal Guards on Stringlights	1926.405(j)(1)(iii)(D) Metallic guards shall be grounded by the means of an equipment grounding conductor run within the power supply cord.	Ericson Lighting Products
Weather Proof Lampholders	1926.405(j)(1)(iv) Lampholders. Lampholders of the screw-shell type shall be installed for use as lampholders only. Lampholders installed in wet or damp locations shall be of the weatherproof type.	
Lighting Fixtures in Wet Locations	1926.405(j)(1)(v) Fixtures. Fixtures installed in wet or damp locations shall be identified for the purpose and shall be installed so that water cannot enter or accumulate in wireways, lampholders, or other electrical parts.	
Plugs / Connectors	1926.405(j)(2)(i) Configuration. Receptacles, cord connectors, and attachment plugs shall be constructed so that no receptacle or cord connector will accept an attachment plug with a different voltage or current rating than that for which the device is intended. However, a 20-ampere T-slot receptacle or cord connector may accept a 15-ampere attachment plug of the same voltage rating. Receptacles connected to circuits having different voltages, frequencies, or types of current (ac or dc) on the same premises shall be of such design that the attachment plugs used on these circuits are not interchangeable.	Ericson Wiring Devices
Wet Locations for Receptacles	1926.405(j)(2)(ii) Damp and wet locations. A receptacle installed in a wet or damp location shall be designed for the location.	FS Flip Covers

1926.56(a)

General. Construction areas, ramps, runways, corridors, offices, shops, and storage areas shall be lighted to not less than the minimum illumination intensities listed in Table D-3 while any work is in progress:

TABLE D-3 - MINIMUM ILLUMINATION INTENSITIES IN FOOT-CANDLES

Foot-Candles	Area of Operation
5.....	General construction area lighting.
3.....	General construction areas, concrete placement, excavation and waste areas, access ways, active storage areas, loading platforms, refueling, and field maintenance areas.
5.....	Indoors: warehouses, corridors, hallways, and exitways.
5.....	Tunnels, shafts, and general underground work areas: (Exception: minimum of 10 foot-candles is required at tunnel and shaft heading during drilling, mucking, and scaling. Bureau of Mines approved cap lights shall be acceptable for use in the tunnel heading)
10.....	General construction plant and shops (e.g., batch plants, screening plants, mechanical and electrical equipment rooms, carpenter shops, rigging lofts and active store rooms, mess halls, and indoor toilets and workrooms.)
30.....	First aid stations, infirmaries, and offices.

AC (Alternating Current) - An electrical current that reverses direction in a circuit at regular intervals, such as normal household current.

Adapter - Device that adapts one form or size of connection to another.

ALCI - Appliance Leakage Current Interrupter. An ALCI is a device intended to be used in conjunction with an electrical appliance whose function is to interrupt both conductors of the electric circuit to a load when a fault current to ground exceeds 4-6 mA and is less than that required to operate the overcurrent protection device of the circuit. The ALCI is intended to be used only in a circuit that has a solidly grounded neutral conductor, and is required. ALCIs are considered "personal protection" devices and contain the following features: a) Can function either line polarity, and b) Other features may or may not be provided.

Ambient Temperature - The temperature of a medium (gas or liquid) surrounding an object.

Ampacity - The current in amperes that a conductor can carry continuously under the conditions of use without exceeding its temperature rating.

Ampere - The unit of current. One ampere is the current flowing through one ohm of resistance at one volt potential.

Attachment Plug - Male contact device for the readily detachable connection of a flexible cord or cable to receptacles, connectors, flanged equipment power outlets, etc.

Auto Reset - GFCI that powers-up automatically upon plug-in and after power loss. User must press the reset button in the event of a ground fault to restore power.

AWG - American Wire Gauge. A relative system for the designation of wire diameter.

Braid - A fibrous or metallic group of filaments interwoven in cylindrical form to form a covering over one or more wires. Typically used to add mechanical strength & abrasion resistance to flexible cord.

Circuit (Electric) - The complete path of an electrical current. When the continuity is broken, it is called an open circuit; when continuity is maintained, it is called a closed circuit.

Collector Ring - A collector ring is an assembly of slip rings for transferring electrical energy from a stationary to a rotating member.

Conductor - An uninsulated wire suitable for carrying electrical current.

Confined Space ⁽¹⁾ - OSHA defines a confined space as an area that: (1) is large enough and so configured that an employee can bodily enter and perform assigned work; and (2) has limited or restricted means for entry or exit (for example, tanks, vessels, silos, storage bins, hoppers, vaults, and pits are spaces that may have limited means of entry); and (3) is not designed for continuous employee occupancy ¹.

Contacts - The parts of the connector that actually carry the electrical current, and are touched together or separated to control the flow.

Continuity Check - A test to determine whether electrical current flows continuously throughout the length of a single wire or individual wires in a cable.

Cord - A flexible insulated cable.

Cord Connector - Female contact device used in making a detachable connection to an attachment plug or a flanged equipment power inlet.

Cord Grip - Means by which the flexible cord entering a device is gripped in order to relieve stress on the terminals from tension applied to the cord.

CSA - Canadian Standards Association. This is a nonprofit, independent organization that operates a listing service for electronic materials and equipment. The Canadian counterpart of the Underwriters Laboratories.

Current Carrying Capacity - The maximum current an insulated conductor can safely carry without exceeding its insulation and jacket temperature limitations.

1. Source OSHA web site www.osha.gov



DC (Direct Current) - An electric current that flows only in one direction through a circuit, such as battery power.

Damp location - Partially protected locations under canopies, marquees, roofed open porches, and like locations, and interior locations subject to moderate degrees of moisture, such as some basements.

Dead Front - Without live parts exposed to a person on the operating side of the equipment.

Dielectric Strength - The voltage that an insulation can withstand before breakdown occurs. Usually expressed as a voltage gradient (such as volts per mil).

Dry Location - A location not normally subject to dampness or wetness. A location classified as dry may be temporarily subject to dampness or wetness, as in the case of a building under construction.

Dustproof - So constructed or protected that dust will not interfere with its successful operation.

EMI - Abbreviation for electromagnetic interference.

Elastomer - Macromolecular material that at room temperature returns rapidly to approximately its initial dimensions and shape after substantial deformation by a weak stress and release of that stress.

ELCI - Equipment Leakage Current Interrupter. The ELCI is a device intended to provide leakage current protection in appliances and utilization equipment whose function is to interrupt all ungrounded conductors of the supply circuit to electrical equipment in the event a current, in excess of the trip current, occurs between live parts and the grounded enclosure of other grounded parts. An ELCI is not intended to be used in place of a GFCI, ALCI, or IDCI and may have any trip current value greater than **6 mA**. The use of an ELCI is not intended to replace or supersede the overcurrent protection requirements concerning trip current and time. ELCIs are considered "equipment protection" devices, not personal protection devices.

Flame Resistance - The ability of a material not to propagate flame once the heat source is removed.

Gauge - A term used to denote the physical size of a wire. See AWG.

GFCI - Ground Fault Circuit Interrupter, also known as a GFI. A device intended for the protection of personnel as well as equipment. It de-energizes a circuit within an established period of time (25 ms) when a current to ground exceeds some predetermined value (4-6 mA, for a Class A GFCI) that is less than that required to operate the overcurrent protective device of the supply circuit.

GFCI - (Class A) - Denotes a ground fault circuit interrupter that will trip when a fault current to ground is 6 mA or more.

Ground - An electrical term meaning to connect to the earth or other large conducting body to serve as an earth, thus making a complete electrical circuit.

Ground Fault - An unintentional electrical path between a part operating normally at some potential to ground, and ground.

Grounded Neutral - GFCI will automatically trip if the neutral conductor is grounded on the load side of the device (after sensor). If the load side neutral is shorted to ground and also a ground fault occurred simultaneously, some of the fault current would flow through the neutral wire to the sensor and some would flow through the inadvertent ground path. If such a ground connection occurred, it would be possible for a person to contact a hot wire and ground, having the ground fault current flow through the inadvertent neutral ground and the neutral to the service entrance. Under this condition, there may not be enough imbalance in current through the sensor to cause the GFCI to trip.

Hospital Grade - A device constructed to meet performance requirements of high abuse areas found in hospital locations, tested to "Hospital Grade" requirements of Underwriters' Laboratories Standard UL 498.

Incandescent - Method for producing light by heating a thin filament.

Manual Reset - GFCI that requires the user to press the reset button upon plug-in, after power loss to prevent accidental equipment start-up and in the event of a ground fault to restore power.

Glossary of Terms

Motor - Circuit Switch - A switch, rated in horsepower, capable of interrupting the maximum operating overload current of a motor of the same horsepower rating as the switch at the rated voltage.

NEMA - National Electrical Manufacturers Association.

NEMA 4X - An enclosure rating per UL50 and UL508 indicating that the product is intended for indoor or outdoor use primarily to provide a degree of protection against corrosion, windblown dust and rain, splashing water, hose-directed water, and damage from external ice formation.

NFPA - National Fire Protection Association.

Nuisance Trip - Tripping caused by conditions other than those for which the device is intended to respond.

Open Neutral Protection - GFCI will automatically trip when the neutral connection is lost. When the neutral connection is open, this creates an unsafe condition where the available current has lost its normal flow path, thus increasing the potential for the current to flow elsewhere.

OSHA - Occupational Safety and Health Act. Specifically the Williams-Steiger Law passed in 1970 covering all factors relating to safety in places of employment.

Overcurrent - Any current in excess of the rated current of equipment or the ampacity of a conductor. It may result from overload (see definition), short circuit, or ground fault. A current in excess of rating may be accommodated by certain equipment and conductors for a given set of conditions. Hence the rules for overcurrent protection are specific for particular situations.

Overload - Operation of equipment in excess of normal, full load rating, or of a conductor in excess of rated ampacity which, when it persists for a sufficient length of time, would cause damage or dangerous overheating. A fault, such as a short circuit or ground fault, is not an overload (See "Overcurrent").

Primary - The line (Power source) side of a device.

PVC - Polyvinyl Chloride. Compound used in thermoplastic (SJTW - STW) cords.

Rated Voltage - The maximum voltage at which an electrical component can operate for extended periods without undue degradation or safety hazard.

RFI - Abbreviation for radio frequency interference.

Reverse Polarity - Condition where the Hot and Neutral connections are switched.

Secondary - The load (equipment) side of a device.

SEOW - Extra Hard Service cord. 600v, oil resistant thermoplastic elastomer outer jacket. Weather resistant for outdoor use.

SJEOW - Junior hard service cord. 300v, oil resistant thermoplastic elastomer outer jacket. Weather resistant for outdoor use.

SJTW - Hard Service cord. 300v thermoplastic outer jacket. Weather resistant for outdoor use.

SOW - Hard service cord. 600v rubber outer jacket. Weather resistant for outdoor use.

SPT-1 - Thermoplastic constructed, parallel jacketed. 300 volt 2 or 3 conductor, 18 gauge.

SPT-2 - Same as SPT-1 but heavier construction. 18-16 gauge.

SPT-3 - Same as SPT-2 but heavier construction. 18-10 gauge.

STW - Extra Hard Service cord. 600v thermoplastic outer jacket. Weather resistant for outdoor use.

SVT - Vacuum cleaner service cord. All plastic construction, 2 or 3 conductors.

Thermoplastic - A material that softens when heated and becomes firm on cooling.



Glossary of Terms

Thermoset - A material that hardens or sets when heat is applied and that, once set, cannot be resoftened by heating. The application of heat is called "curing."

TPE - Abbreviation for thermoplastic elastomer. A compound used in Portable/flexible cords (SEOW, SJEOW).

Trip - Denotes automatic interruption by the GFCI of the electrical circuit to load.

Trip Time - The elapsed interval between the time when the ground fault current is first applied and the time when the circuit is interrupted.

UL - Abbreviation for Underwriters Laboratories, a non-profit independent organization that operates a listing service for electrical and electronic materials and equipment.

UL Listed - Indicates an item has been tested and approved to the safety standards established by Underwriters' Laboratories.

UL Recognized - Refers to products that have been tested and approved to the safety standards established by Underwriters' Laboratories & are typically used as components of a final assembly.

VRMS - Voltage (root mean square).

Voltage - The term most often used in place of electromotive force, potential, potential difference, or voltage drop to designate the electrical pressure that exists between two points and is capable of producing a current when a closed circuit is connected between two points.

Weatherproof - So constructed or protected that exposure to the weather will not interfere with successful operation. Rainproof, raintight, or watertight equipment can fulfill the requirements for weatherproof where varying weather conditions other than wetness, such as snow, ice dust, or temperature extremes, are not a factor.

Wet location - Installations underground or in concrete slabs or masonry in direct contact with the earth, and locations subject to saturation with water or other liquids, such as locations exposed to weather and unprotected.



Temporary Power Add On Options - IPDM and VMM

Input Power Diagnostic Module (IPDM)

Adjacent to power inlet, the IPDM unit provides visual indication of supply power status - easy to read chart for quick reference.

Advanced circuitry monitors and indicates (through LEDs) many common connection and safety issues with Temporary Power. Safety earth ground and mis-connection issues are easily corrected to ensure compliance to electrical codes.

INPUT POWER DIAGNOSTIC MODULE

This module is designed to indicate the incoming power to insure safe and proper operation. Failure to correct any incorrect wiring situations could result in injury or equipment damage.

CORRECT		NO POWER or NO NEUT AND GND
OPEN GND	HOT2 / GND REV	
OPEN NEUT	HOT1 / NEUT REV	
OPEN HOT1	HOT1 / GND REV	
OPEN HOT2	HOT2 / NEUT REV	

NOTICE: Correct any of these conditions before energizing circuit breakers.

Exclusive Voltage Monitor Modules (VMM)

Continuously monitors voltage - if supply voltage falls outside of safe operating range VMM disconnects power to GFCIs/ outlets.

	LOW VOLTAGE SHUTDOWN
	This electronic module has detected low voltage on this phase and has shutdown the receptacles and GFCI modules connected. Correct this condition before operating. The GFCI modules will not reset until this condition has been corrected.
	HIGH VOLTAGE SHUTDOWN
	This electronic module has detected high voltage on this phase and has shutdown the receptacles and GFCI modules connected. Correct this condition before operating. The GFCI modules will not reset until this condition has been corrected.



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
7	89	1448	104	2314	135	2529	104
9	89	1449	104	2314	249	2530	135
79	89	1507	135	2316	135	2530	249
104	88	1510	134	2316	249	2534	104
107	88	1510	135	2317	135	2547	104
118	88	1510	249	2317	249	2550	97
119	88	1512	134	2320	135	2600	98
150	88	1512	135	2320	249	2601	99
211	63	1512	249	2322	135	2602	99
212	64	1514	135	2322	249	2603	99
214	63,64	1514	249	2324	135	2604	99
215	64	1516	135	2324	249	2605	99
216	63,64	1516	249	2410	249	2606	99
220	64	1520	135	2412	249	2607	99
224	64	1520	249	2414	249	2610	249
226	64	1522	135	2416	249	2612	249
702	90	1522	249	2417	249	2614	249
703	90	1524	135	2420	249	2616	249
704	90	1524	249	2422	249	2620	249
707	90	1533	104	2424	249	2622	249
708	90	1547	104	2434	104	2624	249
710	89	1548	104	2447	104	2625	98
712	90	1549	104	2449	104	2626	249
718	87	1610	249	2500	97	2628	249
744	87	1612	249	2510	135	2630	249
825	80	1614	249	2510	249	2647	104
832	80	1616	249	2512	135	2648	104
840	80	1620	249	2512	249	2649	104
918	87	1622	249	2514	135	2650	98
944	87	1624	249	2514	249	2747	104
1000	72	1705	115	2516	135	2748	104
1060	172	1712	115	2516	249	2749	104
1061	172	1740	115	2520	135	2900	176
1062	172	1744	115	2520	249	2910	176
1066	29	2000	71	2522	135	2925	85
1066	33	2200	96	2522	249	2950	85
1067	29	2225	96	2524	135	3769	125
1067	29	2250	96	2524	249	3771	125
1067	37	2310	134	2525	97	3775	125
1068	29	2310	135	2526	135	3777	125
1068	39	2310	249	2526	249	4000	179
1433	104	2312	135	2528	135	5000	179
1447	104	2312	249	2528	249	5502	195



FOR THE LATEST FULL SEARCHABLE LISTING BY PART NUMBER, GO TO: WWW.ERICSON.COM/AGENCY
 Note: Products shown on this page may not be listed.

Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
5504	195	8010	48	1514-P	104	2705-20	121
5506	195	8034	48	1516-P	104	2705-20A	121
5508	195	8200	48	1520-P	104	2705-L142	121
5510	195	8201	48	1522-P	104	2705-L15	121
5512	195	8202	48	1524-P	104	2705-L15A	121
6000	50	8203	48	1532-PHC	124	2705-L162	121
6000	179	8204	48	15PW-AM	107	2820-FS10	121
6002	50	8205	48	1610-C	104	2900-FS	121
6005	50	8206	48	1610-CMGL	109	3762-C	125
6006	50	8207	48	1610-CML	109	3764-C	125
6010	50	8208	48	1610-CW6PL	109	3765-P	125
6011	50	9425	87	1612-C	104	5266-EL	114
6029	51	9450	87	1612-CMGL	109	5269-EL	114
6030	51	9825	87	1612-CML	109	6212NFD	118
6031	51	9850	87	1612-CW6PL	109	6212NFS	118
6032	51	26100	98	1612-PWDX	117	6212NFT	118
6033	51	61001	136	1614-C	104	6212WFD	118
6034	51	61025	136	1614-PWDX	117	6234FD	118
6035	51	61050	136	1616-C	104	6234FT	118
6100	52	61101	136	1616-PWDX	117	6234NFD	118
6102	52	61125	136	1620-C	104	6234NFS	118
6105	52	61150	136	1620-PWDX	117	6234NFT	118
6106	52	61201	136	1622-C	104	6234WFS	118
6110	52	61225	136	1622-PWDX	117	6234WFT	118
6111	52	61250	136	1624-C	104	7764-C(1)	125
7000	132	82005	48	1624-PWDX	117	7765-P(1)	125
7000	179	82010	48	1630-CHC	124	82F90038	143
7002	132	82010	118	1632-CHC	124	82F9006A	143
7004	132	82034	48	16CW-AM	107	82FS006A	143
7008	132	82034	118	2310-PMGL	109	82M9006A	143
7010	132	142100	57	2310-PML	109	82MS006A	143
7020	132	142100	59	2310-PW6PL	109	CG-325-F9	232
7022	132	14012201	69	2410-C	104	CS6360-C	125
7024	132	14012202	69	2410-CMGL	109	CS6361-P	125
7379	125	14012204	69	2410-CML	109	CS6365-P	125
7425	87	123-15P20C	115	2412-C	104	CS8165-P	125
7450	87	1510-PMGL	109	2414-C	104	CS8264-C	125
7717	125	1510-PML	109	2416-C	104	CS8265-P	125
7825	87	1510-PW6PL	109	24CW	111	CS8269	125
7850	87	1512-P	104	24CW-AM	107	CS8275	125
7958	125	1512-PMGL	109	26CW	111	CS8465-P	125
8000	179	1512-PML	109	2705-15	121	SRI-200	229
8005	48	1512-PW6PL	109	2705-15A	121	1000-25	72



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
1000-50	72	1067-ALC	29	1140-50	83	12350CFLXPI-1	66
1000F	73	1067-ALC	35	1140-50F	83	12350CFLXPI-BL	66
1000F-25	73	1067-ALCNF	29	1140-50F-LED	83	12350LEDXPI-1	66
1000F-50	73	1067-B	29	1140-50-LED	83	12350LEDXPI-BL	66
1000F-EMBT	74	1067-B	29	1142-25	83	12350STWY-1C	61
1000F-EMBT-25	74	1067-B	37	1142-25F	83	12350STWY-1L	61
1000F-EMBT-50	74	1067-BLC	29	1142-25F-LED	83	12350STWY-1W	61
1000F-R	73	1067-BLC	29	1142-25-LED	83	12350XPI-1	66
1000F-R25	73	1067-BLC	35	1145-25	83	12350XPI-3	66
1000F-R50	73	1067-BLCNF	29	1145-25F	83	12350XPI-BL	66
1000LED-25F	79	1067-C	29	1145-4	83	12350Y-1	63
1000LED-6	79	1067-C	29	1145-4F	83	12350Y-3	63
1000LED-6F	79	1067-C	37	1145-50	83	12365XPI-1-LP	66
1000LED-6FS	79	1067-CLC	29	1145-50F	83	1239-25	83
1000LED-6S	79	1067-CLC	29	1147-25	83	1239-25F	83
1000-MH	77	1067-CLC	35	1147-25F	83	1239-4	83
1000-R	72	1067-CLCNF	29	118-I	88	1239-4F	83
1000-R25	72	1067LC	35	118-R	88	1239-50	83
1000-R50	72	1067-LC	29	119-R	88	1239-50F	83
1000-RG	72	1067-LC	29	122100STW	57	123B	133
1000-RG25	72	1067-LCNF	29	122100STW	59	123B-TT	133
1000-RG50	72	1068-1	29	122100STW-C	57	123D	133
1002-MHX-LPS	67	1068-1	39	122100STW-C	59	123D-TT	133
1002-MHXPS	67	1068-1A	29	1223100STWY-1W	57	123Y	130
1003-HPS	77	1068-1A	39	123100CFLXPI-1	66	123YL	130
1004-MHX-50PS	67	1068-1C	29	123100CFLXPI-BL	66	124100Y-4	63
1004-MHX-BG	67	1068-1C	39	123100LEDXPI-1	66	12460Y-4	63
1004-MHX-G	67	1068-A	29	123100LEDXPI-BL	66	12560Y-5	63
1004-MHX-LPS	67	1068-A	39	123100STWY-1C	57	12590Y-5	63
1004-MHXPS	67	1068-C	29	123100STWY-1C	61	143100STWY-1C	57
104-I	88	1068-C	39	123100STWY-1L	57	143100STWY-1C	61
104-R	88	1075-AR	171	123100STWY-1L	61	143100STWY-1L	57
104-R	100	1075-MR	171	123100STWY-1W	61	143100STWY-1L	61
1066-B	29	107-I	88	123100XPI-1	66	143100STWY-1W	57
1066-B	33	107-R	88	123100XPI-3	66	143100STWY-1W	61
1066-BFS	29	1140-25	83	123100XPI-BL	66	143100Y-1	57
1066-BFS	33	1140-25F	83	123100Y-1	57	143100Y-1	63
1066F	33	1140-25F-LED	83	123100Y-1	63	143100Y-2	57
1066FS	29	1140-25-LED	83	123100Y-2	57	143100Y-2	63
1067-A	29	1140-4	83	123100Y-2	63	14350STWY-1C	61
1067-A	29	1140-4F	83	123100Y-3	57	14350STWY-1L	61
1067-A	37	1140-4F-LED	83	123100Y-3	63	14350STWY-1W	61
1067-ALC	29	1140-4-LED	83	12345XPI-1-LP	66	14350Y-1	63



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
14350Y-2	63	1935-12	90	2700-F5	121	4123-25	180
150-I	88	1935-12	99	2705-15	120	4123-25-1610	181
1510-P	104	1940-12	76	2705-15A	120	4123-25-1612CG	181
1510-P	247	1940-12CF	76	2705-L142	120	4123-25-B	181
1510-PW6P	118	1941-12	76	2705-L15	120	4123-25-B20	181
1512-P	247	1941-12CF	76	2705-L20	120	4123-25-BG	181
1512-PW6P	118	1948-12	90	2705-L20	121	4123-25-F	180
1514-P	247	1948-12CF	90	2715-FS07	121	4123-25-HS	180
1514-PW6P	118	1948-12CFR	90	2715-FS10	121	4123-25-HSS	180
1516-PW6P	118	1950 Series	84	2715-FS12	121	4123-30S0 (30')	180
1520-PW6P	118	1950-12	75	2715-FS14	121	4123-30S0-B	181
1522-PW6P	118	1950-12 CF	75	2715-FS16	121	4123-50	180
1524-PW6P	118	2000FS	71	2715-FS20	121	4123-50-1610	181
1530-PH	124	2000L	71	2715-FS22	121	4123-50-1612CG	181
1530-PHC	124	2000M	71	2715-FS24	121	4123-50-B	181
1532-PH	124	2000T	71	2800 Series	122	4123-50-B20	181
15PW	111	211-P	63	2800-F5	121	4123-50-BG	181
1610-C	247	2200 Series	84	2820-FS12	121	4123-50-F	180
1610-PWDX	117	220-P	64	2820-FS14	121	4123-50-HS	180
1610-PWDX	118	222-L	64	2820-FS16	121	4123-50-HSS	180
1612-C	247	222-LP	64	2820-FS17	121	4124-25	180
1612-PWDX	118	224-P	64	2830-FS10	121	4124-25S0	180
1614-C	247	2310-P	104	2830-FS12	121	4124-35	180
1614-PWDX	118	2312-P	104	2830-FS14	121	4143-30	180
1616-PWDX	118	2314-P	104	2830-FS16	121	4143-30-1610	181
1620-PWDX	118	2316-P	104	2900 Series	84	4143-30-B	181
1622-PWDX	118	2410-CW6PL	109	2900 Series	122	4143-30-BG	181
1624-PWDX	118	2500 Series	84	2920-FS20	121	4143-30-F	180
1630-CH	124	2600 Series	84	2920-FS22	121	4143-30-HS	180
1632-CH	124	2600-CFL	98	2920-FS24	121	4143-30-HSS	180
16CW	111	2600-LED	98	2930-FS20	121	4143-30S0	180
1917 Series	84	2600-LED-L	98	2930-FS22	121	4143-40	180
1917-12	93	26100-CFL	98	2930-FS24	121	4143-40-1610	181
1917-12S	93	26100-LED	98	2930-FS26	121	4143-40-B	181
1918 Series	84	26100-LED-L	98	2930-FS28	121	4143-40-BG	181
1918-12	93	2625-CFL	98	2930-FS30	121	4143-40-F	180
1918-12S	93	2625-LED	98	3143-50-TT	177	4143-40-HS	180
1924 Series	84	2625-LED-L	98	3163-50-AL	177	4143-40-HSS	180
1924-12A	94	2650-CFL	98	3200-30-TT	178	4143-40S0	180
1924-12B	94	2650-LED	98	3210-30-TT	178	4143-50	180
1926 Series	84	2650-LED-L	98	3763-P	125	4143-50-1610	181
1926-12A	94	26CW-AM	107	400 Series Angle	84	4143-50-B	181
1926-12B	94	2700 Series	122	40LB Spring	222	4143-50-BG	181



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
4143-50-F	180	5106-20	182	5164-20	182	55CG7	201
4143-50-HS	180	5106-30	182	5164-30	182	55CG8	201
4143-50-HSS	180	510-RR	125	5164-40	182	55EN02	200
4144-35	180	5123-20	182	5164-50	182	55EN04	200
4163-25	180	5123-30	182	5164-60	182	55EN06	200
4163-25-HS	180	5123-40	182	5166-20	182	55EN06D	200
4163-25SO	180	5123-50	182	5166-30	182	55EN06H	200
4163-35	180	5123-60	182	5166-40	182	55EN06HD	200
4163-35-HS	180	5124-20	182	5166-50	182	55EN08	200
4163-35SO	180	5124-30	182	5168-20	182	55EN08D	200
4163-50	180	5124-40	182	5168-30	182	55EN08H	200
4163-50-HS	180	5124-50	182	5168-40	182	55EN08HD	200
4163-50SO	180	5126-20	182	5168-50	182	55EN10	200
4164-35	180	5126-30	182	5502-2	195	55EN10D	200
4164-35SO	180	5128-20	182	5502-PG	193	55EN10H	200
4164-50	180	51410-20	182	5503-PG	193	55EN10HD	200
4164-50SO	180	5143-20	182	5503-PG-2	193	55EN12	200
44-W	89	5143-30	182	5503-PG-3	193	55EN12D	200
44-W	90	5143-40	182	5504-A	195	55EN12H	200
45BSO	39	5143-50	182	5504-E	195	55EN12HD	200
45BSO	129	5143-60	182	5506-A	195	55J1	199
45BSOM	129	5144-20	182	5506-E	195	55J2	199
45BSOMPGTL	129	5144-30	182	5508-A	195	55J3	199
45DSO	39	5144-40	182	5508-E	195	55J4	199
45DSO	129	5144-50	182	55CG1	195	55J5	199
45DSOM	129	5144-60	182	55CG1	195	55LD1D	201
45MIL PGTL-100	129	5146-20	182	55CG1	201	55LN1A	201
45MIL PGTL-50	129	5146-30	182	55CG2	195	55LN1D	201
45PGTL-100	39	5146-40	182	55CG2	195	55LN2A	201
45PGTL-100	129	5146-50	182	55CG2	195	55LN2D	201
45PGTL-25	39	5148-20	182	55CG2	201	55PL1A	201
45PGTL-25	129	5148-30	182	55CG3	195	55PL1D	201
45PGTL-50	39	51610-20	182	55CG3	195	55PL2A	201
45PGTL-50	129	51610-30	182	55CG3	195	55PL2D	201
500 Series Pivot	84	51610-40	182	55CG3	195	55S01	196
5103-20	182	51612-20	182	55CG3	195	55S02	196
5103-30	182	51612-30	182	55CG3	201	55S03	196
5103-40	182	51612-40	182	55CG4	195	55S04	196
5103-50	182	5163-20	182	55CG4	195	55S05	196
5104-20	182	5163-30	182	55CG4	195	55S06	196
5104-30	182	5163-40	182	55CG4	201	55S07	196
5104-40	182	5163-50	182	55CG5	201	55S08	193, 195, 196
5104-50	182	5163-60	182	55CG6	201	55S09	195, 196



Numeric Listing

NUMERIC LISTING

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
55S10	196	6101-1	136	6144-70	183	6212FS	118
55S11	196	6101-2	136	6144-80	183	6212FS	119
55S12	196	6102B	52	6144-90	183	6212FSF	119
55S12	197	6102B-F	52	6163-100	183	6212FSK	122
55S13	197	6102-F	52	6163-125	183	6212FT	119
55S14	197	6103-100	183	6163-150	183	6212FTF	119
55S15	193, 195, 197	6103-70	183	6163-70	183	6212NFD	119
55S16	197	6103-80	183	6163-80	183	6212NFDf	119
55S17	196, 197	6103-90	183	6163-90	183	6212NFDK	122
55S18	197	6104-100	183	6164-100	183	6212NFS	119
55S19	197	6104-70	183	6164-125	183	6212NFSF	119
55S20	197	6104-8	183	6164-70	183	6212NFSK	122
55S21	197	6104-90	183	6164-80	183	6212NFT	119
55S22	197	6105-F	52	6164-90	183	6212NFTF	119
55S23	197	6106-143A2	136	6210FD	119	6212WFD	119
55S24	197	6106-143B2	136	6210FDF	119	6212WFDF	119
55S25	198	6106-143C2	136	6210FDK	122	6212WFDK	122
55S26	193, 195, 198	6106-2	136	6210FS	119	6212WFS	119
55S27	198	6106-F	52	6210FSF	119	6212WFSF	119
55S28	198	6110-F	52	6210FSK	122	6212WFSK	122
55S29	198	6111-123A3	136	6210FT	119	6212WFT	119
55S30	198	6111-123A4	136	6210FTF	119	6212WFTF	119
55S31	198	6111-123B3	136	6210NFD	119	6234FD	119
55S32	198	6111-123B4	136	6210NFDf	119	6234FDF	119
55S33	198	6111-123C3	136	6210NFDK	122	6234FDK	122
6000-F	50	6111-123C4	136	6210NFS	119	6234FS	119
6002-F	50	6111-3	136	6210NFSF	119	6234FSF	119
6006-F	50	6111-4	136	6210NFSK	122	6234FSK	122
6010-F	50	6111-F	52	6210NFT	119	6234FT	119
6011-F	50	6123-100	183	6210NFTF	119	6234FTF	119
6030B	51	6123-70	183	6210NFTK	122	6234NFD	119
6031B	51	6123-80	183	6210WFD	119	6234NFDf	119
6032B	51	6123-90	183	6210WFDF	119	6234NFDK	122
6033B	51	6124-100	183	6210WFDK	122	6234NFS	119
6034B	51	6124-70	183	6210WFS	119	6234NFSF	119
6035B	51	6124-80	183	6210WFSF	119	6234NFSK	122
6050 -105F8	137	6124-90	183	6210WFSK	122	6234NFT	119
6050 -105G8	137	6143-100	183	6210WFT	119	6234NFTF	119
6050 -125F8	137	6143-125	183	6210WFTF	119	6234WFD	119
6050 -125G8	137	6143-70	183	6210WFTK	122	6234WFDF	119
6100B	52	6143-80	183	6212FD	119	6234WFDK	122
6100B-F	52	6143-90	183	6212FDF	119	6234WFS	119
6100-F	52	6144-100	183	6212FDK	122	6234WFSF	119



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
6234WFSK	122	7010-25-2	132	72FMSE012F	161	7450-R	87
6234WFT	119	7010-50-2	132	72FMSE020F	161	7450-RS	87
6234WFTF	119	7020-25-2	132	72FRK1	163	7450-S	87
6260WK	118	7020-25-2GF	132	72FRK3	163	74F9006F	159
63BS0	33	7020-50-2	132	72FS006F	159	74F9012F	159
63BS0	35	7020-50-2GF	132	72FS012F	159	74F9020F	159
63BS0	37	7022-25-2	132	72FS020F	159	74FMSE006F	161
63BS0	129	7022-50-2	132	72M9E006F	159	74FMSE012F	161
63DS0	33	7024-25-2	132	72M9E012F	159	74FMSE020F	161
63DS0	35	7024-50-2	132	72M9E020F	159	74FRK1	163
63DS0	37	70-NG	90	72MRK1	163	74FRK3	163
63DS0	129	70-NG Series	84	72MRK2	163	74FS006F	159
63PGTLSO-100	129	70-NG100	90	72MSE006F	159	74FS012F	159
63PGTLSO-50	129	70-NG25	90	72MSE012F	159	74FS020F	159
63YSTW	37	70-NG50	90	72MSE020F	159	74M9E006F	159
63YSTW	129	70-NGQL	90	73F9006F	159	74M9E012F	159
65BS0	39	70-NGQL100	90	73F9012F	159	74M9E020F	159
65BS0	129	70-NGQL25	90	73F9020F	159	74MRK1	163
65BSOM	42	70-NGQL50	90	73FMSE006F	161	74MRK2	163
65BSOM	129	70-NGR	90	73FMSE012F	161	74MSE006F	159
65DS0	39	70-NGR100	90	73FMSE020F	161	74MSE012F	159
65DS0	129	70-NGR25	90	73FRK1	163	74MSE020F	159
65DSOM	42	70-NGR50	90	73FRK3	163	75F9006F	159
65DSOM	129	70-NI	90	73FS006F	159	75F9012F	159
65MIL PGTL	42	70-NI25	90	73FS012F	159	75F9020F	159
65MIL PGTL-100	129	70-NI50	90	73FS020F	159	75FMSE006F	161
65MIL PGTL-50	129	7103-125	183	73M9E006F	159	75FMSE012F	161
65MIL PIGTAIL	129	7104-125	183	73M9E012F	159	75FMSE020F	161
65PGTL-100	39	7123-125	183	73M9E020F	159	75FRK1	163
65PGTL-100	129	7123-150	183	73MRK1	163	75FRK3	163
65PGTL-50	39	7124-125	183	73MRK2	163	75FS006F	159
65PGTL-50	129	7143-150	183	73MSE006F	159	75FS012F	159
7 Series	84	7144-125	183	73MSE012F	159	75FS020F	159
7000-25-2	132	7144-150	183	73MSE020F	159	75M9E006F	159
7000-50-2	132	7164-150	183	7425-I	87	75M9E012F	159
7002-25-2	132	718-I	87	7425-R	87	75M9E020F	159
7002-25-2GF	132	718-R	87	7425-RS	87	75MRK1	163
7002-50-2	132	718-RS	87	7425-S	87	75MRK2	163
7002-50-2GF	132	718-S	87	744-I	87	75MSE006F	159
7004-25-2	132	72F9006F	159	744-R	87	75MSE012F	159
7004-50-2	132	72F9012F	159	744-RS	87	75MSE020F	159
7008-25-2	132	72F9020F	159	744-S	87	76F9006F	159
7008-50-2	132	72FMSE006F	161	7450-I	87	76F9012F	159



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
76F9020F	159	810F9012A	145	8143-20-XPF	184	8207FS	48
76FMSE006F	161	810F9015A	145	8143-20-XPI	184	8208FS	48
76FMSE012F	161	810F9020A	145	8143-40	184	825-25	81
76FMSE020F	161	810FRC	149	8143-40-XPF	184	825-25	81
76FRK1	163	810FS003A	145	8143-40-XPI	184	825-25F-LED	81
76FS006F	159	810FS006A	145	8143-50	184	825-25FS-LED	81
76FS012F	159	810FS012A	145	8143-50-XPF	184	825-25-LED	81
76FS020F	159	810FS015A	145	8143-50-XPI	184	825-25S-LED	81
76M9E006F	159	810FS020A	145	8144-20	184	825-4F-LED	81
76M9E012F	159	810M9003A	145	8144-40	184	825-50	81
76M9E020F	159	810M9006A	145	8144-50	184	825-50	81
76MRK1	163	810M9012A	145	8163-20	184	825-50F-LED	81
76MRK2	163	810M9015A	145	8163-20-XPF	184	825-50FS-LED	81
76MSE006F	159	810M9020A	145	8163-20-XPI	184	825-50-LED	81
76MSE012F	159	810MRC	149	8163-40	184	825-50S-LED	81
76MSE020F	159	810MS003A	145	8163-40-XPF	184	826AETCC	151
7788-CR	125	810MS006A	145	8163-40-XPI	184	826AITCC	151
7825-I	87	810MS012A	145	8163-50	184	826AJAD	151
7825-R	87	810MS015A	145	8163-50-XPF	184	82F9006A	143
7825-RS	87	810MS020A	145	8163-50-XPI	184	82F9012A	143
7825-S	87	812F9003A	145	8164-20	184	82F9015A	143
7850-I	87	812F9006A	145	8164-40	184	82F9020A	143
7850-R	87	812F9012A	145	8164-50	184	82F9M9003A	151
7850-RS	87	812F9015A	145	817-25	81	82F9M9006A	151
7850-S	87	812F9020A	145	817-25F	81	82F9M9012A	151
7-A	89	812FRC	149	817-50	81	82F9M9015A	151
7-A25	88	812FS003A	145	817-50F	81	82F9M9020A	151
7-A50	88	812FS006A	145	82005W	48	82F9MS003A	151
7ETDKCC	163	812FS012A	145	82005W	118	82F9MS006A	151
7ITDKCC	163	812FS015A	145	82005W WIRE MESH	49	82F9MS012A	151
7-S	89	812FS020A	145	82005W-1 WIRE MESH	49	82F9MS015A	151
7-SA	89	812M9003A	145	82010W	48	82F9MS020A	151
7-SA25	88	812M9006A	145	82010W	118	82FMS003A	151
7-SA50	88	812M9012A	145	82010W WIRE MESH	49	82FMS006A	151
800 Mini-Lite Fluorescent	84	812M9015A	145	8201FS	48	82FMS012A	151
8005F	48	812M9020A	145	82034W	48	82FMS015A	151
8010F	48	812MRC	149	82034W	118	82FMS020A	151
801-25	85	812MS003A	145	82034W WIRE MESH	49	82FRC	147
802005W	118	812MS006A	145	82034W-1	118	82FS003A	143
8034F	48	812MS012A	145	82034W-1 WIRE MESH	49	82FS006A	143
80LB SPRING	222	812MS015A	145	8203FS	48	82FS012A	143
810F9003A	145	812MS020A	145	8204FS	48	82FS015A	143
810F9006A	145	8143-20	184	8206FS	48	82FS020A	143



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
82M9003	143	83FMS003A	151	84F9020A	143	85F9M9003A	151
82M9006A	143	83FMS006A	151	84F9M9003A	151	85F9M9006A	151
82M9015A	143	83FMS012A	151	84F9M9006A	151	85F9M9012A	151
82M9020A	143	83FMS015A	151	84F9M9012A	151	85F9M9015A	151
82M9FS003A	151	83FMS020A	151	84F9M9015A	151	85F9M9020A	151
82M9FS006A	151	83FRC	147	84F9M9020A	151	85F9MS003A	151
82M9FS012A	151	83FS003A	143	84F9MS003A	151	85F9MS006A	151
82M9FS015A	151	83FS006A	143	84F9MS006A	151	85F9MS012A	151
82M9FS020A	151	83FS012A	143	84F9MS012A	151	85F9MS015A	151
82MRC	147	83FS015A	143	84F9MS015A	151	85F9MS020A	151
82MS003A	143	83FS020A	143	84F9MS020A	151	85F9MS020A	151
82MS006A	143	83M9003A	143	84FMS003A	151	85FMS003A	151
82MS012A	143	83M9006A	143	84FMS006A	151	85FMS006A	151
82MS015A	143	83M9012A	143	84FMS012A	151	85FMS012A	151
82MS020A	143	83M9015A	143	84FMS015A	151	85FMS015A	151
832-25	81	83M9020A	143	84FMS020A	151	85FMS020A	151
832-25F	81	83M9FS003A	151	84FRC	147	85FRC	147
832-25F-LED	81	83M9FS006A	151	84FS003A	143	85FS003A	143
832-25FS-LED	81	83M9FS012A	151	84FS006A	143	85FS006A	143
832-25-LED	81	83M9FS015A	151	84FS012A	143	85FS012A	143
832-25S-LED	81	83M9FS020A	151	84FS015A	143	85FS015A	143
832-4F-LED	81	83MRC	147	84FS020A	143	85FS020A	143
832-50	81	83MS003A	143	84M9003A	143	85M9003A	143
832-50F	81	83MS006A	143	84M9006A	143	85M9006A	143
832-50F-LED	81	83MS012A	143	84M9012A	143	85M9012A	143
832-50FS-LED	81	83MS015A	143	84M9015A	143	85M9015A	143
832-50-LED	81	83MS020A	143	84M9020A	143	85M9020A	143
832-50S-LED	81	840-25	81	84M9FS003A	151	85M9FS003A	151
83F9003A	143	840-25F	81	84M9FS006A	151	85M9FS006A	151
83F9006A	143	840-25F-LED	81	84M9FS012A	151	85M9FS012A	151
83F9012A	143	840-25FS-LED	81	84M9FS015A	151	85M9FS015A	151
83F9015A	143	840-25-LED	81	84M9FS020A	151	85M9FS020A	151
83F9020A	143	840-25S-LED	81	84MRC	147	85MRC	147
83F9M9003A	151	840-50	81	84MS003A	143	85MS003A	143
83F9M9006A	151	840-50F	81	84MS006A	143	85MS006A	143
83F9M9012A	151	840-50F-LED	81	84MS012A	143	85MS012A	143
83F9M9015A	151	840-50FS-LED	81	84MS015A	143	85MS015A	143
83F9M9020A	151	840-50-LED	81	84MS020A	143	85MS020A	143
83F9MS003A	151	840-50S-LED	81	85F9003A	143	86B8ETCC	151
83F9MS006A	151	84F9003A	143	85F9006A	143	86B8ITCC	151
83F9MS012A	151	84F9006A	143	85F9012A	143	86B8JAD	151
83F9MS015A	151	84F9012A	143	85F9015A	143	86BF9003A	145
83F9MS020A	151	84F9015A	143	85F9020A	143	86BF9006A	145



Numeric Listing

NUMERIC LISTING

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
86BF9012A	145	86F5015A	143	88FRC	149	8V2123SJB6G2	131
86BF9015A	145	86F5020A	143	88F5003A	145	8V2123SJB6GA	131
86BF9020A	145	86M9003A	143	88F5006A	145	8V2123SJB6GB	131
86BFRC	149	86M9006A	143	88F5012A	145	8V3103SE6G2	131
86BFS003A	145	86M9012A	143	88F5015A	145	8V3103SE6GA	131
86BFS006A	145	86M9015A	143	88F5020A	145	8V3103SE6GB	131
86BFS012A	145	86M9015A	145	88F5020A	145	8V3103SE6GD	131
86BFS020A	145	86M9020A	143	88M9003A	145	8Z2124SE8G2	131
86BM9003A	145	86M9FS003A	151	88M9006A	145	8Z2124SE8GA	131
86BM9006A	145	86M9FS006A	151	88M9006A	145	8Z2124SE8GB	131
86BM9012A	145	86M9FS012A	151	88M9012A	145	8Z3104S08G2	131
86BM9020A	145	86M9FS015A	151	88M9015A	145	8Z3104S08GA	131
86BMRC	149	86M9FS020A	151	88M9020A	145	8Z3104S08GB	131
86BMS003A	145	86MRC	147	88MRC	149	8Z3104S08GD	131
86BMS006A	145	86MS003A	143	88MS003A	145	9 Series	84
86BMS012A	145	86MS006A	143	88MS012A	145	900 Series Fluorescent	84
86BMS015A	145	86MS012A	143	88MS015A	145	900-25	91
86BMS020A	145	86MS015A	143	88MS020A	145	900-25S	91
86F9003A	143	86MS020A	143	8912ETCC	151	900-50	91
86F9006A	143	87F9003A	145	8912ITCC	151	900-50S	91
86F9012A	143	87F9006A	145	8912JAD	151	900-L0	91
86F9015A	143	87F9012A	145	89F9003A	145	900-L0S	91
86F9020A	143	87F9012A	145	89F9006A	145	918-I	87
86F9M9003A	151	87F9020A	145	89F9012A	145	918-R	87
86F9M9006A	151	87F5003A	145	89F9015A	145	918-RS	87
86F9M9012A	151	87F5006A	145	89F9020A	145	918-S	87
86F9M9015A	151	87F5012A	145	89FRC	149	926 Series Fluorescent	84
86F9M9020A	151	87F5015A	145	89FS003A	145	926-25	91
86F9MS003A	151	87F5020A	145	89FS006A	145	926-25LV	92
86F9MS006A	151	87M9003A	145	89FS012A	145	926-50	91
86F9MS012A	151	87M9006A	145	89FS015A	145	926-50LV	92
86F9MS015A	151	87M9012A	145	89FS020A	145	926-L0	91
86F9MS020A	151	87M9015A	145	89M9003A	145	926-L0	91
86FBS015A	145	87M9020A	145	89M9006A	145	93F92G	153
86FMS003A	151	87MS003A	145	89M9012A	145	93F94G	153
86FMS006A	151	87MS006A	145	89M9015A	145	93F95G	153
86FMS012A	151	87MS012A	145	89M9020A	145	93FMSE2G	155
86FMS015A	151	87MS015A	145	89MRC	149	93FMSE4G	155
86FMS020A	151	87MS020A	145	89MS003A	145	93FMSE5G	155
86FRC	147	88F9003A	145	89MS006A	145	93FRK1	157
86FS003A	143	88F9006A	145	89MS012A	145	93FRK3	157
86FS006A	143	88F9012A	145	89MS015A	145	93FS2G	153
86FS012A	143	88F9015A	145	89MS020A	145	93FS4G	153



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
93FS4G	153	95FMSE2G	155	BD-082-SE	222	BP49	99
93M9E2G	153	95FMSE4G	155	BD-082-UB	222	CG-143-F6	231
93M9E4G	153	95FMSE5G	155	BD-096-SE	222	CG-100-F4	231
93M9E5G	153	95FRK1	157	BD-096-UB	222	CG-100-F4-90	233
93MRK2	157	95FRK3	157	BD-125-SE	222	CG-100-F5	231
93MRK4	157	95FS2G	153	BE1-CAM2CL1063	25	CG-100-F5-90	233
93MSE2G	153	95FS4G	153	BE1-CAM2CL1120	25	CG-100-F6	231
93MSE4G	153	95FS5G	153	BE1-CAM2CL1180	25	CG-100-F6-90	233
93MSE5G	153	95M9E2G	153	BE1-CAM2CL3006	25	CG-112-F4	231
9425-I	87	95M9E4G	153	BE1-CAM2CL3063	25	CG-112-F4-90	233
9425-R	87	95M9E5G	153	BE1-CAM2CL3120	25	CG-112-F5	231
9425-RS	87	95MRK2	157	BE1-CAM2CL3180	25	CG-112-F5-90	233
9425-S	87	95MRK4	157	BE1-CAMCL1061	25	CG-112-F6	231
944-I	87	95MSE2G	153	BE1-CAMCL1062	25	CG-112-F6-90	233
944-R	87	95MSE4G	153	BE1-CAMCL1120	25	CG-125-F5	231
944-RS	87	95MSE5G	153	BE1-CAMCL1180	25	CG-125-F5-90	233
944-S	87	9825-I	87	BE1-CAMCL3003	25	CG-125-F6	231
9450-I	87	9825-R	87	BE1-CAMCL3006	25	CG-125-F6-90	233
9450-R	87	9825-RS	87	BE1-CAMCL3060L	25	CG-12-F1	231
9450-RS	87	9825-S	87	BE1-CAMCL3061	25	CG-12-F1-90	233
9450-S	87	9850-I	87	BE1-CAMCL3062	25	CG-12-F2	231
94F92G	153	9850-R	87	BE1-CAMCL3063	25	CG-12-F2-90	233
94F94G	153	9850-RS	87	BE1-CAMCL3120	25	CG-137-F5	231
94F95G	153	9850-S	87	BE1-CAMCL3180	25	CG-137-F5-90	233
94FMSE2G	155	9-A	89	BE1-T50CM10801	25	CG-137-F6	231
94FMSE4G	155	9-A25	88	BE4-480CAM2CL3002C	27	CG-137-F6-90	233
94FMSE5G	155	9-A50	88	BE4-480CAMCL3004C	27	CG-137-F7	232
94FRK1	157	9ETSKCC	163	BE4-480CAMCL3004I	27	CG-137-F7-90	233
94FRK3	157	9ITSKCC	163	BE4-600CAM2CL1004C	27	CG-143-F5	231
94FS2G	153	9-S	89	BE4-600CAM2CL3004C	27	CG-143-F5-90	233
94FS4G	153	9-SA	89	BE4-600CAMCL3004C	27	CG-143-F6-90	233
94FS5G	153	9-SA25	88	BE4-CAM2CL3062CL	27	CG-150-F7	232
94M9E2G	153	9-SA50	88	BE4-CAM2CL3122C	27	CG-150-F7-90	233
94M9E4G	153	BD-022-SE	222	BE4-CAMCL1008T	27	CG-162-F7	232
94M9E5G	153	BD-022-UB	222	BE4-CAMCL3004C	27	CG-162-F7-90	233
94MRK2	157	BD-030-SE	222	BE4-CAMCL3062CL	27	CG-175-F7	232
94MRK4	157	BD-030-UB	222	BE4-CAMCL3122C	27	CG-175-F7-90	233
94MSE2G	153	BD-041-SE	222	BL500	100	CG-181-F8	232
94MSE4G	153	BD-041-UB	222	BL500-G	100	CG-187-F7	232
94MSE5G	153	BD-053-SE	222	BL500-L	100	CG-187-F7-90	233
95F92G	153	BD-053-UB	222	BL500M	100	CG-18-F1	231
95F94G	153	BD-070-SE	222	BL500-MAG	100	CG-18-F1-90	233
95F95G	153	BD-070-UB	222	BL500S	100	CG-18-F2	231



Numeric Listing

Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.	Cat. No.	Page No.
CG-18-F2-90	233	CG-87-F3-90	233	CRG-C1.25-CM-075	218	CRG-C3.50-CM-100	218
CG-193-F7	232	CG-87-F4	231	CRG-C1.25-LC-075	219	CRG-C3.50-CM-125	218
CG-193-F7-90	233	CG-87-F4-90	233	CRG-C1.25-RC-075	220	CRG-C3.50-CM-150	218
CG-193-F8	232	CG-87-F5	231	CRG-C1.50-CM-050	218	CRG-C3.50-CM-175	218
CG-200-F7	232	CG-87-F5-90	233	CRG-C1.50-CM-062	218	CRG-C3.50-CM-200	218
CG-200-F7-90	233	CG-87-F6	231	CRG-C1.50-CM-075	218	CRG-C3.50-CM-250	218
CG-206-F8	232	CG-87-F6-90	233	CRG-C1.50-CM-100	218	CRG-C3.5-LC-075	219
CG-218-F8	232	CL1041	19	CRG-C1.5-LC-075	219	CRG-C3.5-LC-100	219
CG-231-F8	232	CL1042	19	CRG-C1.5-LC-100	219	CRG-C3.5-LC-125	219
CG-243-F8	232	CL1043	19	CRG-C1.5-RC-075	220	CRG-C3.5-LC-150	219
CG-25-F1	231	CL1100	19	CRG-C1.5-RC-100	220	CRG-C3.5-LC-175	219
CG-25-F1-90	233	CL1101	19	CRG-C1-CM-050	218	CRG-C3.5-LC-200	219
CG-25-F2	231	CL1102	19	CRG-C1-CM-062	218	CRG-C3.5-LC-250	219
CG-25-F2-90	233	CL1121	19	CRG-C2.50-CM-050	218	CRG-C3.5-RC-075	220
CG-262-F9	232	CL1140	19	CRG-C2.50-CM-062	218	CRG-C3.5-RC-100	220
CG-281-F9	232	CL1180	19	CRG-C2.50-CM-075	218	CRG-C3.5-RC-125	220
CG-300-F9	232	CL3031	18	CRG-C2.50-CM-100	218	CRG-C3.5-RC-150	220
CG-31-F1-90	233	CL3032	18	CRG-C2.50-CM-125	218	CRG-C3.5-RC-175	220
CG-37-F1	231	CL3063	18	CRG-C2.50-CM-150	218	CRG-C3.5-RC-200	220
CG-37-F1-90	233	CL3120	18	CRG-C2.50-CM-175	218	CRG-C3.5-RC-250	220
CG-37-F2	231	CL3121	18	CRG-C2.5-LC-075	219	CRG-C3-CM-050	218
CG-37-F2-90	233	CL3122	18	CRG-C2.5-LC-100	219	CRG-C3-CM-062	218
CG-31-F1	231	CL3180	18	CRG-C2.5-LC-125	219	CRG-C3-CM-075	218
CG-43-F1	231	CM1041	19	CRG-C2.5-LC-150	219	CRG-C3-CM-100	218
CG-43-F1-90	233	CM1042	19	CRG-C2.5-LC-175	219	CRG-C3-CM-125	218
CG-43-F2	231	CM1043	19	CRG-C2.5-RC-075	220	CRG-C3-CM-150	218
CG-43F-2-90	233	CM1061	19	CRG-C2.5-RC-100	220	CRG-C3-CM-175	218
CG-50-F2	231	CM1062	19	CRG-C2.5-RC-125	220	CRG-C3-CM-200	218
CG-50-F2-90	233	CM1100	19	CRG-C2.5-RC-150	220	CRG-C3-LC-075	219
CG-50-F3	231	CM1120	19	CRG-C2.5-RC-175	220	CRG-C3-LC-100	219
CG-50-F3-90	233	CM3031	18	CRG-C2-CM-050	218	CRG-C3-LC-125	219
CG-50-F4	231	CM3032	18	CRG-C2-CM-062	218	CRG-C3-LC-150	219
CG-50-F4-90	233	CM3061	18	CRG-C2-CM-075	218	CRG-C3-LC-175	219
CG-62-F2-90	233	CM3062	18	CRG-C2-CM-100	218	CRG-C3-LC-200	219
CG-62-F3	231	CM3120	18	CRG-C2-CM-125	218	CRG-C3-RC-075	220
CG-62-F3-90	233	CP4-36-ED	13, 139	CRG-C2-LC-075	219	CRG-C3-RC-100	220
CG-62-F4	231	CP5-36-ED	13, 139	CRG-C2-LC-100	219	CRG-C3-RC-125	220
CG-62-F4-90	233	CP5-36-ID	13, 139	CRG-C2-LC-125	219	CRG-C3-RC-150	220
CG-75-F3	231	CP5-45Y-ID	13, 139	CRG-C2-RC-075	220	CRG-C3-RC-175	220
CG-75-F3-90	233	CP5-ECP-ID	13, 139	CRG-C2-RC-100	220	CRG-C3-RC-200	220
CG-75-F4	231	CRG-C.75-CM-050	218	CRG-C2-RC-125	220	CRG-C4.50-CM-075	218
CG-75-F4-90	233	CRG-C1.25-CM-050	218	CRG-C3.50-CM-062	218	CRG-C4.50-CM-100	218
CG-87-F3	231	CRG-C1.25-CM-062	218	CRG-C3.50-CM-075	218	CRG-C4.50-CM-125	218



Where to Buy

Pick a category that best describes you and how you buy product. These markets are serviced by local SALES TEAM MEMBERS that know you and your local area needs. To find your local Ericson Representative please go to www.ericson.com and visit the "Where to Buy" menu.

General & Electrical Contractors



Your local Factory Trained Electrical Representative will assist you with local service and supply stock.

- General Contractors
- Electricians
- Maintenance Personnel

**Service Professional
(Tool and Rental)**



Your local Factory Trained Tool & Rental Expert will assist you with special rental and tool house supply.

- Rental Store Managers
- Tool House Buyers
- Rental Fleet Managers

Government & Military Agency



Ericson is a Small Business that has products and services to meet the needs of all agencies.

- Federal, State, City, County
- DOD, DOE, DOT

CAGE# 82832
GSA# GS-07F-0313Y

Please visit:
www.ericson.com
 and click

 to find
 your local
 Ericson Representative.

The screenshot shows the Ericson website interface. At the top, it features the Ericson logo with the tagline "We Energize, Illuminate, Protect & Connect". Below the logo is a search bar and a navigation menu with links for Home, Products, About Ericson, Where to Buy, How Light, Contact Us, and Careers. The main content area is divided into several vertical panels representing different market segments: Construction, Power Generation & Chemical Refinery Solutions, Event & Rental Industry, Government & Military, and Manufacturing & Processing. Each panel includes a representative image and a "Where to Buy" button at the bottom.

PRODUCTS

- Temporary Power
- Temporary Lighting
- Wiring Devices
- Ground Fault Circuit Interrupters
- Push Button Pendant Stations
- Mini & Micro Cabling
- Cord & Cable Reels
- Custom Solutions
- E-Grips™



MARKETS SERVED

- Power Generation
- Petroleum & Chemical Refining
- Commercial & Industrial Construction
- Rental
- Transportation
- Ship & Vessel Building
- Entertainment
- Government
- Food Processing
- OEM

Ericson Manufacturing Company

4215 Hamann Parkway
Willoughby, Ohio 44094 USA
1-800-ERICSON (374-2766)
fax: 440-951-1867
web: www.ericson.com
e-mail: info@ericson.com

Distributed by:

© Copyright 2014 Ericson Manufacturing Company

™ Trademark of Ericson Manufacturing Company

® Registered Trademark of Ericson Manufacturing Company

Specifications subject to change without notice.

REORDER-L-1000064

B-08/01-25M

Printed in the U.S.A.