


TECHNICAL DATA SHEET

Part#: 530E-5-USL-050

Cutters - Standoff Shear Small Frame - .050" Standoff - Narrow Jaw
 Reduces shock on delicate components and solder connections. Long ergonomic cushioned ESD safe handle.

The 530E-5-USL-050 6" narrow anti-shock shear cutter reduces shock on delicate components and solder connections. The "Stand-Off" keeps the cutting blade from cutting into the solder connections. The tip width is .090". It's recommended cutting capacity is 22 AWG (.25" soft wire). It features a soft cushioned ergonomic Anti-Static grip (10^{10} ohms/sq surface resistivity) with dual leaf springs.

- | | |
|-----------------------|-------------------|
| • Precision Level | ★★★★★ |
| • Material | Carbon |
| • Surface Resistivity | 10^{10} ohms/sq |
| • Shape | Straight |
| • Type of Cut | Shear |
| • Cutting Capacity | .025" |
| • Blade Angle | |
| • Blade Length | .095" |
| • Body Width | 0.42" (10.5mm) |
| • Body Height | |
| • OAL | 6" (150mm) |
| • Weight (OZ) | 6.2 |
| • UPC | 662847013263 |
| • Schedule B | 8203.20.60.30 |
| • ECCN | EAR99 |
| • UNSPSC Code | 27111511 |
| • Country of Origin | USA |
| • Group | Small Frame |



EXCELTA®
 CORPORATION

530E-5-USL
 Anti-Shock, Standoff
 Shear Cutter-Long Handle

A= .640"
 B= .100"
 C= .095"




TECHNICAL DATA SHEET

Part#: 530E-5-USL-040

Cutters - Standoff Shear Small Frame - .040" Standoff - Narrow Jaw
Reduces shock on delicate components and solder connections. Long ergonomic cushioned ESD safe handle.

The 530E-5-USL-040 6" narrow anti-shock shear cutter reduces shock on delicate components and solder connections. The "Stand-Off" keeps the cutting blade from cutting into the solder connections. The tip width is .090". It's recommended cutting capacity is 22 AWG (.25" soft wire). It features a soft cushioned ergonomic Anti-Static grip (10^{10} ohms/sq surface resistivity) with dual leaf springs.

• Precision Level	★★★★★
• Material	Carbon
• Surface Resistivity	10^{10} ohms/sq
• Shape	Straight
• Type of Cut	Shear
• Cutting Capacity	.025"
• Blade Angle	
• Blade Length	.095"
• Body Width	0.42" (10.5mm)
• Body Height	
• OAL	6" (150mm)
• Weight (OZ)	6.2
• UPC	662847013256
• Schedule B	8203.20.60.30
• ECCN	EAR99
• UNSPSC Code	27111511
• Country of Origin	USA
• Group	Small Frame



EXCELTA®
CORPORATION

530E-5-USL
Anti-Shock, Standoff
Shear Cutter-Long Handle

A= .640"
B= .100"
C= .095"




TECHNICAL DATA SHEET

Part#: 530E-5-USL-060

Cutters - Standoff Shear Small Frame - .060" Standoff - Narrow Jaw
Reduces shock on delicate components and solder connections. Long ergonomic cushioned ESD safe handle.

The 530E-5-USL-060 6" narrow anti-shock shear cutter reduces shock on delicate components and solder connections. The "Stand-Off" keeps the cutting blade from cutting into the solder connections. The tip width is .090". It's recommended cutting capacity is 22 AWG (.25" soft wire). It features a soft cushioned ergonomic Anti-Static grip (10^{10} ohms/sq surface resistivity) with dual leaf springs.

- Precision Level ★★★★★
- Material Carbon
- Surface Resistivity 10^{10} ohms/sq
- Shape Straight
- Type of Cut Shear
- Cutting Capacity .025"
- Blade Angle
- Blade Length .095"
- Body Width 0.42" (10.5mm)
- Body Height
- OAL 6" (150mm)
- Weight (OZ) 6.2
- UPC 662847013270
- Schedule B 8203.20.60.30
- ECCN EAR99
- UNSPSC Code 27111511
- Country of Origin USA
- Group Small Frame



EXCELTA®
CORPORATION

530E-5-USL
Anti-Shock, Standoff
Shear Cutter-Long Handle

A= .640"
B= .100"
C= .095"




TECHNICAL DATA SHEET

Part#: 530E-5-USL-030

Cutters - Standoff Shear Small Frame - .030" Standoff - Narrow Jaw
Reduces shock on delicate components and solder connections. Long ergonomic cushioned ESD safe handle.

The 530E-5-USL-030 6" narrow anti-shock shear cutter reduces shock on delicate components and solder connections. The "Stand-Off" keeps the cutting blade from cutting into the solder connections. The tip width is .090". It's recommended cutting capacity is 22 AWG (.25" soft wire). It features an soft cushioned ergonomic Anti-Static grip (10^{10} ohms/sq surface resistivity) with dual leaf springs.

- Precision Level ★★★★★
- Material Carbon
- Surface Resistivity 10^{10} ohms/sq
- Shape Straight
- Type of Cut Shear
- Cutting Capacity .025"
- Blade Angle .095"
- Blade Length 0.42" (10.5mm)
- Body Width 6" (150mm)
- Body Height 6.2
- OAL 662847013249
- Weight (OZ) 8203.20.60.30
- UPC EAR99
- Schedule B 27111511
- ECCN USA
- UNSPSC Code Small Frame
- Country of Origin
- Group

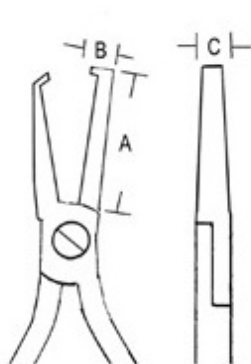

EXCELTA®
CORPORATION

530E-5-USL
Anti-Shock, Standoff
Shear Cutter-Long Handle

A= .640"
B= .100"
C= .095"

