


TECHNICAL DATA SHEET

Part#: 500-108-US

Pliers - Cut & Bend -- Carbon Steel - Cuts lead .06"/bends 45°
 Designed to bend leads to 45°, then cut the lead to .060" keeping component in place when soldering

The 500-108-US 5" shear cutting and bending plier is designed to bend leads to 45 degrees, then cut the lead to .060" keeping component in place when soldering. It's recommended cutting capacity is 22AWG (.025" diameter). It features an ergonomically molded antimicrobial grip (10¹⁰ ohms/sq surface resistivity) with dual leaf springs. antimicrobial (10⁸ ohms/sq) ergonomic Anti-Static grips with dual leaf springs.

- | | |
|-----------------------|--------------------------|
| • Precision Level | ★★★★★ |
| • Material | Carbon |
| • Surface Resistivity | 10 ¹⁰ ohms/sq |
| • Shape | Straight |
| • Type of Cut | Shear |
| • Cutting Capacity | .025" |
| • Blade Angle | |
| • Blade Length | .032" |
| • Body Width | 0.42" (10.5mm) |
| • Body Height | |
| • OAL | 5.5" (137.5mm) |
| • Weight (OZ) | 5 |
| • UPC | 662847006906 |
| • Schedule B | 8203.20.60.30 |
| • ECCN | EAR99 |
| • UNSPSC Code | |
| • Country of Origin | USA |
| • Group | Cutters/Clinch-Bend |

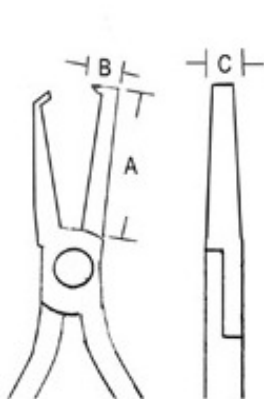

EXCELTA
 CORPORATION

500-108-US
 Shear Cutter & Bender

A= .750"
 B= .170"
 C= .150"