

P/N: 74401-0104

Copyright

© 2016, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 74401-0104

Release:

Commit: 34737

Language:

Modified: 2016-04-06

Formatted: 2016-04-26

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description	
<p>FLIR's new TG130 imaging infrared (IR) thermometer bridges the gap between single-spot IR thermometers and FLIR's legendary thermal cameras. Equipped with FLIR's exclusive Lepton micro thermal camera, the FLIR TG130 shows you where potential problems are brewing and where to aim your spot.</p> <p>The FLIR TG130 lets you see heat patterns, reliably measure temperature. Its menu uses intuitive icons, making it simple to operate.</p>	
Key features	
<ul style="list-style-type: none"> • See the heat and speed up troubleshooting. • Know where to measure temperature. • Grab and go simplicity—no special training required. • Pocket portable to fit a crowded tool bag. • Rugged and reliable. 	
Imaging and optical data	
IR resolution	80 × 60 pixels
Display resolution	160 × 128 pixels
Thermal sensitivity/NETD	< 150 mK
Field of view (FOV)	55° × 43°
Minimum focus distance	0.1 m (4 in.)
Distance to spot ratio	15:1
Image frequency	9 Hz
Focus	Focus free
Detector data	
Detector type	Focal plane array (FPA), uncooled microbolometer
Spectral range	8–14 μm
Image presentation	
Display	1.8 in. TFT LCD



FLIR TG130 (Global)

P/N: 74401-0104

© 2016, FLIR Systems, Inc.

#74401-0104; r. /34737;

Measurement	
Object temperature range	-10 to +150°C (+14 to +302°F)
Accuracy	±4°C (±7.2°F)
Measurement analysis	
Center spot	Yes
Color palettes	Iron
Set-up	
Temperature unit	Selectable: °C or °F
Emissivity correction	No
Power system	
Battery type	3 × AAA (LR03)
Battery operating time	4 hours of continuous scanning
Power management	Fixed; 5 min.
Environmental data	
Operating temperature range	-10 to +45°C (+14 to 113°F)
Storage temperature range	-40 to +70°C (-40 to 158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 hours, 95% relative humidity, 25–40°C (77–104°F)/2 cycles
EMC	<ul style="list-style-type: none">• WEEE 2012/19/EC• RoHs 2011/65/EC• C-Tick• EN 61000-6-3• EN 61000-6-2• FCC 47 CFR Part 15 Class B
Magnetic fields	EN 61000-4-8
Encapsulation	IP 40 (IEC 60529)
Shock	25 g (IEC 60068-2-29)
Vibration	2 g (IEC 60068-2-6)
Drop	Designed for 2 m (6.6 ft.)
Safety	CE/PSE/EN/UL/CSA 60950-1
Physical data	
Camera weight, incl. battery	0.17 kg (0.38 lb.)
Camera size (L × W × H)	169 mm × 45 mm × 48 mm (6.6 in. × 1.8 in. × 1.9 in.)
Color	Black
Material	PC-ABS, TPU
Shipping information	
Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none">• Imaging IR thermometer• Printed documentation• Lanyard• 3 × AAA (LR03) batteries



FLIR TG130 (Global)






P/N: 74401-0104

© 2016, FLIR Systems, Inc.

#74401-0104; r. /34737;

Shipping information	
Packaging, weight	0.33 kg (0.72 lb.)
Packaging, size	167 mm × 271 mm × 70 mm (6.6 in × 10.7 in × 2.8 in.)
EAN-13	7332558010884
UPC-12	845188011635
Country of origin	China

Camera with built in IR lens 50° x 38,6°

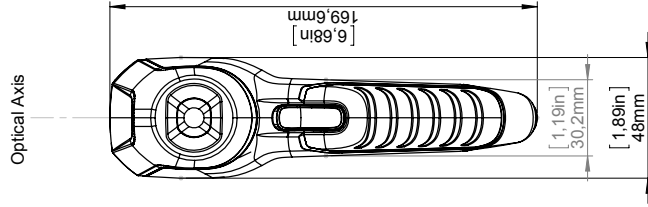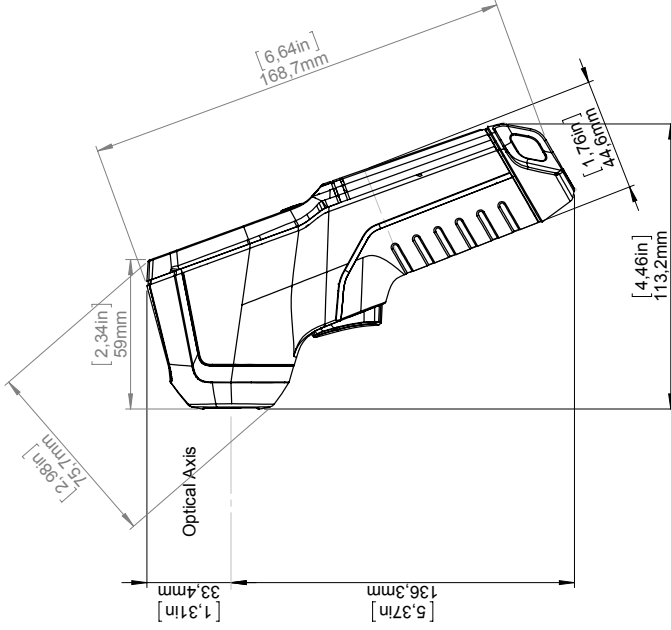

Modified 2015-06-15
Denomination

Check ROPE

Drawn by R&D Thermography

Size A3

Scale 1:2

Sheet 1(1)

Drawing No. T128885

Basic dimension TG-130