

P/N: 73701-0101

Copyright

© 2019, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 73701-0101

Commit: 58597

Language: en-US

Modified: 2019-08-06

Formatted: 2019-08-06

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description

The FLIR K2 is a robust and reliable infrared camera designed to perform under extremely severe conditions. The FLIR K2 has an intuitive interface with a design that makes it easy to control even with a gloved hand.

Benefits:

- **Robust and reliable:** The FLIR K2 is designed to meet tough operating conditions. It can withstand a drop from 2 m (6.5 ft.), is water resistant to IP67, and is fully operational up to 55°C (135°F), and operational up to +85°C (+185°F) for 15 minutes, +150°C (+302°F) for 10 minutes, and +260°C (+500°F) for 3 minutes.
- **Innovative:** The FLIR K2 utilizes our patented technology MSX, where a thermal sensor is combined with a visual camera sensor to give detailed image information in many user situations.
- **Easy-to-use:** Easily used in a gloved professional hand. An intuitive and simple user interface allows you to focus on the job. The FLIR K2 can be controlled by just one large button on top of the unit.

Typical applications:

- Heat detection.
- Search and rescue.
- Final extinction.
- Back-up camera.
- Scanning camera.
- Fire attack.

Imaging and optical data	
IR resolution	160 × 120 pixels
Thermal sensitivity/NETD	< 100 mK @ +30°C (+86°F)
Field of view (FOV)	47° × 35°
Depth of field	0.1 m (0.33 ft.), infinity

P/N: 73701-0101

© 2019, FLIR Systems, Inc.

#73701-0101; r. 58597; en-US

Imaging and optical data	
Focal length	1.9 mm (0.075 in.)
Spatial resolution (IFOV)	6.22 mrad
F-number	1.1
Image frequency	9 Hz
Focus	Fixed
Detector data	
Detector type	Focal plane array, uncooled microbolometer
Spectral range	7.5–13 μm
Pitch	12 μm
Visual camera	
Built-in digital camera	640 × 480 pixels
Digital camera, FOV	73° × 61°, adapts to the IR lens
Sensitivity	Minimum 10 lux
Image presentation	
Display	3 in. LCD, 320 × 240 pixels, backlit
Auto range	Auto, non-selectable
Image presentation modes	
Image modes	• Basic fire-fighting mode (default) • Black-and-white fire-fighting mode • Fire mode • Search-and-rescue mode • Heat detection mode • Cold detection mode • Building analysis mode  NOTE The image mode can only be changed using FLIR Tools.
Multi Spectral Dynamic Imaging (MSX)	Yes
Measurement	
Object temperature range	• -20°C to +150°C (-4°F to +302°F) • 0°C to +500°C (+32°F to +932°F)
Accuracy	±4°C (±7.2°F) or ±4% for ambient temperatures of 10–35°C (50–95°F)
Measurement analysis	
Spotmeter	1
Automatic hot detection	Heat detection mode (the hottest 20% of the of scene is colorized)
Isotherm	Yes
USB	
USB	USB Micro-B

P/N: 73701-0101

© 2019, FLIR Systems, Inc.

#73701-0101; r. 58597; en-US

Compatibility	
Compatible with FLIR software	FLIR Tools
Data communication interfaces	
Interfaces	Update from PC devices
Power system	
Battery type	Li ion
Battery voltage	3.6 V
Battery capacity	2.6 Ah at 20–25°C (68–77°F)
Battery operating time	Approximately 4 hours at +25°C (+77°F) ambient temperature and typical use
Charging system	Battery is charged inside the camera or in a dedicated charger
Charging time	2.5 h to 90% capacity, charging status indicated by LEDs
Charging temperature	0–45°C (32–113°F)
Power management	Automatic shutdown and sleep mode
Start-up time from sleep mode	10 seconds
Start-up time	30 seconds
Environmental data	
Operating temperature range	–10°C to +55°C (+14°F to +131°F): infinity +85°C (+185°F): 15 minutes +150°C (+302°F): 10 minutes +260°C (+500°F): 3 minutes
Storage temperature range	–40°C to +70°C (–40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30, 24 hours, 95% relative humidity, 25–40°C (77–104°F), 2 cycles
Relative humidity	95% relative humidity, 25–40°C (77–104°F), non-condensing
EMC	- EN 61000-6-2:2005 (immunity) - EN 61000-6-3:2011 (emission) - FCC 47 CFR Part 15 B (emission)
Magnetic fields	EN 61 000-4-8, test level 5 for continuous field (severe industrial environment)
Encapsulation	IP 67 (IEC 60529)
Corrosion	ASTM B117, salt spray, 5% saline solution in 48 hours and +35°C
Shock	25 g (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Drop	2 m (6.6 ft.)
Safety (power supply)	CE/EN/UL/CSA/PSE 60950-1
Physical data	
Camera weight, incl. battery	0.7 kg (1.54 lb.)
Battery weight	0.119 kg (0.26 lb.)

P/N: 73701-0101

© 2019, FLIR Systems, Inc.

#73701-0101; r. 58597; en-US

Physical data	
Camera size (L x W x H)	250 mm x 105 mm x 90 mm (9.8 in. x 4.1 in. x 3.5 in.)
Tripod mounting	UNC ¼"-20
Material	- PPSU - Silicon rubber - Aluminium, cast - Flame-resistant magnesium alloy
Shipping information	
List of contents	- Infrared camera - Battery (x2) - Battery charger - Lanyard strap - Power supply - Printed documentation - USB cable
Packaging, weight	1-pack: 2.06 kg (4.5 lb.) 5-pack: 11.2 kg (24.7 lb.)
Packaging, size	1-pack: 323 x 325 x 110 mm (12.7 x 12.8 x 4.3 in.) 5-pack: 578 x 336 x 351 mm (22.93 x 13.10 x 13.68 in.)
EAN-13	4743254002050
UPC-12	845188011345
Country of origin	Estonia

Supplies & accessories:

- T198532; Car charger
- T198533; USB cable Std A <-> Micro B
- T127722ACC; Retractable lanyard
- T199128; Battery charger, incl. power supply with multi plugs
- T199423ACC; Battery Li-ion 3.6 V, 2.6 Ah, 9.4 Wh
- T199414ACC; In-truck charger
- T199130; Lanyard strap
- T199357; Hard transport case
- INST-GM-0115; General Maintenance Package for E4, E5, ix, Kx



The World's Sixth Sense™

August 5, 2019 Täby, Sweden

AQ320200

CE Declaration of Conformity – EU Declaration of Conformity

Product: FLIR K2

Name and address of the manufacturer:

FLIR Systems AB

PO Box 7376

SE-187 15 Täby, Sweden

This declaration of conformity is issued under the sole responsibility of the manufacturer.

The object of the declaration: FLIR K2.

The object of the declaration described above is in conformity with the relevant Union harmonisation legislation:

Directives:

Directive: 2014/30/EU

Electromagnetic Compatibility

Directive: 2011/65/EU incl Am EU 2015/863

RoHS

Standards:

Emission: EN 61000-6-3

Electromagnetic compatibility, Emission

Immunity: EN 61000-6-2

Electromagnetic compatibility, Immunity

Restricted substances (RoHS): EN 50581:2012




Technical documentation




FLIR Systems AB


Quality Assurance

Lea Dabiri

Quality Manager

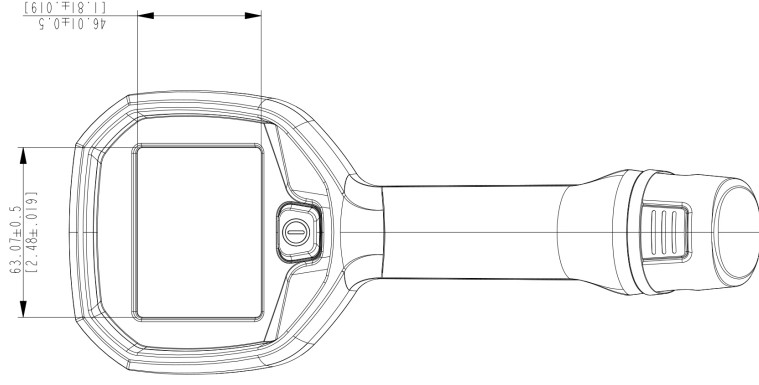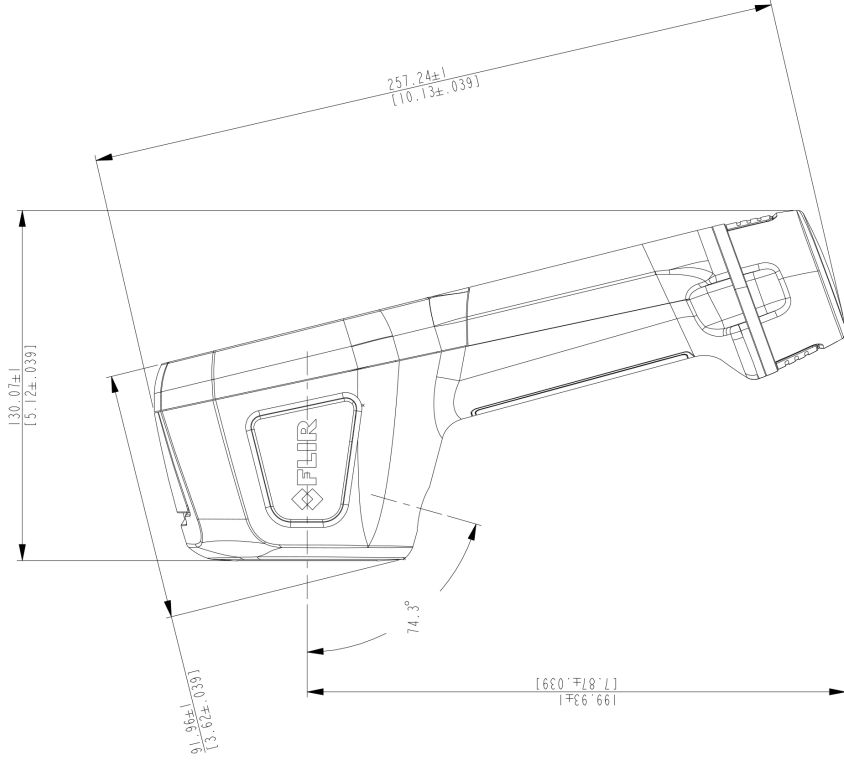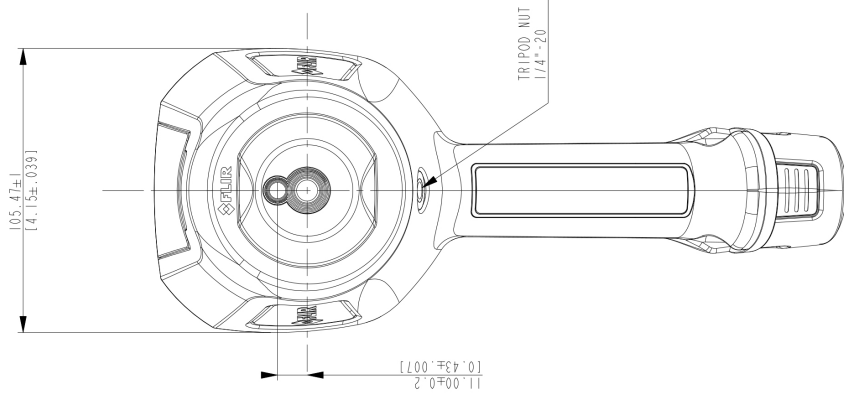

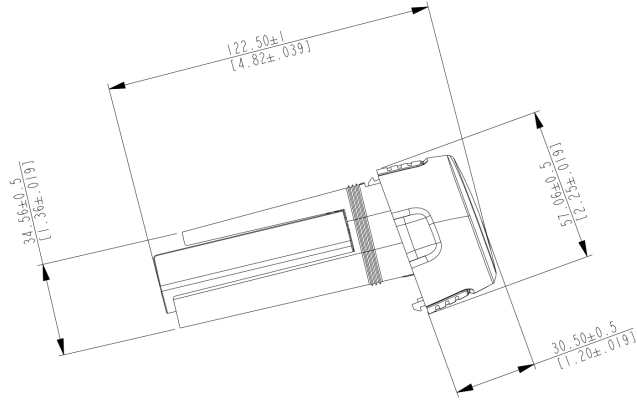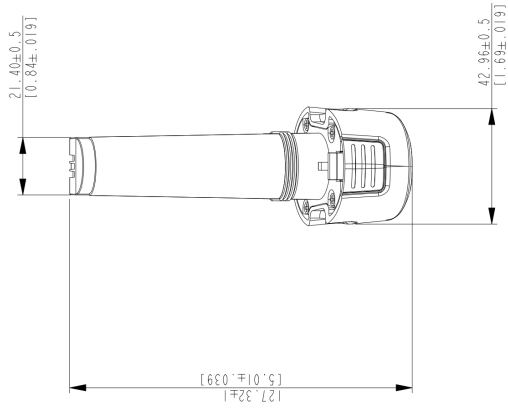

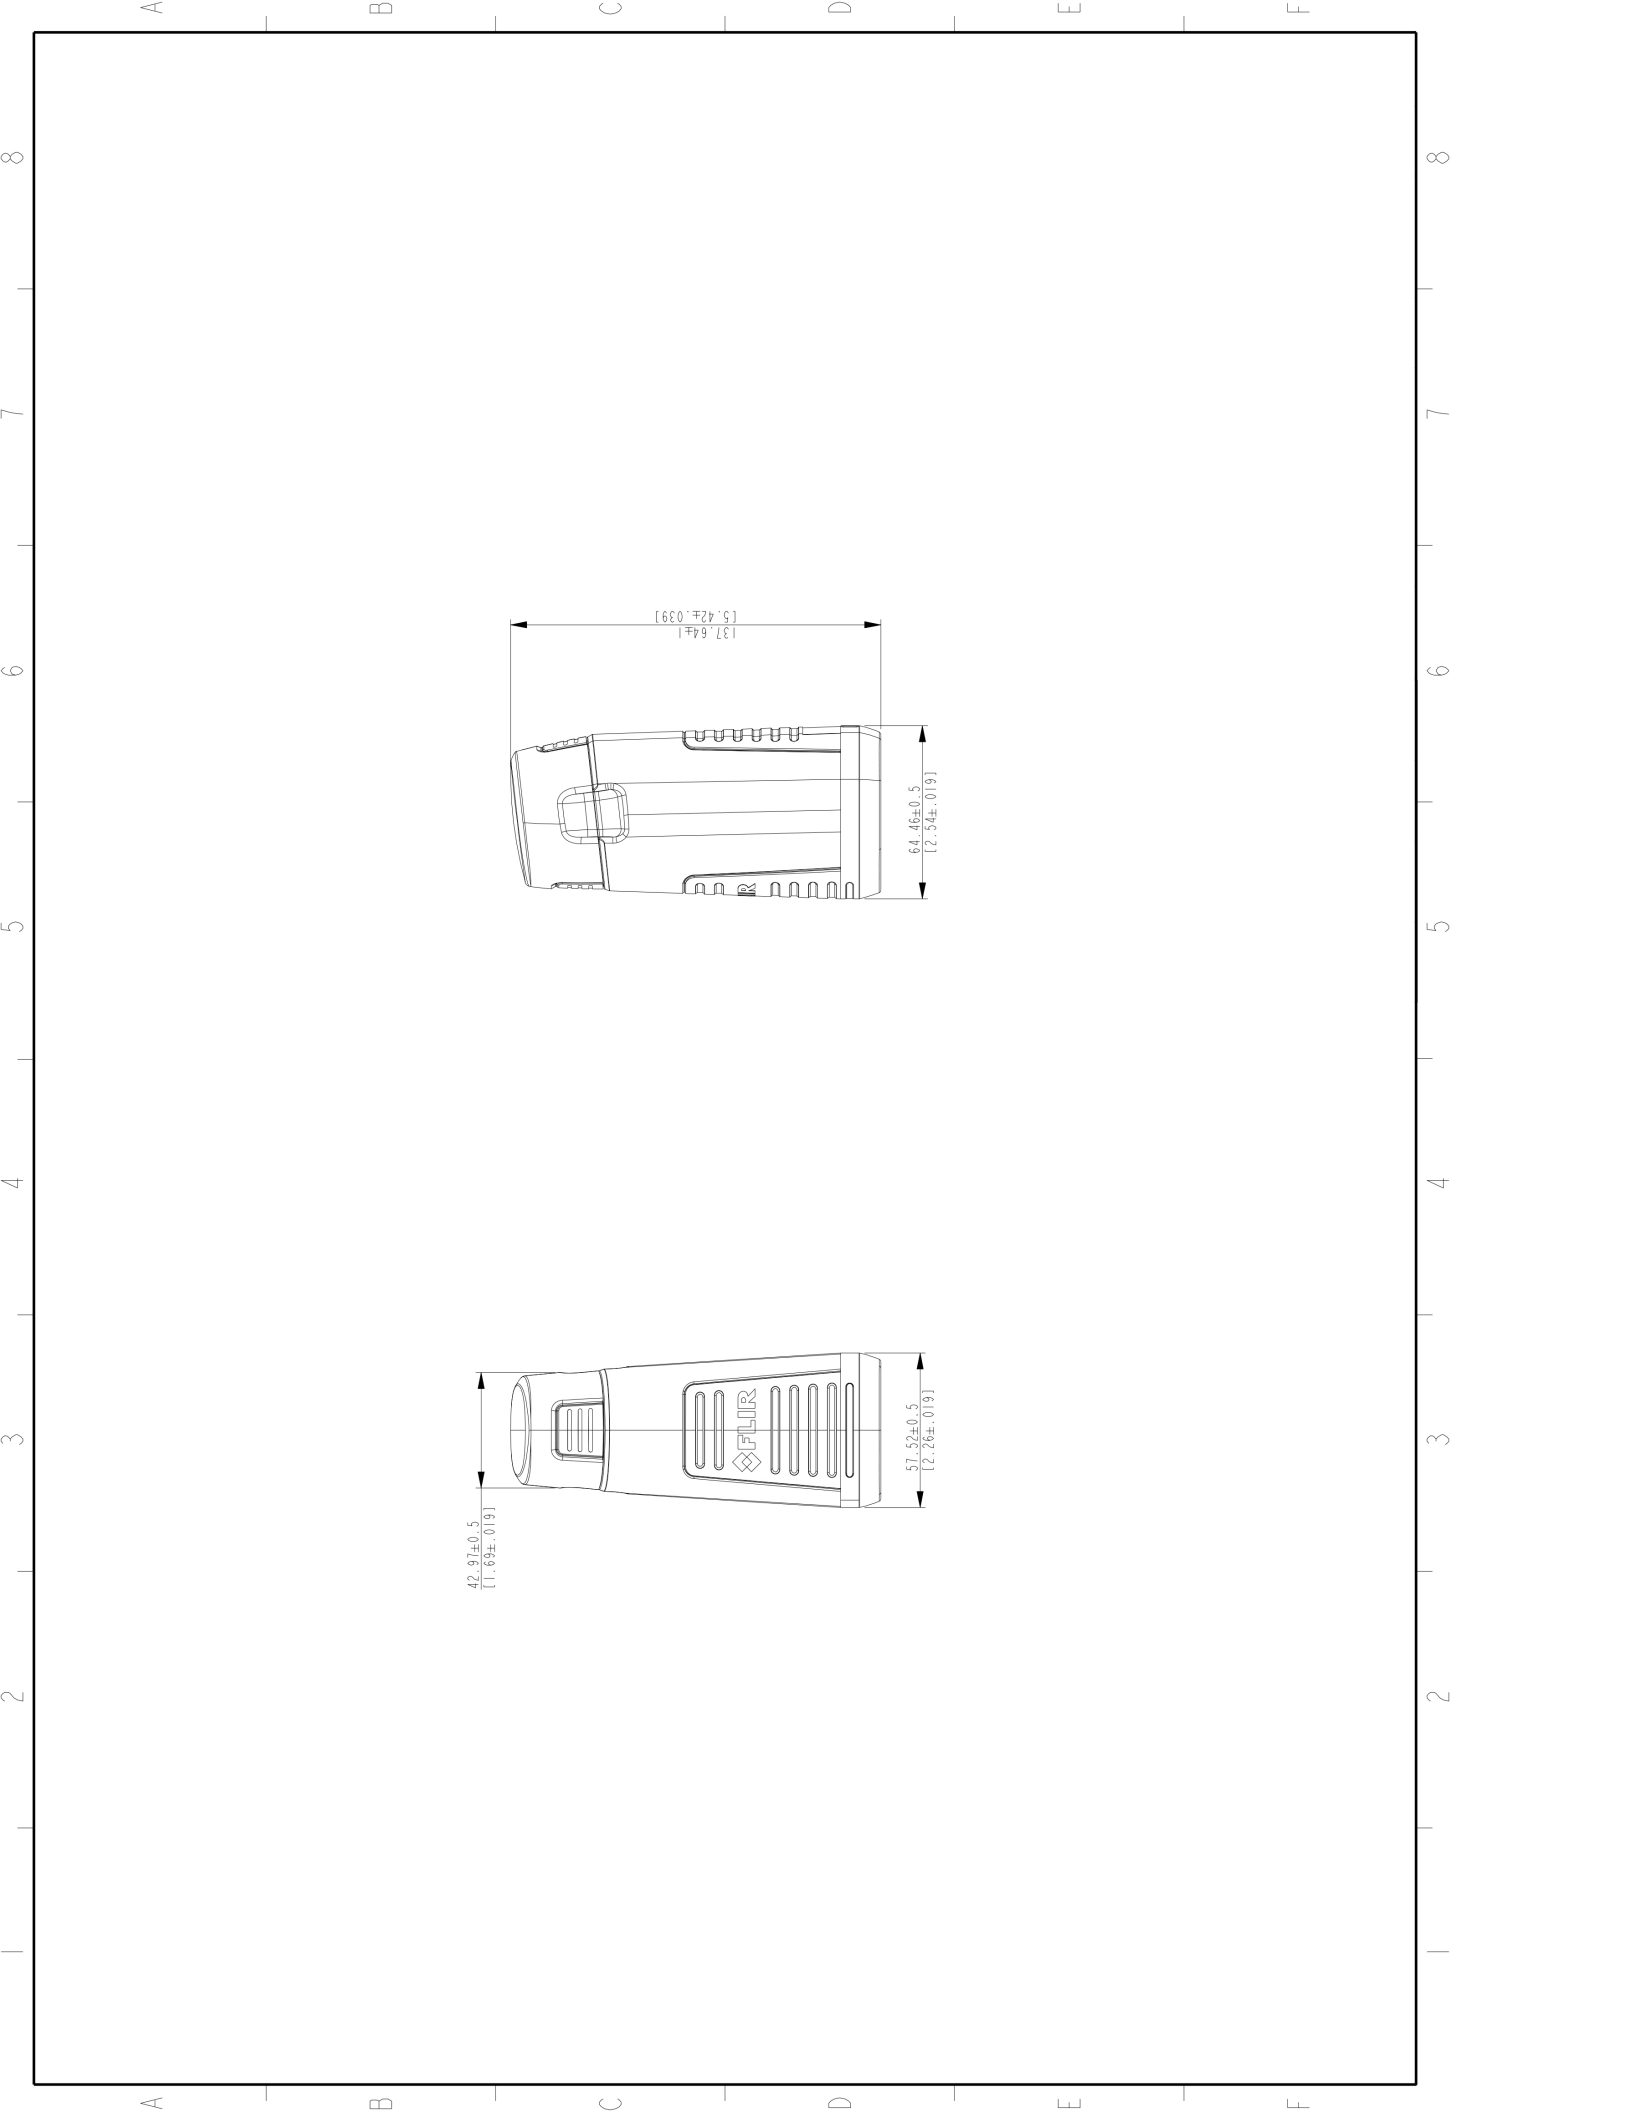

8

7

6

5

4

3

2

F

F

E

E

D

D

C




C


B

B

A

A

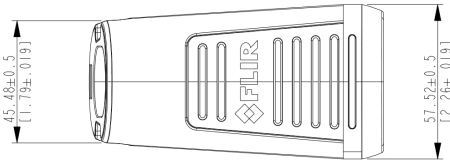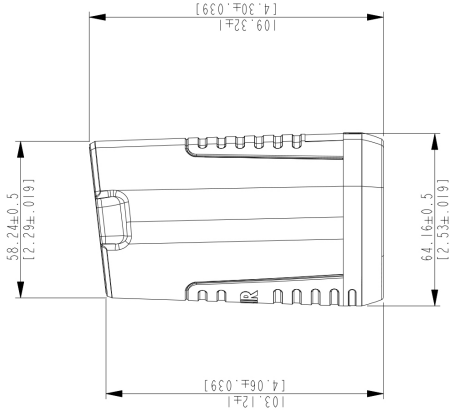

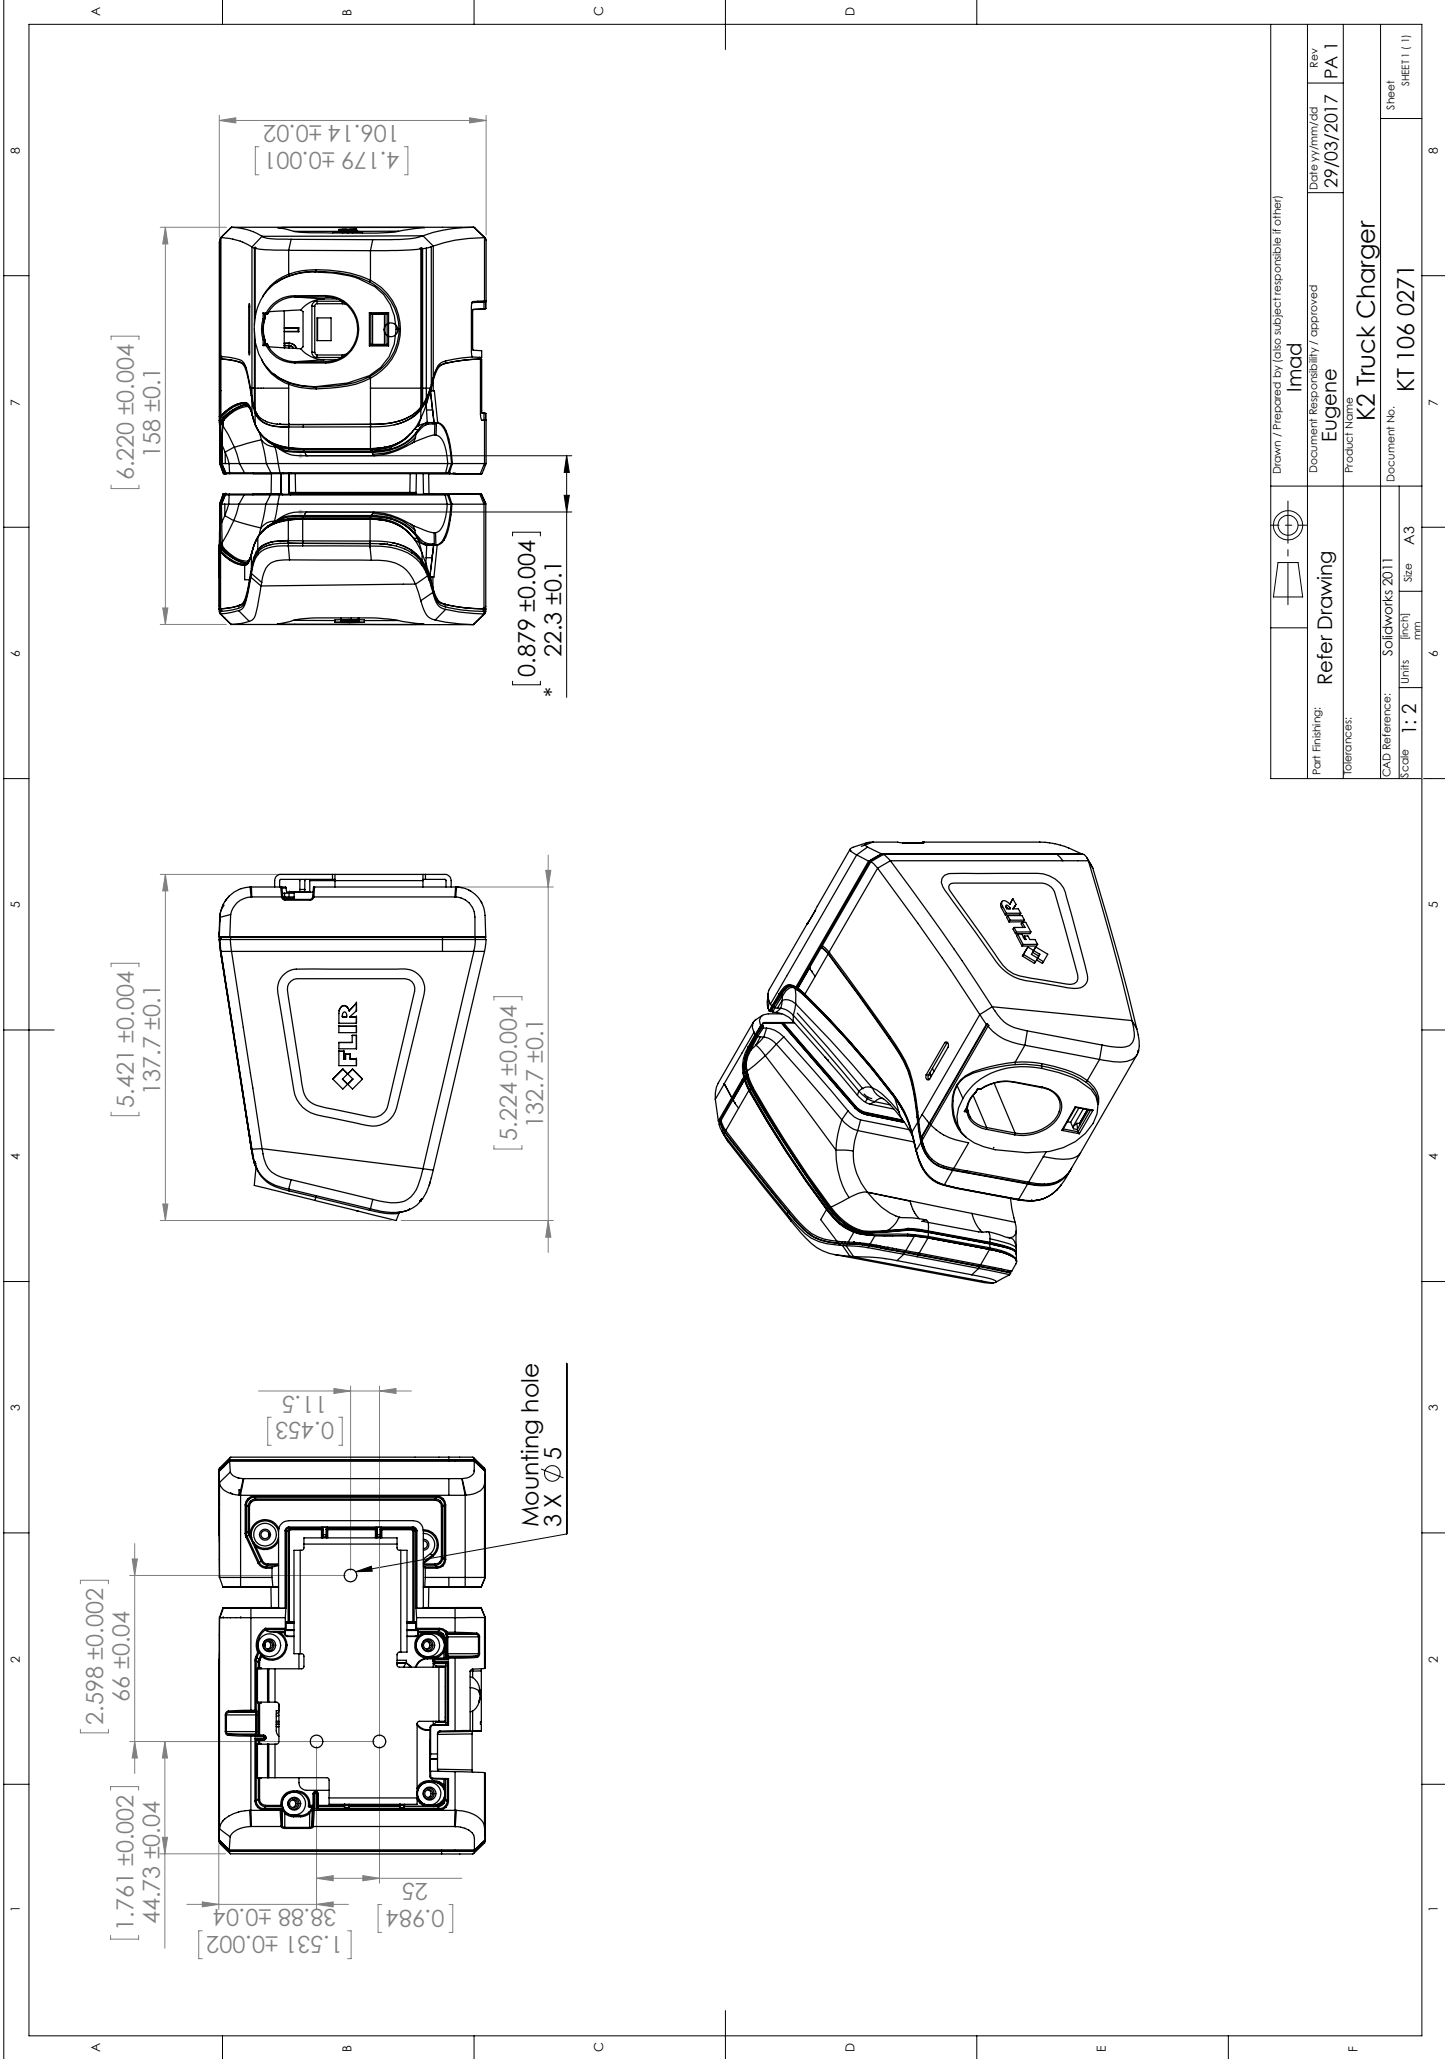

Part Finishing:	Refer Drawing	Drawn / Prepared by (also subject responsible if other):	Imad
Tolerances:		Document Responsibility / approved	Eugene
CAD Reference:	Solidworks 2011	Product Name	K2 Truck Charger
Scale	1:2	Document No.	KT 106 0271
Units	[inch]	Sheet	SHEET 1 (1)
Size	A3		