



RoHS 

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/23/2013
B	Modify cable length.	Dec/25/2013
C	Add note.	Mar/20/2014
D	Modify P/N.	Sep/25/2014

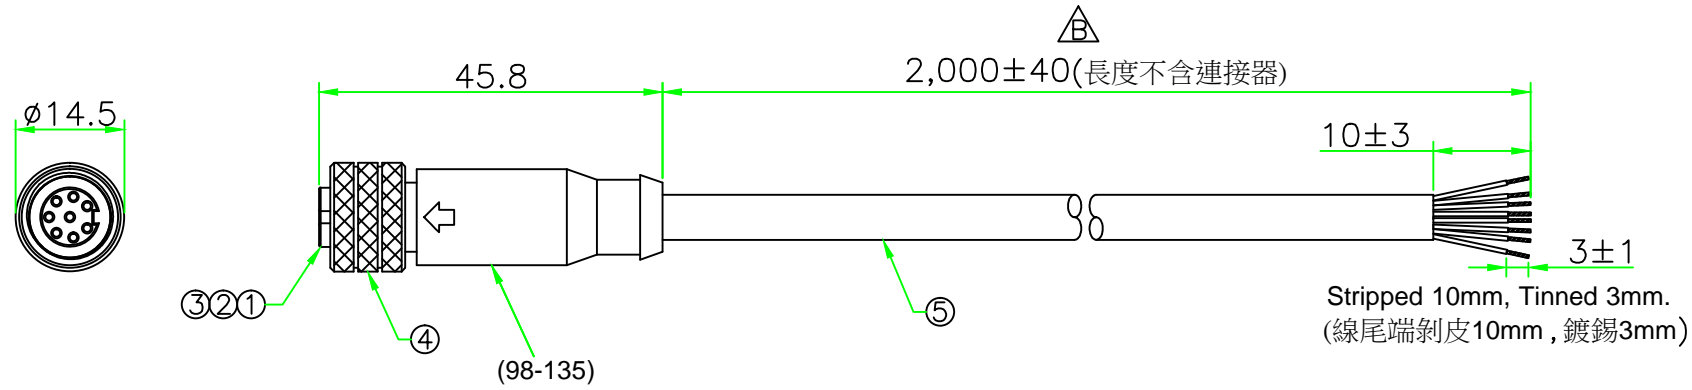

Pin Assignment  
Front View  
(前視圖)

Wiring Diagram

1		Orange/White (橙/白)
2		Orange (橙)
3		Green/White (綠/白)
4		Green (綠)
5		Blue (藍)
6		Blue/White (藍/白)
7		Brown/White (棕/白)
8		Brown (棕)

5	CABLE	CAT5E FTP 24AWG x 4 PAIR + AL/MY + Drain wire, OD:6.0mm.	BLACK	1	WAC2B0026				
4	RING NUT	Brass, Nickel Plated.		1	M12F-RN	 UNIT: mm SCALE 1:1	TITLE M12 A-Coding 8P Female Molded Cable Ass'y		
3	O-RING	Viton.	BLACK	1	M12-O-VK				
2	CONTACT	Brass , Female pin ,6 u" Gold plated .		8	AASPF-1008-0.8	UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X	P/N: K129351003		DR.
1	CONNECTOR	M12 A-coding Female connector insert. Nylon+GF.	BLACK	1	M12A-08F				CH.
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV. D	SHEET 1/1	DWG.NO: T128391 	AP.