

P/N: T128391ACC

Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: T128391ACC

Release:

Commit: 42932

Language: en-US

Modified: 2017-05-30

Formatted: 2017-05-31

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description	
Cable, M12 to pigtail, A-coded.	
Physical data	
Weight	0.085 kg (0.19 lb.)
Cable length	2 m (6.6 ft.)
Connector	M12 to pigtail
Color	Black
Shipping information	
List of contents	<ul style="list-style-type: none">Cable
Packaging, weight	0.136 kg (0.30 lb.)
Packaging, size	202 × 146 × 25 mm (8.0 × 5.7 × 1.0 in.)
EAN-13	4743254001800
UPC-12	845188009953
Country of origin	Estonia

Compatible with the following products:




- 71201-0101; FLIR AX8 9 Hz

RoHS

IP67



REV.	DESCRIPTION	DATE
A	ISSUE	Dec/23/2013
B	Modify cable length.	Dec/25/2013
C	Add note.	Mar/20/2014
D	Modify P/N.	Sep/25/2014

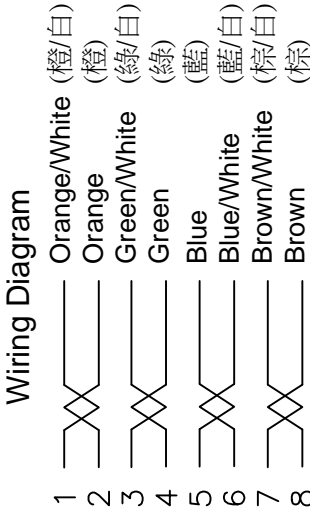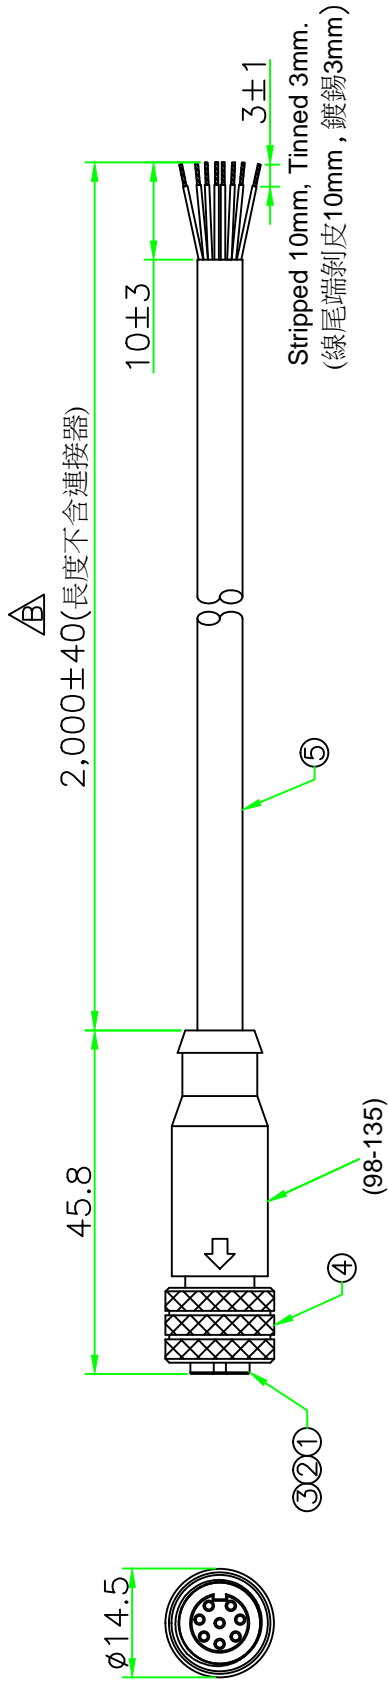

5	CABLE	CAT5E FTP 24AWG x 4 PAIR + AL/MY + Drain wire, OD:6.0mm.	BLACK	1	WAC2B0026
4	RING NUT	Brass, Nickel Plated.		1	M12F-RN
3	O-RING	Viton.	BLACK	1	M12-O-VK
2	CONTACT	Brass, Female pin, 6 u" Gold plated.		8	AASPF-1008-0.8
1	CONNECTOR	M12 A-coding Female connector insert. Nylon+GF.	BLACK	1	M12A-08F
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

UNIT: mm	SCALE	TITLE
1:1	1:1	M12 A-Coding 8P Female Molder Cable Assy

UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N:	DR.
x ± 0.25	K129351003	
xx ± 0.1		CH.
xxx ± 0.05		AP.

REV.	SHEET	DWG.NO.
D	1/1	T128391