

P/N: VP52

Copyright

© 2015, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: VP52

Release:

Commit: 29700

Language: en-US

Modified: 2015-10-16

Formatted: 2015-10-20

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



The FLIR VP52 CAT IV-rated non-contact voltage detector is designed to reliably detect voltages on the latest tamperproof outlets and electrical systems installed.

- Safe CAT IV-1000 V rating and toolbox-tough with a rubber-reinforced case and buttons, and a low-profile detection tip.
- Vibration and red LED alarms alert users to the presence of voltage in noisy areas.
- Versatile high/low-sensitivity modes detect voltage in industrial equipment and low-voltage installations.
- The powerful LED work light is always at the ready to illuminate poorly lit locations.
- The inspection light at the probe tip facilitates testing in dark areas.

Measurement	
AC voltage range (default, green light)	190–1000 V AC
AC excitation voltage/distance	190 V AC/0–5 cm
Frequency range	45–65 Hz
High-sensitivity mode (amber light)	24 V AC

Meter data	
Work light	~50–52 lumens
Tip light	Yes
Category rating	CAT IV-1000 V
Warranty	Limited lifetime
Calibration cycle	N/A

Certifications	
Certifications	UL, cUL, CE, CB

Power system	
Power requirements	2 × AAA alkaline batteries
Battery life	~7 hours continuous (work light off)
Low battery voltage	N/A
Auto power off	Yes

Environmental data	
Drop test	3 m (9.8 ft.)
Operating ambient temperatures	0–60°C (–32 to 140°F)
Storage temperature	–40 to 90°C (–40 to 194°F)
Temperature coefficient	N/A

P/N: VP52


© 2015, FLIR Systems, Inc.
 #VP52; r. /29700; en-US

Physical data	
Weight	0.20 kg (0.44 lb.), including batteries
Dimensions (H x W x L)	29 mm x 26 mm x 156 mm (1.1" x 1.0" x 6.1")
Material	<ul style="list-style-type: none"> Polycarbonate and acrylonitrile butadiene styrene (PC-ABS) Thermoplastic elastomer (TPE)
Color	Gray, black

Shipping information	
Packaging type	Color box with view of product in clamshell
Packaging contents	<ul style="list-style-type: none"> VP52 FLIR detector 2 x AAA Energizer batteries User manual
Packaging weight	0.17 kg (0.38 lb.)
Packaging dimensions (H x W x L)	9 cm x 7 cm x 25 cm (3.5" x 2.8" x 9.8")
Carton weight	4.7 kg (10.3 lb.)
Carton dimensions (H x W x L)	36 cm x 38 cm x 28 cm (14.1" x 14.9" x 11.0")
Carton quantity	20
EAN-13	0793950400524
UPC-12	793950400524
Country of origin	China
Tariff code	9030330040

Technical support	
Website	http://support.flir.com
E-mail	TMSupport@flir.com
Phone	855-499-3662
Repairs	repair@flir.com

© 2014, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

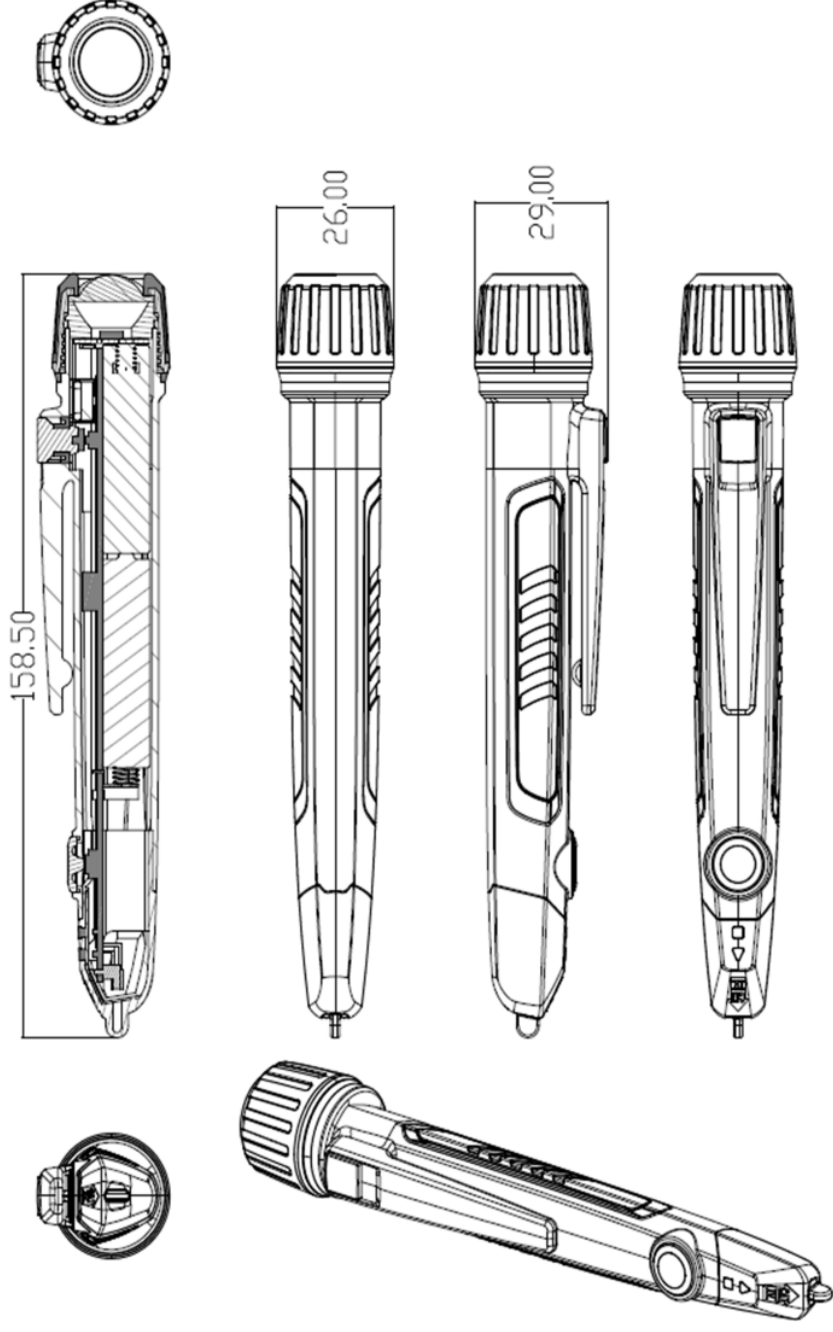

Modified Date Monday, April 21, 2014	Modified By T&M Engineering
Description FLIR VP50/52, Units in mm	

