


FPS-200



Installation Guide


Installationsanleitung, Guía de Instalación, Guida de Installazione, Guide d'Installation, Installatie gids

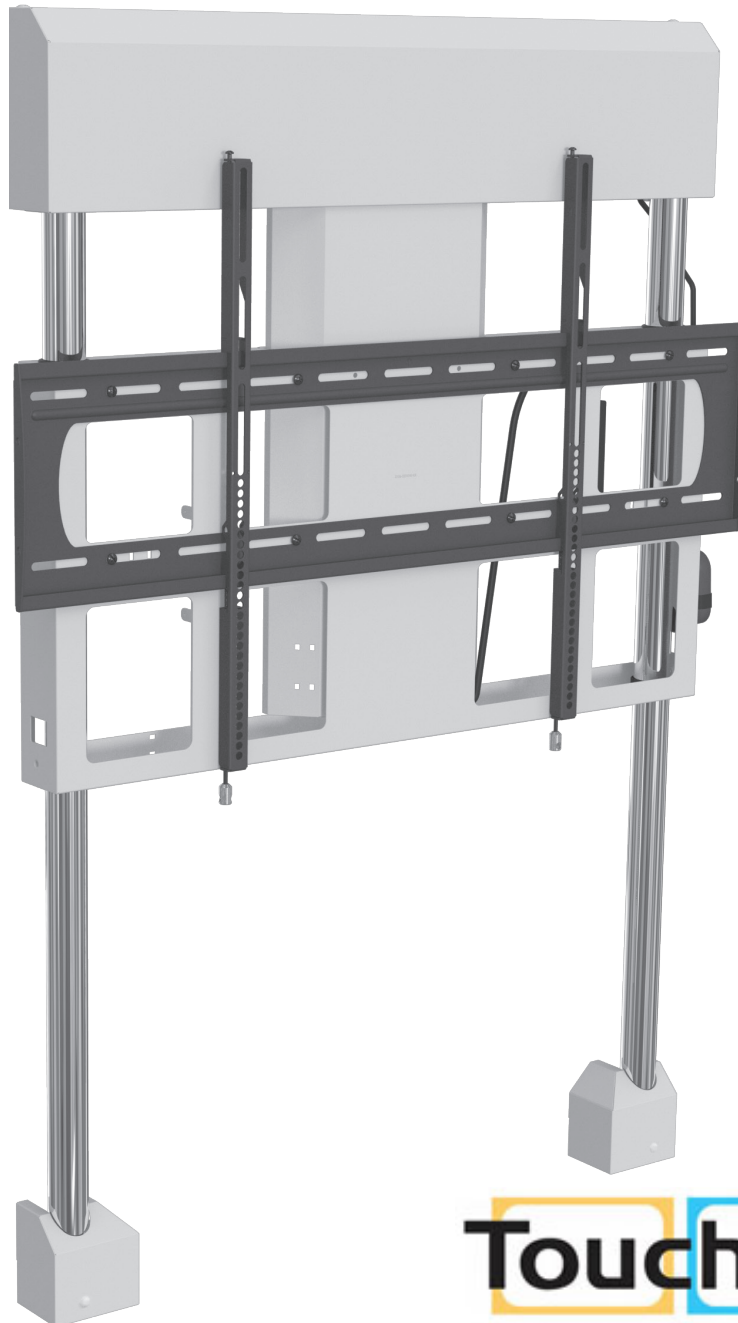


Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Included components

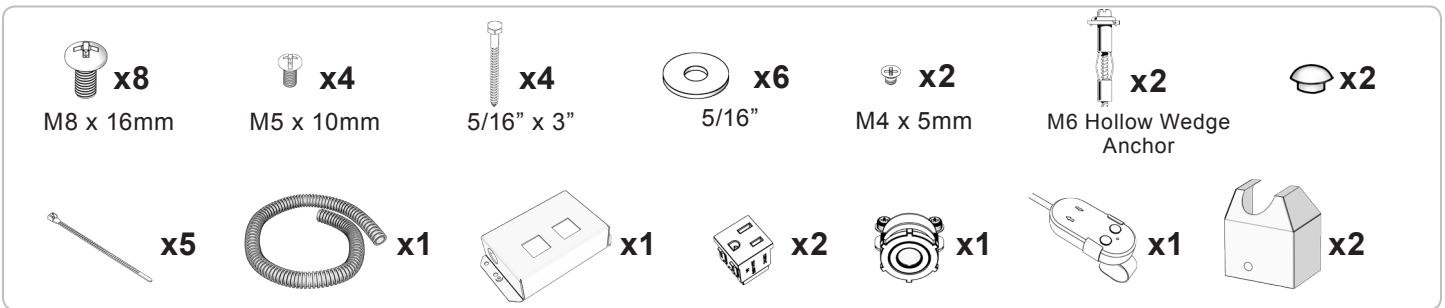


Required for installation

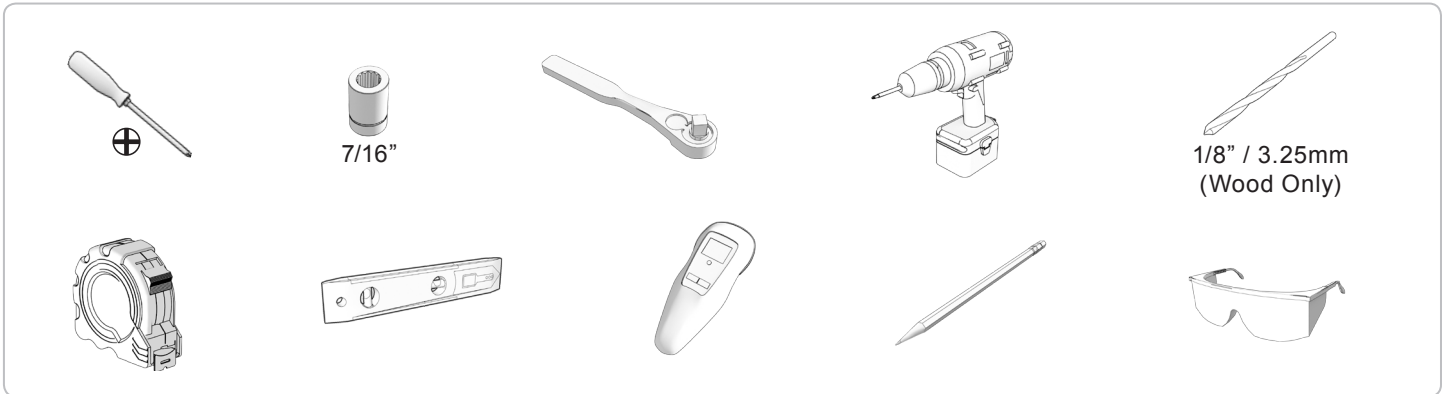

Important Note: Please take the time to completely read the installation manual and confirm your understanding of all steps for the proper installation of the FPS-200 power lift system. Remove all items from the carton and confirm that you have the complete kit. Should you have any missing items, please call (800) 368-9700, or internationally at (714) 632-7100 and ask for customer service.


Step 1: Determine where the desired "centered" height of the display will be, and make a small pencil mark on the wall to indicate. With a minimum of two people, raise the FPS-200 to the wall and mark the center of travel point between the two chrome tubes with your pencil. Measure from the center point of the tubes to the top of the wall mount's slotted mounting points and notate the distance.

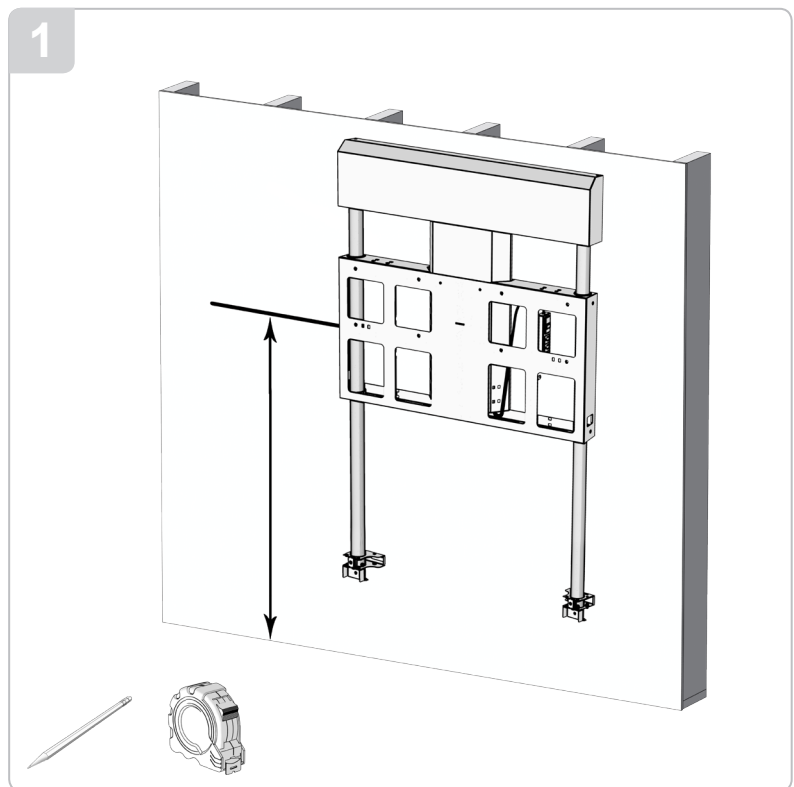


FPS-200

Installation Guide

Installationsanleitung, Guía de Instalación, Guida de Installazione, Guide d'Installation, Installatie gids

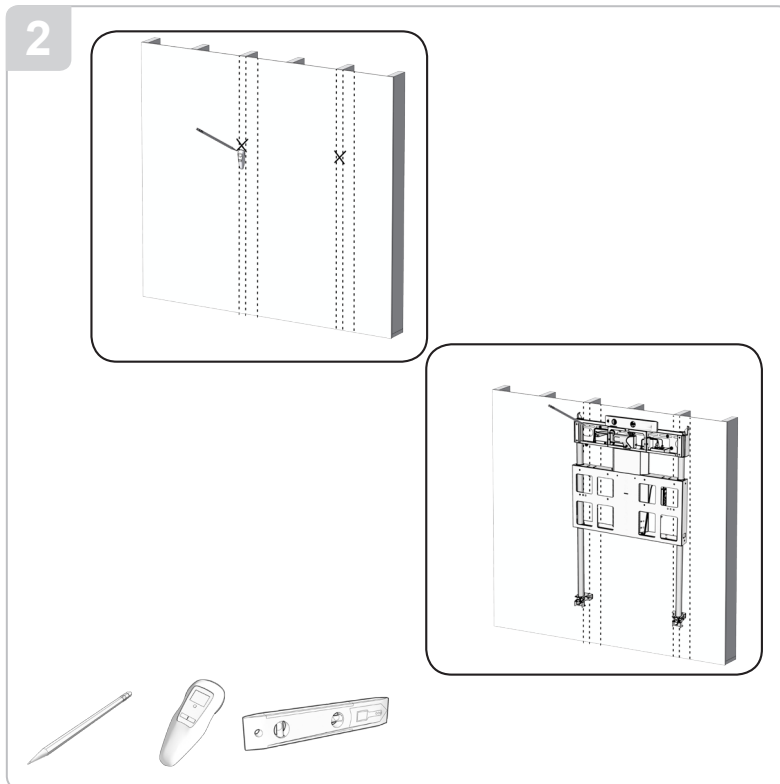

Step 2: With a stud finder, locate the 16" or 24" mark on the center studs inside the wall closest to the desired mounting point and center the mount left to right, then top to bottom. With your pencil, mark the upper and lower left and right mounting points through the mounting plate. Set the FPS-200 aside and drill the four pilot holes.

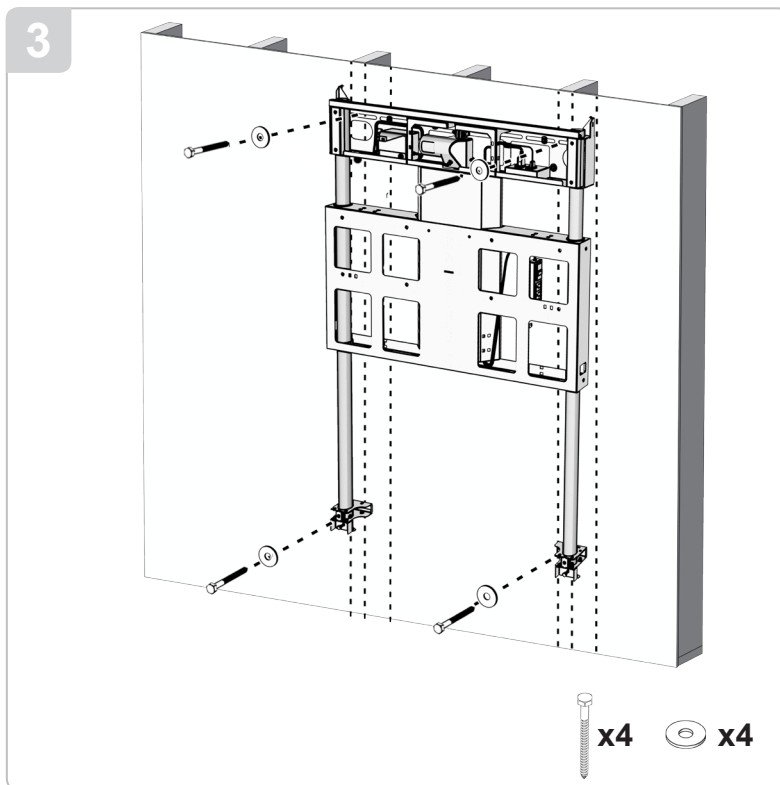

Step 3: With a minimum of two people raise the FPS-200 and secure it to the wall with the 5/16" x 3" lag bolts and flat washers. Note: If you plan to use toggle bolts for steel studs in either the top or bottom mounting points, the 1/4" pilot hole will have to be drilled out with a 5/16" drill to allow for the wedge anchors to be a minimum depth of 3" (75mm).

Note: Depending on your wall structure, use the following hardware accordingly.

Option 1: 5/16x3" lag boltson top and M6 hollow wall anchors on the bottom.

Option 2: 5/16x3 lag bolts on top and bottum

Option 3: Use commercially available hardware, depending on your applications and wall structure.

Warranty: <http://www.mounts.com/warranty>
Garantie, Garantía, Garanzia, Garantie, Waarborg

Updates: The most up-to-date installation guides can be found at mounts.com

9535-001-011-0X Rev.0


 **PREMIER MOUNTS**
THE ORIGINAL MOUNT COMPANY

www.mounts.com | North America 800.368.9700 | International +1-714-632-7100 | Europe +44 (0) 24 7664 4105




Step 4: With the base FPS-200 securely mounted to the wall, the two A/C power outlet boxes can now be mounted to the FPS-200 frame.

Note: The upper power box needs to have the two outlets "hard wired" to them.

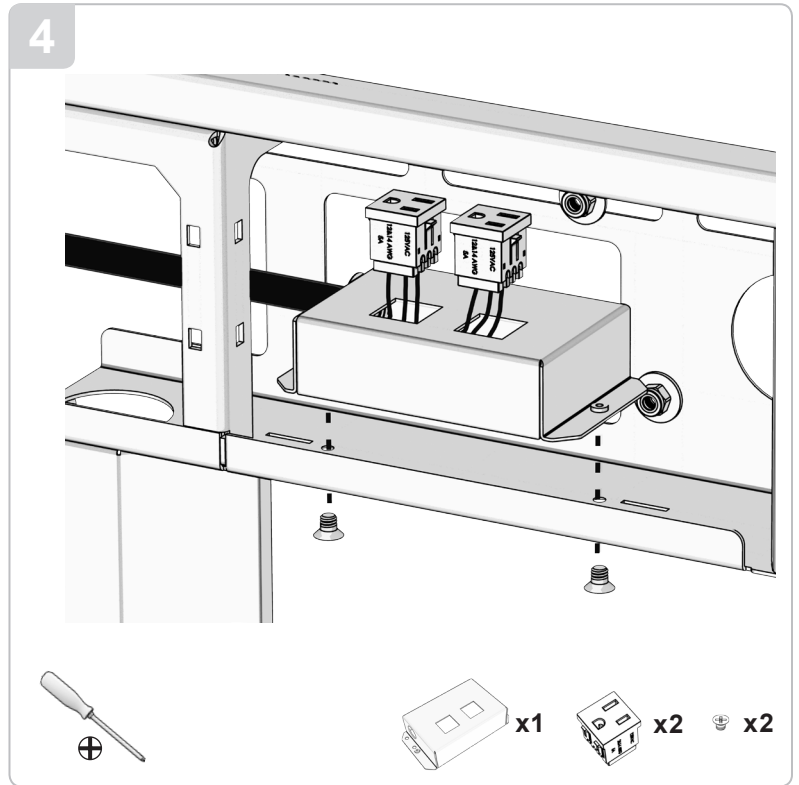


Step 5: Confirm that all power and signal cables are properly strapped to the FPS-200 frame to allow free movement of the cables during the complete up and down travel of the powered mount.

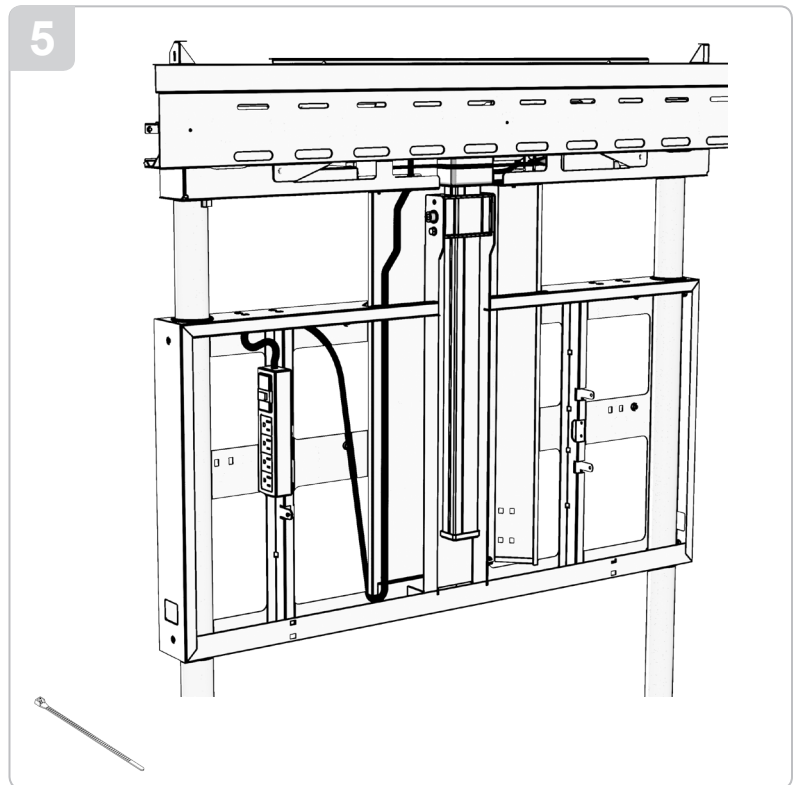


FPS-200

Installation Guide

Installationsanleitung, Guía de Instalación, Guida de Installazione, Guide d'Installation, Installatie gids

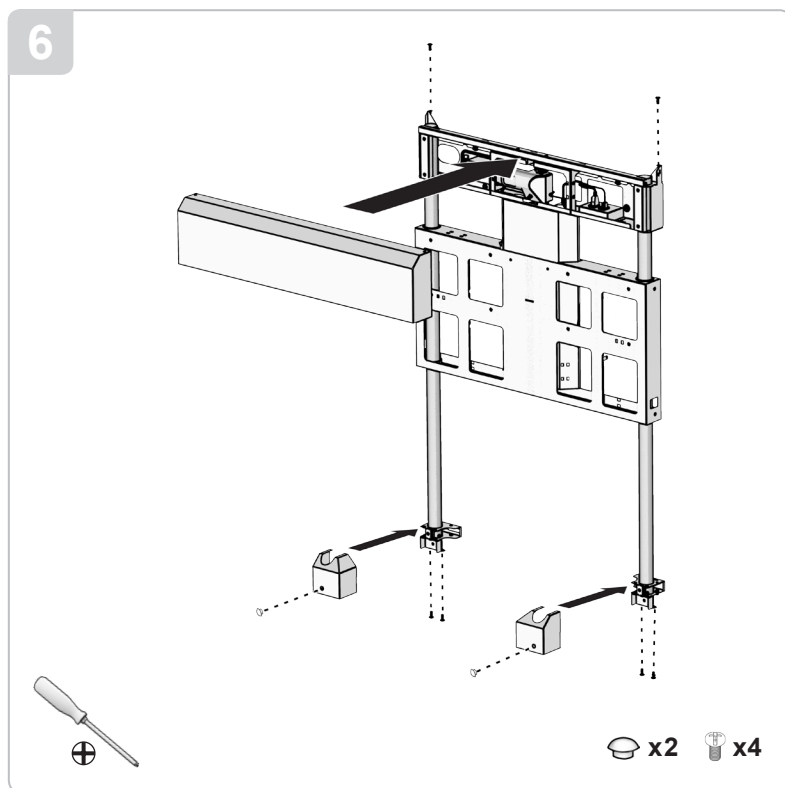

Step 6: With the system now powered and level, re-attach the upper and lower covers with the supplied hardware that you removed.

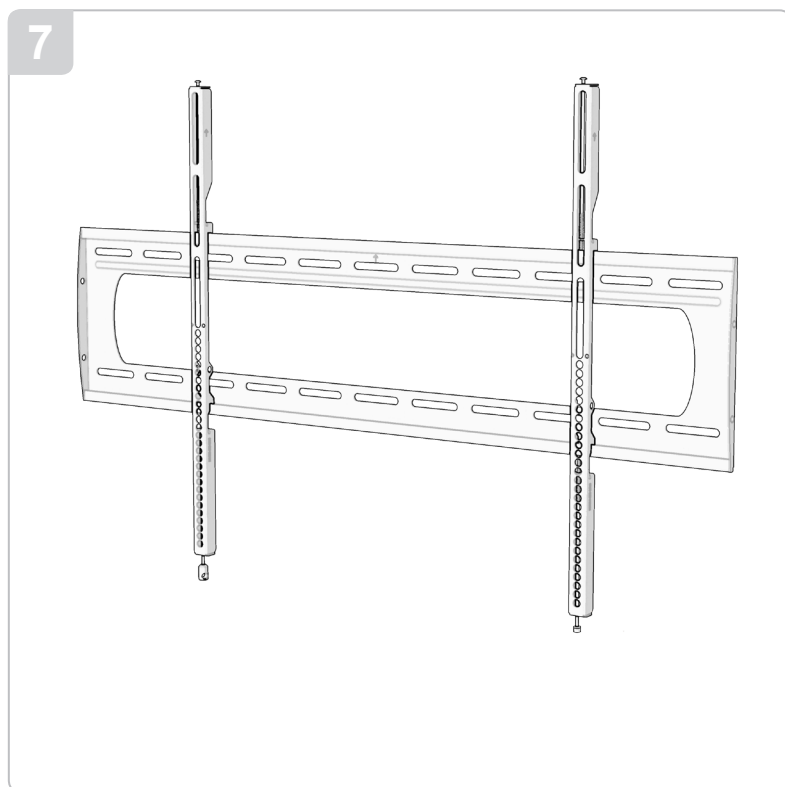

Step 7: Install the "P" series flat mount with the supplied hardware, following the installation instructions supplied with the "P" series flat wall mount. Make sure you center the mount to conform with the original center travel height that you previously marked on the wall.

Warranty: <http://www.mounts.com/warranty>
Garantie, Garantía, Garanzia, Garantie, Waarborg

Updates: The most up-to-date installation guides can be found at mounts.com

9535-001-011-0X Rev.0

 **PREMIER MOUNTS**
THE ORIGINAL MOUNT COMPANY

www.mounts.com | North America 800.368.9700 | International +1-714-632-7100 | Europe +44 (0) 24 7664 4105



FPS-200

Installation Guide

Installationsanleitung, Guía de Instalación, Guida de Installazione, Guide d'Installation, Installatie gids

Limited Lifetime Warranty

What and Who is Covered by this Limited Lifetime Warranty

Premier Mounts warrants all mounting products to be free from defects in material and workmanship for the lifetime of the original installation of the product.

What Premier Mounts Will Do

At the sole option of Premier Mounts, Premier Mounts will repair or replace any product or product part that is defective. If Premier Mounts chooses to replace a defective product or part, a replacement product or part will be shipped to you at no charge, but you must pay any related labor costs.

What is Not Covered: Limitations

Premier Mounts disclaims any liability for damage to mounts, adapters, displays, projectors, other property, or personal injury resulting, in whole or in part, from improper installation, modification, use or misuse of its products.

NOTWITHSTANDING ANYTHING TO THE CONTRARY IN THIS WARRANTY, THIS WARRANTY IS LIMITED TO FIVE YEARS FROM THE DATE OF PURCHASE IN THE EVENT THAT THE WARRANTED PRODUCT IS COMMERCIALY RENTED OUT.

Electrical products and components, such as amplifiers, speakers, motors, switches remote controls and related electrical items, are backed by a 3-year warranty.

Premier Mounts disclaims all other warranties, express or implied, including warranties of merchantability and fitness for a particular purpose. Premier Mounts is not responsible for incidental or consequential damages, including but not limited to, inability to use its products or labor costs for removing and replacing defective products or parts. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

What Customers Must Do for Warranty Service

If you discover a problem that you think may be covered by the warranty, you must report it in writing to the address below within thirty (30) days. Proof of purchase (an original sales receipt) from the original consumer purchaser must accompany all warranty claims. Warranty claims must also include a description of the problem, the purchaser's name, address, and telephone number. General inquiries can be addressed to Premier Mounts Customer Service at 1-800-368-9700. Warranty claims will not be accepted over the phone or by fax.

Premier Mounts

Attn: Warranty Claim
1321 S. State College Blvd.
Fullerton, CA 92831 USA
How State Law Applies

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Legal

This website contains numerous trademarks of Premier Mounts, including but not limited to Premier, Premier logo,

Premier Mounts intends to make this manual accurate and complete. However, Premier Mounts makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Premier Mounts makes no representation of warranty, expressed or implied, regarding the information contained herein. Premier Mounts assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Warranty: <http://www.mounts.com/warranty>
Garantie, Garantía, Garanzia, Garantie, Waarborg

Updates: The most up-to-date installation guides can be found at mounts.com

9531-001-011-0X Rev.0



www.mounts.com | North America 800.368.9700 | International +1-714-632-7100 | Europe +44 (0) 24 7664 4105

