

# CVD-2EQ / CVD-2EQA SVD-2EQ / SVD-2EQA

Composite & S-Video Distribution  
Amplifiers with Cable Equalization  
With and Without Audio

# FSR

Video Products Group



**205 Westwood Ave, Long Branch, NJ 07740**  
**Phone: 866-94 BOARDS (26273) / (732)-222-1511**  
**Fax: (732)-222-7088 | E-mail: sales@touchboards.com**

## FEATURES:

The CVD-2EQA is a 1 in 2 out Composite Video and Stereo Audio DA with cable equalization on each output and 100 MHz of video bandwidth. The AC adapter is included. The CVD-2EQ is also available as a version without audio.

The SVD-2EQA is a 1 in 2 out S - Video and Stereo Audio DA with cable equalization on each output and 100 MHz of video bandwidth. The AC adapter is included. The SVD-2EQ is also available as a version without audio.

These new additions to the FSR line of distribution amplifiers have individual adjustments on each of the outputs allowing adjustment of each output to compensate for the cable's length. This equalization provides superior signal integrity on each line, especially in applications where the output cable runs are of varying length.

## APPLICATIONS:

- Boardrooms
- Education
- Training Rooms
- Rentals
- Staging Events
- Conference Centers
- Videoconferencing

## FSR Inc.


244 Bergen Boulevard, West Paterson, NJ 07424  
 Phone: 973.785.4347 · Fax: 973.785.4207  
 Web: www.fsrinc.com · E-mail: sales@fsrinc.com



CVD-2EQ



CVD-2EQA

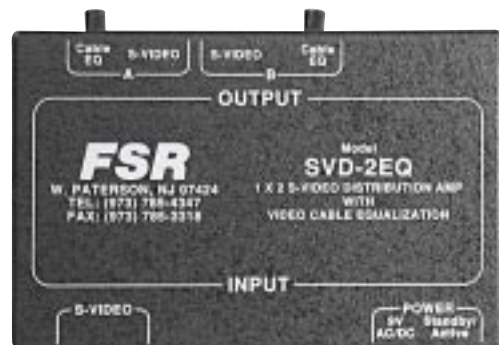

SVD-2EQ



SVD-2EQA

## TECHNICAL SPECIFICATIONS

### VIDEO INPUT

Number/type:	1 Composite on CVD's & 1 S – Video on SVD's
Connectors:	1 BNC Female on CVD's & 1 4-pin d-sub on SVD's
Level (nominal):	Analog 0.7v p-p
Level (maximum):	2v p-p
Impedance:	75 ohms

### VIDEO OUTPUT

Number/type:	2 Composite on CVD's & 2 S – Video on SVD's
Connectors:	2 BNC Female on CVD's & 2 4-pin d-sub on SVD's
Bandwidth:	100 MHz @ -3 dB
Level (nominal)	Unity / User adjustable via knobs for each output
Gain:	Adjustable for cable runs of 1' to 500'
Impedance	75 ohms

### AUDIO **(ON CVD-2EOA & SVD-2EOA MODELS ONLY)**

Gain	Unity
Bandwidth	20 Hz to 20 kHz (+/-0.05 dB)
THD + Noise	0.01% @ 20 kHz at rated Max Output S/N >98 dB
Noise Floor:	better than 98 dB
Stereo separation	-90 dB @ 1 kHz

### AUDIO INPUT **(ON CVD-2EOA & SVD-2EOA MODELS ONLY)**

Number/type	1 stereo unbalanced
Connectors	1/8" mini connector & 2 RCA's
Impedance	10K Ohms DC coupled unbalanced
Max level	+6 dBv (.775v = 0dBv)

### AUDIO OUTPUT **(ON CVD-2EOA & SVD-2EOA MODELS ONLY)**

Number/type	2 Balanced / Unbalanced Stereo
Connector	5 Position Captive screw terminal
Impedance	50 ohm
Maximum Level:	600 ohms: +12 dBv Balanced / +6 dBv Unbalanced
	Hi – Z: +14 dBv Balanced / +8 dBv Unbalanced

### GENERAL

Power	9v AC, 50/60 Hz: 8 – 14v DC, wallmount AC power supply included
Enclosure Type:	Metal
Size:	5.125L X 3.39W X 1.312D
Approvals:	Power supply is UL/CSA approved

Specifications are subject to change without notice.

## FSR Inc.

244 Bergen Boulevard, West Paterson, NJ 07424  
 Phone: 973.785.4347 · Fax: 973.785.4207  
 Web: [www.fsrinc.com](http://www.fsrinc.com) · E-mail: [sales@fsrinc.com](mailto:sales@fsrinc.com)