

SmartFit

6" Fire-Rated Poke-Thru

FIRE RATED

FSR

Metal Products Group

SmartFit 6"



DESCRIPTION

FSR's new Fire-Rated "Poke-Thru" floor boxes provide capacity, aesthetics and installation ease. These sturdy core hole products combine flexibility via recessed mounting bracketry to accommodate a wide assortment of power, data and audio video connection options.

Covers are available in three architectural finishes: Brushed Aluminum, Brushed Brass and Black providing an attractive appearance with superior durability. The entire cover door swings open 180° and the two smaller cable access doors fold down for cable egress while the cover door is secure

A complete line of sub-plates for device mounting is available. The mounting plates incorporate a unique industry first 60/40 & 50/50 layout for un-paralleled capacity and flexibility; including twelve CAT 6 data jacks and two or four 20A AC receptacles. The cover technology exceeds UL scrub water testing requirements.

SPECIFICATIONS

- 2-hour fire rating
- 180° access door opening
- Flange height 0.15" and complies with ADA requirements
- Power wiring junction box included
- Complies with UL514A for scrub water test
- 1000 lb. cover load rating with 2x safety factor
- ULC and cULus

FEATURES

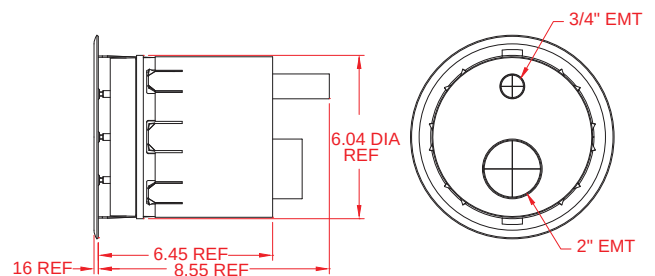



- Drop down cable access doors to reduce trip hazards
- Furniture feed option (6" core hole) for up to thirty CAT 6a data cables and ten 10 AWG power wires
- Pre-pour tubes remove the need for core hole drilling
- Sub-plates accept IPS Plates and third party devices

Touchboards


205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com





All Fire-Rated Poke-Thru's are Buy American compliant

OVERALL DIMENSIONS



Item #	6" Poke-thru without cover
SF6-PT	 Poke thru, no sub plates, no cover

Item #	Complete 6" Poke-Thru with Cover and Sub-Plates Shown
SF6-CPT-DD-ALM SF6-CPT-DD-BLK SF6-CPT-DD-BRS	 Includes: 6" floor fitting, Dual Decora opening subplate, Dual 20A pre-wired AC outlet subplate, Cover Assembly Junction box
SF6-CPT-AVD-ALM SF6-CPT-AVD-BLK SF6-CPT-AVD-BRS	 Includes: 6" floor fitting, One Decora and two keystone opening subplate, One 5-IPS subplate, One 3-AAP subplate, Four 20A pre-wired AC outlet subplate, Cover Assembly, Junction box
SF6-CPT-FF-ALM SF6-CPT-FF-BLK SF6-CPT-FF-BRS	 One piece 6" for Furniture Feed Includes: 6" floor fitting, 2" conduit fitting for data and AV, 3/4" conduit fitting for power, Cover Assembly, Junction box
6" Covers Only	
SF6-CVR-ALM SF6-CVR-BLK SF6-CVR-BRS	

Item #	6" Optional Parts 60/40 Split
SF6-SPLL1	 One decorator opening with two IPS openings (left plate)
SF6-SPLL2	 One decorator opening with two Extron AAP openings (left plate)
SF6-SPLL3	 Two decorator opening sub-plate (left plate)
SF6-SPSR1	 Two 20A pre-wired receptacles with 16" wire lead (right plate)
6" Optional Parts 50/50 Split	
SF6-SPL4	 Blank cover plate sub-plate (left plate)
SF6-SPL5	 One decorator and two keystone openings (left plate)
SF6-SPL6	 Three IPS 2 keystone jacks (left plate)
SF6-SPL7	 One decorator opening (left plate)
SF6-SPL8	 Five IPS openings (left plate)
SF6-SPL9	 Three AAP openings (left plate)
SF6-SPR2	 1.56" opening for Twist-Lock sub-plate (right plate)
SF6-SPR3	 Single duplex device opening sub-plate (right plate)
SF6-SPR4	 1.39" opening for Twist-Lock sub-plate (right plate)
SF6-SPR5	 Single decorator device opening sub-plate (right plate)
SF6-SPR6	 Four pre-wired power cubes with 16" wire lead (right plate)
Accessories	
SF6-PS	 6" pre-pour sleeve
SF6-ABAND	 Abandonment for 6" core hole cover
 MADE IN THE USA  GREEN Specifications are subject to change without notice.	