

Manual Supplement

Manual Title: 7526A Users
Print Date: July 2012
Revision/Date:

Supplement Issue: 2
Issue Date: 8/12
Page Count: 2

This supplement contains information necessary to ensure the accuracy of the above manual. This manual is distributed as an electronic manual on the following CD-ROM:

CD Title: 7526A
CD Rev. & Date: 8/2012
CD PN: 4181286



Change #1, 62467

On page 1-18, under **Specifications** delete **Electromagnetic Compatibility**, and prior to **Analog Low Isolation** add:

- EMC**Complies with EN/IEC 61326-1:2006, EN 61326-2-1:2006 for controlled EM environments except when used in the following conditions:
- In electromagnetic fields from 0.08-2.7 GHz in excess of 1 V/m.
 - When subjected to electrostatic discharge (ESD) to the binding posts. Good static awareness practices should be followed when handling this product such as discharging any built up static charge to the product chassis prior to handling terminals or test connections.
 - When the product is used with data I/O cables in excess of 3 m.

Change #2



On page 1-8, replace footnote [2], and delete footnote [3]:

- [2] **⚠⚠ Warning: To prevent possible electrical shock, fire, or personal injury, do not exceed a maximum of 20 V peak to chassis ground.**

On page 1-13, replace footnote [2], with:

- [2] **⚠⚠ Warning: To prevent possible electrical shock, fire, or personal injury, do not exceed a maximum of 20 V peak to chassis ground.**

Throughout the manual, change all **Front Panel** figures:

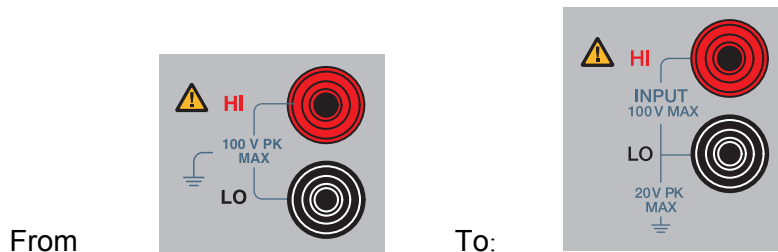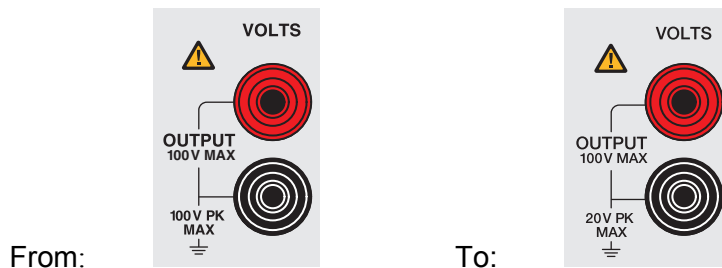

Change #3, 62958

On page 1-20, under **Resistance Specifications, Output**, change Ranges:

From: 5 kΩ to 4.00000 kΩ

To: 5 Ω to 4.00000 kΩ

On page 4-18, under item 10, replace the second Figure #gwp069.eps with:



gwp069.eps

