

# DSX-PLA-004-RKIT DSX-PLA-804-RKIT DTX-PLA002PRP

Replacement Parts for DSX and DTX  
Permanent Link Adapters

## Installation Guide





These kits are sets of RJ45 tips, latches, and cases that replace worn parts on these DSX and DTX permanent link adapters:

<b>Kit</b>	<b>Adapter</b>
DSX-PLA-004-RKIT	DSX-PLA004
DSX-PLA-804-RKIT	DSX-PLA804
DTX-PLA002PRP	DTX-PLA002

The kits include these items:

- Two RJ45 tips
- Two latches
- Two screws
- Two conductive washers
- Two top and bottom cases (DSX kits only)
- Two conductive pads (DSX-PLA-804-RKIT only)
- Installation instructions

## Symbols


	Warning or Caution: Risk of damage or destruction to equipment or software. See explanations in the manuals.
	Consult the user documentation.
	This product complies with the WEEE Directive marking requirements. The affixed label indicates that you must not discard this electrical/electronic product in domestic household waste. Product Category: With reference to the equipment types in the WEEE Directive Annex I, this product is classed as category 9 "Monitoring and Control Instrumentation" product. Do not dispose of this product as unsorted municipal waste. To return unwanted products, contact the manufacturer's web site shown on the product or your local sales office or distributor.
	40 year Environment Friendly Use Period (EFUP) under China Regulation - Administrative Measure on the Control of Pollution Caused by Electronic Information Products. This is the period of time before any of the identified hazardous substances are likely to leak out, causing possible harm to health and the environment.

## How to Replace the Tip and Latch

- 1 Remove the adapter from the tester.
- 2 Use a Phillips screwdriver to loosen the screw on the connector case; then remove and replace the tip or latch as shown below.
- 3 Make sure that the conductive washer is on the case screw as shown below.

For DSX-PLA804 adapters, make sure to put the conductive pads in the case top and bottom.

- 4 Reassemble the connector case, then tighten the screw.

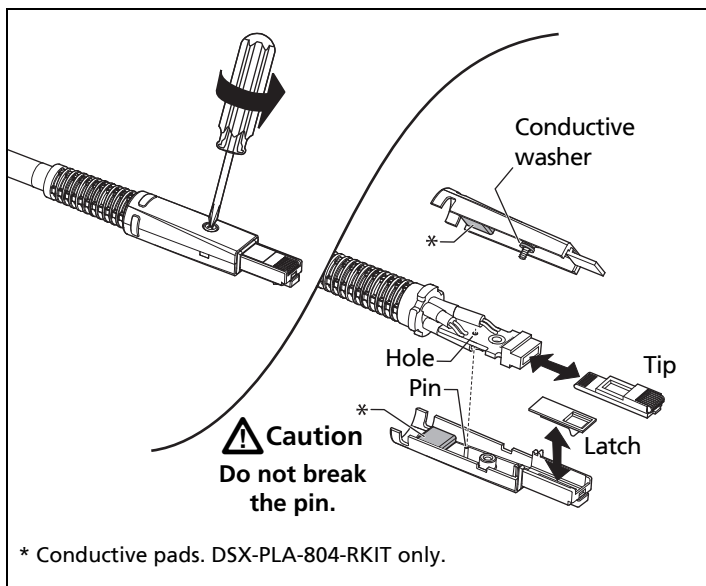

HFN00.EPS

## How to Replace the Tip and Latch

## Specifications

**Life of tip contacts (typical):** > 5,000 cycles

For more performance specifications on the DSX or DTX adapters, see the *Versiv Series Technical Reference Handbook* or the *DTX Technical Reference Handbook* or visit the Fluke Networks website.

## Contact Fluke Networks



[www.flukenetworks.com/support](http://www.flukenetworks.com/support)



[info@flukenetworks.com](mailto:info@flukenetworks.com)



1-800-283-5853, +1-425-446-5500



**Fluke Networks**

**6920 Seaway Boulevard, MS 143F  
Everett WA 98203 USA**

Fluke Networks operates in more than 50 countries worldwide. For more contact information, visit our website.

### LIMITED WARRANTY

Parts, accessories, product repairs and services are warranted for 90 days, unless otherwise stated. See the product manual for details.

4/15

Fluke Networks  
PO Box 777  
Everett, WA 98206-0777  
USA