

Go Getter

Sound System





Go Getter Sound System


Technical Specifications



The Go Getter is perfect for voice projection in an indoor or outdoor setting, and for playing music during school **Features** activities. The unit delivers 109dB of intelligible speech, and is designed for users with little-to-no technical background.

Featuring a quick set-up and easy-to-use controls, the new Go Getter is a truly versatile sound system with true AC/DC operation, optional Bluetooth capability and improved battery life. The system is ideal for schools, corporate training, and places of worship.



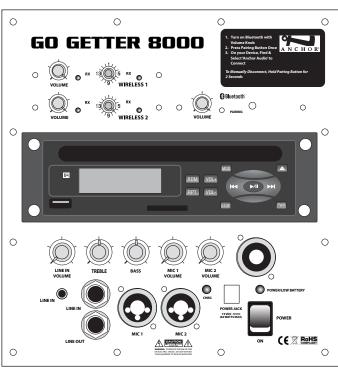

(GG-8000CU2 Back Panel Shown)



Phone: 866-94 BOARDS (26273) / (732)-222-1511 Fax: (732)-222-7088 | E-mail: sales@touchboards.com Reach Crowds of 500+

True AC/DC - 110/220V Power Supply

Single or Dual UHF Wireless with 16 User Selectable Channels

Optional CD/MP3 Combo Player

Comes with Standard Built-in Bluetooth

Remote Control for CD/MP3 Combo Player

LED Displays Charging and Low Battery

Two Microphone Combo Input Jacks

6.5" Woven Fiber Woofer & High-Output Horn Tweeter

Lightweight at just 20 Pounds

Improved "Limiter" Circuitry Reduces Distortion & Increases Intelligibility

Operates 6 - 8 Hours on a Single Charge

Speaker Out to Power Companion Speaker

GO GETTER MODELS

ы		
	GG-8000	Go Getter with Bluetooth
	GG-8000U1	Go Getter with Bluetooth & 1 wireless receiver
	GG-8000U2	Go Getter with Bluetooth & 2 wireless receivers
	GG-8000C	Go Getter with Bluetooth & CD/MP3 combo player
	GG-8000CU1	Go Getter with Bluetooth, CD/MP3 combo player & 1 wireless receiver
	GG-8000CU2	Go Getter with Bluetooth, CD/MP3 combo player & 2 wireless receivers
	GG-8001	Unpowered companion speaker

UHF WIRELESS

WH-8000 Wireless handheld microphone/ transmitter (540-570 MHz)

WB-8000 Wireless body-pack transmitter (540-570 MHz) (requires handsfree

microphone) Microphone options include:

Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

75 watts AC/DC mode Rated Power Output Max SPL @ Rated Power 109dB @ 1 meter Frequency Response 60 Hz - 16 kHz AC Power Regs. Dimensions (HWD)

90 - 264 VAC, 50/60 Hz 18" x 11" x 9" (46 x 28 x 23 cm)

Weight (AC/DC) 20 lbs/ 9.07 Kg

TECHNICAL SPECIFICATIONS

Microphone (Two combo) Lo-Z (1 KΩ), balanced, XLR

12 VDC condenser microphone

phantom power

Hi-Z (10 K Ω), balanced 1/4" phone Hi-Z (10 K Ω), balanced 1/4'' phone

Auxiliary (line) Outputs

Line (post fader)

Lo-Z, buffered, 1/4"unbalanced/

balanced

Speaker Out 4-pole Neutrik Speakon® jack

C E ROHS

(Features & Specifications Subject to Change Without Notice)

Anchor Audio, Inc.

Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com