


GL220 midi LOGGER




Up-to-the-minute Temp Measurement of Refrigeration Units

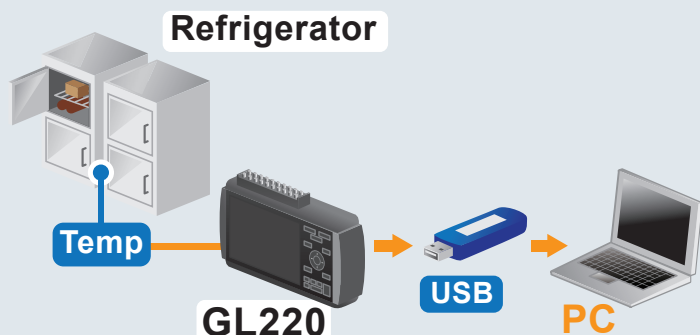

Target Industry:
Electronics

Target Testing Environment:
R&D


Measuring Various Levels on Instrumentation & Process Control Equipment

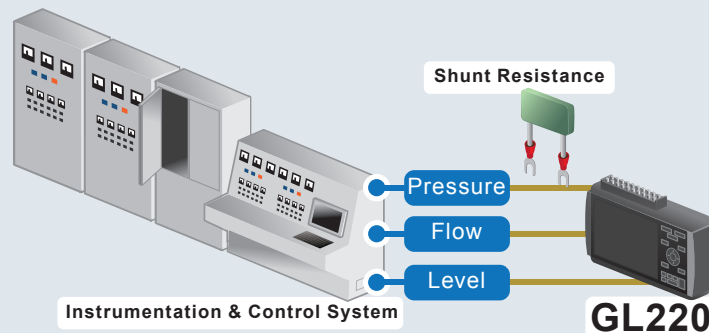

Target Industry:
Factory Production & Energy

Target Testing Environment:
Service & Maintenance


Temperature & Humidity Logging for Clean Room Environment

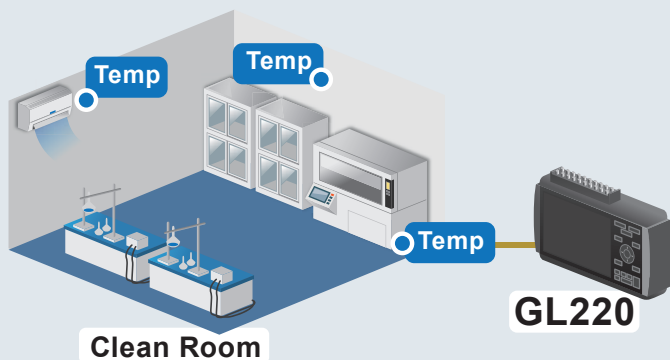

Target Industry:
Electronics

Target Testing Environment:
R&D

Lab Equipment Measurements for Micro-organism Cultivation

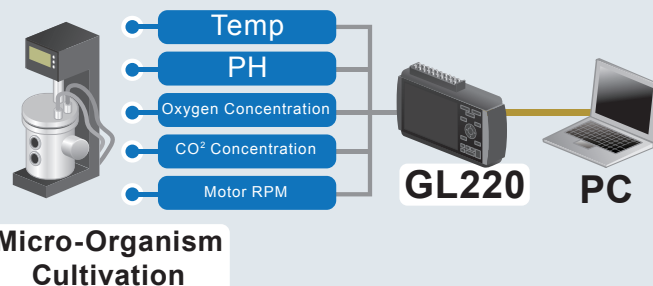

Target Industry:
Agriculture & Microbiology

Target Testing Environment:
R&D

MAX
10ms^{*1}
Sampling

Σ Δ
type
A/D Converter

Built-in
2GB Flash
Memory

Up to
10 ch

LAN
USB
USB Memory

4.3 inch
TFT LCD
Display

Voltage

20 mV to 50 V

Logic

4 channels^{*2}

Temp

Thermocouple types:
K, J, E, T, R, S, B, N, W (WRe5-26)

Humidity

0 to 100% RH using the optional
humidity sensor (B-530 option)

Pulse

4 channels^{*2}
Accumulating, Instant or RPM count

*1: Maximum sampling is achieved only when 1 channel is being used.

*2: Select either Pulse input or Logic input, and use the optional Input / Output cable (B-513 option).

GL220 main unit specifications		
Item		Description
Number of analog input channels		10 ch
External input/output	Input *1	Trigger or Sampling input 1 ch, Logic or Pulse input 4 ch
	Output *1	Alarm output 4 ch
Sampling interval		10 ms to 1 h (in 10ms to 50ms, voltage only and limited channel), External
Time scale		1 sec to 24 hour /division
Trigger function	Action	Start or stop capturing data by the trigger
	Source	Start: Off, Input signal, Alarm, External *1, Clock, Week or Time Stop: Off, Input signal, Alarm, External *1, Clock, Week or Time
	Combination	OR or AND condition at the level of signal or edge of signal
	Condition	Analog: Rising, Falling, Window-in, Window-out Pulse: Rising, Falling, Window-in, Window-out Logic: Rising or Falling
Alarm function	Detecting method	Level or edge of signal
	Condition	Analog: Rising, Falling, Window-in, Window-out Pulse: Rising, Falling, Window-in, Window-out Logic: Rising, Falling
	Alarm output *1	4 channels, Output type: Open collector (pull-up resistor 10 kΩ)
Pulse input function *1	Accumulating count mode	Accumulating the number of pulses from the start of measurement Range: 50, 500, 5 k, 50 k, 500 k, 5 M, 50 M, 500 M counts/F.S.
	Instant count mode	Counting the number of pulses per sampling interval Range: 50, 500, 5 k, 50 k, 500 k, 5 M, 50 M, 500 M counts/F.S.
	Rotation count (RPM) mode	Counting the number of pulses per second and then it is converted to RPM Range: 50 rpm, 500 rpm, 5 krpm, 50 krpm, 500 krpm, 5 Mrpm, 50 Mrpm, 500 Mrpm /F.S.
	Max. input pulse rate	50 k pulses/sec or 50k counts per sampling interval, 16 bits counter is used
Calculation function	Between channels	Addition, Subtraction, Multiplication and Division for analog input
	Statistical	Select two calculations from Average, Peak, Max., Min., RMS
Search function		Search for analog signal levels, values of logic or pulse or alarm point in captured data
Interface to PC		USB (Full speed)
Storage device		Built-in Flash memory (2 giga-bytes), USB memory device *2
Data saving function	Captured data	Direct saving of data into built-in Flash memory or USB memory device
	Others	Setting conditions, Screen copy
Ring capturing mode		Function: ON/OFF, Number of capturing point: 1,000 to 2,000,000 (Size of the capture data will be limited to 1/3 of available memory)
USB memory device emulation		USB Memory emulation mode (Transfer or delete the file in built-in memory)
Engineering scale function		Set based on the reference point of the scaled output and input signal for each channel (Voltage measurement: four points are necessary to scale the output, Temperature measurement: two points are necessary to scale the output).
Display	Size	4.3 inch TFT color LCD (WQVGA: 480 x 272 dots)
	Formats	Waveform + Digital, Waveform only, Calculation + Digital, Expanded digital
Operating environment		0 to 45 °C, 5 to 85 %RH (When operating with battery pack 0 to 40 °C, charging battery 15 to 35 °C)
Power source		AC adapter (100 to 240 V, 50/60 Hz), DC power (8.5 to 24 V DC, max. 26.4 V) *3, Battery pack *3
Power consumption		29 VA or lower (when operating with AC adapter, displaying LCD)
External dimensions (W×D×H)		approx. 7.63in x 4.63in x 1.65in
Weight		approx. 520 g (Excluding AC adapter and battery pack)


Software specifications		
Item		Description
Supported OS		Windows XP / Vista / 7 (32 bits and 64 bits edition)
Functions		Control GL220, Real-time data capture, Replay data, Data format conversion
GL220 settings control		Input settings, Memory settings, Alarm settings, Trigger settings
Captured data		Transfers data in real-time (in binary or CSV format), saved data in GL220 or the USB memory
Displayed information		Analog waveforms, Logic waveforms, Pulse waveforms, Digital values
Display modes		Y-T waveforms, Digital values, Report, X-Y graph (specified period of data, data replay only)
Warning functions		Sends E-mail to the specified address when the alarm occurred
File format conversions		Converts the specified period data or all data to the CSV format (thinning function is available)
Report functions		Creates a daily or monthly report automatically (can also export directly to Excel)
Displayed Max. Min.		Displays the maximum, minimum and current value in measurement

Standard accessories		
Item		Description
AC adapter		100 to 240 V AC, 50 / 60 Hz (with specified type of power cord)
CD-ROM		User's manual (PDF format), Application software
Quick Start Guide		1 copy

Analog input specifications				
Item		Description		
Type of input terminal		Screw terminal (M3 screw)		
Input method		Scans by the photo-MOS-relay, all channels isolated, balanced input		
Measurement range	Voltage	20, 50, 100, 200, 500 mV, 1, 2, 5, 10, 20, 50 V, and 1-5 V /F.S.		
	Temperature	Thermocouple: K, J, E, T, R, S, B, N, and W (WRe5-26)		
	Humidity	0 to 100% (using humidity sensor (B-530 optional), power is supplied to only one sensor)		
Filter		Off, 2, 5, 10, 20, 40 (moving average in selected number)		
Measurement accuracy *4	Voltage	0.1 % of F.S.		
	Temperature	Thermocouple	Measurement range	Accuracy
		R/S	0 °C ≤ TS ≤ 100 °C	± 5.2 °C
			100 °C < TS ≤ 300 °C	± 3.0 °C
			R: 300 °C < TS ≤ 1600 °C	± (0.05 % of reading + 2.0 °C)
			S: 300 °C < TS ≤ 1760 °C	± (0.05 % of reading + 2.0 °C)
			B	400 °C ≤ TS ≤ 600 °C
		600 °C < TS ≤ 1820 °C		± (0.05 % of reading + 2.0 °C)
		K	-200 °C ≤ TS ≤ -100 °C	± (0.05 % of reading + 2.0 °C)
			-100 °C < TS ≤ 1370 °C	± (0.05 % of reading + 1.0 °C)
		E	-200 °C ≤ TS ≤ -100 °C	± (0.05 % of reading + 2.0 °C)
			-100 °C < TS ≤ 800 °C	± (0.05 % of reading + 1.0 °C)
		T	-200 °C ≤ TS ≤ -100 °C	± (0.1 % of reading + 1.5 °C)
			-100 °C < TS ≤ 400 °C	± (0.1 % of reading + 0.5 °C)
		J	-200 °C ≤ TS ≤ -100 °C	± 2.7 °C
			-100 °C < TS ≤ 100 °C	± 1.7 °C
			100 °C < TS ≤ 1100 °C	± (0.05 % of reading + 1.0 °C)
N	0 °C ≤ TS ≤ 1300 °C	± (0.1 % of reading + 1.0 °C)		
	0 °C ≤ TS ≤ 2000 °C	± (0.1 % of reading + 1.5 °C)		
		Reference Junction Compensation (R.J.C.): ±0.5 °C		
A/D Converter		ΣΔ type, 16 bits (effective resolution: 1/40,000 of measuring full range)		
Maximum input voltage	Between + / - terminal	60 V p-p		
	Between channels	60 V p-p		
	Between channel / GND	60 V p-p		
Withstand voltage	Between channels	350 V p-p (1 minute)		
	Between channel(-)/ GND	350 V p-p (1 minute)		

- *1: Logic alarm cable (B-513) option is required.
Input signal of External sampling, Logic, Pulse; Maximum voltage: 24 V, Threshold: approx. 2.5 V, Hysteresis: approx. 0.5 V.
*2: Size of the USB memory device is unlimited. Maximum file size is limited to 2GB.
*3: DC drive cable (B-514) or battery pack (B-517) option is required.
*4: Subject to the following conditions;
• Room Temperature is 23°C ±5°C.
• When 30 minute or more have elapsed after power was turned on.
• Filter is set to 10.
• Sampling rate is set to 1s with 10 channels.
• GND terminal is connected to the ground.

Options and accessories			
Item	Model number	Remarks	
Logic alarm cable	B-513	2 m long (no clip on end of cable)	
DC drive cable	B-514	2 m long (no clip on end of cable)	
Battery pack	B-517	1 piece (7.4 V 2200 mAh, 17Wh)	
Humidity sensor *5	B-530	3 m long (with power plug)	



*5: Operating environment: -25 to 80 °C

Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners. Specifications are subject to change without notice.

GRAPHTEC
GRAPHTEC AMERICA, INC.
 17462 Armstrong Avenue
 Irvine, CA 92614

Website www.graphtecamerica.com/instruments

