

GENERAL®

Data Logging Hot Wire Anemometer w/ CFM/CMM and 30:1 IR Thermometer

Ideal for measuring speed, volume and temperature of slow-moving air

Features & Benefits:

- Data logging capacity: 20,000 data points via USB interface
- Measures air flow volume up to 2.5 million CFM (72,000 CMM)
- Hot wire sensor detects even the slightest (2.0 ft./min) air movement; also measures ambient temperature
- Five available air speed units: ft./min, m/sec, mph, km/hr, knots
- 30:1 IR thermometer with laser pointer has measurement range of -25° to 999°F (-32° to 537°C)

CE 
RoHS

No. CIH30DL



Large backlit LCD simultaneously displays air flow volume or speed from hot wire sensor plus remote surface temperature from IRT



Data Logging Hot Wire Anemometer w/ CFM/CMM and 30:1 IR Thermometer

Ideal for measuring speed, volume and temperature of slow-moving air

Specifications:

Air Flow Volume Measurement Range/Resolution:

0 to 2,542,700 CFM (0 to 72,000 CMM)/0.01 CFM (0.001 CMM)

Air Speed Measurement Range:

2.0 to 7874 ft./min (20mm/sec to 40m/sec)

Air Speed Measurement Accuracy: $\pm 3\% + 5.9$ ft./min (0.03m/sec)

IRT Distance-To-Spot (D:S) Ratio: 30:1

IRT Emissivity: Adjustable from 0.1 to 1.0 in increments of 0.01

IRT Measurement Range: -25° to 999° F (-32° to 537° C)

IRT Measurement Accuracy:

$\pm 5.4^{\circ}$ F ($\pm 3^{\circ}$ C) from -25° to -4° F (-32° to -20° C);
 $\pm 3.6^{\circ}$ F ($\pm 2^{\circ}$ C) from -4° to 212° F (-20° to 100° C);
 $\pm 2\%$ from 212° to 999° F (100° to 537° C)

IRT Measurement Resolution: 0.1 $^{\circ}$ (F or C)

IRT Response Time: 0.5 seconds, max

Hot Wire Sensor Temperature Measurement Range/Accuracy:

32° to 158° F (0° to 70° C)/ $\pm 1.5^{\circ}$ F ($\pm 0.8^{\circ}$ C)

Resolution: 0.1 $^{\circ}$ F (0.1 $^{\circ}$ C)

Memory: Nine readings + Max/Min/Avg + Data Hold

Extended Length of Telescoping Hot Wire Probe:

70.8 in. (1.8m)

Dimensions:


7.24 x 2.75 x 1.57 in. (184 x 70 x 40mm)

Weight: 12.36 oz. (350g)

Power Source: 1 "9V" battery (included)

Includes:

USB Cable, PC Interface Software, AC Adapter,
 1 "9V" Battery, Hard Carrying Case, User's
 Manual, 1 Year Limited Warranty

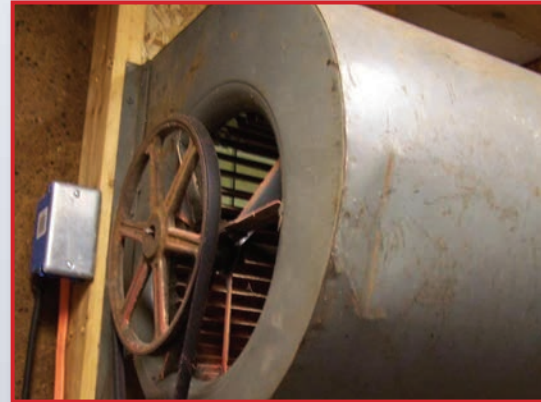

A low-speed squirrel cage blower motor



Air movers wrapping up a water damage restoration project



Enables minimally invasive duct flow testing



General Tools & Instruments

80 White Street, New York, NY 10013-3567
 TEL: 212. 431. 6100 TOLL FREE: 800. 697. 8665
 sales@generaltools.com www.generaltools.com
 CIH30DLSS Printed in USA 05/14