

Compatibility

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

Features

- 20X Optical Zoom
- USB 3.0
- RS-232
- 1920 x 1080
- 58° Field of View
- Up to 30fps
- 64 Presets
- IR Remote
- Certified SONY Lens

The HuddleCamHD 20X Gen 2 is ideal for a medium to large sized meeting rooms. Comes standard with certified SONY lens

HuddleCamHD



- Lens**
20x Optical Zoom.
- IR Receiver**
To receive IR remote controller signal.
- Power LED**
Blue LED blinks when unit is powered,
- Standby LED**
Orange LED blinks for Stand-By status. Blue LED for Working status.
- LCD Display**
Information display for camera/firmware.
- USB 3.0 Interface**
For connection to PC USB 3.0 port (also compatible with USB 2.0 port and driver).
- IR Selective Switch**
When using only one remote to control more than one camera, this switch will assign a unique ID to each camera .
- VISCA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
- VISCA OUT Port/RS485**
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- DC IN 12V Socket**
Only use the Power Adapter supplied with this camera.



Specifications

Camera & Lens

Video CMOS Sensor	1/2.8" CMOS 3.27 Mega Pixel
Frame Rate	30fps 1920 x 1080p, 60fps 1280 x 720p
Lens Zoom	20X Optical Zoom, 12X Digital Zoom f=4.7-90mm
Field of View	5°~58°
Min Lux	0.1 Lux
White Balance	Auto/Sunlight/Shade/Fluorescence White Balance

What's in the Box

20X Zoom USB 3.0 Camera
12V/2.0A DC Power Adapter
Installation Bracket & Screw
USB 3.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable
IR Remote Control
User Manual (Downloadable online)

Pan/Tilt Movement

Pan Movement	0-355°
Tilt Rotation	Up: 45°, Down: 45°
Presets	64 Presets, 4 Patrol lines

Electrical Index

Power Supply Adapter	12V DC 2A
Input Voltage	12V DC (10.5-14V DC)
Input Power	24W (Max)


Rear Board Connectors

High Definition Interface	USB 3.0
Controller Signal Interface	Mini DIN-8 (VISCA IN, VISCA OUT/RS485)
Controller Signal Config.	IDip-Switch Pin 7/TTL Signal
Baud Rate	9600 bds
Power Supply Interface	DC 12V 2A

Physical

Material	Aluminum, Plastic
Dimensions (W x H x D) mm	5.68"W x 5.63"H x 5.88"D (7" Height Ext) 144mm x 142mm x 149mm (177mm Height Ext)
Camera Weight	2.52 lbs (1.14 kg)
Box Dimensions	13.25"x9.25"x9.5" (336mm x 234mm x 241mm)
Boxed Weight	5.8 lbs 2.63 kg
Temperature	32°F to + 113°F
Color	Silver Gray

Remote Control

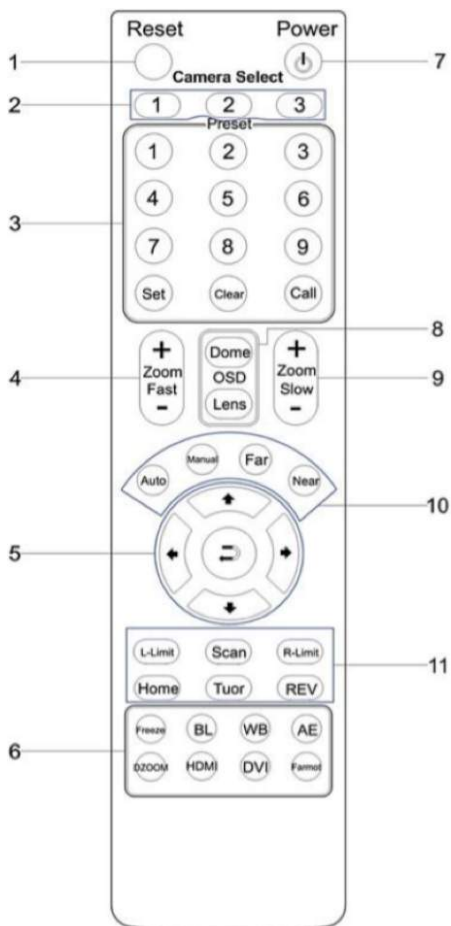

- Reset**
Restarts the camera and restores it to Factory Default settings. (Note: Will delete all memory).
- Camera Selection**
Select Camera ID: 1, 2 or 3
- Preset Positions**
1-9: Preset Positions
Set: Setting Preset Position
Clear: Clear Preset Position
Call: Call Preset Position
Note: If you want to set (or call) the first preset position to 1, you should press number key "1", then press "Set" (or "Call") to set (call) the position.
- Fast Zoom in/out Control Zone**
+ : Zoom in quickly
- : Zoom out quickly
- Pan/Tilt Controller**
 - ↑ Move Up
 - ↓ Move Down
 - ← Move Left
 - Move Right
 - ↻ Auto Pan
- Additional Function Zone**
Freeze: Image Freeze
BL: Back-light Compensation
WB: White Balance
AE: Auto Exposure
D Zoom: Digital Zoom
HDMI: Swap to HDMI video output
DVI: Swap to DVI video output
Format: Swap between different formats
- Power Supply Switch**
Switch for turning camera on (i.e. Stand-By mode vs. Working mode)
- OSD Menu Zone**
Dome OSD: Enter Pan Tilt Zoom OSD menu
Lens OSD: Enter lens OSD menu
- Slow Zoom In/Out Zone**
+ : Zoom in slowly
- : Zoom out slowly
- Focus Control Zone**
Auto: Turn on auto focus
Manual: Turn on manual focus
Far: Set focus at farther distance
Near: Set focus at nearer distance
- Pan/Tilt Function Zone**
L-Limit: Set left boundary limit scanning position
Scan: Enable Boundary Scanning (Auto Panning)
R-Limit: Set right boundary limit scanning position
Home: Go to camera's Home position
Tour: Enable automatic patrol tour of presets
Rev: Enable image flip for ceiling mounting

Touchboards
 205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Still have questions?
Give us a call.
↓