

Specification Sheet

Part Number: 553-50242

Flexible, flame retardant, heat shrinkable polyolefin tubing meets all military specification.

3:1 shrink ratio enables a wide range of wire sizes to be covered.

Standard colors - yellow, white and black.

Larger pack options result in less box changes.


Center slit and multiple slit versions reduce or eliminate hand cutting.

Nonslip printable liner allows additional marker data to be printed on the reverse side for records and placement instructions.

Use HellermannTyton's Durattach ribbon system for the highest print performance on the market.

Custom box opening allows markers to dispense directly into HellermannTyton thermal transfer printers.

Dispense markers faster and easier with waxed core dispenser.

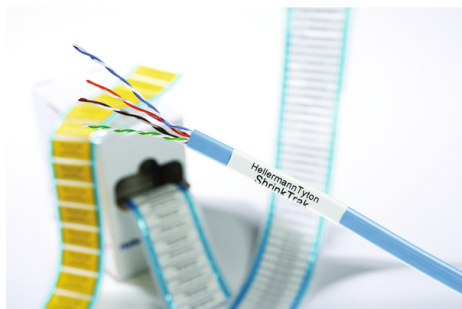

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.25" (6.35mm), PO-X, White, 10,000/box

Article Number	553-50242
----------------	-----------

Type	HST6-2WH-S
------	------------

Color	White (WH)
-------	------------

Quantity Per	pack
--------------	------

Product Description	HellermannTyton's ShrinkTrak™ heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.25" (6.35mm), PO-X, White, 10,000/box
Global Part Name	HST6-2WH-S-PO-X-WH
Variant	Thin-Wall
Width W (Imperial)	0.63
Width W (Metric)	16.0
Thickness T (Imperial)	.003
Thickness T (Metric)	.0762
Height H (Imperial)	0.42
Height H (Metric)	10.67
Width of Liner (Metric)	76.2
Width of Liner (Imperial)	3.0
Outside Diameter OD (Imperial)	0.25
Outside Diameter OD (Metric)	6.35

Outside Diameter Max (Imperial)	0.25
Outside Diameter Max (Metric)	6.35
Wall Thickness WT (Imperial)	0.028
Wall Thickness WT (Metric)	0.71
Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	MIL-STD-202G Method 215K SAE-AS81531 SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Certification/Specification	SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C 600V VW-1 SAE - AS81531

Package Quantity (Imperial)	10000
Package Quantity (Metric)	10000
Customs Number	3917320000

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)


Specification Sheet

Part Number: 553-50176

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

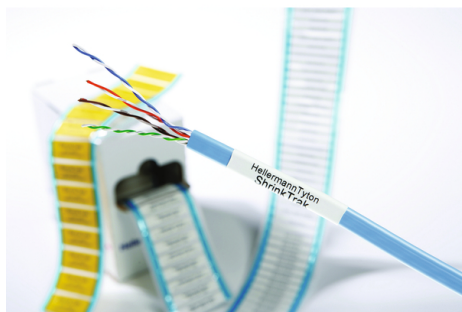

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.187" (4.74mm), PO-X, White, 3000/box

Article Number	553-50176
----------------	-----------

Type	HST4.8-1.6WH-S
------	----------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.187" (4.74mm), PO-X, White, 3000/box
-------------------	--

Global Part Name	HST4.8-1.6WH-S-PO-X-WH
------------------	------------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.312
---------------------	-------

Height H (Metric)	7.92
-------------------	------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.187
--------------------------------	-------

Outside Diameter OD (Metric)	4.74
------------------------------	------

Outside Diameter Max (Imperial)	0.187
---------------------------------	-------

Outside Diameter Max (Metric)	4.74
-------------------------------	------

Wall Thickness WT (Imperial)	0.026
------------------------------	-------

Wall Thickness WT (Metric)	0.66
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL 224 125 °C 600V VW-1 SAE - AS81531 SAE - AMS - DTL-23053/5 Class 1 and 3
Package Quantity (Imperial)	3000
Package Quantity (Metric)	3000
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50084

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

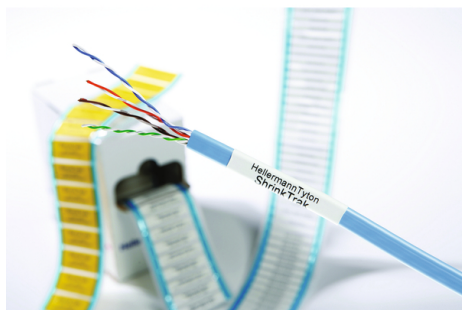

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.25" (6.35mm), PO-X, White, 2000/box

Article Number	553-50084
----------------	-----------

Type	HST6-2WH-S
------	------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.25" (6.35mm), PO-X, White, 2000/box
-------------------	---

Global Part Name	HST6-2WH-S-PO-X-WH
------------------	--------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.42
---------------------	------

Height H (Metric)	10.67
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.25
--------------------------------	------

Outside Diameter OD (Metric)	6.35
------------------------------	------

Outside Diameter Max (Imperial)	0.25
---------------------------------	------

Outside Diameter Max (Metric)	6.35
-------------------------------	------

Wall Thickness WT (Imperial)	0.028
------------------------------	-------

Wall Thickness WT (Metric)	0.71
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	CEN
Package Quantity (Imperial)	2000
Package Quantity (Metric)	2000
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50080

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

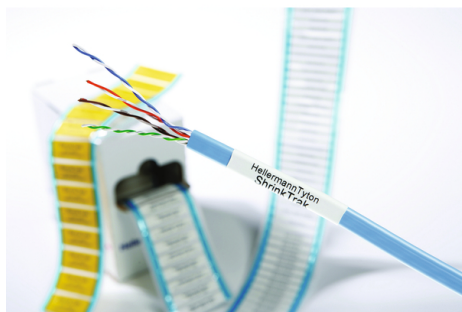

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.187" (4.74mm), PO-X, White, 2000/box

Article Number	553-50080
----------------	-----------

Type	HST4.8-1.6WH-S
------	----------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.187" (4.74mm), PO-X, White, 2000/box
-------------------	--

Global Part Name	HST4.8-1.6WH-S-PO-X-WH
------------------	------------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.312
---------------------	-------

Height H (Metric)	7.92
-------------------	------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.187
--------------------------------	-------

Outside Diameter OD (Metric)	4.74
------------------------------	------

Outside Diameter Max (Imperial)	0.187
---------------------------------	-------

Outside Diameter Max (Metric)	4.74
-------------------------------	------

Wall Thickness WT (Imperial)	0.026
------------------------------	-------

Wall Thickness WT (Metric)	0.66
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	CEN
Package Quantity (Imperial)	2000
Package Quantity (Metric)	2000
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50074

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

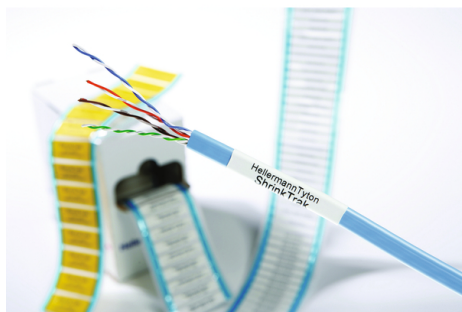

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.125" (3.17mm), PO-X, White, 2000/box

Article Number	553-50074
----------------	-----------

Type	HST3-1WH-S
------	------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.125" (3.17mm), PO-X, White, 2000/box
-------------------	--

Global Part Name	HST3-1WH-S-PO-X-WH
------------------	--------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.235
---------------------	-------

Height H (Metric)	5.69
-------------------	------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.125
--------------------------------	-------

Outside Diameter OD (Metric)	3.2
------------------------------	-----

Outside Diameter Max (Imperial)	0.125
---------------------------------	-------

Outside Diameter Max (Metric)	3.2
-------------------------------	-----

Wall Thickness WT (Imperial)	0.031
------------------------------	-------

Wall Thickness WT (Metric)	0.79
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	CEN
Package Quantity (Imperial)	2000
Package Quantity (Metric)	2000
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50040

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

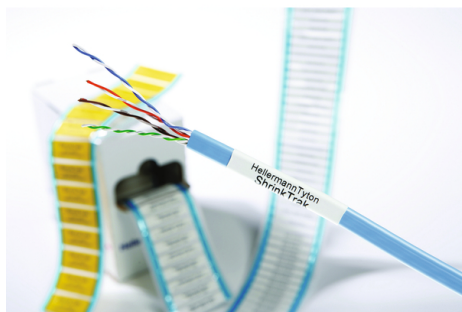

ShrinkTrak Labels, 1-Sided, 1-Slit, 1.0" (25.4mm), PO-X, White, 500/box

Article Number	553-50040
----------------	-----------

Type	HST24-8WH-S
------	-------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 1.0" (25.4mm), PO-X, White, 500/box
-------------------	---

Global Part Name	HST24-8WH-S-PO-X-WH
------------------	---------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	1.69
---------------------	------

Height H (Metric)	42.92
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	1.0
--------------------------------	-----

Outside Diameter OD (Metric)	25.4
------------------------------	------

Outside Diameter Max (Imperial)	1.0
---------------------------------	-----

Outside Diameter Max (Metric)	25.4
-------------------------------	------

Wall Thickness WT (Imperial)	0.039
------------------------------	-------

Wall Thickness WT (Metric)	0.99
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 MIL-STD-202G Method 215K SAE-AS81531
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50035

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

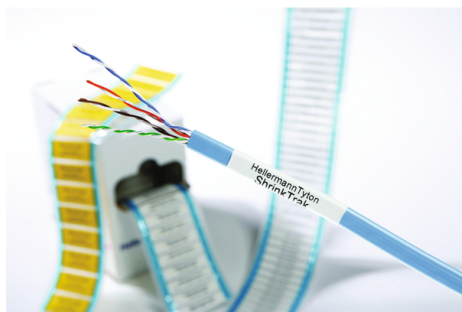

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.75" (19.05mm), PO-X, White, 500/box

Article Number	553-50035
----------------	-----------

Type	HST18-6WH-S
------	-------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.75" (19.05mm), PO-X, White, 500/box
-------------------	---

Global Part Name	HST18-6WH-S-PO-X-WH
------------------	---------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	1.2
---------------------	-----

Height H (Metric)	30.48
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.75
--------------------------------	------

Outside Diameter OD (Metric)	19.05
------------------------------	-------

Outside Diameter Max (Imperial)	0.75
---------------------------------	------

Outside Diameter Max (Metric)	19.05
-------------------------------	-------

Wall Thickness WT (Imperial)	0.036
------------------------------	-------

Wall Thickness WT (Metric)	0.914
----------------------------	-------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50030

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

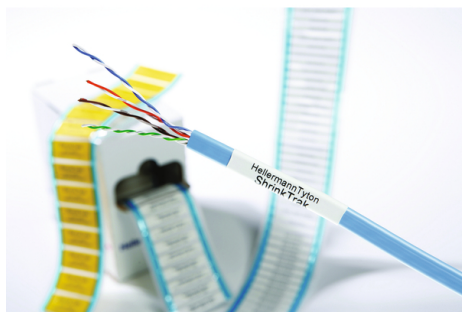

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.5" (12.7mm), PO-X, White, 500/box

Article Number	553-50030
----------------	-----------

Type	HST12-4WH-S
------	-------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.5" (12.7mm), PO-X, White, 500/box
-------------------	---

Global Part Name	HST12-4WH-S-PO-X-WH
------------------	---------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.77
---------------------	------

Height H (Metric)	19.55
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.5
--------------------------------	-----

Outside Diameter OD (Metric)	12.7
------------------------------	------

Outside Diameter Max (Imperial)	0.5
---------------------------------	-----

Outside Diameter Max (Metric)	12.7
-------------------------------	------

Wall Thickness WT (Imperial)	0.033
------------------------------	-------

Wall Thickness WT (Metric)	0.84
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 MIL-STD-202G Method 215K SAE-AS81531
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	SAE - AS81531 UL 224 125 °C 600V VW-1 SAE - AMS - DTL-23053/5 Class 1 and 3
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50025

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

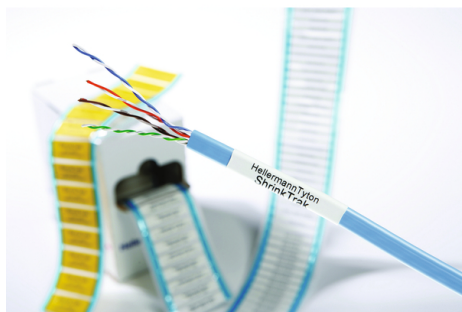

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.38" (9.52mm), PO-X, White, 500/box

Article Number	553-50025
----------------	-----------

Type	HST9-3WH-S
------	------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.38" (9.52mm), PO-X, White, 500/box
-------------------	--

Global Part Name	HST9-3WH-S-PO-X-WH
------------------	--------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.597
---------------------	-------

Height H (Metric)	15.16
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.375
--------------------------------	-------

Outside Diameter OD (Metric)	9.52
------------------------------	------

Outside Diameter Max (Imperial)	0.375
---------------------------------	-------

Outside Diameter Max (Metric)	9.52
-------------------------------	------

Wall Thickness WT (Imperial)	0.031
------------------------------	-------

Wall Thickness WT (Metric)	0.79
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	SAE - AS81531 SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50019

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

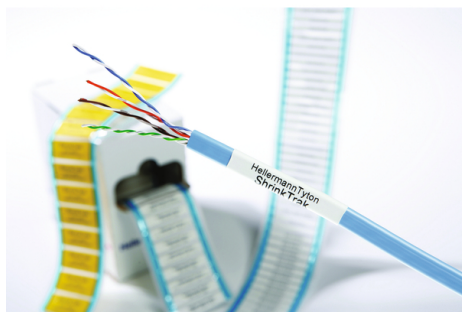

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.25" (6.35mm), PO-X, White, 500/box

Article Number	553-50019
----------------	-----------

Type	HST6-2WH-S
------	------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.25" (6.35mm), PO-X, White, 500/box
-------------------	--

Global Part Name	HST6-2WH-S-PO-X-WH
------------------	--------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.42
---------------------	------

Height H (Metric)	10.67
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.25
--------------------------------	------

Outside Diameter OD (Metric)	6.35
------------------------------	------

Outside Diameter Max (Imperial)	0.25
---------------------------------	------

Outside Diameter Max (Metric)	6.35
-------------------------------	------

Wall Thickness WT (Imperial)	0.028
------------------------------	-------

Wall Thickness WT (Metric)	0.71
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 SAE-AMS-DTL-23053/5 Class 1 and 3 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	SAE - AMS - DTL-23053/5 Class 1 and 3 SAE - AS81531 UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50011

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

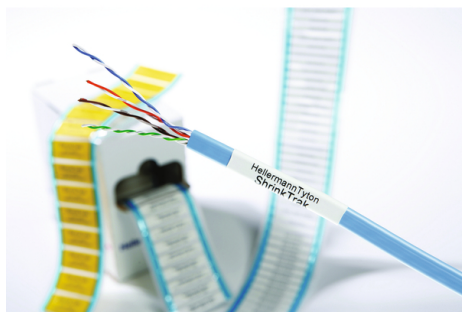

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.187" (4.74mm), PO-X, White, 500/box

Article Number	553-50011
----------------	-----------

Type	HST4.8-1.6WH-S
------	----------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.187" (4.74mm), PO-X, White, 500/box
-------------------	---

Global Part Name	HST4.8-1.6WH-S-PO-X-WH
------------------	------------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.312
---------------------	-------

Height H (Metric)	7.92
-------------------	------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.187
--------------------------------	-------

Outside Diameter OD (Metric)	4.74
------------------------------	------

Outside Diameter Max (Imperial)	0.187
---------------------------------	-------

Outside Diameter Max (Metric)	4.74
-------------------------------	------

Wall Thickness WT (Imperial)	0.026
------------------------------	-------

Wall Thickness WT (Metric)	0.66
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	SAE - AMS - DTL-23053/5 Class 1 and 3 SAE - AS81531 UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50004

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

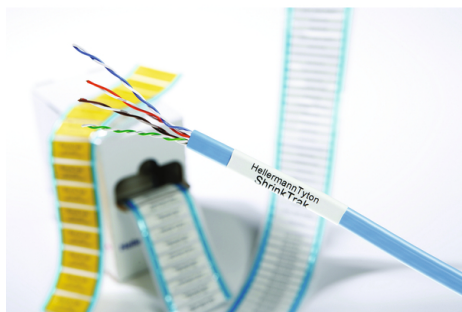

ShrinkTrak Labels, 1-Sided, 1-Slit, 0.125" (3.17mm), PO-X, White, 500/box

Article Number	553-50004
----------------	-----------

Type	HST3-1WH-S
------	------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 1-Slit, 0.125" (3.17mm), PO-X, White, 500/box
-------------------	---

Global Part Name	HST3-1WH-S-PO-X-WH
------------------	--------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.95
--------------------	------

Width W (Metric)	24.13
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.235
---------------------	-------

Height H (Metric)	5.69
-------------------	------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.125
--------------------------------	-------

Outside Diameter OD (Metric)	3.2
------------------------------	-----

Outside Diameter Max (Imperial)	0.125
---------------------------------	-------

Outside Diameter Max (Metric)	3.2
-------------------------------	-----

Wall Thickness WT (Imperial)	0.031
------------------------------	-------

Wall Thickness WT (Metric)	0.79
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).