

Specification Sheet

Part Number: 553-50063

Versatile

Flexible, flame retardant, heat shrinkable polyolefin tubing meets all military specification.

3:1 shrink ratio enables a wide range of wire sizes to be covered.

Standard colors - yellow, white and black.

Larger pack options result in less box changes.

High Performance Design

Center slit and multiple slit versions reduce or eliminate hand cutting.

Nonslip printable liner allows additional marker data to be printed on the reverse side for records and placement instructions.

Use HellermannTyton's Durattach ribbon system for the highest print performance on the market.

Reduce Printer Jams

Custom box opening allows markers to dispense directly into HellermannTyton thermal transfer printers.

Dispense markers faster and easier with waxed core dispenser.



ShrinkTrak Labels, 1-Sided, 4-Slit, 0.125" (3.17mm), PO-X, White, 1000/box

Article Number

553-50063

Type

HST3-1WH-3S

Color

White (WH)

Quantity Per	box
Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
Short Description	ShrinkTrak Labels, 1-Sided, 4-Slit, 0.125" (3.17mm), PO-X, White, 1000/box
Global Part Name	HST3-1WH-3S-PO-X-WH
Variant	Thin-Wall
Width W (Imperial)	0.475
Width W (Metric)	12.07
Thickness T (Imperial)	.003
Thickness T (Metric)	.0762
Height H (Imperial)	0.235
Height H (Metric)	5.69
Width of Liner (Metric)	76.2
Width of Liner (Imperial)	3.0
Outside Diameter OD (Imperial)	0.125

Outside Diameter OD (Metric)	3.2
Outside Diameter Max (Imperial)	0.125
Outside Diameter Max (Metric)	3.2
Wall Thickness WT (Imperial)	0.031
Wall Thickness WT (Metric)	0.79
Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	MIL-STD-202G Method 215K SAE-AS81531 SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	CEN

Package Quantity (Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3917320000
Labels per Column	1
Labels per Row	4

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)


Specification Sheet

Part Number: 553-50065

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

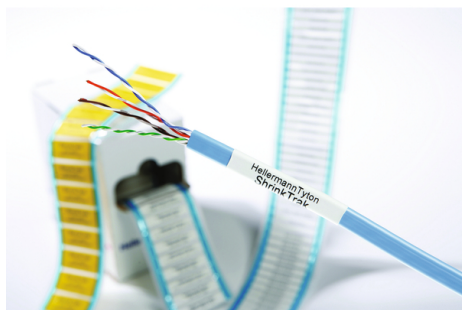

ShrinkTrak Labels, 1-Sided, 4-Slit, 0.25" (6.35mm), PO-X, White, 1000/box

Article Number	553-50065
----------------	-----------

Type	HST6-2WH-3S
------	-------------

Color	White (WH)
-------	------------

Quantity Per	reel
--------------	------

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 4-Slit, 0.25" (6.35mm), PO-X, White, 1000/box
-------------------	---

Global Part Name	HST6-2WH-3S-PO-X-WH
------------------	---------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.63
--------------------	------

Width W (Metric)	16.0
------------------	------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.77
---------------------	------

Height H (Metric)	19.55
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.25
--------------------------------	------

Outside Diameter OD (Metric)	6.35
------------------------------	------

Outside Diameter Max (Imperial)	0.25
---------------------------------	------

Outside Diameter Max (Metric)	6.35
-------------------------------	------

Wall Thickness WT (Imperial)	0.028
------------------------------	-------

Wall Thickness WT (Metric)	0.71
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	CEN
Package Quantity (Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3917320000

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)

Specification Sheet

Part Number: 553-50066

Versatile

Flexible, flame retardant, heat shrinkable polyolefin tubing meets all military specification.

3:1 shrink ratio enables a wide range of wire sizes to be covered.

Standard colors - yellow, white and black.

Larger pack options result in less box changes.

High Performance Design

Center slit and multiple slit versions reduce or eliminate hand cutting.

Nonslip printable liner allows additional marker data to be printed on the reverse side for records and placement instructions.

Use HellermannTyton's Durattach ribbon system for the highest print performance on the market.

Reduce Printer Jams

Custom box opening allows markers to dispense directly into HellermannTyton thermal transfer printers.

Dispense markers faster and easier with waxed core dispenser.



ShrinkTrak Labels, 1-Sided, 4-Slit, 0.38" (9.52mm), PO-X, White, 1000/box

Article Number

553-50066

Type

HST9-3WH-3S

Color

White (WH)

Quantity Per	box
Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
Short Description	ShrinkTrak Labels, 1-Sided, 4-Slit, 0.38" (9.52mm), PO-X, White, 1000/box
Global Part Name	HST9-3WH-3S-PO-X-WH
Variant	Thin-Wall
Width W (Imperial)	0.475
Width W (Metric)	12.07
Thickness T (Imperial)	.003
Thickness T (Metric)	.0762
Height H (Imperial)	0.597
Height H (Metric)	15.16
Width of Liner (Metric)	76.2
Width of Liner (Imperial)	3.0
Outside Diameter OD (Imperial)	0.375

Outside Diameter OD (Metric)	9.52
Outside Diameter Max (Imperial)	0.375
Outside Diameter Max (Metric)	9.52
Wall Thickness WT (Imperial)	0.031
Wall Thickness WT (Metric)	0.79
Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	CEN

Package Quantity (Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3917320000
Labels per Column	1
Labels per Row	4

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)


Specification Sheet

Part Number: 553-50081

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

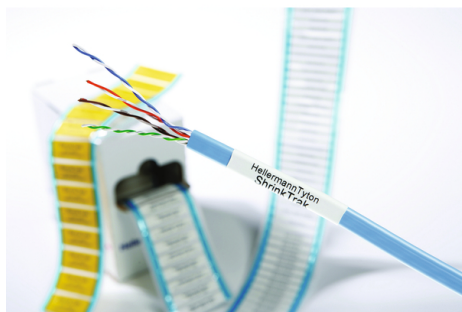

ShrinkTrak Labels, 1-Sided, 4-Slit, 0.187" (4.74mm), PO-X, White, 4000/box

Article Number	553-50081
----------------	-----------

Type	HST4.8-1.6WH-3S
------	-----------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 4-Slit, 0.187" (4.74mm), PO-X, White, 4000/box
-------------------	--

Global Part Name	HST4.8-1.6WH-3S-PO-X-WH
------------------	-------------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.475
--------------------	-------

Width W (Metric)	12.07
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.312
---------------------	-------

Height H (Metric)	7.92
-------------------	------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.187
--------------------------------	-------

Outside Diameter OD (Metric)	4.74
------------------------------	------

Outside Diameter Max (Imperial)	0.187
---------------------------------	-------

Outside Diameter Max (Metric)	4.74
-------------------------------	------

Wall Thickness WT (Imperial)	0.026
------------------------------	-------

Wall Thickness WT (Metric)	0.66
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	CEN
Package Quantity (Imperial)	4000
Package Quantity (Metric)	4000
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50086

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

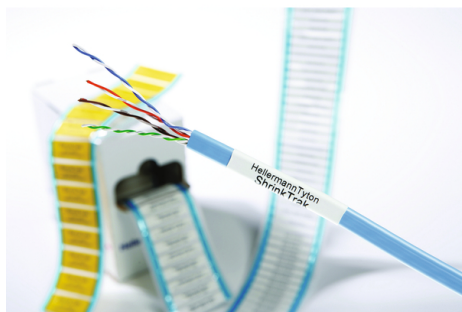

ShrinkTrak Labels, 1-Sided, 4-Slit, 0.5" (12.7mm), PO-X, White, 1000/box

Article Number	553-50086
----------------	-----------

Type	HST12-4WH-4S
------	--------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 4-Slit, 0.5" (12.7mm), PO-X, White, 1000/box
-------------------	--

Global Part Name	HST12-4WH-4S-PO-X-WH
------------------	----------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.475
--------------------	-------

Width W (Metric)	12.07
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.77
---------------------	------

Height H (Metric)	19.55
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.5
--------------------------------	-----

Outside Diameter OD (Metric)	12.7
------------------------------	------

Outside Diameter Max (Imperial)	0.5
---------------------------------	-----

Outside Diameter Max (Metric)	12.7
-------------------------------	------

Wall Thickness WT (Imperial)	0.033
------------------------------	-------

Wall Thickness WT (Metric)	0.84
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 SAE-AMS-DTL-23053/5 Class 1 and 3 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL 224 125 °C 600V VW-1 SAE - AMS - DTL-23053/5 Class 1 and 3 SAE - AS81531
Package Quantity (Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50089

Side Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

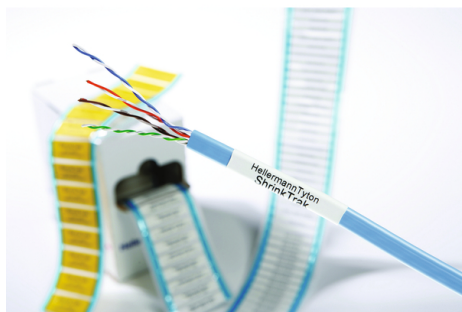

ShrinkTrak Labels, 1-Sided, 4-Slit, 0.25" (6.35mm), PO-X, White, 4000/box

Article Number	553-50089
----------------	-----------

Type	HST6-2WH-3S
------	-------------

Color	White (WH)
-------	------------

Quantity Per	box
--------------	-----

Product Description	HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
---------------------	---

Short Description	ShrinkTrak Labels, 1-Sided, 4-Slit, 0.25" (6.35mm), PO-X, White, 4000/box
-------------------	---

Global Part Name	HST6-2WH-3S-PO-X-WH
------------------	---------------------

Variant	Thin-Wall
---------	-----------

Width W (Imperial)	0.475
--------------------	-------

Width W (Metric)	12.07
------------------	-------

Thickness T (Imperial)	.003
------------------------	------

Thickness T (Metric)	.0762
----------------------	-------

Height H (Imperial)	0.42
---------------------	------

Height H (Metric)	10.67
-------------------	-------

Width of Liner (Metric)	76.2
-------------------------	------

Width of Liner (Imperial)	3.0
---------------------------	-----

Outside Diameter OD (Imperial)	0.25
--------------------------------	------

Outside Diameter OD (Metric)	6.35
------------------------------	------

Outside Diameter Max (Imperial)	0.25
---------------------------------	------

Outside Diameter Max (Metric)	6.35
-------------------------------	------

Wall Thickness WT (Imperial)	0.028
------------------------------	-------

Wall Thickness WT (Metric)	0.71
----------------------------	------

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AS81531 SAE-AMS-DTL-23053/5 Class 1 and 3 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	CEN
Package Quantity (Imperial)	4000
Package Quantity (Metric)	4000
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).