



SW

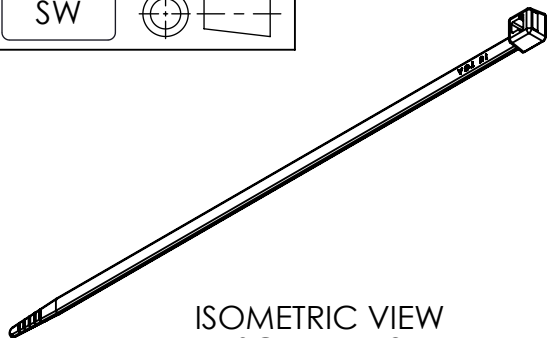

ISOMETRIC VIEW
SCALE 1 : 2

Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
03.1	Design Release	-	SEE ECN# 015204	CTF	06/11/2019	GAL	06/11/2019

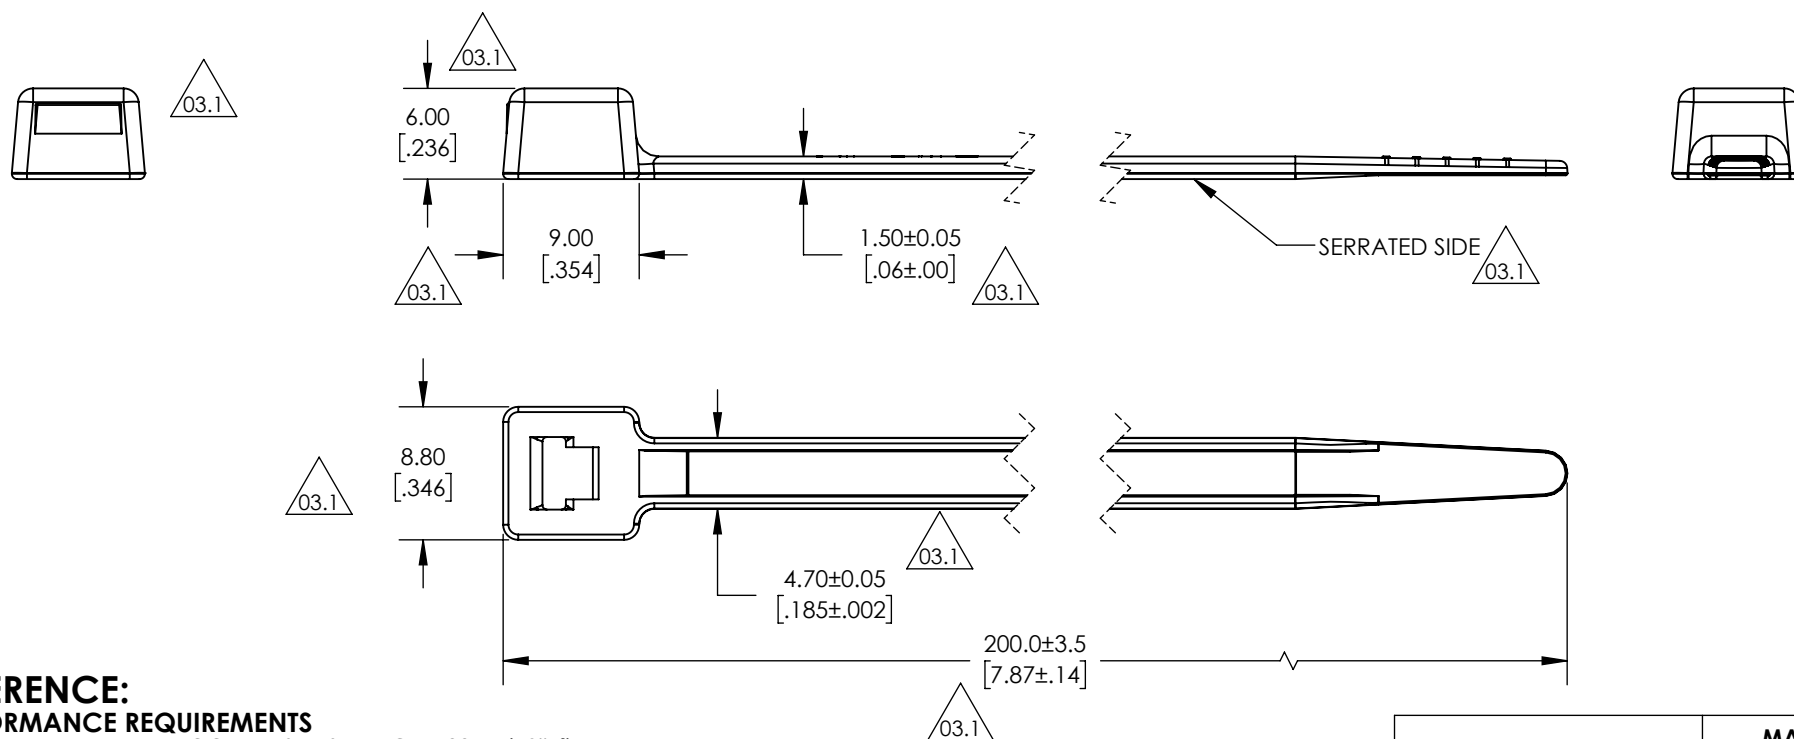

REFERENCE: PERFORMANCE REQUIREMENTS

1. CABLE TIE MINIMUM LOOP TENSILE STRENGTH: 225N (50lbf)
2. TOOL APPLICATION MAXIMUM TENSION FORCE: 79N (17lbf)
3. BUNDLE DIAMETER RANGE: 8mm TO 50mm
4. TEMPERATURE RANGE: -40°C to +140°C [-40°F to +284°F]
5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 50%

Material SEE CHART	Units: millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CTF	1/11/2019	Article/Type-No	T50RPVDF	Scale	2:1
	Dimension without tolerances details to: .XXX = ±.013 .XX = ±.13 .X = ±.3 None = ±.8 ∠ = ±0.5°		Approved	GAL	1/11/2019	Title	STANDARD T50R CABLE TIE	Project Number	PRP 17-2468
	Dimension Formatted mm/[in]		HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	Production : Phase	Format	AH
						17-2468-001-CSU		Sheet	1/1

GLOBAL PART DESCRIPTION	MATERIAL	
	TYPE	COLOR
T50R-PVDF-GY	PVDF	GRAY