Revision level		Revision Record	Changed	Date	Approved	Date
Part	Drawing					
-	12	See ECN 010978	SJA	03/05/2008	JJP	11/20/2007



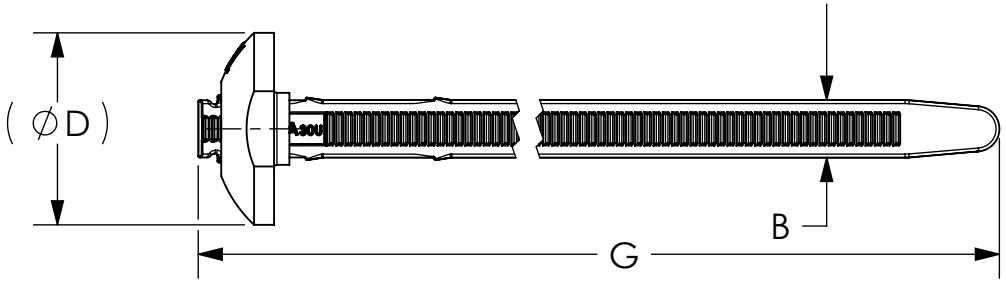

NOTES:

1. **RECOMMENDED APPLICATION TOOL IS THE HT MARK 9 (MK9).**
2. **LOOPED BUNDLE LOAD APPLIED INLINE WITH MOUNTING HOLE AXIS.**
3. **FOR PROPER INSTALLATION FULLY SEAT STRAP WEDGE**

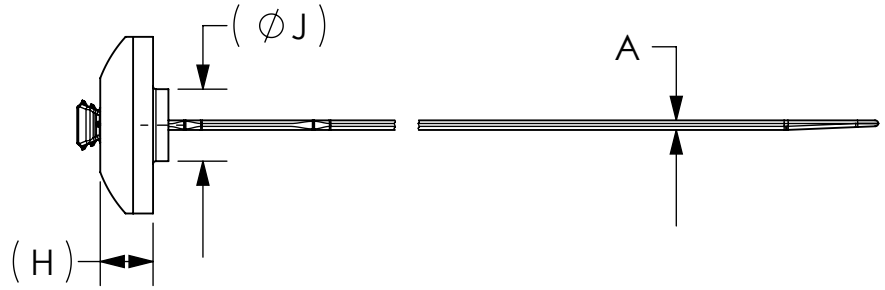

HEAD - PA 6/6 HS BLACK
STRAP - PA 6/6
IMHSUV BLACK

Material

Bundle Dia. Range (mm)	A	B	D	G	H	J	Panel Hole Diameter (mm)	Min Loop Tensile Strength (Newtons) (2.)
6.4 to 73	1.3±0.2	7.6±0.25	25.4±0.6	267±8.0	7.0±0.5	9.5±0.5	10.0 to 20.83	578

Dimension tolerances unless otherwise specified

.XXXX = ±.013
.XXX = ±.13
.XX = ±.3
.X = ±.8
∠ = ±0.5°

Dimension Units milimeters

PERFORMANCE SPECIFICATION

SW 2007

Drawn	PLN	10/15/2004
Approved	GGG	02/10/2006

Scale 1:1

Computer File Number CT05-047-005CST_12

Title

BT130RDP BUTTON HEAD TIE

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANNTYTON

HellermannTyton®
Cable Management Products

7930 N. Faulkner Rd.
Milwaukee, WI 53224
Ph: (414) 355-1130
Fx: (414) 362-8338

Drawing-No

CT05-047-005CST

Format AH

Sheet 1 of 1