


Specification Sheet

Part Number: 156-01601

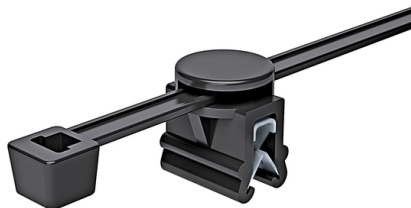

Edge Clip applies easily to plastic and metal sheets without the need for a mounting hole.

Edge Clip provides low insertion force and high extraction force ideal for assembly environments.

Cable tie is rotatable and inside serrated.

Article Number	156-01601
----------------	-----------

Type	CBTO50R
------	---------

Color	Black (BK)
-------	------------

Quantity Per	bag
--------------	-----

Product Description	HellermannTyton's Two-Piece Edge Clip with Cable Tie Assemblies are designed specifically to route bundles by securing them to the edge of a plastic or metal sheet without the need for a mounting hole. The clip is easy to secure and the extraction force is high due to the integrated metal clamp that holds the edge clip in place. The clips are available in 90° and 360° models for use with different types of cable tie. On the CBTO50R the bundle runs over the center of the clip and the cable tie is inside serrated.
---------------------	---

Short Description	Rotatable Cable Tie & Edge Clip, 8.0" Long, Inside Serrated, PA66HS/PA66HIRHSUV, Black, 500/bg
-------------------	--

Global Part Name	CBTO50R-PA66HS/PA66HIRHS-BK
------------------	-----------------------------

Minimum Tensile Strength (Imperial)	50.0
-------------------------------------	------

Minimum Tensile Strength (Metric)	225
-----------------------------------	-----

Length L (Imperial)	8.0
---------------------	-----

Length L (Metric)	202
-------------------	-----

Fixation Method	Edge Clips with tie
-----------------	---------------------

Identification Plate Position	none
-------------------------------	------

Releasable Closure	No
--------------------	----

Variant	Inside Serrated
---------	-----------------

Width W (Imperial)	0.18
--------------------	------

Width W (Metric)	4.6
------------------	-----

Bundle Diameter Min (Imperial)	0.08
--------------------------------	------

Bundle Diameter Min (Metric)	2.0
------------------------------	-----

Bundle Diameter Max (Imperial)	1.9
--------------------------------	-----

Bundle Diameter Max (Metric)	47.0
------------------------------	------

Thickness T (Imperial)	0.05
------------------------	------

Thickness T (Metric)	1.2
Height H (Imperial)	0.05
Height H (Metric)	1.2
Cable Tie Width Max (Imperial)	0.18
Cable Tie Width Max (Metric)	4.6
Panel Thickness Min (Imperial)	0.04
Panel Thickness Max (Imperial)	0.12
Panel Thickness Min (Metric)	1.0
Panel Thickness Max (Metric)	3.0
Material	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS) Polyamide 6.6 heat stabilized (PA66HS)
Material Shortcut	PA66HS PA66HIRHS
Material Cable Tie	Polyamide 6.6 heat stabilized (PA66HS)
Flammability	UL 94 V-2
UV Resistant (Yes/No)	No
Operating Temperature	-40°F to +221°F (-40°C to +105°C)

Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)