

Specification Sheet


Part Number: 596-01010

Made with UV-stable inks and materials for durability and weather resistance.

Reflective properties to meet applicable NEC code requirements for reflective identification.

Supplied with an aggressive adhesive to ensure long life.

Meets NEC & IFC standards for printed text, character height, color and outdoor UV stability to pass inspections.

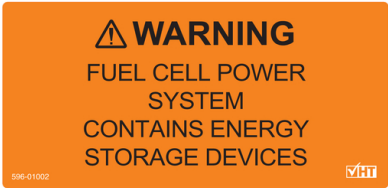

|                |             |
|----------------|-------------|
| Article Number | 596-01010   |
| Type           | FCPS202010  |
| Color          | Orange (OG) |
| Quantity Per   | pack        |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Description       | HellermannTyton makes it easier than ever for solar installers to meet PV labeling codes. Solar Label Convenience Packs allow installers to quickly and economically purchase high quality preprinted NEC code-compliant solar installation labels. Packaged in 10-count quantities to meet the needs of smaller scale solar installations and independent contractors, Solar Label Convenience Packs are available in HellermannTyton's most popular preprinted NEC code-compliant solar label formats. Each Solar Label Convenience Pack contains 10 solar installation labels. Choose from a variety of regular and reflective preprinted labels. For enhanced durability, clear laminate overlay labels are also available in a convenience pack. |
| Short Description         | Solar Label, FUEL CELL POWER SYSTEM LABEL, 4.12" X 2.0", VL, Orange, 10/pkg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Global Part Name          | FCPS202010-443/281-OG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Width W (Imperial)        | 4.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Width W (Metric)          | 104.14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Thickness T (Imperial)    | 0.0025                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Thickness T (Metric)      | 64.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Height H (Imperial)       | 2.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Height H (Metric)         | 50.80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Width of Liner (Metric)   | 107.69                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Width of Liner (Imperial) | 4.24                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                                |                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------|
| Material                       | Type 443/281, UV-stabilised, flexible white vinyl with clear polyester laminate (443/281) |
| Material Shortcut              | 443/281                                                                                   |
| Adhesive                       | Acrylic                                                                                   |
| Halogen Free                   | No                                                                                        |
| UV Resistant (Yes/No)          | Yes                                                                                       |
| Adhesive Operating Temperature | -40°F to +174°F (-40°C to +79°C)                                                          |
| Operating Temperature          | -40°F to +174°F (-40°C to +79°C)                                                          |
| Reach Compliant (Article 33)   | Yes                                                                                       |
| ROHS Compliant                 | Yes                                                                                       |
| Certification/Specification    | NEC2020 UL 969 NEC2023                                                                    |
| UL Recognized (US)             | Yes                                                                                       |
| Package Quantity (Imperial)    | 10                                                                                        |
| Package Quantity (Metric)      | 10                                                                                        |
| Customs Number                 | 3919905060                                                                                |
| Labels per Column              | 1                                                                                         |
| Labels per Row                 | 1                                                                                         |

## About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. ([www.hellermann.tyton.com](http://www.hellermann.tyton.com)).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)