


## Specification Sheet

Part Number: 115-07189

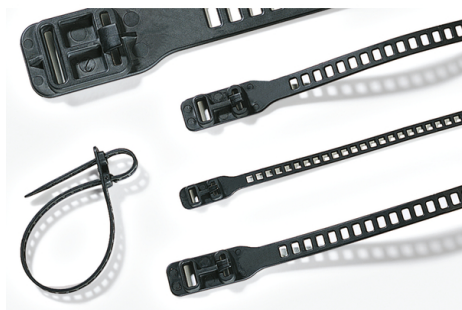

Manufactured from a soft, tear-resistant thermoplastic polyurethane these ties have several unique features: strong, yet elastic, and suitable for temperatures as low as -20 degrees C.

The SOFTFIX ties are releasable and reusable which is ideal for bundling cables in temporary applications such as musical events, theatres etc.

Cable Tie without Serration, 7.0" Long, Flexible TPU, Black, 50/pkg

Article Number 115-07189

Type SRT1807

Color Black (BK)

Quantity Per pack

Product Description Soft, flexible material makes these ties particularly suitable for use on sensitive wires, such as fibre-optic cables. Additionally the ties are suitable for use on moving or vibrating applications. The double slotted head allows for parallel bundling.

Short Description Cable Tie without Serration, 7.0" Long, Flexible TPU, Black, 50/pkg

Global Part Name SRT1807-TPU-BK

|                                   |                                  |
|-----------------------------------|----------------------------------|
| Minimum Tensile Strength (Metric) | 57                               |
| Length L (Imperial)               | 7.0                              |
| Length L (Metric)                 | 180                              |
| Fixation Method                   | Releasable Cable Tie             |
| Identification Plate Position     | none                             |
| Releasable Closure                | Yes                              |
| Tie Closure                       | ladder style                     |
| Variant                           | Not Serrated                     |
| Width W (Metric)                  | 7.0                              |
| Bundle Diameter Min (Imperial)    | 0.39                             |
| Bundle Diameter Min (Metric)      | 10.0                             |
| Bundle Diameter Max (Imperial)    | 1.77                             |
| Bundle Diameter Max (Metric)      | 45.0                             |
| Thickness T (Metric)              | 1.7                              |
| Material                          | Thermoplastic Polyurethane (TPU) |

|                              |                                  |
|------------------------------|----------------------------------|
| Material Shortcut            | TPU                              |
| Flammability                 | UL 94 HB                         |
| Halogen Free                 | Yes                              |
| UV Resistant (Yes/No)        | No                               |
| Use Conditions               | For Indoor Use Only              |
| Operating Temperature        | -40°F to +185°F (-40°C to +85°C) |
| Reach Compliant (Article 33) | Yes                              |
| ROHS Compliant               | Yes                              |
| Package Quantity (Imperial)  | 50                               |
| Package Quantity (Metric)    | 50                               |
| Customs Number               | 3926909988                       |
| Weight (Metric)              | 2.2                              |

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: [corp@htamericas.com](mailto:corp@htamericas.com)

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)