

Specification Sheet

Part Number: 148-90050

Spring technology for safe, secure and reliable connections.


Smaller footprint fits in tight spaces.

Low insertion force makes installation of solid or stranded copper wire fast and easy.

Color coded for easy identification of size.

Each port accepts multiple wire diameters for flexible applications.

Accepts 12–22 AWG solid wire and 14–22 AWG stranded wire.

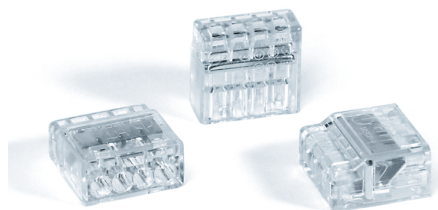

HelaCon Plus Mini, Push-In Style Wire Connector, Double Spring, 4-Port, (Piece), Clear, 300/pkg

Article Number 148-90050

Type HCPM-4

Color Clear (CL)

Quantity Per pack

Product Description HelaCon Plus Mini Wire Connectors replace traditional twist-on wire connectors. They provide faster, easier and more reliable connection and distribution of cable and conductors in electrical installation applications. Mini connectors have a compact footprint and can be applied tool-free using convenient, push-in simplicity. Internal spring technology is approved for solid and stranded wires.

| | |
|---------------------|---|
| Short Description | HelaCon Plus Mini, Push-In Style Wire Connector, Double Spring, 4-Port, (Piece), Clear, 300/pkg |
| Global Part Name | HCPM-4-PC-CL |
| Length L (Imperial) | 0.65 |
| Length L (Metric) | 16.5 |
| Width W (Imperial) | 0.76 |
| Width W (Metric) | 19.4 |
| Height H (Imperial) | 0.30 |
| Height H (Metric) | 7.70 |
| Depth D (Imperial) | 0.65 |
| Depth D (Metric) | 16.5 |
| Material | Polycarbonate (PC) |
| Material Shortcut | PC |
| Flammability | UL 94 V-0 |
| Halogen Free | Yes |

| | |
|------------------------------|---|
| UV Resistant (Yes/No) | No |
| Use Conditions | For Indoor Use Only |
| Operating Temperature | -22°F to +185°F (-30°C to +85°C) |
| Reach Compliant (Article 33) | No |
| ROHS Compliant | Yes |
| Certification/Specification | NF EN 60695-2-11 (2014) NF EN 60695-2-10 (2013) Intertek Semko EN 60998-2-2:2004 UL ANSI/UL 486-B UL ANSI/UL 486-A UL ANSI/UL 486-C SGS Fimko Ltd EN 60998-2-2:2004 NEMKO AS EN 60998-2-2:2004 SGS Fimko Ltd EN 60998-2-2:201 ENEC CE 2006/65/EC cULus VDE DIN EN 60998-2-2:2005-03 |
| UL Listed (US and Canada) | Yes |
| UL Listed (US) | Yes |
| Package Quantity (Imperial) | 300 |
| Package Quantity (Metric) | 300 |
| Customs Number | 8536908085 |

7930 N. Faulkner Road, Milwaukee, WI 53224
Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)