

Electrical Installation

Wire Connectors


Connectors for Wire

HelaCon Releasable Wire Connectors

HelaCon Releasable Wire Connectors replace traditional twist-on wire connectors. They provide faster, easier and more reliable connections and distribution of cable and conductors in electrical installation applications. These connectors have a lever that opens for insertion and repositioning of wires, and snaps closed to establish a secure connection. Suitable for use with solid and stranded wires.

Features and Benefits

- Quick release simplifies insertion and removal of wires for fast, safe and secure operation.
- Connects solid and stranded wires within same housing for versatile wire management.
- Accepts 12 AWG solid wire and 14 - 28 AWG stranded wire.
- Clear housing eases inspection with visual verification that wires have been inserted properly.

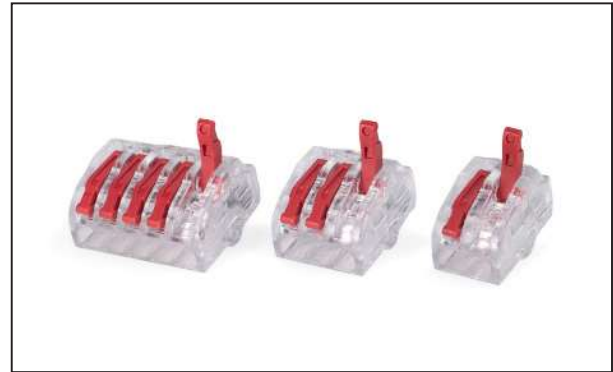

MATERIAL	Polycarbonate (PC)
Operating Temperature	-22°F to +185°F (-30°C to +85°C)
Color	Clear (CL)



PART NO.	TYPE	Number of Conductors	Length (L) in. (mm)	Width (W) in. (mm)	Height (H) in. (mm)	Color	Pkg. Qty.
148-90059*	HCRN-2	2	0.5 (12.0)	0.8 (20.5)	0.6 (14.0)	Clear	80
148-90065*	HCRN-2	2	0.5 (12.0)	0.8 (20.5)	0.6 (14.0)	Clear	500
148-90060*	HCRN-3	3	0.7 (17.0)	0.8 (20.5)	0.6 (14.0)	Clear	50
148-90066*	HCRN-3	3	0.7 (17.0)	0.8 (20.5)	0.6 (14.0)	Clear	500
148-90061*	HCRN-5	5	1.0 (26.0)	0.8 (20.5)	0.6 (14.0)	Clear	30
148-90067*	HCRN-5	5	1.0 (26.0)	0.8 (20.5)	0.6 (14.0)	Clear	300

*This product meets UL standards. Please go to hellermann-tyton.com for specific file numbers.

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.



Please note - not all products listed on this page may have this approval. Please see www.Hellermann.Tyton.com for the latest approvals.

HellermannTyton

HellermannTyton North American Corporate Headquarters

7930 N. Faulkner Rd, PO Box 245017
Milwaukee, WI 53224-9517
Phone: (414) 355-1130, (800) 537-1512
Fax: (414) 355-7341, (800) 848-9866
email: corp@htamericas.com
www.hellermann-tyton.com

IATF 16949, AS9100, ISO 9001 and ISO 14001 certified

HellermannTyton Canada

Unit #4, 205 Industrial Parkway North
Aurora, Ontario L4G 4C4 Canada
Phone: (800) 661-2461
Fax: (800) 390-3904
email: sales@hellermanntyton.ca

HellermannTyton Mexico

Anillo Periferico Sur 7980 Edificio 6A
Parque Industrial Tecnológico II
Santa María Tequepexpan
Tlaquepaque, Jalisco, Mexico 45601
Phone: 011-52-33-3-133-9880
Fax: 011-52-33-3-133-9861
email: info-mx@hellermanntyton.com

ISO 9001 certified

Warranty Policy – HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses.