

# Electrical Installation

## Wire Connectors


### Connectors for Wire

#### HelaCon Releasable Wire Connectors

HelaCon Releasable Wire Connectors replace traditional twist-on wire connectors. They provide faster, easier and more reliable connections and distribution of cable and conductors in electrical installation applications. These connectors have a lever that opens for insertion and repositioning of wires, and snaps closed to establish a secure connection. Suitable for use with solid and stranded wires.

#### Features and Benefits

- Quick release simplifies insertion and removal of wires for fast, safe and secure operation.
- Connects solid and stranded wires within same housing for versatile wire management.
- Accepts 12 AWG solid wire and 14 - 28 AWG stranded wire.
- Clear housing eases inspection with visual verification that wires have been inserted properly.

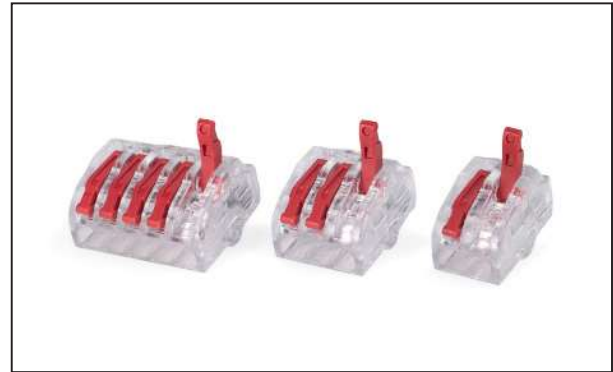

<b>MATERIAL</b>	Polycarbonate (PC)
<b>Operating Temperature</b>	-22°F to +185°F (-30°C to +85°C)
<b>Color</b>	Clear (CL)



PART NO.	TYPE	Number of Conductors	Length (L) in. (mm)	Width (W) in. (mm)	Height (H) in. (mm)	Color	Pkg. Qty.
148-90059*	HCRN-2	2	0.5 (12.0)	0.8 (20.5)	0.6 (14.0)	Clear	80
148-90065*	HCRN-2	2	0.5 (12.0)	0.8 (20.5)	0.6 (14.0)	Clear	500
148-90060*	HCRN-3	3	0.7 (17.0)	0.8 (20.5)	0.6 (14.0)	Clear	50
148-90066*	HCRN-3	3	0.7 (17.0)	0.8 (20.5)	0.6 (14.0)	Clear	500
148-90061*	HCRN-5	5	1.0 (26.0)	0.8 (20.5)	0.6 (14.0)	Clear	30
148-90067*	HCRN-5	5	1.0 (26.0)	0.8 (20.5)	0.6 (14.0)	Clear	300

\*This product meets UL standards. Please go to [hellermann-tyton.com](http://hellermann-tyton.com) for specific file numbers.

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.



Please note - not all products listed on this page may have this approval. Please see [www.Hellermann.Tyton.com](http://www.Hellermann.Tyton.com) for the latest approvals.

## HellermannTyton

#### HellermannTyton North American Corporate Headquarters

7930 N. Faulkner Rd, PO Box 245017  
Milwaukee, WI 53224-9517  
Phone: (414) 355-1130, (800) 537-1512  
Fax: (414) 355-7341, (800) 848-9866  
email: [corp@htamericas.com](mailto:corp@htamericas.com)  
[www.hellermann-tyton.com](http://www.hellermann-tyton.com)

**IATF 16949, AS9100, ISO 9001 and ISO 14001 certified**

#### HellermannTyton Canada

Unit #4, 205 Industrial Parkway North  
Aurora, Ontario L4G 4C4 Canada  
Phone: (800) 661-2461  
Fax: (800) 390-3904  
email: [sales@hellermanntyton.ca](mailto:sales@hellermanntyton.ca)

#### HellermannTyton Mexico

Anillo Periferico Sur 7980 Edificio 6A  
Parque Industrial Tecnológico II  
Santa María Tequepexpan  
Tlaquepaque, Jalisco, Mexico 45601  
Phone: 011-52-33-3-133-9880  
Fax: 011-52-33-3-133-9861  
email: [info-mx@hellermanntyton.com](mailto:info-mx@hellermanntyton.com)

**ISO 9001 certified**

**Warranty Policy** – HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses.