


## Specification Sheet

Part Number: MB19C2

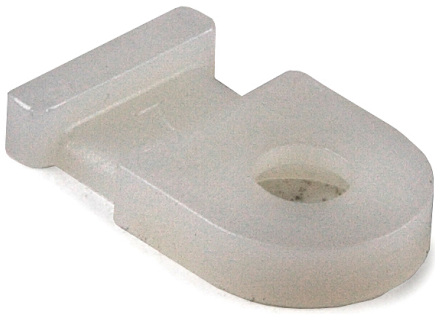

Compact size for areas with limited mounting space.

Simple to install with a screw or rivet.

Single hole attachment with two-way entry for cable tie.

Cable Tie Anchor Mount, 0.50 x .312" .13" Hole Dia, 0.1" Max Tie Width, PA66, Natural, 100/pkg

Article Number 151-00226

Type MB1

Color Natural (NA)

Quantity Per pack

Product Description These cable tie mounts are compact in size. They are designed for simple yet robust installation particularly in areas with limited space. They pair with a cable tie for mounting applications including telecom equipment, switchgear and control cabinets.

Short Description Cable Tie Anchor Mount, 0.50 x .312" .13" Hole Dia, 0.1" Max Tie Width, PA66, Natural, 100/pkg

Global Part Name MB1-PA66-NA

|                                       |                      |
|---------------------------------------|----------------------|
| Length L (Imperial)                   | 0.5                  |
| Length L (Metric)                     | 12.7                 |
| Fixation Method                       | Screw Mount          |
| Width W (Imperial)                    | 0.312                |
| Width W (Metric)                      | 7.92                 |
| Cable Ties                            | T18                  |
| Height H (Imperial)                   | 0.13                 |
| Height H (Metric)                     | 3.30                 |
| Cable Tie Width Max (Imperial)        | 0.1                  |
| Cable Tie Width Max (Metric)          | 2.54                 |
| Mounting Hole Diameter D (Imperial)   | 0.13 "               |
| Mounting Hole Diameter D (Metric)     | 3.3 mm               |
| Mounting Hole Diameter D Max (Metric) | 3.3                  |
| Material                              | Polyamide 6.6 (PA66) |
| Material Shortcut                     | PA66                 |

|                              |                                  |
|------------------------------|----------------------------------|
| Flammability                 | UL 94 V-2                        |
| Halogen Free                 | Yes                              |
| UV Resistant (Yes/No)        | No                               |
| Use Conditions               | For Indoor Use Only              |
| Operating Temperature        | -40°F to +185°F (-40°C to +85°C) |
| Reach Compliant (Article 33) | Yes                              |
| ROHS Compliant               | Yes                              |
| Package Quantity (Imperial)  | 100                              |
| Package Quantity (Metric)    | 100                              |
| Customs Number               | 3926909988                       |

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: [corp@htamericas.com](mailto:corp@htamericas.com)

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)