


Specification Sheet

Part Number: 151-00629

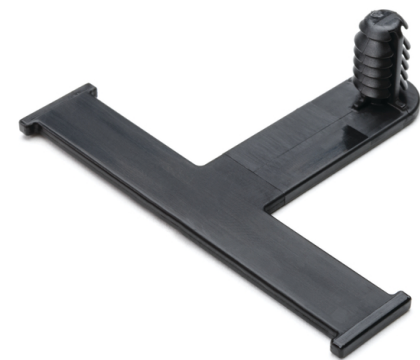

Clip can be installed by hand – no need for hardware or tools.

Design provides low insertion and high extraction force, for simple, secure performance.

Clip keeps bundle away from areas that could cause damage due to rubbing.

Standoff Bundling Clip, 2.2" Long, 0.03 - 0.22" Panel Thickness, PA66HIRHSUV, Black, 3000/box

Article Number	151-00629
Type	SOC7FT6
Color	Black (BK)
Quantity Per	pack
Product Description	Standoff bundling clips provide a straightforward way to secure cable bundles, hoses or pipes. The bundle fastens to the tape bar using tape or cable ties. Multiple orientations allow tape clips to be used with a wide range of panel thicknesses and hole diameters. Standoff keeps bundles away from mounting area to prevent them from damage due to rubbing.
Short Description	Standoff Bundling Clip, 2.2" Long, 0.03 - 0.22" Panel Thickness, PA66HIRHSUV, Black, 3000/box

Global Part Name	SOC7FT6-PA66HIRHSUV-BK
------------------	------------------------

Length L (Imperial)	2.2
---------------------	-----

Length L (Metric)	56.0
-------------------	------

Offset Length (Imperial)	1.22
--------------------------	------

Offset Length (Metric)	31.0
------------------------	------

Fixation Method	Fir Tree
-----------------	----------

Width W (Metric)	42.5
------------------	------

Height H (Imperial)	0.9
---------------------	-----

Height H (Metric)	22.5
-------------------	------

Panel Thickness Min (Imperial)	0.03
--------------------------------	------

Panel Thickness Max (Imperial)	0.22
--------------------------------	------

Panel Thickness Min (Metric)	0.7
------------------------------	-----

Panel Thickness Max (Metric)	5.75
------------------------------	------

Mounting Hole Diameter D (Imperial)	0.25 - 0.28 "
-------------------------------------	---------------

Mounting Hole Diameter D (Metric)	6.6 mm
-----------------------------------	--------

Material	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)	
Material Shortcut	PA66HIRHSUV	
Flammability	UL 94 HB	
UV Resistant (Yes/No)	Yes	
Use Conditions	For Indoor and Outdoor Use	
Operating Temperature	-40°F to +221°F (-40°C to +105°C)	
Operating Temperature intermittant, 1000 hours	+320°F (+160°C)	
Operating Temperature intermittant, 5000 hours	+257°F (+125°C)	
Operating Temperature intermittant, 500 hours	+329°F (+165°C)	
Reach Compliant (Article 33)	Yes	
ROHS Compliant	Yes	
Package Quantity (Imperial)	3000	
Package Quantity (Metric)	3000	
Customs Number	3926909988	

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Privacy Policy](#)

[Cookie Policy](#)

[Terms and Conditions](#)