


Specification Sheet

Part Number: 151-00677

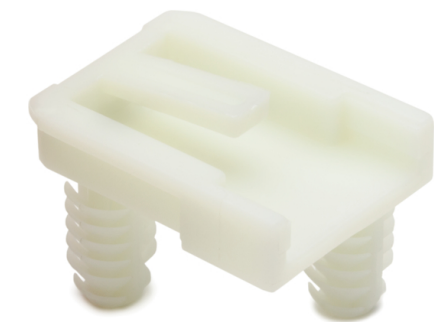

HellermannTyton Connector Clips provide a single method to mount connectors to various surfaces in a variety of applications.

Highly engineered designs feature anti-rattle discs, anti-rotation oval fir trees and clamps for mounting on edges.

An assortment of Connector Cips is available to fit the variety of connector slot designs made by most of the largest global connector manufacturers.

Connector Clip with Round Fir Tree, 0.76-5.75mm Panel Thick., 6.25-6.75mm Hole Dia, PA66HIRHS, Natural, 5000/ctn

Article Number	151-00677
Type	CC08
Color	Natural (NA)
Quantity Per	pack
Product Description	Connector Clips feature various attachment point configurations to accommodate the many connectors on the market. They are first mated with a connector on a wire harness or cable assembly, then secured to a surface using the integrated mount. With so many configurations available, attachment surfaces can be a hole, edge, stud or even another harness assembly.
Short Description	Connector Clip with Round Fir Tree, 0.76-5.75mm Panel Thick., 6.25-6.75mm Hole Dia, PA66HIRHS, Natural, 5000/ctn

Global Part Name	CC08-PA66HIRHS-NA
Compatible For Third Party Product 2	CC08 can be used for Delphi - Heavy Duty Slots - connectors.
Length L (Imperial)	0.99
Length L (Metric)	25.2
Fixation Method	Fir tree for round holes
Width W (Imperial)	0.78
Width W (Metric)	19.81
Height H (Imperial)	0.81
Height H (Metric)	20.55
Panel Thickness Min (Imperial)	0.03
Panel Thickness Max (Imperial)	0.23
Panel Thickness Min (Metric)	0.7
Panel Thickness Max (Metric)	5.75
Mounting Hole Diameter D (Imperial)	0.25 - 0.27 "
Mounting Hole Diameter D (Metric)	6.25 - 6.75 mm
Mounting Hole Diameter D Min (Imperial)	0.25

Mounting Hole Diameter D Max (Imperial) 0.27

Mounting Hole Diameter D Max (Metric) 6.75

Material Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)

Material Shortcut PA66HIRHS

UV Resistant (Yes/No) No

Use Conditions For Indoor Use Only

Operating Temperature -40°F to +221°F (-40°C to +105°C)

Operating Temperature intermittant, 1000 hours +320°F (+160°C)

Operating Temperature intermittant, 5000 hours +257°F (+125°C)

Operating Temperature intermittant, 500 hours +329°F (+165°C)

Reach Compliant (Article 33) Yes

ROHS Compliant Yes

Package Quantity (Imperial) 5000

Package Quantity (Metric) 5000

Customs Number

3926909988

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)