


## Specification Sheet

Part Number: 151-00903

Clip can be installed by hand – no need for hardware or tools.

Design provides low insertion and high extraction force, for simple, secure performance.

Clip keeps bundle away from areas that could cause damage due to rubbing.

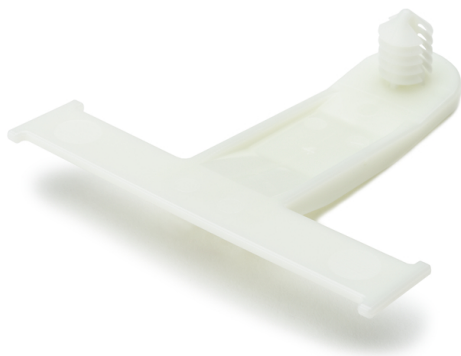

Standoff Bundling Clip, 2.3" Long, 0.02 - 0.23" Panel Thickness, PA66HIRHS, Natural, 3000/box

Article Number 151-00903

Type SOC10FT6LG

Color Natural (NA)

Quantity Per pack

Product Description Bundling clips are designed to provide simple and easy methods of securing cable bundles, hoses, or pipes. They are fastened onto the tape bar using bundle or cable ties. The different fixing orientations allow tape clips to be used with a wide range of panel thicknesses and hole diameters. Standard bundling clips are available as well as standoff and stud mount versions.

Short Description Standoff Bundling Clip, 2.3" Long, 0.02 - 0.23" Panel Thickness, PA66HIRHS, Natural, 3000/box

Global Part Name SOC10FT6LG-PA66HIRHS-NA

Length L (Imperial) 2.3

Length L (Metric) 58.0

Offset Length (Imperial) 1.71

Offset Length (Metric) 43.35

Fixation Method Fir Tree

Width W (Imperial) 0.6

Width W (Metric) 16.0

Height H (Imperial) 0.60

Height H (Metric) 14.50

Panel Thickness Min (Imperial) 0.02

Panel Thickness Max (Imperial) 0.23

Panel Thickness Min (Metric) 0.6

Panel Thickness Max (Metric) 5.75

Mounting Hole Diameter D (Imperial) 0.24 - 0.26 " (HEXAGONAL) 0.24 - 0.27 "

Mounting Hole Diameter D (Metric) 6.1 - 6.6 mm

Mounting Hole Diameter D Min (Imperial) 0.24

Mounting Hole Diameter D Max (Imperial) 0.27

Mounting Hole Diameter D Max (Metric) 6.9

Material Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)

Material Shortcut PA66HIRHS

Flammability UL 94 HB

UV Resistant (Yes/No) No

Use Conditions For Indoor Use Only

Operating Temperature -40°F to +221°F (-40°C to +105°C)

Operating Temperature intermittent, 1000 hours +320°F (+160°C)

Operating Temperature intermittent, 5000 hours +257°F (+125°C)

Operating Temperature intermittent, 500 hours +329°F (+165°C)

Reach Compliant (Article 33) Yes

ROHS Compliant Yes

|                             |            |
|-----------------------------|------------|
| Package Quantity (Imperial) | 3000       |
| Package Quantity (Metric)   | 3000       |
| Customs Number              | 3926909988 |

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: [corp@htamericas.com](mailto:corp@htamericas.com)

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)