

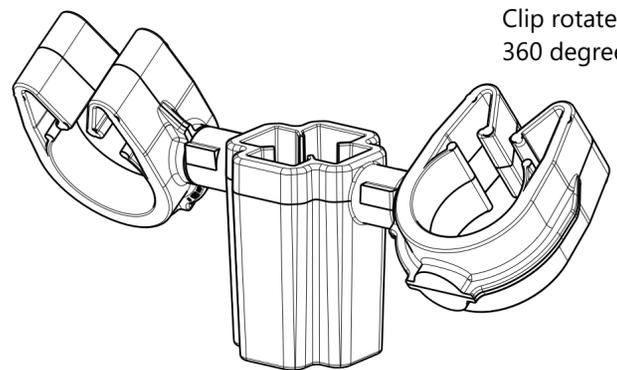
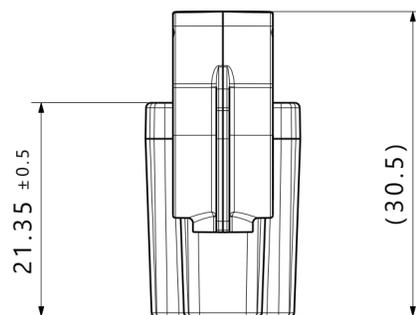


Isometric view

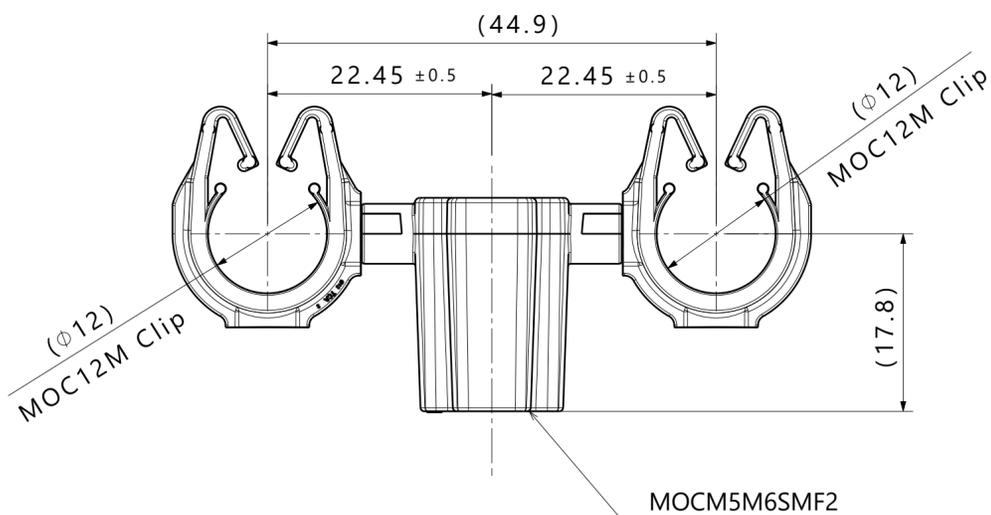

Clip rotate
360 degrees

Isometric view - Rotated

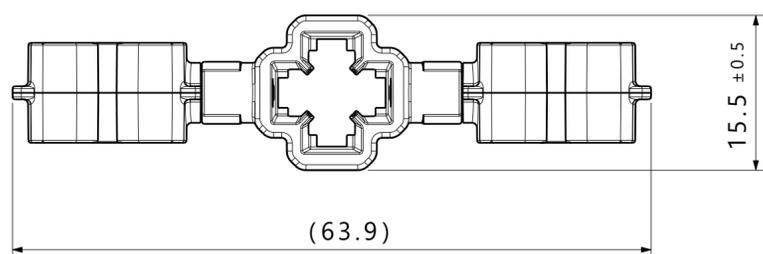

Reference:

Performance requirements at dry as molded:

1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.25mm
5. Max allowable mismatch to be: 0.1mm
6. Applicable stud size:
 - A. M5 x 0.8
 - B. T5
 - C. M6 x 1
 - D. T6

*Rotational orientation of clips upon delivery is not controlled

**Recommended sizes may differ depending on the application, product requirements, and materials used.

**Patent: US D822,476 S, EU 003864313, CN 304373914 S

Clip	Diameter Range*		
	Harness	Hose	Hard pipe/tube
MOC12M	11.5MM-13.0MM	10.5MM-13.0MM	12.0MM-13.8MM

Global Parts Description	Part	Drawing	Material	Color
SMF2MOC12MX2-PA66HIRHSUV-BK	MOC12M**	16-0319-000-CSU	PA66HIRHSUV	Black
	MOCM5M6SMF2	19-0239-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn Duncan 2020/09/28	Date (YYYY/MM/DD)	Title M5/M6 stud mount coupled to two MOC12Ms with male pin	Scale 2:1
02.1	Design Release	-	ECN 016852	Changed	Date (YYYY/MM/DD)					
	Klos	2022/01/20		Approved	Date (YYYY/MM/DD)				Drawing-No 19-1695-101-CSU	Format A2
	Cottrill	2022/01/21							Sheet 1 / 1	

HellermannTyton
www.HellermannTyton.com