


Specification Sheet

Part Number: 157-00068

Friction tab inside of fir tree allows tie to sit in mount without falling out prior to installation.

Initial fir tree serves as a locating feature for assistance in blind assembly applications.

Disc feature provides anti-rattle protection in high vibration applications.

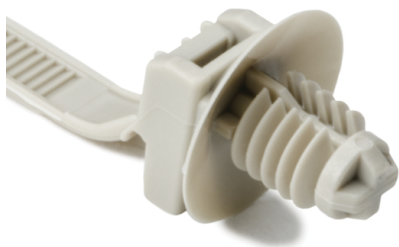

1-Piece Cable Tie with Fir Tree Mount, 6.7" Long, 0.25" (hexagonal) or 0.26 - 0.28 " Mounting Hole, PA66, Gray, 500/pkg

Article Number 157-00068

Type OS180FT7LH

Color Gray (GY)

Quantity Per pack

Product Description Fir tree mounts with ties cables provide a secure grip in mounting holes and protect against dirt and other impurities. The mount provides low insertion and high extraction force, and slides along the cable tie for the proper orientation. This is sold as an assembly with the cable tie.

Short Description 1-Piece Cable Tie with Fir Tree Mount, 6.7" Long, 0.25" (hexagonal) or 0.26 - 0.28 " Mounting Hole, PA66, Gray, 500/pkg

Global Part Name OS180FT7LH-PA66-GY

Minimum Tensile Strength (Imperial)	50
Minimum Tensile Strength (Metric)	200
Length L (Imperial)	7.0
Length L (Metric)	180.0
Fixation Method	Fir tree for round holes
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Width W (Imperial)	0.21
Width W (Metric)	5.3
Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.6
Bundle Diameter Max (Imperial)	1.18
Bundle Diameter Max (Metric)	30.0
Thickness T (Metric)	1.4
Height H (Imperial)	0.7

Panel Thickness Min (Imperial)	0.03
Panel Thickness Max (Imperial)	0.18
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	4.5
Mounting Hole Diameter D (Imperial)	0.26 - 0.28 " 0.25 " (HEXAGONAL)
Mounting Hole Diameter D (Metric)	6.5 - 7.0 mm 6.35 mm (hexagonal)
Mounting Hole Diameter D Min (Imperial)	0.25
Mounting Hole Diameter D Max (Imperial)	0.28
Mounting Hole Diameter D Max (Metric)	7.0
Disc Diameter (Metric)	16.0
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
UV Resistant (Yes/No)	No
Use Conditions	For Indoor Use Only
Reach Compliant (Article 33)	Yes

ROHS Compliant	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)