


Specification Sheet

Part Number: 157-00366

Off-Set design allows bundles to sit off of mounting points to avoid friction against surrounding areas.

Fir tree gives 3 to 1 extraction versus insertion force making them strong and easy to install.

Friction tab inside of fir tree allows tie to sit in mount without falling out prior to installation.

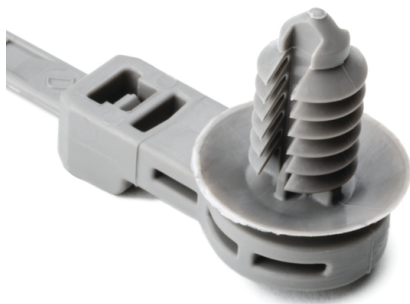

1-Piece Cable Tie with Fir Tree Mount with Disc, 12.5mm Offset, 8.5"L, 6.1 - 7.0 mm or 6.35 mm (hexagonal) Hole, PA66HIRHS, Gray, 3000/ctn

Article Number 157-00366

Type T50ROSFT6SO12.5A

Color Gray (GY)

Quantity Per pack

Product Description HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

Short Description 1-Piece Cable Tie with Fir Tree Mount with Disc, 12.5mm Offset, 8.5"L, 6.1 - 7.0 mm or 6.35 mm (hexagonal) Hole, PA66HIRHS, Gray, 3000/ctn

Global Part Name T50ROSFT6SO12.5A-PA66HIRHS-GY

Minimum Tensile Strength (Imperial) 50

Minimum Tensile Strength (Metric) 225

Length L (Imperial) 8.5

Length L (Metric) 215.9

Offset Length (Imperial) 0.49

Offset Length (Metric) 12.5

Fixation Method Fir tree for round holes

Identification Plate Position none

Releasable Closure No

Width W (Imperial) 0.19

Width W (Metric) 5.1

Bundle Diameter Min (Imperial) 0.08

Bundle Diameter Min (Metric) 2.0

Bundle Diameter Max (Imperial) 1.97

Bundle Diameter Max (Metric) 50.0

Height H (Imperial)	0.87
Panel Thickness Min (Imperial)	0.02
Panel Thickness Max (Imperial)	0.26
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	6.65
Mounting Hole Diameter D (Imperial)	0.24 - 0.28 " 0.25 " (HEXAGONAL)
Mounting Hole Diameter D (Metric)	6.1 - 7.0 mm 6.35 mm (hexagonal)
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.28
Mounting Hole Diameter D Max (Metric)	7.0
Disc Diameter (Metric)	15.0
Disc Diameter (Imperial)	0.59
Material	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
Material Shortcut	PA66HIRHS
UV Resistant (Yes/No)	No

Use Conditions	For Indoor Use Only
Operating Temperature	-40°F to +221°F (-40°C to +105°C)
Operating Temperature intermittent, 1000 hours	+320°F (+160°C)
Operating Temperature intermittent, 5000 hours	+257°F (+125°C)
Operating Temperature intermittent, 500 hours	+329°F (+165°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes

Package Quantity (Imperial)	3000
Package Quantity (Metric)	3000
Customs Number	3926909988

7930 N. Faulkner Road, Milwaukee, WI 53224
Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)