


## Specification Sheet

Part Number: 166-90450

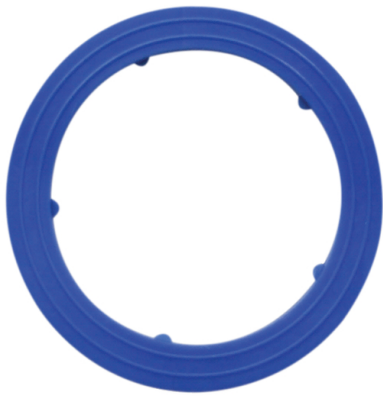

Polyester elastomer washer provides ingress protection against moisture and is oil resistant.

Small "pips" in bore retain washer onto metric threaded fittings.

Ribs on both sides of washer enhances sealing performance.

HelaGuard® Accessories, Sealing Washer, M40-1.25", Polyester Elastomer, Blue, 10/pkg

|                |           |
|----------------|-----------|
| Article Number | 166-90450 |
|----------------|-----------|

|      |        |
|------|--------|
| Type | RSW125 |
|------|--------|

|       |           |
|-------|-----------|
| Color | Blue (BU) |
|-------|-----------|

|              |      |
|--------------|------|
| Quantity Per | pack |
|--------------|------|

|                     |                                                                                                                                                                                                                 |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Description | Face sealing washer affixed between metric threaded fitting and entry wall surface to achieve IP66, IP67, IP68 and IP69 levels of ingress protection. Hardness 33 Shore D. Self-extinguishing and halogen free. |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                   |                                                                                      |
|-------------------|--------------------------------------------------------------------------------------|
| Short Description | HelaGuard® Accessories, Sealing Washer, M40-1.25", Polyester Elastomer, Blue, 10/pkg |
|-------------------|--------------------------------------------------------------------------------------|

|                  |               |
|------------------|---------------|
| Global Part Name | RSW125-TPE-BU |
|------------------|---------------|

|                                |                                   |
|--------------------------------|-----------------------------------|
| Variant                        | Seal Washer                       |
| Thickness T (Imperial)         | 0.07                              |
| Thickness T (Metric)           | 1.8                               |
| Inner Diameter D (Imperial)    | 1.57                              |
| Inner Diameter D (Metric)      | 40.0                              |
| Outside Diameter OD (Imperial) | 1.97                              |
| Outside Diameter OD (Metric)   | 50.0                              |
| Nominal Diameter (Imperial)    | 1.25                              |
| Nominal Diameter (Metric)      | 40.0                              |
| Material                       | Thermoplastic Elastomer (TPE)     |
| Material Shortcut              | TPE                               |
| UV Resistant (Yes/No)          | No                                |
| Use Conditions                 | For Indoor Use Only               |
| Operating Temperature          | -58°F to +275°F (-50°C to +135°C) |
| Reach Compliant (Article 33)   | No                                |

|                             |            |
|-----------------------------|------------|
| Package Quantity (Imperial) | 10         |
| Package Quantity (Metric)   | 10         |
| Customs Number              | 3926904500 |

7930 N. Faulkner Road, Milwaukee, WI 53224  
Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#)   [RoHS/WEEE Compliance](#)   [Privacy Policy](#)   [Cookie Policy](#)   [Terms and Conditions](#)