

Specification Sheet


Part Number: CTN140STDUNSLIT

Durable tubing provides protection of wire harness from friction, vibration, fraying and puncture.

Tubing protects cables and wires against automotive fluids, vibration wear.

Weather resistant material provides protection against water, snow, ice, and the effects of heat, cold, and sunlight.

Nylon material is formulated to withstand high temperatures.

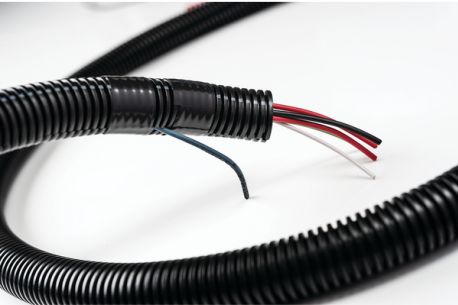

Convoluted Tubing, Unslit, 0.25" Dia, PA6, Black with Gray Stripe, 2500 ft/ctn

Article Number	169-60029
Type	CTN140UNSLIT
Color	Black with Gray Stripe (BKSTGY)
Quantity Per	carton
Product Description	HellermannTyton’s Convoluted Tubing, also known as Loom Tubing, provides an efficient method of routing and protecting wire harness assemblies, while reducing the chance of installation damage. It can also serve to protect valuable hoses and cables. Convoluted tubing offers excellent protection against vibration wear, water, snow, ice and the effects of heat, cold and sunlight on cables and wires.

Short Description	Convuluted Tubing, Unslit, 0.25" Dia, PA6, Black with Gray Stripe, 2500 ft/ctn
Global Part Name	CTN140UNSLIT-PA6-BK
Length L (Imperial)	2500.0
Length L (Metric)	762.0
Variant	Unslit
Inner Diameter D (Imperial)	0.276
Inner Diameter D (Metric)	7.01
Diameter D (Imperial)	0.398
Diameter D (Metric)	10.11
Outside Diameter OD (Imperial)	0.398
Outside Diameter OD (Metric)	10.11
Nominal Diameter (Imperial)	0.25
Nominal Diameter (Metric)	6.35
Wall Thickness WT (Imperial)	0.004
Wall Thickness WT (Metric)	0.102

Material	Polyamide 6 (PA6)
Material Shortcut	PA6
Flammability	UL 94 HB
Halogen Free	No
UV Resistant (Yes/No)	No
Use Conditions	For Indoor Use Only
Operating Temperature	-40°F to +257°F (-40°C to +125°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	2500
Package Quantity (Metric)	762.0
Customs Number	3926909988

7930 N. Faulkner Road, Milwaukee, WI 53224
Phone: (800) 537-1512 | Email: corp@htamericas.com