

Routing, Protection and Insulation

Braided Sleeving


Braided Sleeving - Specialty

Twist-In Rodent-Repellent Wrap

Twist-In Rodent-Repellent Wrap is a self-closing fiberglass sleeving used to bundle cables and hoses and protect against rodents in infestation-prone areas such as automotive, railways, telecom, underground and waste treatment systems.

Features and Benefits

- Self-wrapping woven sleeving made of fiberglass and PET polyester protects against chewing damage.
- Provides good protection against abrasion, UV and weathering, vibration and impact.
- Quick and easy installation and removal, ideal for retrofitting.
- Lightweight material won't add significant weight to the installation.
- Resists acids, solvents and micro-organisms for extended performance in industrial environments.

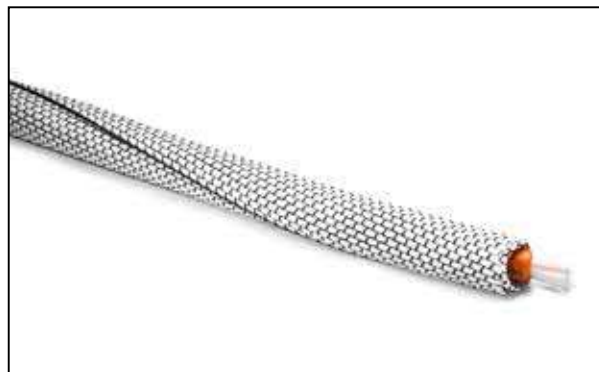

| | |
|------------------------------|-----------------------------------|
| MATERIAL | Polyester (PET), Glass Fiber (GF) |
| Operating Temperature | -94°F to +257°F (-70°C to +125°C) |
| Flammability | Self-extinguishing, FMVSS 302 |
| Melting Point | +437 °F (+225 °C) |

| PART NO. | TYPE | Nominal Diameter in. (mm) | Min. Bundle Diameter in. (mm) | Max. Bundle Diameter in. (mm) | Color | Reel Length ft. (m) |
|-----------|----------------|---------------------------|-------------------------------|-------------------------------|--------------|---------------------|
| 170-01161 | Twist-In-RR-13 | 0.5 (12.7) | 0.4 (10.0) | 0.5 (13.0) | White, Black | 164.0 (50.0) |
| 170-01162 | Twist-In-RR-19 | 0.75 (19.1) | 0.6 (16.0) | 0.8 (19.0) | White, Black | 82.0 (25.0) |
| 170-01163 | Twist-In-RR-29 | 1.0 (25.4) | 1.0 (25.0) | 1.1 (29.0) | White, Black | 49.2 (15.0) |
| 170-01164 | Twist-In-RR-32 | 1.25 (31.8) | 1.1 (29.0) | 1.3 (32.0) | White, Black | 49.2 (15.0) |

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

HellermannTyton

HellermannTyton North American Corporate Headquarters

7930 N. Faulkner Rd, PO Box 245017
Milwaukee, WI 53224-9517
Phone: (414) 355-1130, (800) 537-1512
Fax: (414) 355-7341, (800) 848-9866
email: corp@htamericas.com
www.hellermann.tyton.com

IATF 16949, AS9100, ISO 9001 and ISO 14001 certified

HellermannTyton Canada

Unit #4, 205 Industrial Parkway North
Aurora, Ontario L4G 4C4 Canada
Phone: (800) 661-2461
Fax: (800) 390-3904
email: sales@hellermanntyton.ca

HellermannTyton Mexico

Anillo Periferico Sur 7980 Edificio 6A
Parque Industrial Tecnologico II
Santa María Tequepexpan
Tlaquepaque, Jalisco, Mexico 45601
Phone: 011-52-33-3-133-9880
Fax: 011-52-33-3-133-9861
email: info-mx@hellermanntyton.com
ISO 9001 certified

Warranty Policy – HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses.