


Specification Sheet

Part Number: FHE

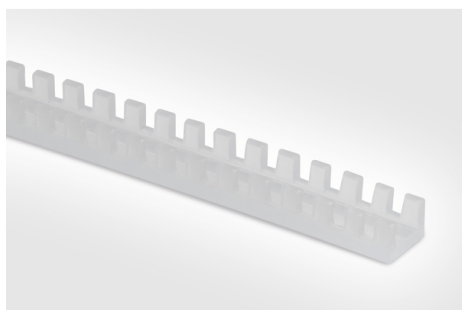

Can be cut to length with scissors, eliminating waste and keeping stock to a minimum.

Available in 9 sizes, for thicknesses from .016" to .512", insuring proper fit.

Grommet, Panel Thickness 0.189"-0.256", PA6, Natural, 82ft/pkg

Article Number 251-21509

Type G51NE

Color Natural (NA)

Quantity Per pack

Product Description HellermannTyton's Flexiform grommet is a unique, continuous wire protection product which fits easily in all shapes and sizes of holes without the aid of tools or adhesives. Flexiform grommet can be used on any type of material including wood, steel, aluminum, plexiglass, and glass.

Short Description Grommet, Panel Thickness 0.189"-0.256", PA6, Natural, 82ft/pkg

Global Part Name G51NE-PA6-NA

| | |
|--------------------------------|-------------------|
| Length L (Imperial) | 82.0 |
| Variant | Open |
| Width W (Imperial) | 0.39 |
| Width W (Metric) | 9.9 |
| Height H (Imperial) | 0.252 |
| Height H (Metric) | 6.4 |
| Panel Thickness Min (Imperial) | 0.19 |
| Panel Thickness Max (Imperial) | 0.25 |
| Panel Thickness Min (Metric) | 4.8 |
| Panel Thickness Max (Metric) | 6.5 |
| Material | Polyamide 6 (PA6) |
| Material Shortcut | PA6 |
| US MIL SPEC | MS21266-5N |
| Flammability | UL 94 HB |
| Halogen Free | Yes |

| | |
|------------------------------|----------------------------------|
| UV Resistant (Yes/No) | No |
| Use Conditions | For Indoor Use Only |
| Operating Temperature | -76°F to +203°F (-60°C to +95°C) |
| Reach Compliant (Article 33) | Yes |
| ROHS Compliant | Yes |
| Certification/Specification | NASM21266 |
| Package Quantity (Imperial) | 82 |
| Package Quantity (Metric) | 25 |
| Customs Number | 3926909988 |

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)