

Specification Sheet

Part Number: 309-65310


Thin, 2 to 1 shrink ratio tubing provides insulation and abrasion protection for wires and cables.

Flammability rating of UL224 VW-1 for use in applications requiring the highest degree of flame protection (excludes clear tubing).

Flexible-yet-durable material resists most common oils, chemicals and fluids.

Available in a variety of diameters and colors for identifying and marking wires and cables.

Available in mini reels, bulk reels, and sticks for small to large volume applications.

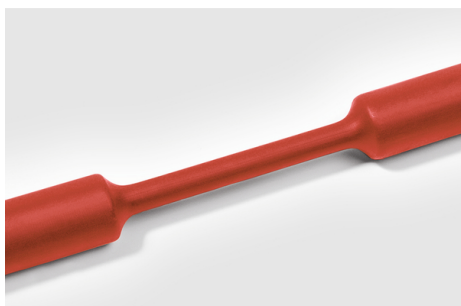

Heat Shrink Tubing, Non-Adhesive Bulk Reel, 2:1 Shrink Ratio, 3/4", 19.1/9.5 Dia, PO, Red, 200 ft/reel

Article Number 309-65310

Type TFN21 19.1/9.5

Color Red (RD)

Quantity Per pack

Product Description TFN21 is a highly flexible thin wall heat shrink tubing with a 2 to 1 shrink ratio and excellent flame retardant properties. In addition to providing insulation and abrasion protection for wires and cables, the polyolefin material also offers resistance to oils, solvents and chemicals.

| | |
|--------------------------------|--|
| Short Description | Heat Shrink Tubing, Non-Adhesive Bulk Reel, 2:1 Shrink Ratio, 3/4", 19.1/9.5 Dia, PO, Red, 200 ft/reel |
| Global Part Name | TFN21 19.1/9.5-PO-X-RD |
| Length L (Metric) | 60 |
| Variant | Thin-Wall |
| Bundle Diameter Min (Imperial) | 0.375 |
| Bundle Diameter Min (Metric) | 9.5 |
| Bundle Diameter Max (Imperial) | 0.75 |
| Bundle Diameter Max (Metric) | 19.1 |
| Diameter D (Imperial) | 0.75 |
| Diameter D (Metric) | 19.1 |
| Nominal Diameter (Imperial) | .75 |
| Nominal Diameter (Metric) | 19.1 |
| Wall Thickness WT (Imperial) | 0.027 |
| Wall Thickness WT (Metric) | 0.68 |

| | |
|-------------------------------|-----------------------------------|
| Material | Polyolefin, cross-linked (PO-X) |
| Material Shortcut | PO-X |
| Flammability | UL 224 VW-1 |
| Halogen Free | No |
| UV Resistant (Yes/No) | No |
| Use Conditions | For Indoor Use Only |
| Operating Temperature | -67°F to +275°F (-55°C to +135°C) |
| Reach Compliant (Article 33) | No |
| ROHS Compliant | Yes |
| Certification/Specification | UL ANSI/UL 224 |
| UL Recognized (US) | Yes |
| UL Recognized (US and Canada) | Yes |
| Package Quantity (Imperial) | 200 |
| Package Quantity (Metric) | 60.96 |
| Customs Number | 3926909988 |

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Privacy Policy](#) [Cookie Policy](#) [Terms and Conditions](#)