

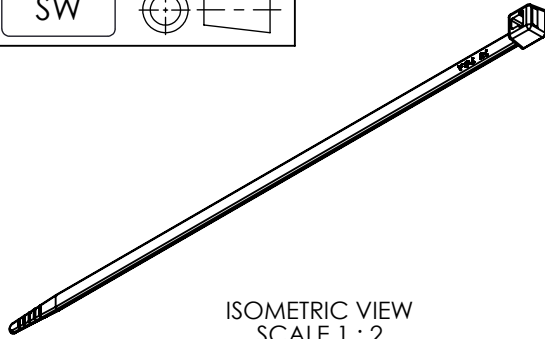

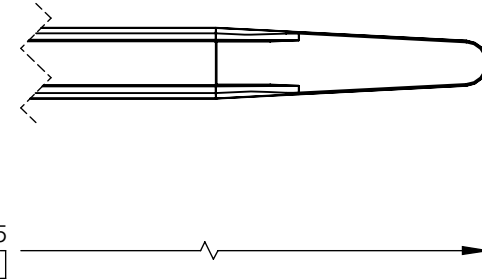
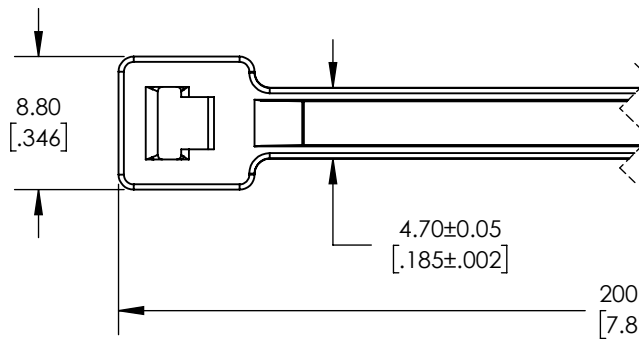

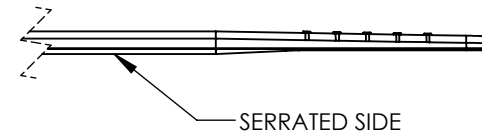


SW

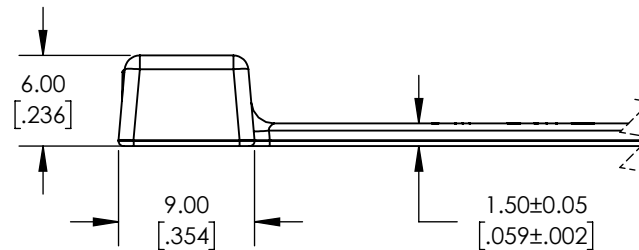

ISOMETRIC VIEW
SCALE 1 : 2



01.1

REFERENCE: PERFORMANCE REQUIREMENTS

1. CABLE TIE MINIMUM LOOP TENSILE STRENGTH: 225N [50 lbf]
2. TOOL APPLICATION MAXIMUM TENSION FORCE: 55N [12 lbf]

GLOBAL PART DESCRIPTION	TEMPERATURE RANGE	WIRE BUNDLE		MATERIAL	
		MINIMUM	MAXIMUM	TYPE	COLOR
T50R-PA66V0-BK	-40°C to 100°C [-40°F to 212°F]	4mm [0.157 in]	50mm [1.969 in]	PA66V0	BLACK
T50R-PA666V0-BK	-40°C to 120°C [-40°F to 248°F]	4mm [0.157 in]	50mm [1.969 in]	PA666V0	BLACK

Material SEE CHART	Units: millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CTF	12/23/2019	Article/Type-No T50R	Scale 2:1	
	Dimension without tolerances details to: .xxx = ±.013 .xx = ±.13 .x = ±.3 None = ±.8 ∠ = ±0.5° Dimension Formatted mm/[in]		Approved	MHT	12/23/2019	Title STANDARD T50R CABLE TIE	Project Number PRP 17-2468	
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	Production : Phase	Format AH
						17-2468-002-CSU		Sheet 1/1