


## Specification Sheet

Part Number: QTTIE9

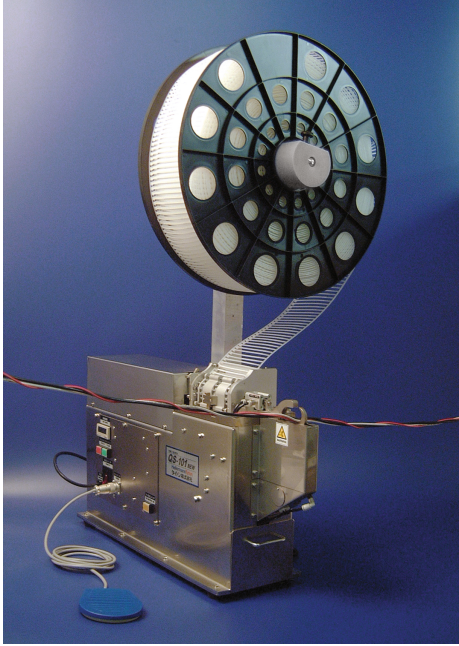

Ties are available in two styles: standard and heat stabilized. Custom colors for Quick Tool ties are also available. Contact HellermannTyton for more information.

Article Number 105-00006

Type AZ100

Color Natural (NA)

Quantity Per reel

Product Description HellermannTyton's Quick Tool is an automatic bench mount system suited for high volume cable tie applications. This air powered tool accommodates a reel of 5000 ties and, like HellermannTyton's other automamted systems, can be integrated into further automation as well as fully incorporated into conveyor or assembly line applications. Custom colors for Quick Tool ties are also available.

|                                     |                                                                                           |
|-------------------------------------|-------------------------------------------------------------------------------------------|
| Short Description                   | Cable Tie for QS101, 18lb Tensile Strength, PA66, Natural, 5000 Ties/Reel, 2 Reels/Carton |
| Global Part Name                    | AZ100-PA66-NA                                                                             |
| Minimum Tensile Strength (Imperial) | 18.0                                                                                      |
| Minimum Tensile Strength (Metric)   | 80                                                                                        |
| Length L (Imperial)                 | 3.94                                                                                      |
| Length L (Metric)                   | 100                                                                                       |
| Identification Plate Position       | none                                                                                      |
| Reel Diameter (Imperial)            | 18                                                                                        |
| Reel Diameter (Metric))             | 450.00                                                                                    |
| Reel Width (Imperial)               | 5.2                                                                                       |
| Reel Width (Metric)                 | 132                                                                                       |
| Releasable Closure                  | No                                                                                        |
| Variant                             | bandolier                                                                                 |
| Width W (Imperial)                  | 0.1                                                                                       |
| Width W (Metric)                    | 2.5                                                                                       |
| Bundle Diameter Min (Imperial)      | 0.03                                                                                      |

|                                |                                      |
|--------------------------------|--------------------------------------|
| Bundle Diameter Min (Metric)   | 0.7                                  |
| Bundle Diameter Max (Imperial) | 0.63                                 |
| Bundle Diameter Max (Metric)   | 16.0                                 |
| Thickness T (Imperial)         | 0.043                                |
| Thickness T (Metric)           | 1.1                                  |
| Material                       | Polyamide 6.6 (PA66)                 |
| Material Shortcut              | PA66                                 |
| Flammability                   | UL 94 V-2                            |
| UV Resistant (Yes/No)          | No                                   |
| Operating Temperature          | -40°F to +185°F (-40°C to +85°C)     |
| Reach Compliant (Article 33)   | No                                   |
| ROHS Compliant                 | Yes                                  |
| Certification/Specification    | UL   ANSI/UL 62275 UL   ANSI/UL 1565 |
| UL Recognized (US)             | Yes                                  |
| Package Quantity (Imperial)    | 5000                                 |

|                           |            |
|---------------------------|------------|
| Package Quantity (Metric) | 5000       |
| Customs Number            | 3926909988 |
| Reel Weight (Imperial)    | 4.8        |
| Reel Weight (Metric)      | 2.46       |

## About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. ([www.hellermann.tyton.com](http://www.hellermann.tyton.com)).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)