


Short-Range Solution - DS-2TD1217B-3/PA

— 3mm



DS-2TD1217B-3/PA

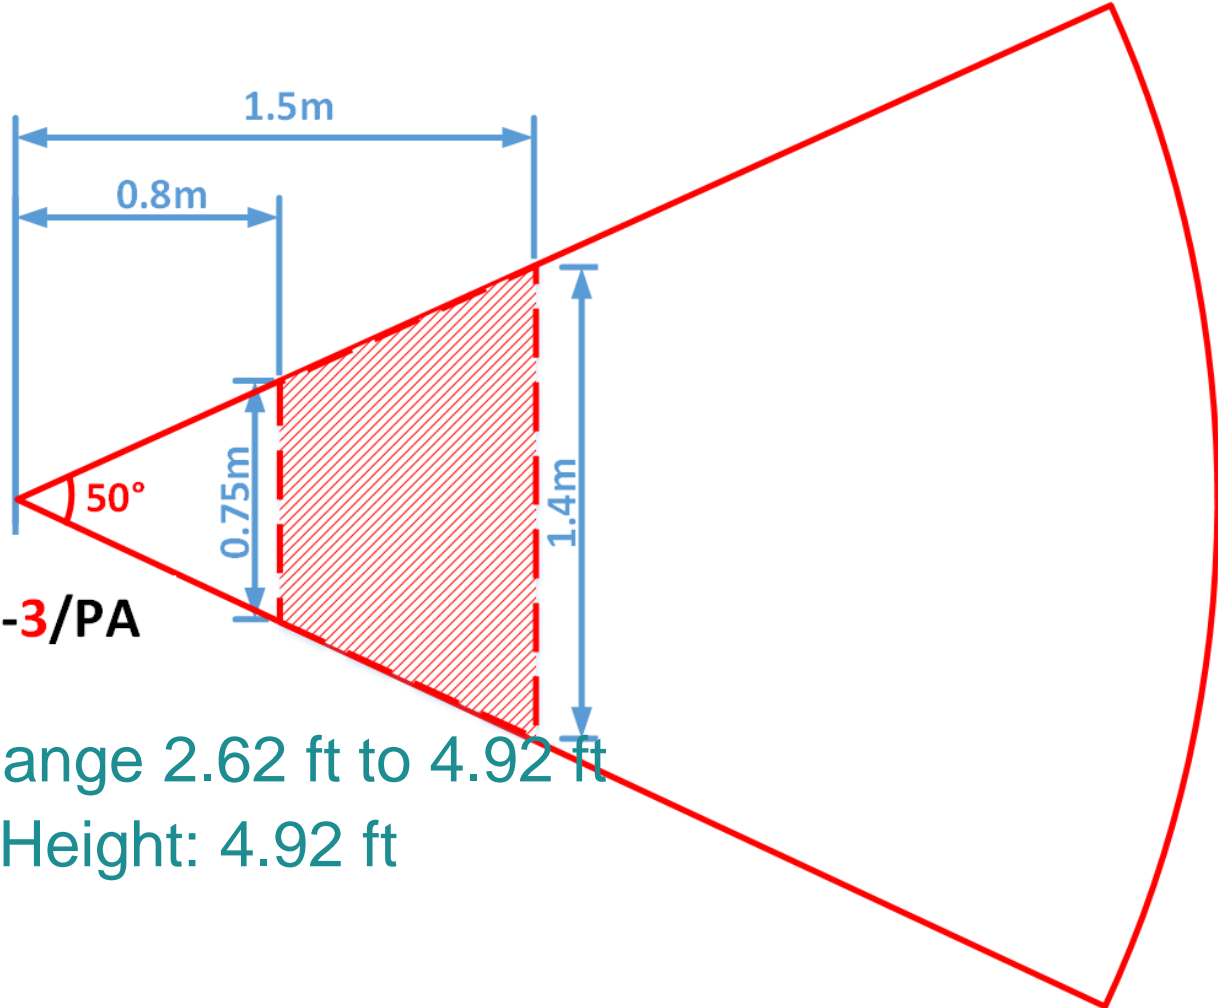


Detection Range 2.62 ft to 4.92 ft
Installation Height: 4.92 ft

Thermal Resolution	Thermal Focal Length	Recommended Distance (between human and camera)	Installation Height
160 * 120	3 mm	0.8 m-1.5 m	1.5 m
	6 mm	1.5 m-3 m	

Mid-Range Solution - DS-2TD2617B-6/PA

Thermal Resolution	Thermal Focal Length	Recommended Distance (between human and camera)	Installation Height
160 * 120	3 mm	0.8 m-1.5 m	1.5 m
	6 mm	1.5 m-3 m	

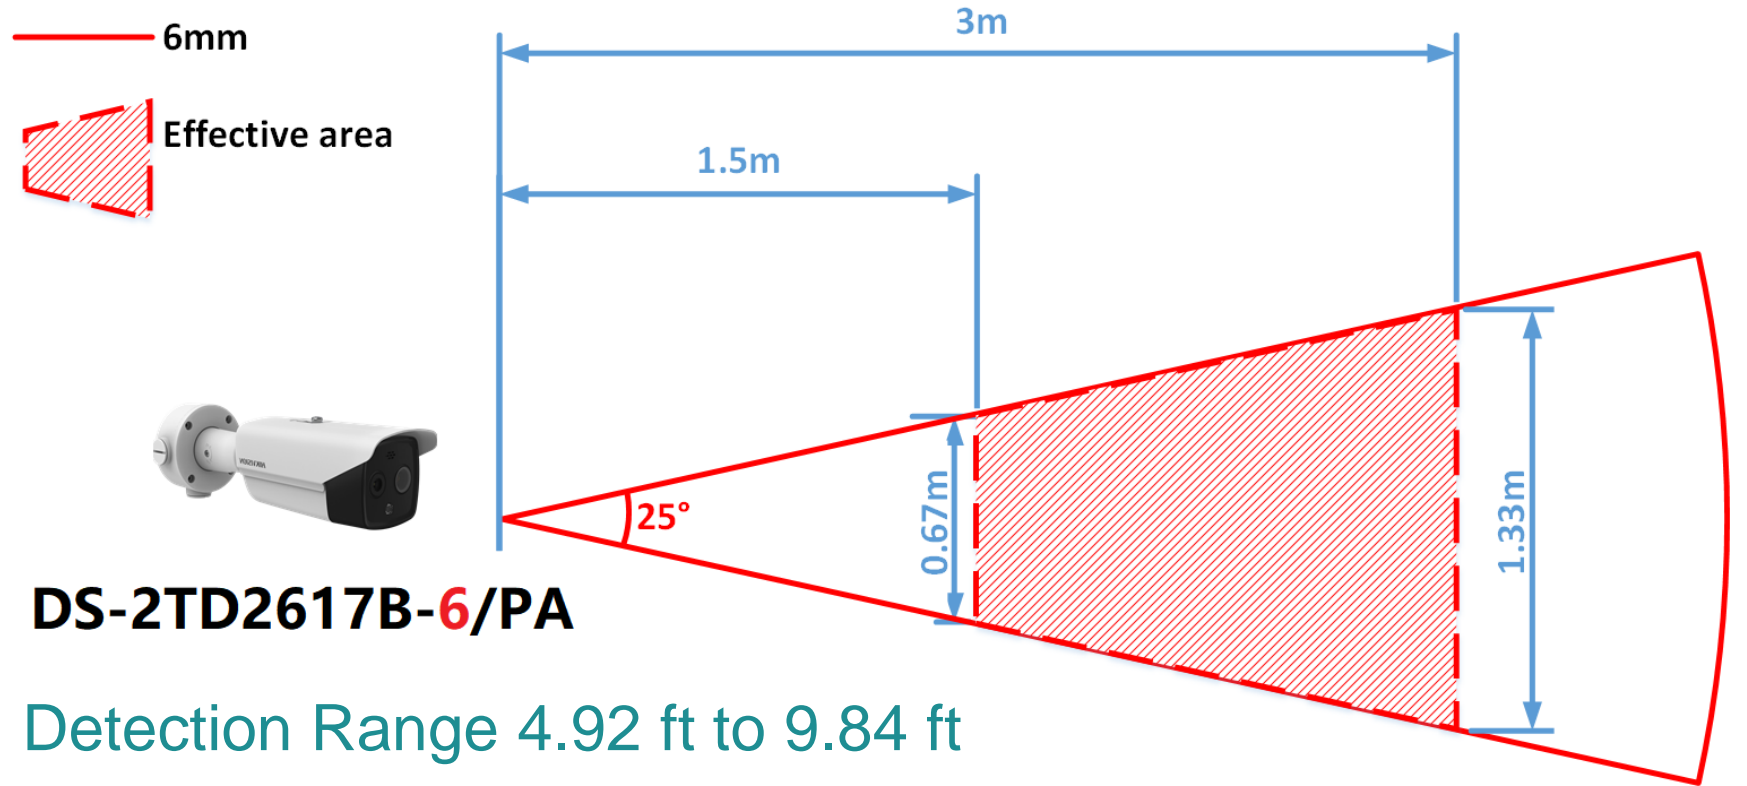

DS-2TD2617B-6/PA

Detection Range 4.92 ft to 9.84 ft

Installation Height: 4.92 ft


Long-Range Solution - DS-2TD2636B-13/P

Thermal Resolution	Thermal Focal Length	Recommended Distance (between human and camera)	Installation Height
160 * 120	3 mm	0.8 m–1.5 m	1.5 m
	6 mm	1.5 m–3 m	
384 * 288	13 mm	2.5 m–7 m	1.7 m–2.5 m



DS-2TD2636B-13P

Detection Range 8.2 feet to 22.0 feet
 Installation Height: between 5.6 to 8.2 ft

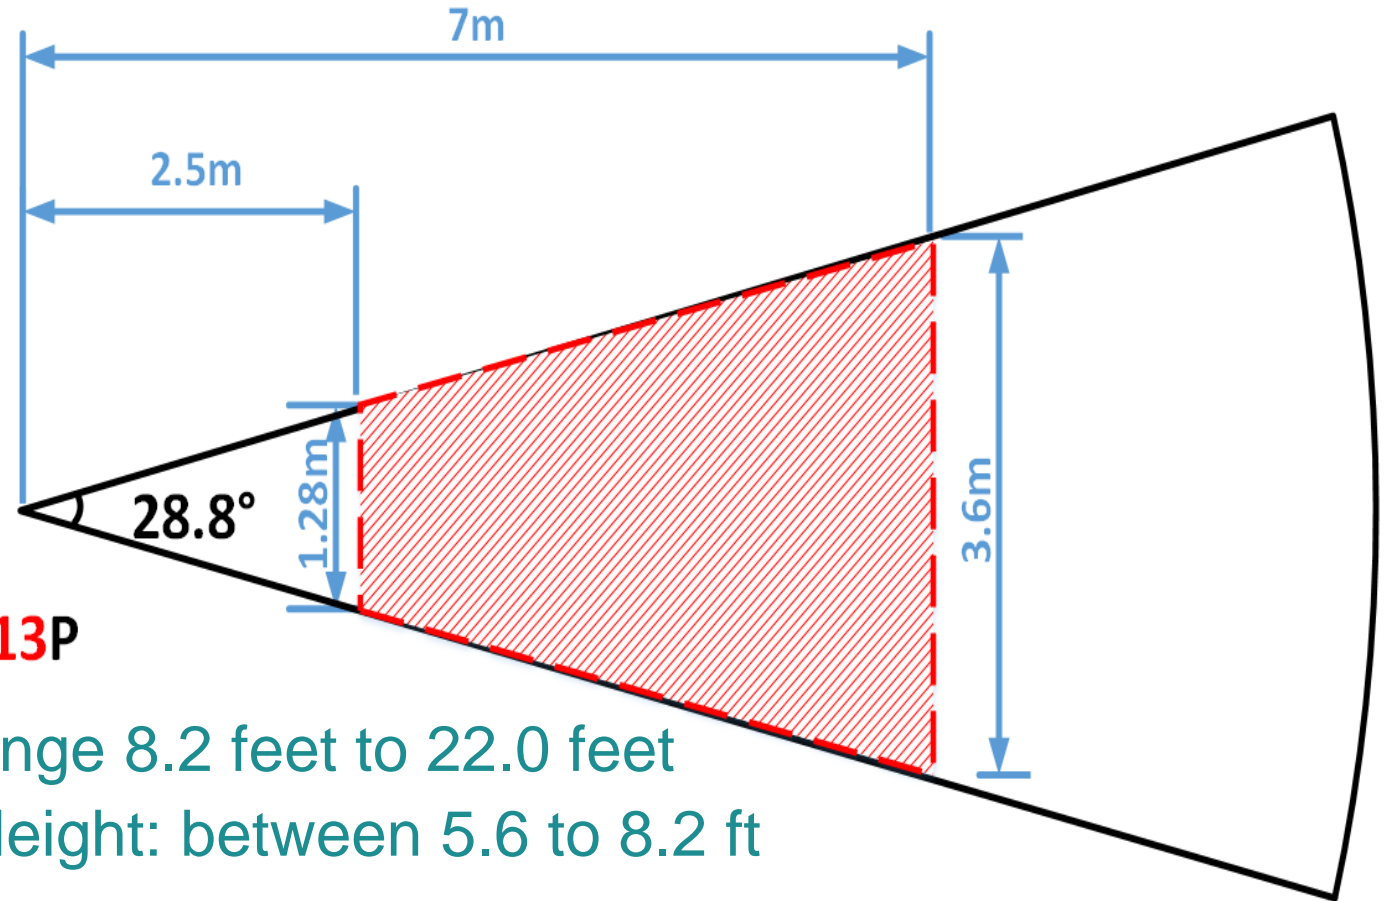

Handheld Solution DS-2TP21B-6AVF/W

