


TE-SN-70

INTERACTIVE FLAT PANEL DISPLAY



Starboard Interactive Flat Panel Displays provide the latest infrared touch technology. The multifunctional touch displays are suitable for presentations, video conferences, lessons and meetings.

Captivate your audience with our high-quality Full HD interactive displays and make your lessons or briefings simple and efficient. The elegant design is equally suitable for office and classroom.



The affordable option for all institutions: Teachers and students will benefit from the latest technology and high quality hardware. Students feel more involved thanks to the large, bright and vibrant images.

Infrared Touch Technology

Infrared touch screen based on light-beam interruption technology with light transmission

Software

Powerful Starboard Software is included

Finger-Driven Technology

Drawing and navigating through activity




Compatible with Windows, Mac OS, Linux and Android



Built-in Speakers



Ultra-Slim and Ultra-Narrow Design



Multi-Touch within Draw View Gesture Recognition Patent

FULL HD

Full HD with 1920*1080@60Hz

TE-SN-70

Model number	TE-SN-70
Cabinet	Aluminum Front Cover (Frame) Metal Back Cover

Display Specification

Display area	1538.88*865.62 mm
Backlight Type	LED
Brightness	350cd/m ²
Display ratio	16:9
Viewing Angle	178°(deg)
Contrast Ratio	4000:1
Picture model	16:9/4:3/dot to dot/full screen
Resolution	UP to 1920*1080
Orientation	Landscape
Displayable Colors	RGB
Minimum life length panel	50.000 hours
Standard Energy Star	

Monitor Specifications

Video Mode	PAL, SECAM (NTSC)
Sound Mode	DK, BG, I,
Resolution	1280*960/1280*1024/1360*768/1440*900/1600*1200/1920*1080@60Hz
Response time	<17ms

Input Terminals

CVBS/Audio Input	1 x 3RCA (yellow, white, red)
YPbPr	1 x MINI 3.5 mm (three-in-one terminal)
USB input	2 x USB-A (horizontal)
PC-RGB Input	2 x D-SUB 15 Pin (blue)
PC Audio Input	2 x 3.5 mm Stereo Audio-In jack (green)
HDMI input	3 x HDMI-A (horizontal), one inside
RS232	1 x RS232

Output Terminals

PC-RGB Output	1 x D-SUB 15 Pin (black)
---------------	--------------------------

Touch monitor Specification

Glass	Tempered glass/Anti-Glare glass
Technology	Protective glass with 7 MOHS strength infrared
Response object	finger, pen, stylus pen, other object
Points input	10 Points
Accuracy	Φ<3mm
Positioning resolution	4096*4096/16384*16384/32768*32768
Continuous speed	<8ms
Cursor speed	>180dot/s
PC port	USB
OS(system)	WINDOWS all/LINUX/MAC /Android
PC response	plug and play

Electrical Specifications


Voltage range	AC (100~240) V-50/60HZ
Power consumption	standby:<1W Rated power:<420W
Work temperature	0~40°C
Work Humidity	0~90%
Storage temperature	-10~50°C
Storage Humidity	0~90%

Optional Parts

Glass	Transparent Tempered glass
OPS	I3/I5, 4G, 500G
Mobile stand	

Dimension and weight

Product dimension	1656*964*72 mm /±2 mm
Package Size	1785*1095*205 mm/±5 mm
Weight Net	75 ±2kg
Weight Gross	95±2KG

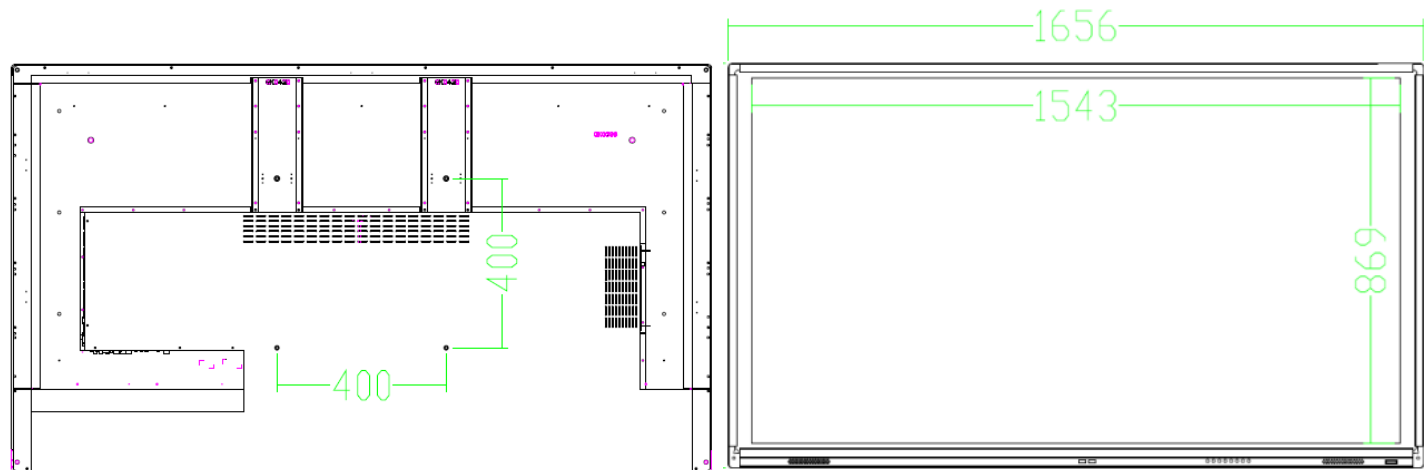

StarBoard Solution GmbH

Am Borsigturn 53,
D-13507 Berlin, Germany
Tel: +49 (0)30 8877 2600
Fax: +49 (0)30 8877 2610
Email: berlin@starboard-solution.com

www.starboard-solution.eu



StarBoard