

SPECIFICATIONS

Includes	D-TEK Stratus Infrared sensor Lithium ion battery Spare filters AC wall charger DC car charger Extra-long probe Carrying case Earbuds
----------	---

Compatible refrigerants

Refrigerant sensor	R22, R32, R134a, R404a, R407c, R410a, R422b, R448a, R449a, R452a, R452b, R507 (AZ50), R1234yf and more
CO ₂ sensor	CO ₂ (R744)
Flammable refrigerant sensor	R290, R600a, R441a

Sensitivity (tested to EN14624 standard)

R134a	1g/yr
R1234yf	0.5g/yr
R290	5g/yr
R744 (CO ₂)	2g/yr
Ammonia	3g/yr

Sensor life	Up to 2,000 hours
-------------	-------------------

Power source	Lithium ion battery (rechargeable) USB (can operate while charging)
--------------	--

Battery life	~8 hours (Cloud Hunting Mode) ~10 hours (Pinpoint Mode)
--------------	--

Weight	500 g
--------	-------

Certifications	CE EN14624:2020 A2L certified
----------------	-------------------------------------

Patents (pending)	Application #10 2018 206 877.1 Application #18171080.7 Application #10 2018 208 826.8
-------------------	---

Probe length (standard probe)	43 cm
-------------------------------	-------

Warranty	Two-year
----------	----------


ORDERING INFORMATION

D-TEK Stratus (includes refrigerant sensor only)	724-202-G1
--	------------

D-TEK Stratus (includes CO ₂ sensor only)	724-204-G1
--	------------

Accessories and Replacement Parts

Earbuds	721-607-G1
TEK-Check R134a reference leak	703-080-G10
TEK-Check R1234yf reference leak	703-080-G12
Wall charger (US and international)	721-606-G1
12 V (dc) car charger	721-605-G1
Lithium ion battery	721-702-G1
Battery charging cradle	721-610-G1
Battery/cradle combo	721-604-G1
Extra-long probe (69 cm)	721-611-G1
Needle probe extension	721-612-G1
Refrigerant sensor (Detects CFCs, HFCs, and HFOs)	721-701-G1
CO ₂ sensor	724-701-G2
Flammable refrigerant sensor	724-701-G3
Filter cap	712-705-G1
Filter cartridges	712-707-G1
Carrying case	724-700-G1

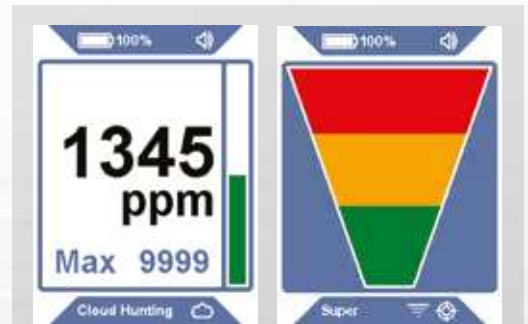

DUAL MODES HELP FIND THE LEAK FASTER

Use the new Cloud Hunting mode (left) to find the area highest in concentration, then switch to classic Pinpoint Mode (right) to pinpoint the leak.

DETECT REFRIGERANT, CO₂, AND EVEN FLAMMABLES

D-TEK 3 and D-TEK Stratus are designed with versatility in mind. Quickly and easily switch sensors to look for refrigerant, CO₂, or even flammable leaks.

- 724-202-G1 D-TEK Stratus with standard refrigerant sensor
- 724-204-G1 D-TEK Stratus with CO₂ sensor only
- 724-701-G1 Refrigerant sensor
- 724-701-G2 CO₂ sensor
- 724-701-G3 Flammable refrigerant sensor



From left to right: refrigerant sensor 724-701-G1, CO₂ sensor 724-701-G2, and flammable refrigerant sensor 724-701-G3.

D-TEK[®] 3

REFRIGERANT LEAK DETECTOR

Stop leaking profits.

D-TEK 3 builds on the proven performance of D-TEK leak detectors with added features to help you get your job done faster. An easy-to-change sensor, quick charge lithium ion battery, and a new ergonomic design make D-TEK 3 a versatile tool for everyday RAC maintenance and repair. Plus, new optional CO₂ and flammable refrigerant sensors give you three instruments in one. Upgrade your toolbox with this accurate and reliable leak detector.



WATCH OUR VIDEO!



WARRANTY 2 YEAR WARRANTY
CE
A2L CERTIFIED
PATENT PENDING
EN14624
Li-Ion



SPECIFICATIONS

Includes	D-TEK 3 Infrared sensor Lithium ion battery Spare filters AC wall charger Carrying case
Compatible refrigerants	
Refrigerant sensor	R22, R32, R134a, R404a, R407c, R410a, R422b, R448a, R449a, R452a, R452b, R507 (AZ50), R1234yf and more
CO ₂ sensor	CO ₂ (R744)
Flammable refrigerant sensor	R290, R600a, R441a
Sensitivity (tested to EN14624 standard)	
R134a	1g/yr
R1234yf	0.5g/yr
R290	5g/yr
R744 (CO ₂)	2g/yr
Ammonia	3g/yr
Sensor life	Up to 2,000 hours
Power source	Lithium ion battery (rechargeable) Micro USB (can operate while charging)
Battery life	~10 hours
Weight	440 g
Certifications	CE EN14624:2020 A2L certified
Patents (pending)	Application #10 2018 208 826.8
Probe length (standard probe)	43 cm
Warranty	Two-year

ORDERING INFORMATION

D-TEK 3 (includes refrigerant sensor only)	721-202-G1
D-TEK 3 (includes CO ₂ sensor only)	721-204-G1
Accessories and Replacement Parts	
Earbuds	721-607-G1
TEK-Check R134a reference leak	703-080-G10
TEK-Check R1234yf reference leak	703-080-G12
Wall charger (US and international)	721-606-G1
12 V (dc) car charger	721-605-G1
Lithium ion battery	721-702-G1
Battery charging cradle	721-610-G1
Battery/cradle combo	721-604-G1
Extra-long probe (69 cm)	721-611-G1
Needle probe extension	721-612-G1
Refrigerant sensor (Detects CFCs, HFCs, HFCs, and HFOs)	721-701-G1
CO ₂ sensor	724-701-G2
Flammable refrigerant sensor	724-701-G3
Filter cap	712-705-G1
Filter cartridges	712-707-G1
Carrying case	724-700-G1

ADVANTAGES

- Detects traditional refrigerants, blends, CO₂*, and even flammables*
- All new, redesigned infrared sensor
 - Longest sensor life in the industry
 - Easy field replacement
- New lithium ion battery
 - Quick charge capability
 - Easy field replacement
- Automatic and manual zero modes
- Sensitivity will not degrade over time
- Rugged carrying case included

*Requires optional sensor

DETECT REFRIGERANT, CO₂, AND EVEN FLAMMABLES

D-TEK 3 and D-TEK Stratus are designed with versatility in mind. Quickly and easily switch sensors to look for refrigerant, CO₂, or even flammable leaks.

- 724-202-G1 D-TEK 3 with standard refrigerant sensor
- 724-204-G1 D-TEK 3 with CO₂ sensor only
- 724-701-G1 Refrigerant sensor
- 724-701-G2 CO₂ sensor
- 724-701-G3 Flammable refrigerant sensor



From left to right: refrigerant sensor 724-701-G1, CO₂ sensor 724-701-G2, and flammable refrigerant sensor 724-701-G3.

