

# **JTouch** Interactive Displays

# Touchboards

205 Westwood Ave, Long Branch, NJ 07740 Phone: 866-94 BOARDS (26273) / (732)-222-1511 Fax: (732)-222-7088 | E-mail: sales@touchboards.com



Touchscreen displays to captivate and collaborate with audiences of all types

www.infocus.com

## **The JTouch Family**



Part#s: INF4030p, INF4032p, INF5701, INF6501wp, INF6501wAGp, INF6501cp, INF6501cAGp, INF7001ap, INF8002 K-12 Only Part#s: INF4030, INF4032, INF6501w, INF6501wAG, INF6501c, INF6501cAG, INF7001a

Enrich and engage audiences in huddle spaces, classrooms, boardrooms, and beyond with the JTouch family of bright, colorful LCD touchscreen displays.

Available with a digital whiteboard or LightCast Technology for wireless casting and web browsing, JTouch provides amazing versatility and convenience, so you can collaborate at a moment's notice.

#### **Brightness and Clarity**

JTouch helps you get your message across and connect with your audience with incredible brightness, color, and clarity. Your images, text, and video will be seen from anywhere in the room, even in large spaces with high ambient light.

## Engage Your Audience with Touch


Whether you're in a classroom, a boardroom, or at a trade show, the interactivity of JTouch engages audiences and encourages participation. JTouch gets students involved, attracts customers, and provides a great medium for testing and presenting touch-enabled applications.

## Easy to Connect

JTouch provides multiple ways to display your content, including HDMI, VGA, and wireless via Lightcast Technology, available in select JTouch models. To enable touch, simply connect the JTouch to your computer via USB.



Choose from a variety of InFocus mobile carts so that you can move your JTouch from room to room- wherever it's needed most.

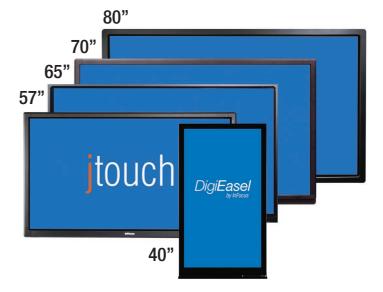

- 1080p display with accurate and responsive multi-touch
- Incredibly sharp 4K resolution now available on 80-inch model
- Interactive, bright, crisp content in any light
- Quickly connect and display your notebook via HDMI, VGA, and more
- Easily share your mobile device's screen on LightCast-enabled
  JTouch displays
- Built-in whiteboard and web browser (varies by model)
- Anti-glare models available



## Bring Your Display to Life with 4K

The 80-inch JTouch now features 4K resolution for an incredibly sharp, vivid picture. Boost the impact of your content and make every meeting or presentation more engaging, informative, and memorable with 4K.

- · More pixels mean more detail and depth for amazingly life-like images
- Enhanced color rendering
- Presenters benefit from crisp, clear images up close
- Audiences enjoy vibrant, detailed images, even from the back of a conference room

### Draw or Write on a JTouch Whiteboard

Toss aside your stained dry erase board, and turn your display into a stand-alone, full-featured interactive whiteboard. The JTouch Whiteboard is available on all 40-inch and 65-inch models.

- Capture and save whiteboard notes electronically
- Comes with a complete collection of digital pens, highlighters, shapes, and lines in a spectrum of colors

### LightCast Technology

LightCast Technology invigorates your JTouch with wireless content sharing and collaboration tools, making meetings or lessons of all types more engaging and efficient.

Mirror the screen of your wireless device on the JTouch display in seconds—it's easy and fast for users inside your organization, as well as guests. Or, browse the web and access cloud-based content. The JTouch with LightCast is a powerful, all-in-one tool for collaboration and creativity.

#### Available in:

- INF4032/INF4032p
- INF6501c/INF6501cp
- INF6501cAG/INF6501cAGp

#### Cast Your Screen

Don't huddle around a tiny laptop or tablet with your team. Wirelessly cast your device's screen and share your content in comfort.

- Works with Android, Windows, Apple, and Chrome devices\*
- Cast using your device's native protocol Miracast for Android or Windows, or AirPlay (Mirroring mode) for Apple\*
- Use InFocus LightCast Sender to cast using Chrome extension (works on Apple, Windows, or Chrome OS)

#### Browse the Web

Access the world of online content and tools with LightCast's built-in web browser.

- Connect the JTouch to your network via WiFi or LAN
- Easily access cloud content using built-in bookmark settings
- Quickly access file sharing platforms, such as DropBox or Google Docs
- Email information directly from the whiteboard

### Capture Ideas As They Occur with DigiEasel

At 40-inches, DigiEasel is the most versatile and portable member of the JTouch family—ensuring that you capture the next big idea, whenever or wherever it strikes.

Available as a stand-alone touchscreen and whiteboard (INF4030), DigiEasel allows you to draw, write, or capture notes on a vivid touch display in portrait or landscape mode.

Upgrade to DigiEasel with LightCast (INF4032/INF4032p) to add wireless content sharing and web browsing to your 40-inch display—all at a great value.



JTouch Whiteboard with LightCast, model INF6501c/INF6501cp



JTouch Whiteboard with LightCast, model INF6501c/INF6501cp



DigiEasel, model INF4032/INF4032p

Specificatio	NS <sup>*</sup> INF4030 INF4030p	INF4032 (NF4032p)	INF5701	INF6501w INF6501wp INF6501wAG INF6501wAGp	INF6501c INF6501cp INF6501cAG INF6501cAGp	INF7001a INF7001ap	INF8002	
Size	40" d	40" diagonal		65" diagonal		70" diagonal	80" diagonal	
Resolution			Full HD 1920 x 1080				4K 3840 x 2160	
Anti-Glare Option Available		No		Yes - INF6501wAG/INF6501wAGp and INF6501cAG/INF6501cAGp		No	Yes, plus Gorilla Glass	
Whiteboard	Yes		No	Yes		No		
Wireless Display (Casting)	No	Yes	No	No	Yes	No		
Browser	No	Yes	No	No	Yes	No		
Mounting Orientation	Portrait or	Portrait or Landscape Landscape						
Technology			LED Edge-Lit LCD					
Pixel Pitch	0.15 mm horizonta	0.15 mm horizontal, 0.45 mm vertical		0.63 mm			0.46 mm	
Response Time	8.5	8.5ms		6.5 ms		6 ms		
Contrast Ratio				5000:1		4000:1		
Brightness	300	300 cd/m <sup>2</sup>		400 cd/m <sup>2</sup>		350 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>	
Input Connections	3.5mm audio in, R RS232, USB-B for t USB-A x2 on panel,	HDMI x4, VGA, component, composite, 3.5mm audio in, RCA stereo audio in, RS232, USB-B for touch screen control USB-A x2 on panel, USB-A x2 on bottom for embedded software		HDMI x4, VGA, component, composite, USB hub (USB 3.0 x4), 3.5mm audio in, RCA stereo audio in, RS232, USB-B for touch screen control		HDMI x2, VGA, RS232, RCA stereo audio in, 3.5 mm stereo audio in, USB-B for touch screen control	Displayport 1.2, HDMI 2.0 x2, HDMI 1.4, VGA, component, 3.5mm audio in, RCA stereo audio in, RS232	
Output Connections	RCA a	RCA audio out		RCA audio out		RCA audio out, 3.5 mm stereo audio out		
Touch Screen	Edge to edge	Edge to edge capacitive glass		IR multi-touch system				
Touch Points	1	10		5 6		5		
Speakers (Integrated)	10	10W x2		10W x2		7W x2		
Mount	VESA standard 200 x	VESA standard 200 x 200 mm M6 screws		VESA standard 400 x 400 mm M6 screws			VESA 400 x 600 M6 screws	
Accessories Included		Power cord, VGA & USB cable, tray, stylus, and documentation		Power cord, VGA cable, USB cable, remote control, and documentation				
Product Weight	44 lbs	44 lbs / 20 kg		110.2 lbs	/ 50.1 kg	154 lbs / 70 kg	154 lbs / 70 kg	
Product Dimensions (H x W >	, 2110 / 00	•		36.4 x 60 925 x 152	.2 x 3.3 in. 9 x 84 mm	39 x 65.7 x 4 in. 991 x 1669 x 102 mm	46.3 x 74.8 x 4 in. 1176 x 1900 x 101 mm	
Shipping Weight	56.4 lbs	56.4 lbs / 25.6 kg		150 lbs / 68.2 kg		170 lbs / 77.1 kg	201 lbs / 91.2 kg	
Shipping Dims (H x W x D)		28.1 x 41.9 x 7.9 in. 715 x 1063 x 200 mm			x 9.5 in. 7 x 241 mm	49 x 73 x 10.5 in. 1245 x 1854 x 267 mm	53.5 in. x 83.5 x 10.5 in. 1359 x 2121 x 267 mm	

#### LightCast Technology (available in INF6501c/INF6501cp, INF6501cAG/INF6501cAGp, and INF4032/INF4032p)

Wireless Display Protocol	Miracast, AirPlay, and InFocus LightCast Sender				
Casting Device Compatibility	Chrome and specific versions of Android, Windows, and Apple operating systems; check with your manufacturer for details.				
Connectivity	802.11 b/g/n (2 dipole antenna), RJ-45 (10Base-TX), USB Type-A				
Wireless Range	Up to 300 ft/91 m				
Data Rate	Wireless: Up to 150 Mbps LAN: 10/100				
Wi-Fi Compliant	802.11 b/g/n with MIMO				
Security	IEEE Standard 64/128 bit WEP/WPA/WPA2-PSK/WPA-Enterprise				

#### Additional Display Specifications

Refresh Rate: 120 Hz

Viewing Angle: 176°

Computer Touch Compatibility (via USB): PC, Mac, Chromebook Power: AC 100 to 240V, 50/60 Hz

Operating Conditions: 32° to 104° F at 0 to 10K feet / 0° to 40°

INF6501c: 2 Year

INF7001a: 2 Year INF8002: 1 Year

INF6501cAG: 2 Year

at 0 to 3,048 m

**Noise:** <40dBA at 77° F / 25° C

Warranty: INF4030: 1 Year INF4032: 1 Year INF5701: 2 Year INF6501w: 2 Year INF6501wAG: 2 Year Accessories

Wall Mount for 50-70 Inch Display (INF-WALLMNT2) Mobile Carts for 57-70 Inch Display (INF-MOBCART, INF-MOBCARTPRO-B, INF-MOBCARTPRO-S) Wall Mount for 80 Inch Display (INF-WALLMNT3) Mobile Cart for 80 Inch Display (INF-MCART-PL) Deluxe Mobile Cart with PTZ Mount

and Accessory Shelf (INA-MCARTDX) Lift Assist Mount for 57-70 Inch Display (INA-MNTBB70) Lift Assist Mount for 80 Inch Display (INA-MNTBB95) Floor Support for Lift Assist Wall Mount (INA-SUPPORTBB) Mobile Cart for List Assist Mount (INA-CARTBB) VESA Interface Bracket (INA-VESABB) DigiEasel Floor Stand (INA-STNDSM) LightCast Key (INA-LCKEY1, INA-LCKEY2, INA-LCKEY3 - selection is location dependent) Touchscreen Stylus (INA-STYLUS) Extended Warranties 40-Inch (EPWHW40JT1, EPWHW40JT2) 57-Inch (EPWHW40JT1) 65-Inch (EPWHW57JT1) 65-Inch (EPWHW65JT1) 70-Inch (EPWHW70JT1) 80-Inch (EPWHW80JT1, EPWHW80JT2)

\* Product specifications, terms, and offerings are subject to change at any time without notice.

©2016 InFocus Corporation. All rights reserved. Specifications are subject to change without further notice. InFocus, InFocus Collaboration That Works and JTouch are either trademarks or registered trademarks of InFocus Corporation in the United States and other countries. All trademarks are used with permission or are for identification purposes only and are the property of their respective companies. InFocus-JTouch-INF4030-INF4032-INF5701-INF6501c-INF6501cAG-INF7001a-INF8002-Datasheet-EN-09JAN16

