

Accessories Index

PAGE	MODEL	DESCRIPTION	APPLICABLE DEVICE
F9	ADB-002	DC Block BNC 50 Ohm 10MHz to 2.2GHz	GSP-9300
F9	ADB-006	DC Block N-TYPE 50 Ohm 10MHz to 6GHz	GSP-9300
F9	ADB-008	DC Block SMA 50 Ohm 0.1MHz to 8GHz	GSP-9300
F9	ADP-001	Adaptor, 50Ω, BNC(I/F) - N(P/M)	GSP-Series
F9	ADP-002	Adaptor, 50Ω, SMA(I/F) - N(P/M)	GSP-Series, GRF-3300S
C46	ADP-003	Adaptor, 50Ω, N(I/F) - SMA(I/F)	USG-Series
F9	ADP-101	Adaptor, 75Ω BNC(I/F) - 50Ω BNC(P/M)	GSP-Series
C28	AFG-125	USB Arbitrary Function Generator, 1CH/25MHz	GDS-2000A Series
C28	AFG-225	USB Arbitrary Function Generator, 2CH/25MHz	GDS-2000A Series
D76	APS-001	GPIO interface card	APS-7000/7000E Series
D76	APS-002	RS-232 / USB interface card	APS-7000/7000E Series
D76	APS-003	Output Voltage Capacity (0 - 600Vrms)	APS-7000/7000E Series
D76	APS-004	Output Frequency Capacity (45-999.9Hz)	APS-7000/7000E Series
F9	ATA-001	Antenna, General FM Antenna, BNC(M)	GSP-Series
F9	ATN-100	Adaptor, 10dB Attenuator, 50Ω, N(I/F)-N(P/M)	GSP-Series
A18	DS2-08LA	8-Channel Logic Analyzer, Includes 8-channel Logic analyzer card (GLA-08) and 8 channel Logic analyser probe (GTL-08LA)	GDS-2000A Series
A18	DS2-16LA	16-Channel Logic Analyzer, Includes 16-channel Logic analyzer card (GLA-16) and 16 channel Logic analyser probe (GTL-16LA)	GDS-2000A Series
A18	DS2-FGN	DDS Function Generator, 5MHz, sine/square/triangle/pulse function	GDS-2000A Series
A18	DS2-FH1	Module extension bay & USB Type A to Type A/B cable	GDS-2000A Series, AFG-100/200 Series
A18	DS2-GPIB	GPIB Interface	GDS-2000A Series
A18	DS2-LAN	Ethernet & SVGA Output	GDS-2000A Series
A10	DS3-PWR	Power Analysis Software: Power quality/Harmonic/Ripple/In-rush current	GDS-3000 Series
A10	DS3-SBD	Serial Bus Analysis software I2C / SPI / UART (for 4 channel model only)	GDS-3000 Series
F9	GAK-001	Adaptor, 50Ω Termination, N(P/M)	GSP-Series
F9	GAK-002	Adaptor, Cap with Chain, N(P/M)	GSP-Series
F9	GAK-003	Adaptor, 50Ω Termination, BNC(P/M)	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series, GSP-Series
A32	GAP-001	AC-DC Adaptor	GDS-300/200 Series
F9	GAP-802	Preamplifier, 20dB Preamplifier, 9kHz - 3GHz, N(P/M)	GSP-830
B26	GBK-001	GRF-1300 Experiment Text Book of Teacher Version	GRF-1300
B26	GBK-002	GRF-1300A Experiment Text Book of Teacher Version	GRF-1300A
A32	GCL-001	Vertical Calibration Cable	GDS-300/200 Series
F8	GCP-005	Current Probe, 40Hz - 1kHz, 5A, Current Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F8	GCP-020	Current Probe, DC - 100KHz, 10A, Current Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F8	GCP-100	Current Probe, 40Hz - 10KHz, 20A, Current Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F8	GCP-1030	Current Probe, DC - 100MHz, 30Arms, Current probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F8	GCP-206P	Current Probe - Power Supply, 2 Channel Power Supply for GCP-530/1030	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F8	GCP-425P	Current Probe - Power Supply, 4 Channel Power Supply for GCP-530/1030	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F8	GCP-530	Current Probe, DC - 50MHz, 30Arms, Current Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
A68	GDB-03	Digital Storage Oscilloscope Demo Kit	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000B
E5	GDM-01	Calibration Key	GDM-8261A/8255A/8251A
E5	GDM-SC1	Scanner Card, 16+2 Channel Testing	GDM-8261A/8255A/8251A
F8	GDP-025	Differential Probe, 25M High Voltage Differential Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series
A32	GDP-040D	Differential Probe, 40M High Voltage Differential Probe, Suitable for GDS-300/200	GDS-300/200 Series
F8	GDP-050	Differential Probe, 50M High Voltage Differential Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F8	GDP-100	Differential Probe, 100M High Voltage Differential Probe	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
D15	GET-001	Extended terminal for 30V/80V/160V models	PSW-Series
D15	GET-002	Extended terminal for 250V/800V models	PSW-Series
E58	GHT-108	H.V. Wiring Lead, 500mm	GSB-01/02
E58	GHT-109	G.B. Wiring Lead, 450mm	GSB-01/02
F12	GHT-113	High Voltage Test Pistol, Approx. 1000mm	GPT-Series
E12	GHT-114	High Voltage Test Lead, Clip High Voltage Probe, Approx. 1000mm	GPT-Series
E58	GHT-116B	High Voltage Test Lead, Color Black, 1500mm	GSB-01/02
E58	GHT-116R	High Voltage Test Lead, Color Red, 1500mm	GSB-01/02
E50	GHT-117	HV Adapter	GPT-9000 Series
E50	GHT-118	HV/GB Adapter	GPT-9000 Series
F12	GHT-205	High Voltage Test Lead, High Voltage Test Probe	GPT-Series
B10	GIT-5060	Isolated transformer	GSP-9330
F9	GKT-001	General Kit Set, Including ADP-002, ATN-100, GTL-303, GSC-002	GSP-Series
F9	GKT-002	CATV Kit Set, Including ADP-001, ADP-101, GTL-304, GSC-003	GSP-Series
F9	GKT-003	RLB Kit Set, Including GAK-001, GAK-002, GTL-302, GSC-004	GSP-Series
F9	GKT-008	EMI Probe Kit Set, Including ANT-04, ANT-05, PR-01, PR-02, ADP-002, GTL-303	GSP-Series
F6	GKT-100	Deskew fixture	GDS-3000 Series
A18	GLA-08	Logic Analyzer Card, 8-Channel Logic Analyzer Card for DS2-8LA	GDS-2000A Series

Accessories Index

PAGE	MODEL	DESCRIPTION	APPLICABLE DEVICE
A18	GLA-16	Logic Analyzer Card, 16-Channel Logic Analyzer Card for DS2-16LA	GDS-2000A Series
E61	GLC-01	Alligator Clips	GLC-9000 Series
E61	GLC-02	Foil Probe	GLC-9000 Series
B10	GLN-5040A	Line Impedance Stabilization Network	GSP-9330
C28	GPA-501	Power Adapter, DC Output: 5V/2A	AFG-200/100 Series
C28	GPA-502	Universal Power Adapter, DC Output: 5V/2A	AFG-200/100 Series
A32	GPF-700	Protection Films for 7" Touch Screen	GDS-300/200 Series
B10	GPL-5010	Transient Limiter	GSP-9330
D67	GPS-001	Knob, Voltage/Current Protection Knob	GPS-x303 Series, SPD-3606
D20	GPW-001	UL/CSA Power Cord, 3000mm	PSU-Series
D20	GPW-002	VDE Power Cord, 3000mm	PSU-Series
D20	GPW-003	PSE Power Cord, 3000mm	PSU-Series
F15	GRA-401	Rack Adapter Kit, 19", 4U Size	GPC-Series, GPR-M Series, PPE-3323, PPS-3635, PPT-Series, PEL-300
F15	GRA-402	Rack Adapter Kit, 19", 4U Size	LCR-800 Series
F15	GRA-403	Rack Adapter Kit, 19", 4U Size	PSH-Series
F15	GRA-404	Rack Adapter Kit, 19", 4U Size	GSP-830, LCR-8000G Series
F15	GRA-407	Rack Adapter Kit, 19", 4U Size	PSM-Series, PST-Series
F14	GRA-408	Rack Adapter Kit, 19", 4U Size	PSS-Series
F14	GRA-409	Rack Adapter Kit, 19", 4U Size	APS-1102A
F14	GRA-410-E	Rack Adapter Kit (EIA), 19", 3U Size	PSW-Series
F14	GRA-410-J	Rack Adapter Kit (JIS), 19", 3U Size	PSW-Series
F14	GRA-411	Rack Adapter Kit, 19", 6U Size	GDS-3000 Series
F17	GRA-413	Rack Adapter Kit (EIA+JIS), 19", 3U Size for PEL-3211	PEL-3000 Series
F17	GRA-414-E	Rack Adapter Kit (EIA), 19", 3U Size for PEL-3021/3041/3111	PEL-3000 Series
F17	GRA-414-J	Rack Adapter Kit (JIS), 19", 3U Size for PEL-3021/3041/3111	PEL-3000 Series
F17	GRA-415	Rack Adapter Kit, 19", 6U Size	GSP-9300, GSP-9330
F16	GRA-417	Rack Adapter Kit, 19", 4U Size	GPT-9000 Series
F18	GRA-418-E	Rack Adapter Kit (EIA), 19", 2U Size	PSB-1000 Series
F18	GRA-418-J	Rack Adapter Kit (JIS), 19", 2U Size	PSB-1000 Series
F16	GRA-419-E	Rack Adapter Kit (EIA), 19", 2U Size	PCS-1000
F16	GRA-419-J	Rack Adapter Kit (JIS), 19", 2U Size	PCS-1000
F16	GRA-420	Rack Adapter Kit, 19", 6U Size	GDS-2000A Series
F16	GRA-422	Rack Adapter Kit, 19", 2U Size	GDM-8261A/8255A/8351/834x Series, LCR-6000 Series
F13	GRA-423	Rack Adapter Kit, 19", 2U Size	APS-7000/7000E Series
F13	GRA-424	Rack Adapter Kit, 19", 2U Size	PSB-2000 Series
F13	GRA-426	Rack Adapter Kit, 19", 2U Size	GDS-1000B Series
D27	GRJ-1101	Local Bus	PSB-2000 Series
D20	GRM-001	Slide bracket 2pcs / set	PSU-Series
E57	GSB-01	8-CH High Voltage Scanner Box, for GPT-9800/9900/9900A	GPT-9900/9800 Series
E57	GSB-02	6-CH High Voltage and 2-CH Ground Bond Scanner Box, for GPT-9800/9900/9900A	GPT-9900/9800 Series
B19	GSC-001	Soft Carrying Case	GSP-830
A44	GSC-006	Soft carrying case	GDS-1000A-U Series, GDS-1000-U Series
A10	GSC-008	Soft carrying case	GDS-3000 Series, GDS-2000A Series
B15	GSC-009	Soft Carrying Case	GSP-9300, GSP-9330
A32	GSC-010	Soft Carrying Case	GDS-300/200 Series
A32	GSC-011	Soft Carrying Bag	GDS-300/200 Series
F13	GTC-001	Instrument Cart, 120V Input Socket, Self Loading 30kg	All Products
F13	GTC-002	Instrument Cart, 120V Input Socket, Self Loading 30kg	All Products
A18	GTL-08LA	Logic Analyzer Probe, 8-Channel Logic Analyzer Probe for DS2-8LA	GDS-2000A Series
F10	GTL-101	Test Lead, BNC(P/M) to Alligator Test Lead, 1100mm	AFG-Series, SFG-Series, GFG-Series, GFC-Series, GVT-Series
F10	GTL-103	Test Lead, Banana to Alligator Test Lead, 1200mm	GAG-800 Series, GAD-201G
F10	GTL-104A	Test Lead, U-type to Alligator Test Lead, Max. Current 10A, 1000mm	PSM/PSP/PSS/PST/GPC/GPD/GPR/GPS/GPE/PPT-Series, PPS-3635, SPD-3606
F10	GTL-105A	Test Lead, Alligator to Banana Test Lead, Max. Current 3A, 1000mm	AFG-200/100 Series, PSS/PST/GPC/GPD/GPR/GPS/PPT-Series, PEL-2000A, PPE-3323, SPD-3606, PCS-1000
F12	GTL-107A	Test Lead, Banana to Probe Test Lead, 1100mm	GDM-8135/8034
F12	GTL-108A	Test Lead, Banana to Kelvin Test Lead, 4W Type, 1100mm	GDM-8261A/8255A/8351, GOM-802/801H
F10	GTL-110	BNC Cable, BNC(P/M)-BNC(P/M), 1000mm	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series, GDS-1000B Series, GRS-6000A Series, GOS-Series, GSP-Series, AFG-Series, SFG-Series, GFG-Series, GFC-Series
F10	GTL-115	Test Lead, U-type to Alligator Test Lead, Approx. 1000mm	GPT-9900/9800 Series
E58	GTL-116B	G.B. Test Lead, Color Black, 1500mm	GSB-01/02
E58	GTL-116R	G.B. Test Lead, Color Red, 1500mm	GSB-01/02
F10	GTL-117	Test Lead, Banana to Probe Test Lead, 1200mm	PPH-1503/1503D, GDM-8245, GDM-400/300 Series
F10	GTL-120	Test Lead, O-type to O-type Test Lead, Max. 40A, 1200mm	PEL-3000 Series, PEL-2000A Series
F10	GTL-121	Sense Lead, O-type to free Lead, 1200mm	PEL-2000A Series
F10	GTL-122	Test Lead, U-type to Alligator Test Lead, Max. Current 40A, 1200mm	PSH-Series, GPR-U Series, GPR-H Series
F11	GTL-123	Test Lead, O-type to O-type Test Lead, 1200mm	PSW-Series, APS-7000 Series, PSB-1000 Series
E5	GTL-128J	Extension cable, with J-type connector, Approx. 600mm	GDM-8261A/8255A/8351/834x Series
E5	GTL-128K	Extension cable, with K-type connector, Approx. 600mm	GDM-8261A/8255A/8351/834x Series
E5	GTL-128T	Extension cable, with T-type connector, Approx. 600mm	GDM-8261A/8255A/8351/834x Series
D15	GTL-130	Test leads: 2 x red, 2 x black, for 250V/800V models, 1200mm	PSW-Series


Accessories Index

PAGE	MODEL	DESCRIPTION	APPLICABLE DEVICE
A32	GTL-131	Test Clip, Suitable for GDP-040D	GDS-300/200 Series
A18	GTL-16LA	Logic Analyzer Probe, 16-Channel Logic Analyzer Probe for DS2-16LA	GDS-2000A Series
F11	GTL-201A	Ground Lead, Banana to Banana, European Terminal, 200mm	AFG-200/100 Series, PSM Series, GPD-Series, GPS-x303 Series, SPD-3606
F11	GTL-202	Sense Lead, Banana to Banana Lead, European Terminal, 200mm	PSM-Series
F11	GTL-203A	Test Lead, Banana to Alligator, European Terminal, Max. Current 3A, 1000mm	PSS/PST/GPD/GPS/SPS-Series, SPD-3606, PPH-1503/1503D
F11	GTL-204A	Test Lead, Banana to Alligator, European Terminal, Max. Current 10A, 1000mm	PSM/PSP/PSS/GPS/GPE/PPT/PST/GPD-Series, SPD-3606, PPH-1503/1503D
E5	GTL-205	Test Lead, Temperature probe adaptor with thermocouple (K-type), Approx. 1000mm	GDM-8261A/8255A/8351/834x Series
E5	GTL-207	Test Lead, Banana to Probe Test Lead, 800mm	GDS-300/200 Series, GDM-8261A/8255A/8351/834x Series, GDM-400/300 Series, GLC-9000 Series, PCS-1000
E55	GTL-215	Test Lead, U-type to Alligator Test Lead, Approx. 1000mm	GCT-9040
F11	GTL-232	RS-232C Cable, 9-pin, F-F Type, null modem, 2000mm	GDS-3000 Series, GDS-2000A Series, GRS-6000A Series, AFG-3000 Series, GFC-8200 Series, PSH/PSM/PSS/PST-Series, APS-7000 Series, PEL-2000A Series, GDM-8261A/8255A/8351/834x Series, LCR-800 Series, GPT-9900/9800 Series, GLC-9000, GOM-Series, GPM-8212
F11	GTL-232A	RS-232C Cable, 9-pin, F-F Type, null modem, 2000mm	PSP-Series
D72	GTL-234	RS-232C Cable, 9-pin, F-F Type, 2000mm	APS-1102A, LCR-8000G Series
E57	GTL-235	Communication Cable, 700mm	GSM-01/02
F11	GTL-240	USB Cable, USB 2.0, A-B Type (L Type), 1200mm	GSP-9300, GSP-730, GRF-1300/1300A, PSW-Series, PSU-Series, APS-1102A, APS-7000 Series, GLC-9000, PCS-1000
F11	GTL-246	USB Cable, USB 2.0, A-B Type, 1200mm	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series, GDS-1000B, GDB-03/02, GSP-9300, GSP-730, GRF-1300/1300A, AFG-Series, PSU-Series, PSB-2000 Series, PPH-1503/1503D, GPD-Series, APS-1102A, APS-7000 Series, PEL-3000 Series, PEL-3000E Series, PEL-2000A Series, GDM-8351, GDM-834x Series, GLC-9000, PCS-1000
F11	GTL-247	USB Cable, USB 1.1, A-A Type, 1800mm	GDM-8261A/8255A, GPT-9900/9800 Series
F12	GTL-248	GPIB Cable, Double Shielded, 2000mm	GDS-3000 Series, GDS-2000A Series, GSP-9300, GSP-830, AFG-3000 Series, PSB-2000 Series, PPH-1503, PSW/PSU/PSH/PSM/PSS/PST/PPT-Series, PPS-3635, APS-7000 Series, PEL-3000 Series, PEL-3000E Series, PEL-2000A Series, GDM-8261A/834x Series, LCR-8000G Series, GPT-9900/9800 Series, GLC-9000, GOM-Series, PCS-1000
D100	GTL-249	Frame Link Cable, 300mm	PEL-2000A Series
F12	GTL-250	GPIB Cable, Double Shielded, 600mm	GDS-3000 Series, GDS-2000A Series, GSP-9300, GSP-830, AFG-3000 Series, PSW/PSU/PSH-Series, PSB-2000 Series, APS-7000 Series, GDM-8261A/834x Series, LCR-8000G Series, GPT-9900/9800 Series, GLC-9000, GOM-802, PCS-1000
F12	GTL-251	USB-GPIB Adapter, GPIB-USB-HS, USB 2.0, Hi-Speed USB compliance, 2000mm	GDS-3000 Series, GDS-2000A Series, GSP-9300, GSP-830, AFG-3000 Series, PSB-2000 Series, PPH-1503, PPS-3635, PSW/PSU/PSH/PSM/PSS/PST/PPT-Series, APS-7000 Series, PEL-3000/2000A Series, GDM-8261A/834x Series, LCR-8000G Series, GPT-9900/9800 Series, GLC-9000, GOM-Series, PCS-1000
F12	GTL-253	USB Cable, USB 2.0, A-mini B Type, 1400mm	GDS-300/200 Series, GSP-830, USG-Series
D84	GTL-255	Frame Link Cable, 300mm	PEL-3000 Series
F9	GTL-301	RF Cable, RG223 Assembly, 1000mm, N(P/M)	GSP-Series
F9	GTL-302	RF Cable, RG223 Assembly, 300mm, N(P/M)	GSP-Series
F9	GTL-303	RF Cable, RG316 Assembly, 600mm, SMA(P/M)	GSP-Series, GRF-1300/1300A, USG-Series
F9	GTL-304	RF Cable, RG223 Assembly, 280mm, N(P/M) - N(I/F)	GSP-Series
E68	GTL-308	Test lead	GOM-804/805
F9	GTL-401	DC Power Cord, DC Power Cord with Lighter Plug, Max. Current 5A	GSP-830
F5	GTP-020A-4	Oscilloscope Probe, 20MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GOS-630 & GOS-620, GOS-620FG
F7	GTP-033A	Oscilloscope Probe, 35MHz 1:1 Passive Probe, BNC(P/M)	GDS-3000 Series, GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, GDS-1000-U Series
F5	GTP-060A-4	Oscilloscope Probe, 60MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GRS-6000A Series, GOS-Series
F5	GTP-070B-4	Oscilloscope Probe, 70MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, 1000-U Series, 1000B, GOS-6112/6103/6103C
F5	GTP-100B-4	Oscilloscope Probe, 100MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series, GDS-1000A-U Series, 1000-U Series, 1000B, GOS-6112/6103/6103C
F5	GTP-150B-4	Oscilloscope Probe, 150MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000E Series
F5	GTP-150B-2	Oscilloscope Probe, 150MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-300/200 Series
F6	GTP-151R	Oscilloscope Probe, 150MHz 10:1 Passive Probe, BNC(P/M)	GDS-3000 Series
F5	GTP-200B-4	Oscilloscope Probe, 200MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-3000 Series, GDS-2000A/E Series, GDS-1000A-U Series, 1000-U Series
F5	GTP-250A-2	Oscilloscope Probe, 250MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series
F6	GTP-250B-2	Oscilloscope Probe, 250MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-300/200 Series
F6	GTP-251R	Oscilloscope Probe, 250MHz 10:1 Passive Probe, BNC(P/M)	GDS-3000 Series
F6	GTP-300A-4	Oscilloscope Probe, 300MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000E Series
F6	GTP-350A-2	Oscilloscope Probe, 350MHz (10:1/1:1) Switching Passive Probe, BNC(P/M)	GDS-2000A Series, GDS-2000E Series
F6	GTP-351R	Oscilloscope Probe, 350MHz 10:1 Passive Probe, BNC(P/M)	GDS-3000 Series
F6	GTP-352R	Oscilloscope Probe, 350MHz 20:1 Passive Probe, BNC(P/M)	GDS-3000 Series
F7	GTP-501R	Oscilloscope Probe, 500MHz 10:1 Passive Probe, BNC(P/M)	GDS-3000 Series
A10	GUG-001	GPIB-USB Adaptor, GPIB to USB adaptor	GDS-3000 Series, PSW-Series
D14	GUR-001	RS232-USB Cable ,300mm	PSW-Series
A31	GWS-001	Wrist Strap	GDS-300/200 Series
E34	LCR-05	Test Fixture, 4 Wire	LCR-8000G Series, LCR-800 Series, LCR-6000 Series
E34	LCR-06A	Test Fixture, 4 Wire, Kelvin Clip	LCR-8000G Series, LCR-800 Series, LCR-6000 Series
E38	LCR-06B	Test Fixture, 4 Wire, Kelvin Clip	LCR-6000 Series
E34	LCR-07	Test Fixture, 2 Wire, Alligator Clip	LCR-8000G Series, LCR-800 Series, LCR-6000 Series
E34	LCR-08	Test Fixture, 4 Wire, SMD/Clip tweezers	LCR-8000G Series, LCR-800 Series, LCR-6000 Series
E34	LCR-12	Test Fixture, 4Wire, Kelvin Clip	LCR-8000G Series
E38	LCR-15	Test Fixture for SMD/Chip Components (0201 to 1812)	LCR-6000G Series, LCR-800 Series

Accessories

PAGE	MODEL	DESCRIPTION	APPLICABLE DEVICE
E38	LCR-16	Test Fixture, ±45V DC Bias Voltage Box	LCR-6000G Series
E38	LCR-17	Test Fixture, ±2.5A DC Bias Current Box	LCR-6000G Series
E76	PCS-001	Basic Accessory Kit	PCS-1000
D98	PEL-001	GPIB Card	PEL-2000A Series
F17	PEL-002	Rack Mount Kit, PEL-2000 Series Rack Mount Kit	PEL-2000A Series
D98	PEL-003	Panel Cover	PEL-2000A Series
D86	PEL-004	GPIB Card	PEL-3000 Series, PEL-3000E Series
D86	PEL-010	Dust filter	PEL-3000 Series, PEL-3000E Series
D27	PSB-001	GPIB Card	PSB-2000 Series, PSB-1000 Series
D27	PSB-003	Parallel connection kit (for horizontal installation), Kit includes: (PSB-007 Joint	PSB-2000 Series, PSB-1000 Series
D27	PSB-004	Parallel connection kit (for vertical installation) Kit includes: (PSB-007 Joint Kit, Verical	PSB-2000 Series, PSB-1000 Series
D27	PSB-005	Parallel Connection Signal Cable	PSB-2000 Series, PSB-1000 Series
D27	PSB-006	Serial Connection Signal Cable	PSB-2000 Series, PSB-1000 Series
D27	PSB-007	Joint Kit: Includes 4 joining plates, [M3x6]screws x 4 ; [M3x8]screw x 2	PSB-2000 Series
D27	PSB-008	RS232C Cable (PSB-2000 Only)	PSB-2000 Series
D32	PSB-101	Cable for 2 units of PSB-1000 units in parallel mode connection	PSB-1000 Series
D32	PSB-102	Cable for 3 units of PSB-1000 units in parallel mode connection	PSB-1000 Series
D32	PSB-103	Cable for 4 units of PSB-1000 units in parallel mode connection	PSB-1000 Series
D32	PSB-104	Cable for 2 units of PSB-1000 units in series mode connection	PSB-1000 Series
D32	PSB-105	GPIB card	PSB-1000 Series
D31	PSB-106	basic accessory kit : M4 terminal screws and washers x 2, M8 terminal bolts, nuts and	PSB-1000 Series
D20	PSU-01B	Bus Bar for 2 units in parallel operation	PSU-Series
D20	PSU-01C	Cable for 2 units in parallel operation	PSU-Series
D20	PSU-02B	Bus Bar for 3 units in parallel operation	PSU-Series
D20	PSU-02C	Cable for 3 units in parallel operation	PSU-Series
D20	PSU-03B	Bus Bar for 4 units in parallel operation	PSU-Series
D20	PSU-03C	Cable for 4 units in parallel operation	PSU-Series
D20	PSU-232	RS232 Cable with DB9 connector kit	PSU-Series
D20	PSU-485	RS485 Cable with DB9 connector kit	PSU-Series
D20	PSU-GPIB	PSU GPIB Interface Card (Factory Installed)	PSU-Series
D20	PSU-ISO-I	Isolated Current Remote Control Card (Factory Installed)	PSU-Series
D20	PSU-ISO-V	Isolated Voltage Remote Control Card (Factory Installed)	PSU-Series
D15	PSW-001	Accessory Kits	PSW-Series, PSB-1000 Series
D15	PSW-002	Simple IDC Tool	PSW-Series, PSB-1000 Series
D15	PSW-003	Contact Removal Tool	PSW-Series, PSB-1000 Series
D15	PSW-004	Basic Accessory Kit for 30V/80V/160V models	PSW-Series
D15	PSW-005	Series Operation Cable for 2 units. (30V/80V/160V models moly)	PSW-Series
D15	PSW-006	Parallel Operation Cable for 2 units.	PSW-Series
D15	PSW-007	Parallel Operation Cable for 3 units.	PSW-Series
D15	PSW-008	Basic Accessory Kit for 250V/800V models	PSW-Series
D14	PSW-009	Output terminal cover for 30V/80V/160V models	PSW-Series
D14	PSW-010	Large filter (Type II/III)	PSW-Series
D14	PSW-011	Output terminal cover for 250V/800V models	PSW-Series
D14	PSW-012	High voltage output terminal for 250V/800V model	PSW-Series
E71	PT-100	Temperature Probe, Temperature Sensor	GOM-Series, GDM-8261A, GDM-8255A
F9	RLB-001	Return Loss Bride, 10MHz - 1GHz, Source/Load: N(I/F), Coupling: N(P/M)	GSP-9300/830/810


GTP-070B-4
For: GDS-1052-U/1072-U/1072A-U, GDS-2072A/2074A, GDS-2072E/2074E



The GTP-070B-4 is a x1, x10 attenuator modular probe. Designed for use with DC to 70MHz oscilloscope with input impedance of 1MΩ. The probe consists of following separate units:
1. BNC male connector and compensation box.
2. Probe body probe tip and R.C. assemblies.
3. Approx. 1.2M cable

Item	10:1	1:1
Bandwidth	DC~70MHz(±3dB)	DC~6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	14.5~17.5pF	85~115pF
Att. Ratio	1/10	1/1
Max. Input Voltage	≤600V DC+AC peak	≤200V DC+AC peak
Accessories	1.Pincher tip 2.Ground lead 3.Cable marker 4.Screw driver 5.IC tip 6.Adjusting tool 7.Earth tip	


GTP-100B-4
For: GDS-2102A/2104A, GDS-2102E/2104E, GOS-6103/6103C/6112

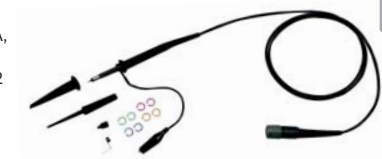

The GTP-100B-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 5~30pF(10:1). The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC~100MHz(±3dB)	DC~10MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	14.5~17.5pF	85~115pF
Att. Ratio	1/10	1/1
Max. Input Voltage	DC 500V CAT I, 300V CAT II	DC 300V CAT I, 150V CAT II
Accessories	1.Channel identifier clip 2.Hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Earth tip	


GTP-150B-4
For: GDS-1152A-U, GDS-2102A/2104A



The GTP-150B-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 5~30pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC~150MHz(±3dB)	DC~6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	8.5~18.5pF	45~65pF
Att. Ratio	1/10	1/1
Max. Input Voltage	600V DC+AC peak	200V DC+AC peak
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Earth tip	


GTP-150B-2
For: GDS-300/200 Series



The GTP-150B-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10~30pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC~150MHz(±3dB)	DC~6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	13pF	56pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300CAT II	300V CAT I, 150CAT II
Accessories	1.Channel identifier clip 2.Hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Earth tip	
Compensatim Range	—	10~30pF


GTP-200B-4
For: GDS-Series



The GTP-200B-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 5~30pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC~200MHz(±3dB)	DC~10MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	10.5~17.5pF	65~105pF
Att. Ratio	1/10	1/1
Max. Input Voltage	600V peak	DC 200V peak
Accessories	1.Channel identifier clip 2.hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Earth tip	
Compensation Range	5~30pF	—

GTP-250A-2
For: GDS-2202A/2204A




The GTP-250A-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10~35pF. Connect this sentence to the end of the previous sentence.

Item	10:1	1:1
Bandwidth	DC~250MHz(±3dB)	DC~6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~17pF	~47pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300CAT II	300V CAT I, 150CAT II
Accessories	1.Channel identifier clip 2.Hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Earth tip	

Ordering Guide

If an accessory is ordered separately from the main product, please indicate the nomenclature of the accessory when placing order.
 Example : GSC-006 Soft Carrying Case for GDS-1000A-U Series
 If an accessory is ordered along with the main product, please indicate the option number of the accessory when placing order.
 Example : GDS-3352 350MHz, 2-Channel, Visual Persistence DSO , GSC-008 Soft Carrying Case


GTP-151R
For: GDS-3000 Series



The GTP-151R is compatible with readout function oscilloscopes that automatically detect and display the attenuation factor of the probe.

Item	10:1
Bandwidth	DC~150MHz(±3dB)
Input R	~10MΩ
Input C	~12pF
Att. Ratio	1/10
Max. Input Voltage	< 500 Vpk
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip


GTP-251R
For: GDS-3000 Series

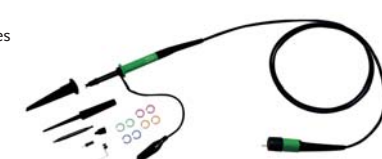

The GTP-251R is compatible with readout function oscilloscopes that automatically detect and display the attenuation factor of the probe.

Item	10:1
Bandwidth	DC~250MHz(±3dB)
Input R	~10MΩ
Input C	~12pF
Att. Ratio	1/10
Max. Input Voltage	DC 500V CAT I, 300V CAT II
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip


GTP-250B-2
For: GDS-300/200 Series



The GTP-250B-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10~35pF. Connect this sentence to the end of the previous sentence.

Item	10:1	1:1
Bandwidth	DC~250MHz(±3dB)	DC~6MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	~17pF	~47pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300CAT II	300V CAT I, 150CAT II
Accessories	1.Channel identifier clip 2.Hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Earth tip	


GTP-300A-4
For: GDS-2202E/2204E Series



The GTP-300A-4 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10~35pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

Item	10:1	1:1
Bandwidth	DC~300MHz(±3dB)	DC~10MHz(±3dB)
Input R	~10MΩ	1MΩ (Oscilloscope)
Input C	8.5~18.5pF	45~65pF
Att. Ratio	1/10	1/1
Max. Input Voltage	600V CAT II	200V CAT II
Accessories	1.Channel identifier clip 2.Hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Earth tip	


GTP-351R/352R
For: GDS-3000 Series



Both GTP-351R and GTP-352R are passive high impedance oscilloscope probes designed and calibrated for use on instrument. GTP-351R has an input impedance of 1 MΩ shunted by 20pF while GTP-352R has an input impedance of 1 MΩ shunted by 15pF. However, GTP-351R may be compensated for use with instruments having an input capacitance of 10~35pF while GTP-352R has an input impedance of 10~30pF.

Item	GTP-351R	GTP-352R
Bandwidth	DC~350MHz	DC~350MHz
Input R	~10MΩ	~10MΩ
Input C	~12pF	~7pF
Att. Ratio	1/10	1/20
Max. Input Voltage	500V CAT I, 300CAT II	1kV CAT II
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip	

GTP-350A-2
For: GDS-3000 Series GDS-2302A/2304A



The GTP-352A-2 is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 15pF. However, it may be compensated for use with instruments having an input capacitance of 10~30pF. Connect this sentence to the end of the previous sentence.

Item	10:1	1:1
Bandwidth	DC~350MHz	DC~6MHz
Input R	~10MΩ	~1MΩ
Input C	~13pF	~46pF
Att. Ratio	1/10	1/1
Max. Input Voltage	500V CAT I, 300VAC I	300V CAT I, 150VAC II
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip	

GKT-100 Deskew Fixture

The GKT-100 deskew fixture is used to compensate for the propagation delay between a passive voltage probe and current probe. It is used with the GDS-3000 Series, Required tools.

- GDS-3000 x 1
- GKT-100 x 1
- USB type A-B cable x1 -used for deskew fixture
- Standard passive probe x1
- Current probe x1 (GCP-530 or GCP-1030)



Accessories

GTP-501R

For: GDS-3000 Series
GDS-2000A Series



The GTP-501R is a passive high impedance oscilloscope probe designed and calibrated for use on instrument having an input impedance of 1MΩ shunted by 13pF. However, it may be compensated for use with instruments having an input capacitance of 8–20pF. Connect this sentence to the end of the previous sentence.

Item	10:1
Bandwidth	DC–500MHz
Input R	~10MΩ
Input C	~11.5pF
Att. Ratio	1/10
Max. Input Voltage	500V CAT I, 300V CAT II
Accessories	1.Channel identifier clip 2.Sprung hook 3.Ground lead 4.Insulating tip 5.IC tip 6.Adjusting tool 7.Measuring tip 8. Sprung earth tip

GTP-033A

For: GDS-3000 Series



GTP-033A is a x 1, attenuator modular probe. Designed for use with DC to 35MHz oscilloscope with input impedance of 1MΩ The probe consists of following separate units:
1. BNC male connector and compensation box.
2. Approx. 1.2M cable

Item	1:1
Bandwidth	DC–35MHz(±3dB)
Input R	1MΩ (Oscilloscope)
Input C	~83pF
Att. Ratio	1/1
Max. Input Voltage	<300 CATI
Accessories	1.Channel Identifier Clip 2.Sprung Hook 3.Ground Lead 4.Insulating Tip 5. IC Tip

Accessories

Current Probe and Differential Probe Selections



GCP-005/100/020



GCP-530/1030 & GCP-206P/425P



GDP-025



GDP-050/100

In addition to the standard passive probes, the optional current or differential probes can be used to perform additional tests or power analysis. The differential probes come in three bandwidths: 25MHz, 50MHz and 100MHz. The current probes come in a broad variety of bandwidth and current ranges (ranging from 50MHz/30A, 100MHz/30A, 10kHz/200A and 100kHz/100A), to cover any number of power supply testing applications.

* The GCP-530/1030 must be used in conjunction with the GCP-206P/425P current probe power supply.

* The GCP-100 requires a standard 9V battery; The GCP-005 and GCP-020 do not require batteries or a power supply source.






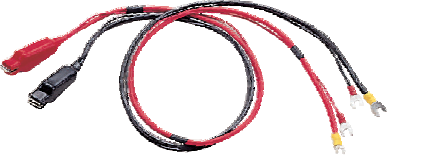
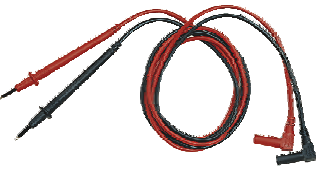
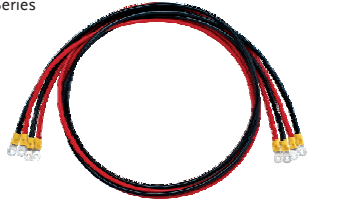
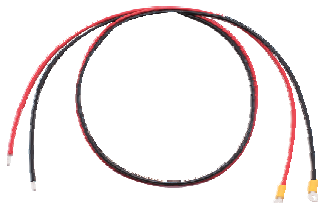

CURRENT PROBE						CURRENT PROBE POWER SUPPLY		
	GCP-005	GCP-100	GCP-020	GCP-530	GCP-1030		GCP-206P	GCP-425P
Probe Bandwidth	40Hz–1kHz	DC–100kHz	40Hz–40kHz	DC–50MHz	DC–100MHz	Compatible Current Probe	GCP-530 GCP-1030	GCP-530 GCP-1030
Rise Time	–	–	–	7ns or less	3.5ns or less	Number of Power Supply Connectors	2	4
Maximum Continuous Input Range	5A	0.05–10A(100mV/A) 1–100A(10mV/A)	0.1–24A(100mV/A) 0.5–240A(10mV/A)	30Arms	30Arms	Output Voltage	12V 0.5V	12V 0.5V
Maximum Peak Current Value	50A	100A	60A(100mV/A) 600A(10mV/A)	50Arms	50Arms	Rated Output Current	600mA	2.5A
Output Voltage Rate	10mV/A	100mV/A;10mV/A	10mV/A;100mV/A	0.1V/A	0.1V/A	Rated Supply Voltage (50/60Hz)	110V/120V, 220V/240V AC 10%	100V–240V AC 10%
Amplitude Accuracy	0.5%rdg 0.1mV (50/60Hz) 1.0%rdg 0.2mV (40–1kHz)	≤3% 5mV (50mA–10A peak) ≤4% 500μV (0.5A–40A peak) ≤15%(40–100A peak)	≤2% 50mV (100mA–20A peak) ≤3.5% 5mV (0.5–10A peak) ≤3% 5mV (10–40A peak) ≤1.5% 5mV (100A–240A peak)	1.0%rdg 1mV (0–30Arms/DC, 45–66Hz); 2.0%rdg (30Arms–50A peak /DC, 45–66Hz)	1.0%rdg 1mV (0–30Arms/DC, 45–66Hz); 2.0%rdg (30Arms–50A peak /DC, 45–66Hz)	Maximum Rated Power	20VA	170VA
Noise	–	–	–	2.5mArms or less	2.5mArms or less	Dimensions & Weight	73(W)x110(H)x 186(D)mm ; Approx.1.1kg	80(W)x119(H)x 200(D)mm ; Approx.1.1kg
Rate Supply Voltage	–	–	–	12V 0.5V	12V 0.5V	Accessories	Power cord, fuse	Power cord, fuse
Maximum Rated Power	–	–	–	5.6VA	5.3VA			
Maximum Rated Voltage	300Vrms, CAT III	600V, CAT III	600V, CAT III	300V, CAT I	300V, CAT I			

HIGH-VOLTAGE DIFFERENTIAL PROBE			
	GDP-025	GDP-050	GDP-100
Probe Bandwidth	DC – 25MHz(attenuationx50, x200); DC – 15MHz(attenuationx20)	DC – 50MHz(attenuationx200, x500, x1000); DC – 25MHz(attenuationx100)	DC – 100MHz(attenuationx200, x500, x1000); DC – 50MHz(attenuationx100)
Attenuation	x20, x50, x200	x100, x200, x500, x1000	x100, x200, x500, x1000
Accuracy	2%	2%	2%
Voltage Input Range (DC+AC peak to peak)	≤140Vp-p for x 20, ≤350Vp-p for x 50, ≤1400Vp-p for x 200	≤700Vp-p for x 100 ≤1400Vp-p for x 200 ≤3500Vp-p for x 500 ≤7000Vp-p for x 1000	≤700Vp-p for x 100 ≤1400Vp-p for x 200 ≤3500Vp-p for x 500 ≤7000Vp-p for x 1000
Permitted Max Input Voltage	Maximum differential voltage: Max voltage between input terminal and ground: 600Vrms	Maximum differential voltage: Max voltage between input terminal and ground: 6500Vrms	Maximum differential voltage: Max voltage between input terminal and ground: 6500Vrms
Input Impedance	Differential:4MΩ/1.2pF; Between terminals and ground:2MΩ/2.3pF	Differential:54MΩ/1.2pF; Between terminals and ground:27MΩ/2.3pF	Differential: 54MΩ/1.2pF; Between terminals and ground: 27MΩ/2.3pF
Output	≤7.0V	≤7.0V	≤7.0V
Output impedance	50Ω	50Ω	50Ω
Rise Time	14ns (x50, x200 attenuation); 23.4ns (x20 attenuation)	7ns (x200, x500, x1000 attenuation); 14ns (x100 attenuation)	3.5ns (x200, x500, x1000 attenuation); 7ns (x100 attenuation)
Rejection Rate on Common Mode (CMRR)	60Hz>80dB, 100Hz>60dB, 1MHz>50dB	60Hz>80dB, 100Hz>60dB, 1MHz>50dB	60Hz>80dB, 100Hz>60dB, 1MHz>50dB
Power Supply	External DC adapter	External DC adapter	External DC adapter
Consumption	Maximum 35mA (0.4Watt)	Maximum 35mA (0.4Watt)	Maximum 35mA (0.4Watt)

Accessories

GAP-802 Preampifier Preampifier with 20dB(Typical 9kHz ~ 3GHz) For: GSP-830 		RLB-001 Return Loss Bridge 10MHz ~ 1GHz For: GSP-Series 																																																															
<table border="1"> <thead> <tr> <th>Parameter</th> <th>Term</th> <th>Minimum</th> <th>Typical</th> <th>Maximum</th> <th>Unit</th> </tr> </thead> <tbody> <tr> <td>Frequency Range</td> <td>f_0</td> <td>0.009</td> <td>---</td> <td>3</td> <td>GHz</td> </tr> <tr> <td>Gain</td> <td>G_p</td> <td>15</td> <td>20</td> <td>---</td> <td>dB</td> </tr> <tr> <td>Output 1dB-Compression Point</td> <td>P_{1dB}</td> <td>+13.4</td> <td>+16.4</td> <td>---</td> <td>dBm</td> </tr> <tr> <td>Standing Wave Ratio</td> <td>SWR</td> <td>< 2:1</td> <td>---</td> <td>< 1.2:1</td> <td>---</td> </tr> <tr> <td>3rd Order Intercept Point</td> <td>IP_3</td> <td>+24</td> <td>+30</td> <td>---</td> <td>dBm</td> </tr> <tr> <td>Noise Figure</td> <td>NF</td> <td>---</td> <td>3.5</td> <td>3.7</td> <td>dB</td> </tr> <tr> <td>Device Current</td> <td>I_c</td> <td>76</td> <td>80</td> <td>85</td> <td>mA</td> </tr> </tbody> </table>		Parameter	Term	Minimum	Typical	Maximum	Unit	Frequency Range	f_0	0.009	---	3	GHz	Gain	G_p	15	20	---	dB	Output 1dB-Compression Point	P_{1dB}	+13.4	+16.4	---	dBm	Standing Wave Ratio	SWR	< 2:1	---	< 1.2:1	---	3 rd Order Intercept Point	IP_3	+24	+30	---	dBm	Noise Figure	NF	---	3.5	3.7	dB	Device Current	I_c	76	80	85	mA	<table border="1"> <tbody> <tr> <td>Frequency Range</td> <td>10MHz ~ 1GHz</td> </tr> <tr> <td>Directivity</td> <td>10MHz ~ 100MHz : >48dB ; 100MHz ~ 1000MHz : >38dB</td> </tr> <tr> <td>Insertion Loss</td> <td>Source to Load : <10dB ; Load to Coupler : <6dB</td> </tr> <tr> <td>Return Loss</td> <td>Source Return Loss : >7dB ; Load Return Loss : >11dB Coupler Return Loss : >17dB</td> </tr> <tr> <td>Characteristic Impedance</td> <td>50 Ohm</td> </tr> <tr> <td>Connector</td> <td>N Type ; Source and Load : Female ; Coupler : Male</td> </tr> <tr> <td>Dimension & Weight</td> <td>88 x 54 x 32 (mm) , 230 g</td> </tr> </tbody> </table>		Frequency Range	10MHz ~ 1GHz	Directivity	10MHz ~ 100MHz : >48dB ; 100MHz ~ 1000MHz : >38dB	Insertion Loss	Source to Load : <10dB ; Load to Coupler : <6dB	Return Loss	Source Return Loss : >7dB ; Load Return Loss : >11dB Coupler Return Loss : >17dB	Characteristic Impedance	50 Ohm	Connector	N Type ; Source and Load : Female ; Coupler : Male	Dimension & Weight	88 x 54 x 32 (mm) , 230 g
Parameter	Term	Minimum	Typical	Maximum	Unit																																																												
Frequency Range	f_0	0.009	---	3	GHz																																																												
Gain	G_p	15	20	---	dB																																																												
Output 1dB-Compression Point	P_{1dB}	+13.4	+16.4	---	dBm																																																												
Standing Wave Ratio	SWR	< 2:1	---	< 1.2:1	---																																																												
3 rd Order Intercept Point	IP_3	+24	+30	---	dBm																																																												
Noise Figure	NF	---	3.5	3.7	dB																																																												
Device Current	I_c	76	80	85	mA																																																												
Frequency Range	10MHz ~ 1GHz																																																																
Directivity	10MHz ~ 100MHz : >48dB ; 100MHz ~ 1000MHz : >38dB																																																																
Insertion Loss	Source to Load : <10dB ; Load to Coupler : <6dB																																																																
Return Loss	Source Return Loss : >7dB ; Load Return Loss : >11dB Coupler Return Loss : >17dB																																																																
Characteristic Impedance	50 Ohm																																																																
Connector	N Type ; Source and Load : Female ; Coupler : Male																																																																
Dimension & Weight	88 x 54 x 32 (mm) , 230 g																																																																
GKT-008 EMI Probe Kit Set ADP-002 : Adaptor SMA(J/F) ~ N (P/M) x 1 GTL-303 : RF Cable SMA(P/M) ~ SMA(P/M) x 1 PR-01 : AC Voltage Probe x 1 PR-02 : Touch Passive RF Probe x 1 ANT-04 : H-field Probe x 1 ANT-05 : H-field Probe x 1 For: GSP-Series 		GKT-001 General Kit Set ADP-002 ATN-100 GTL-303 GSC-002 For:GSP-Series 																																																															
GKT-002 CATV Kit Set ADP-001 ADP-101 GTL-304 GSC-003 For:GSP-Series 		GKT-003 RLB Kit Set GAK-001 GAK-002 GTL-302 GSC-004 For:GSP-Series 																																																															
ADP-001 Adaptor BNC(J/F)~N(P/M) For:GSP-Series 	ADP-002 Adaptor SMA(J/F)~N(P/M) For:GSP-Series 	GAK-001 Termination 50Ω N (P/M) For:GSP-Series 	GAK-002 Cap with Chain N (P/M) For:GSP-Series 																																																														
ADB-002 DC Block BNC 50Ω 10MHz~2.2GHz For: GSP-9300 	ADB-006 DC Block N-TYPE 50Ω 10MHz~6GHz For: GSP-9300 	ADB-008 DC Block SMA 50Ω 0.1MHz~8GHz For: GSP-9300 																																																															
GAK-003 50Ω Impedance Adaptor For:GDS-Series, GSP-Series 	ADP-101 BNC(J/F) 75Ω ~ BNC(P/M) 50Ω For:GSP-Series (An additional ADP-001 is needed for fitting GSP spectrum analyzers) 	ATN-100 10dB Attenuator N(J/F) ~ N(P/M) For:GSP-Series 																																																															
GTL-401 DC Power Cord with DC Jack and Lighter Plug, Current 5A For: GSP-830 	ATA-001 BNC Antenna For:GSP-Series (An additional ADP-001 is needed for fitting GSP spectrum analyzers) 																																																																
GTL-301 RF Cable (RG 223 N(P/M) , 1000mm) For:GSP-Series 	GTL-302 RF Cable Assembly (RG223, N(P/M), 300mm) For:GSP-Series 	GTL-303 RF Cable Assembly (SMA(P/M),RG316, 600mm) For: GSP-Series, USG-Series (An additional ADP-002 is needed for fitting GSP spectrum analyzers) 	GTL-304 RF Cable Assembly (Rg223, N (P/M) ~N(J/F),280mm) For: GSP-Series 																																																														

Accessories

GTL-101 Approx. 1100mm For: GOS-620FG, GVT-427B/417B, SFG-2000 Series, SFG-1000 Series, GFG-8000 Series, AFG-Series 	GTL-103 Approx. 1200mm For: GAG-809/810, GAD-201G 
GTL-104A Approx. 1000mm ; Max. Current 10A For: PSP-Series, PST-Series, PSS-Series, PSM-Series, GPR-U/H/M Series, GPS-Series, GPC-Series 	GTL-105A Approx. 1000mm ; MAX Current 3A For: GPR-U/H/M Series, GPC-Series, GPS-Series, PPE-Series, PPS-Series, PPT-Series, PSS-Series, PST-Series 
GTL-110 Approx. 1000mm For: GDS-2000 Series, GOS-Series, GDS-1000-U/1000A-U Series, GRS-Series, GFC-8131H/8270H, GSP-Series, SFG-Series, AFG-Series 	GTL-115 Approx. 1000mm For: GPT-9904/9804 
GTL-117 Approx. 1200mm For: GDM-8245 	GTL-120 Approx. 1200mm, MAX. Current 40A For: PEL-3000 Series, PEL-2000 Series 
GTL-121 Approx. 1200mm, Voltage sense lead For: PEL-2000 Series 	GTL-122 Approx. 1200mm, MAX. Current 40A For: PSH-Series, GPR-U Series, GPR-H Series 

Accessories

Accessories

<p>GTL-123 Test Lead Approx. 1200mm , MAX. Current 40A For: PSW-Series</p> 	<p>GTL-202 Sense Lead (European Terminal) Approx. 200mm For: PSM-Series</p> 
<p>GTL-201A Ground Lead (European Terminal) Approx. 200mm For: GPS-2303/3303/4303, PSM-Series, GPS-3030/3030D/3030DD, AFG-225P/125P</p> 	<p>GTL-203A (European Terminal) Approx. 1000mm , MAX. Current 3A For: PSS-Series, PST-Series, SPS-Series</p> 
<p>GTL-232 RS-232C Cable Approx. 2000mm For: GDS-2000 Series, GRS-6032A/6052A, LCR-800 Series, PSM-2010/3004/6003, GOM-802, GDM-8261A, GDM-8255A, GDM-8351, GPT-9900/9800 Series</p> 	<p>GTL-204A (European Terminal) Approx. 1000mm , MAX. Current 10A For: GPC-Series, GPS-Series, PPE-Series, PPS-Series, PPT-Series, PSM-Series, PSP-Series, PST-Series,</p> 
<p>GTL-232A RS-232C Cable Approx. 2000mm For: PSP-603/405/2010</p> 	<p>GTL-240 USB Cable Approx. 1200mm USB 2.0 Type A-Type B Cable , 4P, Type B as " L " Format For: PSW-Series</p> 
<p>GTL-246 USB Cable Approx. 1200mm USB 2.0 Type A-Type B Cable, 4P For: GDS-3000/2000 Series, GDS-1000A-U/1000-U Series, GLA-1000 Series, AFG-3000/2000 Series, GPD-2303S/3303S/4303S/3303D, GLC-9000, PPH-Series, GDM-8342/8341, GDM-8351, GSP-930, GSP-730, GRF-1300/1300A</p> 	<p>GTL-247 USB Cable Approx. 1800mm , A-A type cable For: GDM-8261A, GDM-8255A, GPT-9900/9800 Series</p> 

<p>GTL-248 GPIB Cable (2.0m) Approx. 2000mm For: GDS-2000 Series, GSP-830, AFG-3000 Series, PPH-Series, PS-3635, PPT-1830, PST-3201/3202, PPS-2005/3203, PSM-Series, PSH-A Series, PEL-2000 Series, GDM-8261A, GOM-802, LCR-8000G Series, GPT-9900/9800 Series, GDM-8342</p> 	<p>GTL-250 GPIB Cable Approx. 600mm For: GDS-2000 Series, GSP-830, AFG-3000 Series, PPS-3635, PPT-1830, PST-3201/3202, PPS-2005/3203, PSM-Series, PSH-A Series, PEL-2000 Series, GDM-8261A, GOM-802, LCR-8000G Series, GPT-9900/9800 Series, GDM-8342</p> 
<p>GTL-251 GPIB-USB-HS (High Speed) For: GDS-Series, GSP-830, AFG-3000 Series, PPH-Series, PPS-3635, PPT-1830, PST-3201/3202, PPS-2005/3203, PSM-Series, PSH-A Series, PEL-2000 Series, GDM-8261A, GOM-802, LCR-8000G Series, GPT-9900/9800 Series, GDM-8342</p> 	<p>GTL-253 Mini USB Cable Approx. 1300mm USB Cable 2.0 A-B (mini) For : GDS-300/200 Series, USG-Series, GSP-830, LCR-916/915</p> 
<p>GHT-205 High Voltage Test Probe Approx. 1000mm For: GPT-9900/9800/9600 Series</p> 	<p>GHT-113 High Voltage Test Pistol Approx. 2000mm For : GPT-9900/9800/9600 Series</p> 
<p>GTL-108A 4W Type Test Lead Approx. 1.1m For: GOM-801H/802, GDM-8261A , GDM-8255A, GDM-8351</p> 	<p>GTL-107A Test Lead Approx. 1.1m For: GDM-8034, GDM-8135</p> 
<p>GHT-114 Clip High Voltage Probe Approx. 1m For: GPT-9900/9800/9600 Series</p> 	


Accessories

GRA-423 Rack Adapter Kit

Rack Mounting (19", 2U),
For : APS-7000/7000E Series



GRA-423 Rack Dimension (mm)

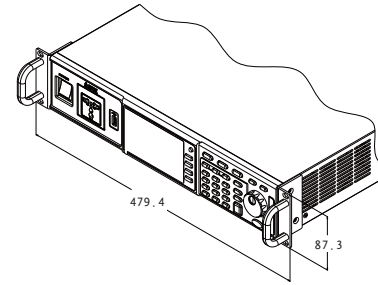


GRA-424 Rack Adapter Kit

Rack Mounting (19", 2U),
For : PSB-2000 Series



GRA-424 Rack Dimension (mm)

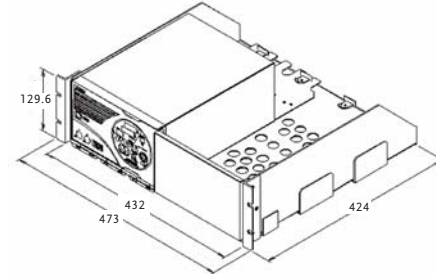


GRA-426 Rack Adapter Kit

For : GDS-1000B Series



GRA-426 Rack Dimension (mm)

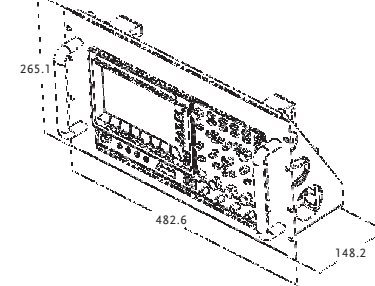


PEL-002 Rack Mount Kit

For: PEL-2000A Series




PEL-002 Rack Dimension (mm)

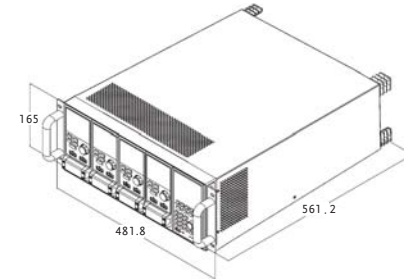


GTC-001

Instrument Cart (Shelf Loading 30kg)
U.A. Type Input Socket
470(W) x 430(D) x 820(H)mm
For: All Product



GTC-002

Instrument Cart (Shelf Loading 30kg)
U.A. Type Input Socket
330(W) x 430(D) x 820(H)mm
For: All Product




Accessories

GRA-408 Rack Adapter Kit

Rack Mounting (19", 4U), For : PSS-Series



GRA-408 Rack Dimension (mm)

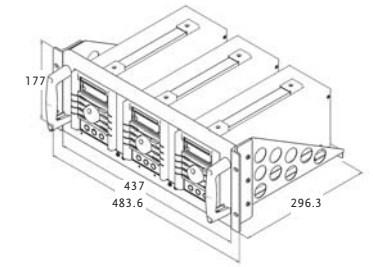


GRA-409 Rack Adapter Kit

For : APS-1102A



GRA-409 Rack Dimension (mm)

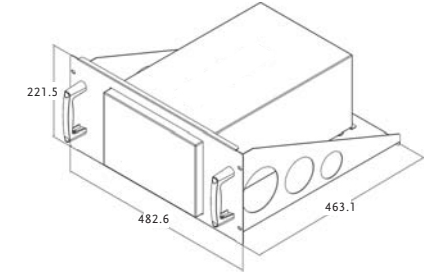


GRA-410-J Rack Mount Kit (JIS)

For : PSW-Series



GRA-410-J Rack Dimension (mm)

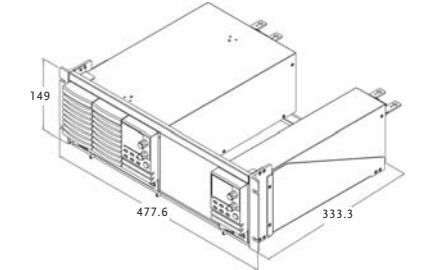


GRA-410-E Rack Mount Kit (EIA)

For : PSW-Series



GRA-410-E Rack Dimension (mm)

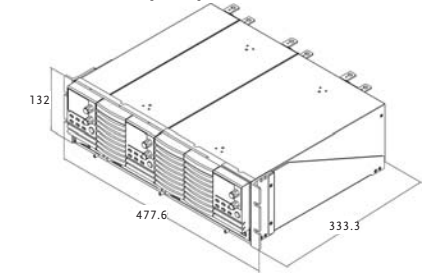


GRA-411 Rack Adapter Kit


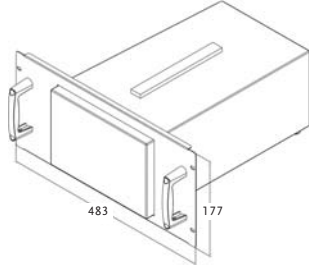

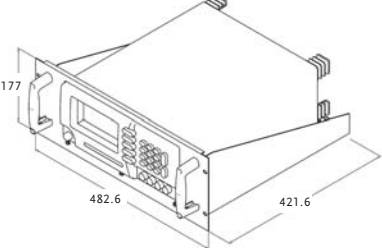

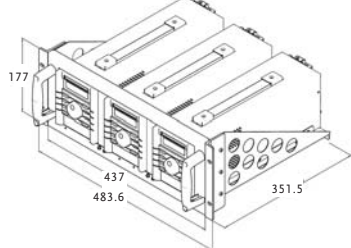

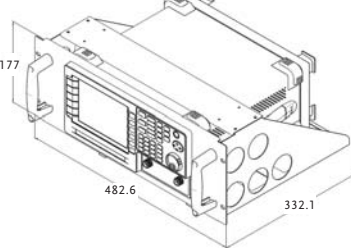

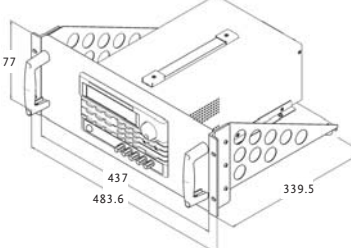
Rack Mounting (19", 6U), For : GDS-3000 Series




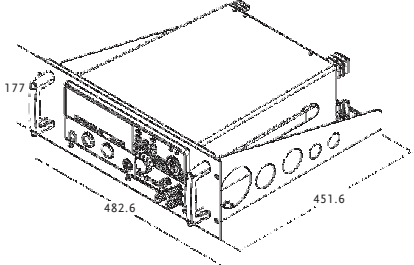

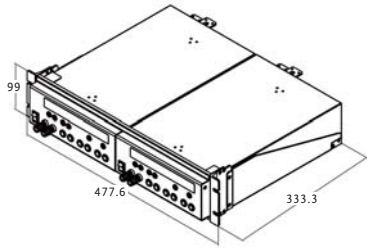

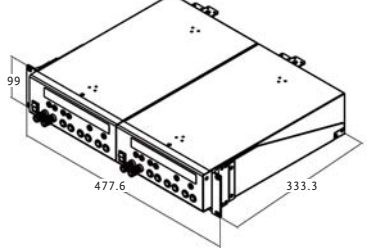

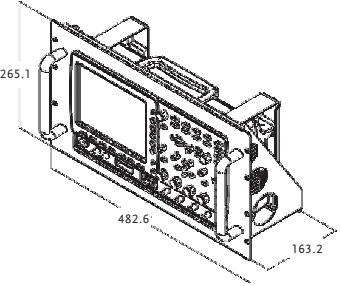
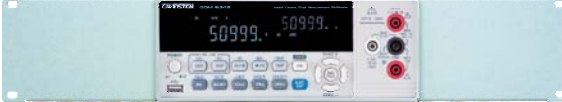
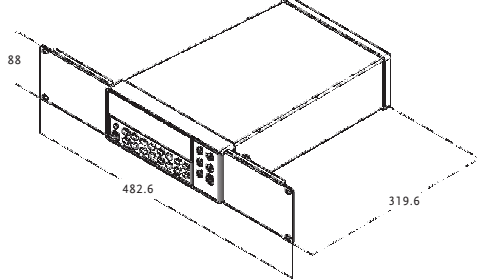
GRA-411 Rack Dimension (mm)

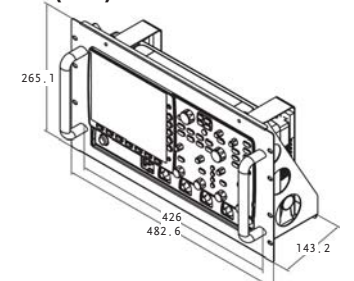

Accessories

<p>GRA-401 Rack Adapter Kit Rack Mounting (19", 4U) , For: PPE/PPS/PPT/PEL/GPC/GPR-M Series</p> 	<p>GRA-401 Rack Dimension (mm)</p> 
<p>GRA-402 Rack Adapter Kit Rack Mounting (19", 4U) , For: LCR-800 Series</p> 	<p>GRA-402 Rack Dimension (mm)</p> 
<p>GRA-403 Rack Adapter Kit Rack Mounting (19", 4U) , For: PSH-Series</p> 	<p>GRA-403 Rack Dimension (mm)</p> 
<p>GRA-404 Rack Adapter Kit Rack Mounting (19", 4U) , For: GSP-830, LCR-8000G</p> 	<p>GRA-404 Rack Dimension (mm)</p> 
<p>GRA-407 Rack Adapter Kit Rack Mounting (19", 4U) , For: PSM-Series, PST-Series</p> 	<p>GRA-407 Rack Dimension (mm)</p> 

Accessories

<p>GRA-417 Rack Adapter Kit Rack Mounting (19", 4U) , For: GPT-9900/9800/9600 Series</p> 	<p>GRA-417 Rack Dimension (mm)</p> 
<p>GRA-419 JIS Rack Adapter Kit For: PCS-1000</p> 	<p>GRA-419 JIS Rack Dimension (mm)</p> 
<p>GRA-419 EIA Rack Adapter Kit For: PCS-1000</p> 	<p>GRA-419 EIA Rack Dimension (mm)</p> 
<p>GRA-420 Rack Adapter Kit Rack Mounting (19", 6U) , For: GDM-2000A Series</p> 	<p>GRA-420 Rack Dimension (mm)</p> 
<p>GRA-422 Rack Adapter Kit Rack Mounting (19", 2U) , For: GDM-8261A/8255A/8342/8341/8351, LCR-6000 Series</p> 	<p>GRA-422 Rack Dimension (mm)</p> 



Accessories

GRA-413 JIS+EIA Rack Mount Kit

For : PEL-3211



GRA-413 JIS+EIA Rack Dimension (mm)

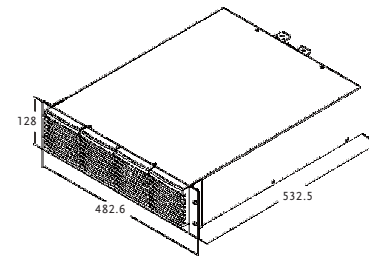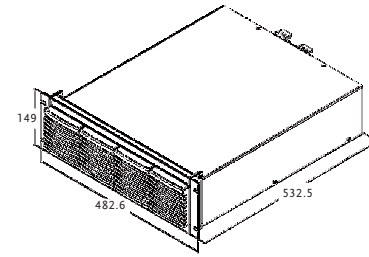


GRA-414-J Rack Mount Kit (JIS)

For : PEL-3021/3041/3111



GRA-414-J Rack Dimension (mm)

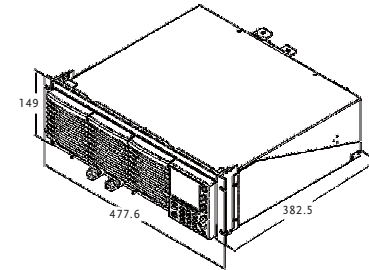


GRA-414-E Rack Mount Kit (EIA)

For : PEL-3021/3041/3111



GRA-414-E Rack Dimension (mm)

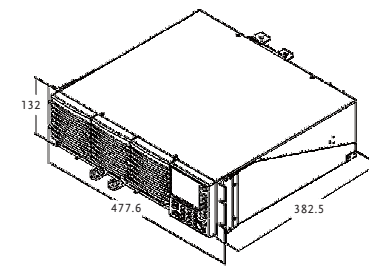


GRA-415 Rack Adapter Kit

Rack Mounting (19" , 6U) , For : GSP-9300/9330



GRA-415 Rack Dimension (mm)




Accessories

GRA-418-J Rack Mount Kit (JIS)

For : PSB-1000 Series



GRA-418-J Rack Dimension (mm)

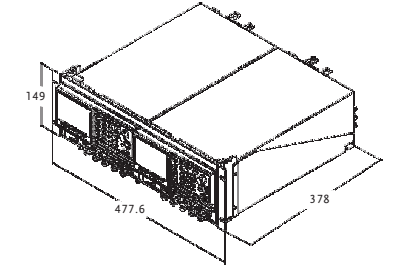


GRA-418-E Rack Mount Kit (EIA)

For : PSB-1000 Series



GRA-418-E Rack Dimension (mm)

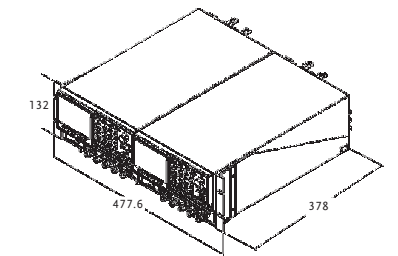

Uncompromised Durability
with Highest Quality Standard



NOTE

GW INSTEK WINS TAIWAN EXCELLENCE AWARD



GW INSTEK WINS TECHNOLOGY INNOVATION AWARD

