




2.1mm X5.5mm DC POWER JACK

JACK43

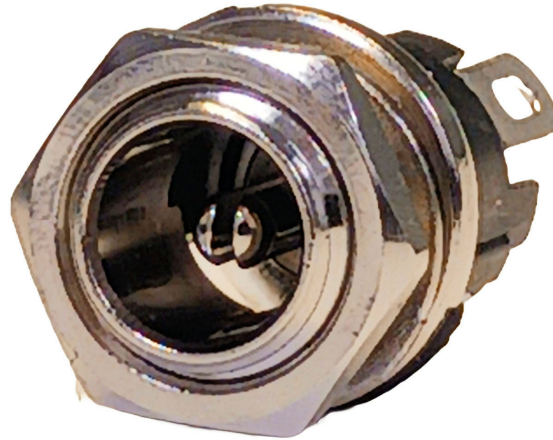

Overview:

JACK43 is a 2.1mm x 5.5mm DC power jack. This jack can be used with either 4-Pole or 6-Pole filtered terminal blocks to be used as a RF filtered DC power feedthrough. The jacks are mounted to both the internal and external terminal block covers and wired to the terminal blocks filters.

Applications:

- DC power feedthrough.
- Small signal passthrough.

Features:

- Easy Connection.
- Nickel Plated Brass Construction.
- Panel Mount.
- Wide Temperature Range.



Specifications:


Electrical:.


Voltage Rating:	24VDC
Current Rating:	5 Amps.
Contact Resistance:	30mΩ.
Insulation Resistance:	100MΩ.
Dielectric Withstanding Voltage:	500VRMS.

Mechanical:

Mounting:	Panel Mount.
Pin Contact:	Ø2.0mm, Nickel Plated Brass.
Sleeve Contact:	Ø5.7mm, Nickel Plated Brass.
Insertion Depth:	9.0mm.
Body:	PBT (UL94V-0).
Hex Nut:	Nickel Plated Brass.
Lock Washer:	Nickel Plated Steel.
Max Panel Thickness:	0.125 Inches (3.2mm).
Mounting Threads:	5/16-32.
Insertion or Withdrawal Force:	0.3 - 3kg.
Operating Temperature:	-40°F to 158°F (-40°C to +70°C).
Durability:	5,000 Mating Cycles Minimum.

Schematic

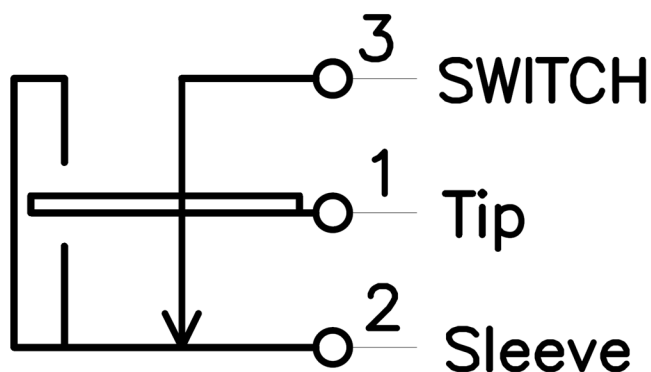

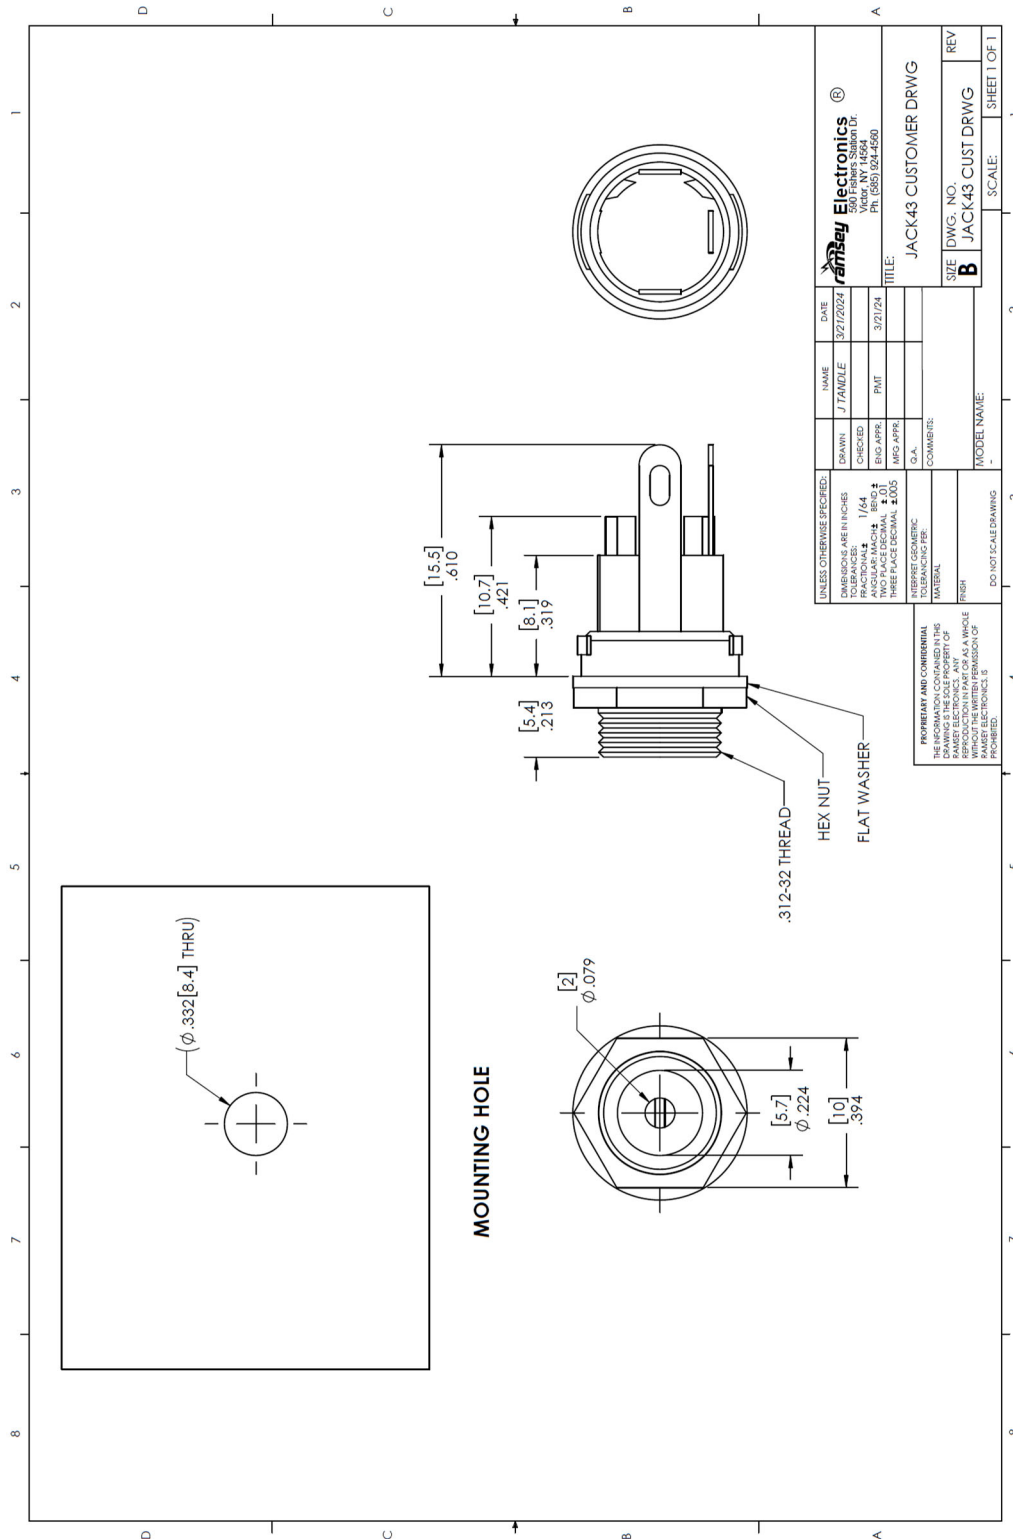

The information in this datasheet, although believed to be accurate, is not to be taken as warranty for which Ramsey Electronics assumes legal responsibility. Ramsey Electronics reserves the right to make changes, corrections, and improvements to its products and/or this document at anytime without notice.