

# DMM7510 7½-Digit Graphical Sampling Multimeter




## Key Features

- Precision multimeter with 3½- to 7½-digit resolution
- Capture and display waveforms or transients with 1 MS/sec digitizer
- Large internal memory buffer; store over 11 million readings in standard mode or 27.5 million in compact mode
- 14 PPM basic one-year DCV accuracy
- 100 mV, 1 Ω, and 10 μA ranges offer the sensitivity needed for measuring low level signals such as portable device sleep mode currents
- Make accurate low resistance measurements with offset compensated ohms, four-wire, and dry circuit functions
- Auto-calibration feature improves accuracy and stability by minimizing temperature and time drift
- Display more with five-inch, high resolution touchscreen interface
- Readings and screen images can be saved quickly via the front panel USB memory port
- Multiple connectivity options: GPIB, USB, and LXI-compliant LAN interfaces
- Two-year specifications enable longer calibration cycles


The DMM7510 combines all the advantages of a precision digital multimeter, a graphical touchscreen display, and a high speed, high resolution digitizer to create an industry first: a graphical sampling multimeter. The digitizer gives the DMM7510 unprecedented signal analysis flexibility; the five-inch capacitive touchscreen display makes it easy to observe, interact with, and explore measurements with “pinch and zoom” simplicity. This combination of high performance and high ease of use offers unparalleled insight into your test results.

## Capture Waveforms with the Built-in 1 MS/sec Digitizer

Capturing and displaying waveforms and transient events just got easier with the DMM7510's voltage or current digitizing function. The built-in 1 MS/sec, 18-bit digitizer makes it possible to acquire waveforms without the need to use a separate instrument. The digitizing functions employ the same ranges that the DC voltage and current functions use to deliver exceptional dynamic measurement range. In addition, the voltage digitizing function uses the same DC voltage input impedance (10 GΩ or 10 MΩ) levels to reduce loading significantly on the DUT.

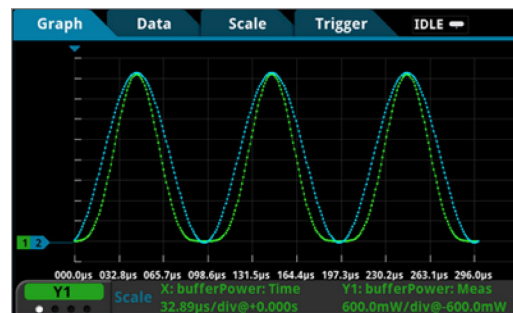

The built-in graphing utility supports displaying and comparing measurements or waveforms from up to four reading buffers at once.

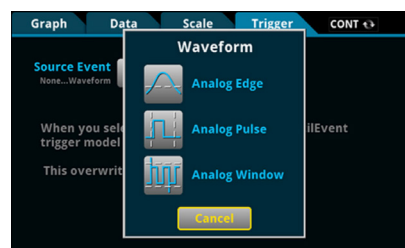

Advanced triggering options make it possible to capture a signal at precisely the right point.

## Accurately Measure and Visualize Ultra-Low Current Drain Levels


Determine the current drain of the components such as the microcontroller (MCU) in your low-power, battery-operated product as well as the product's total current draw. In addition, profile the current drain in all of the product's operating states from its sleep mode to its transmit mode. Using the enhanced accuracy DC current function, the DMM7510 can measure a 1  $\mu\text{A}$  sleep mode current with 1 pA resolution and with 0.375 nA tolerance. Furthermore, using the digitizing current function, the DMM7510 can capture the current wave shapes as the product transitions from sleep mode to transmit mode.



Capture the current drain from all the operating states – sleep mode to active transmit mode – of a component or a product with the DMM7510's digitizing function. Focus in on characteristics of the wave shapes with the touchscreen pinch and zoom features.

## Make Demanding Measurements with Confidence


The DMM7510's design makes the most of Keithley's low level measurement expertise. Features like the low noise input stage and the 32-bit A-to-D converter allow this instrument to deliver DC accuracies typically only found in metrology-grade instrumentation—but at about half the price of those solutions. The DMM7510's 100 mV, 10  $\Omega$ , and 10  $\mu\text{A}$  ranges deliver the sensitivity needed to measure low signals with confidence when characterizing today's demanding electronic designs. In addition to one- and two-year accuracy specifications, an auto-calibration function ensures greater accuracy between calibration cycles.

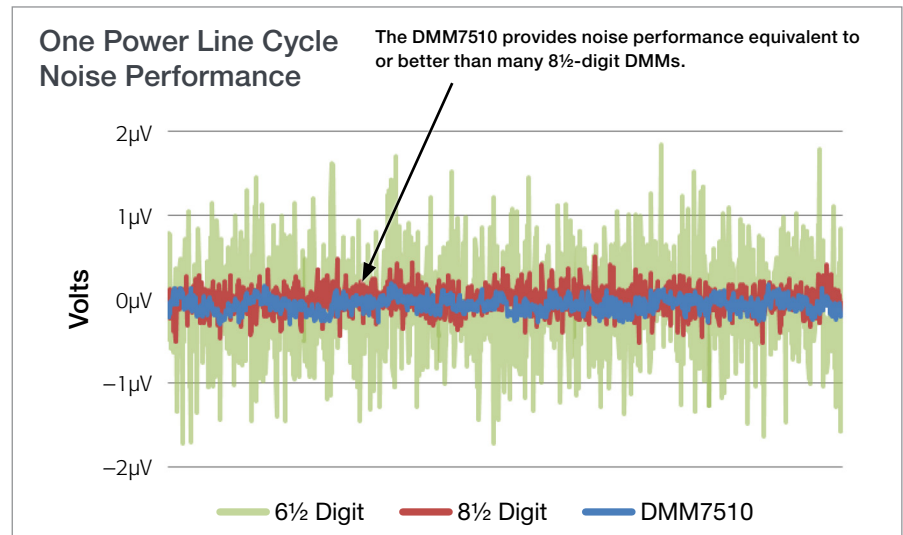


Comparison of the DMM7510's 1 VDC noise performance with that of typical 6½- and 8½-digit multimeters. All data was taken at 1 NPLC with a low thermal short applied to the input.

## 15 Measurement Functions

The DMM7510 provides 15 basic measurement functions. In addition to the digitizing voltage and current functions, it includes capacitance, ACV and ACI, temperature (RTD, thermistor, and thermocouple), 2- and 4-wire resistance, dry circuit ohms, period, frequency, diode test, and DC voltage ratio. The instrument's flat menu structure allows for fast configuration and improves usability. Its intuitive design lets you to learn how to operate the instrument and begin making device measurements faster and with greater confidence.

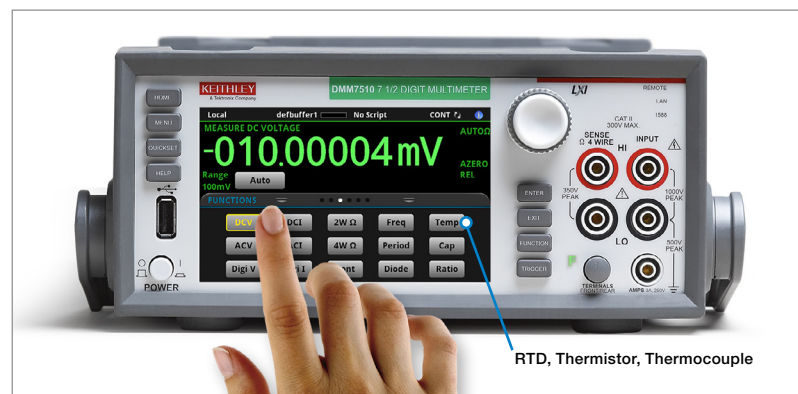


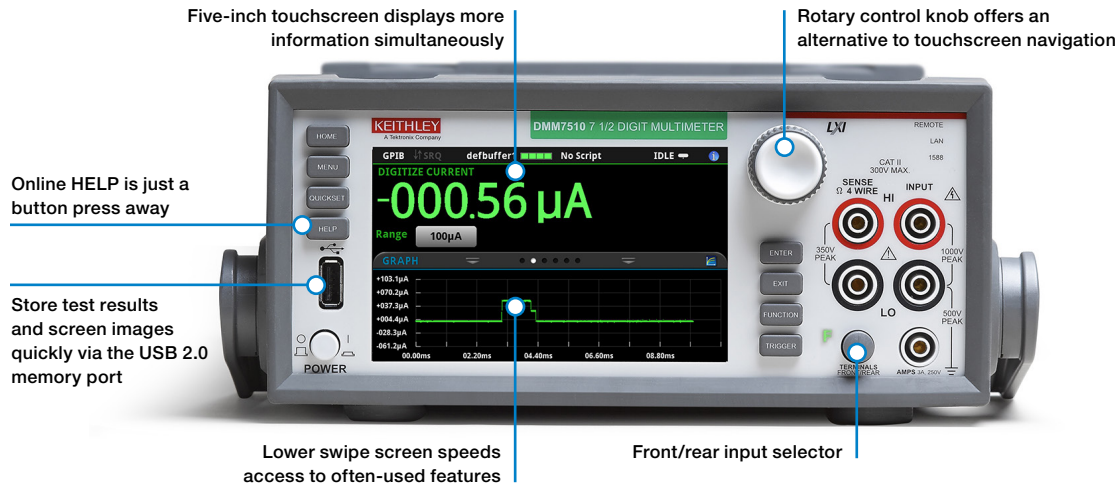


## Designed for Higher Testing Productivity

In addition to its advanced touchscreen, the DMM7510's front panel offers a variety of features that enhance its speed, user-friendliness, and learnability, including a USB 2.0 memory I/O port, a HELP key, a rotary navigation/control knob, and front/rear input selector button. All front-panel buttons are backlit to enhance visibility.

The rear panel of the DMM7510 provides connections and controls that simplify configuring multi-instrument test solutions, including input connectors, remote control interfaces (GPIB, USB 2.0 and LXI/Ethernet), a D-sub 9-pin digital I/O port (for internal/external trigger signals and handler control), and TSP-Link® jacks for connecting to other TSP-enabled instruments.

## DMM7510 Measurement Capabilities

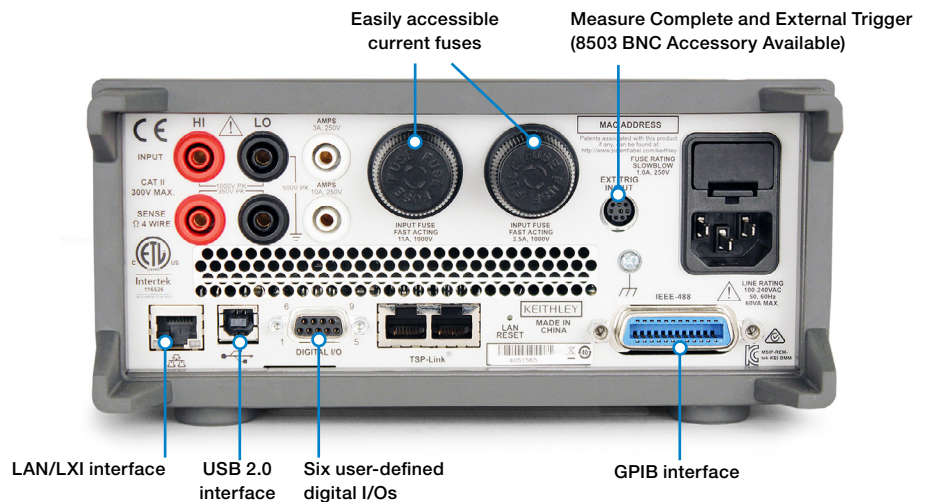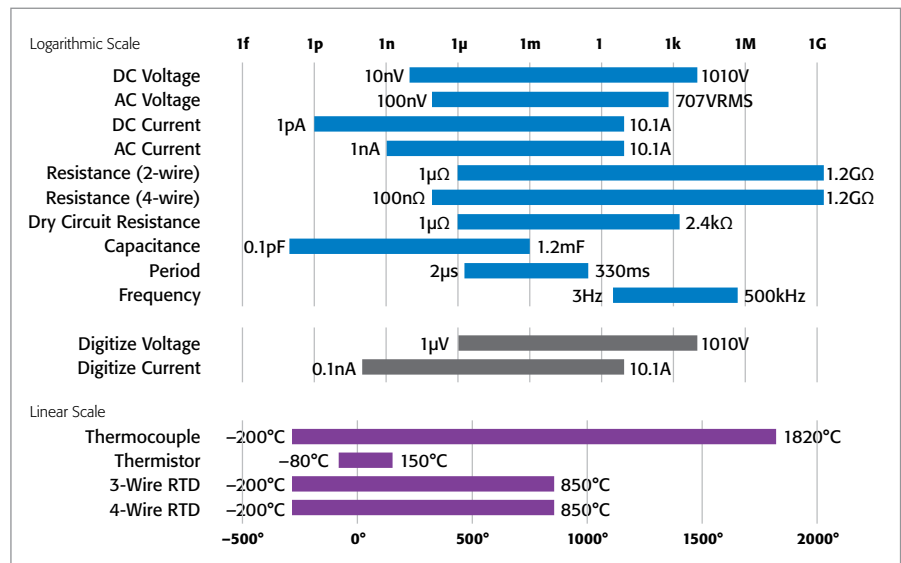

## Flexible System Integration and Programming


To offer users maximum programming flexibility and simplify configuring multi-instrument test systems, the DMM7510 includes Keithley's powerful Test Script Processor (TSP®) system and SCPI programming mode. The embedded scripting capability allows running powerful test scripts directly on the instrument, without the need for an external PC controller. These test scripts are complete test programs based on an easy-to-use yet highly efficient and compact scripting language, Lua (www.lua.org). Scripts are a collection of instrument control commands and/or program statements. Program statements control script execution and provide facilities such as variables, functions, branching, and loop control. This allows you to create powerful measurement applications with significantly reduced development times. Test scripts can contain any sequence of routines that are executable by conventional programming languages (including decision-making algorithms), so the instrument can manage every facet of the test without the need to communicate with a PC for decision-making. This eliminates delays due to GPIB, Ethernet or USB traffic congestion and greatly improves overall test times.

TSP technology also offers "mainframe-less channel expansion." The TSP-Link® channel expansion bus and a 100 Base T Ethernet cable allow connecting multiple DMM7510s with other TSP-enabled instruments in a master-slave configuration so they operate as a single integrated system. These instruments include the 2450 and 2460 Graphical SourceMeter® SMU instruments, Series 2600B

SourceMeter SMU instruments, and the Series 3700A Switch/Multimeter systems. TSP-Link supports up to 32 units per GPIB or IP address, so it's easy to scale a system to fit the requirements of an application.

A standard SCPI programming mode supports taking advantage of all of the DMM7510's new features when programming remotely. In addition, the instrument is code-compatible with the SCPI language, which many other DMMs use. This code compatibility avoids the need to rewrite code that is normally associated with upgrading to a new instrument with new capabilities.

## Instrument Control Software

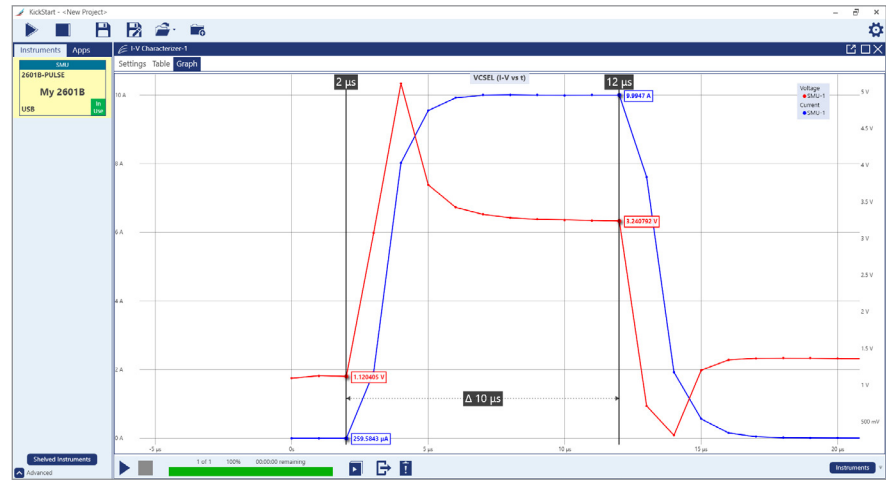

Keithley's KickStart instrument control software lets you begin taking measurements in minutes.

### KickStart combines a wide range of functions to enhance testing productivity:

- Instrument-specific UI panel
- Manual instrument configuration
- Basic reading display and tabular viewing of data
- Datalogging
- Native X-Y data graphing
- Panning and zooming
- Basic statistics (native to instrument, mX+b)
- Saving/exporting data
- Connect using any remote interface (GPIB, USB, LAN)
- Saving instrument setups
- Screenshot capture
- Command line dialog box

## Ready-to-use Instrument Drivers Simplify Programming

Need to create your own customized application software? Native National Instruments LabVIEW®, IVI-C, and IVI-COM drivers are available for downloading at www.tek.com to simplify the programming process.

## Specification Conditions

This document contains specifications and supplemental information for the DMM7510 7½-Digit Graphical Sampling Multimeter instrument. Specifications are the standards against which the DMM7510 is tested. Upon leaving the factory, the Model DMM7510 meets these specifications. Supplemental and typical values are nonwarranted, apply at 23°C (73°F), and are provided solely as useful information. Measurement accuracies are specified at the DMM7510 terminals under these conditions:

- Temperature 23° ±5°C, 5% to 80% relative humidity, noncondensing.
- After a 90-minute warmup period.
- 1 PLC or 5 PLC; for NPLC settings less than 1 PLC, add appropriate ppm of range for peak noise uncertainty from the RMS noise table.
- Autozero enabled unless otherwise noted.
- Remote sense operation or properly zeroed local operation.
- Calibration period: One year or two years (calibration period may vary depending on customer requirements).
- $T_{ACAL}$  = Ambient temperature of last automatic calibration.
- $T_{CAL}$  = Ambient temperature of last external calibration; factory calibration performed at 23° ±1°C.

## DC Voltage

### Accuracy (Input impedance AUTO)

| Range <sup>1</sup>         | Resolution | Input Impedance <sup>2</sup> | Accuracy ±(ppm of reading + ppm of range)             |   |   |   |                                      |
|----------------------------|------------|------------------------------|---|---|---|---|--------------------------------------|
|                            |            |                              | 24 Hour<br>$T_{CAL} \pm 1^\circ\text{C}$ <sup>2</sup> | 90 Day<br>$T_{CAL} \pm 5^\circ\text{C}$ | 1 Year<br>$T_{CAL} \pm 5^\circ\text{C}$ | 2 Year<br>$T_{CAL} \pm 5^\circ\text{C}$ | Temperature Coefficient <sup>3</sup> |
| 100.00000 mV <sup>4</sup>  | 10 nV      | >10 GΩ or<br>10 MΩ ±1 %      | 6 + 9   | 12 + 9                                  | 18 + 9                                  | 29 + 9                                  | 0.1 + 2.5                            |
| 1.0000000 V <sup>4</sup>   | 100 nV     | >10 GΩ or<br>10 MΩ ±1 %      | 4 + 1   | 9 + 2                                   | 15 + 2                                  | 26 + 2                                  | 0.1 + 0.5                            |
| 10.000000 V <sup>4</sup>   | 1 μV       | >10 GΩ or<br>10 MΩ ±1 %      | 2 + 0.7   | 9 + 1.2                                 | 14 + 1.2                                | 22 + 1.2                                | 0.1 + 0.05                           |
| 100.00000 V <sup>4</sup>   | 10 μV      | 10 MΩ ±1 %                   | 8 + 3   | (18 + 5) <sup>5</sup>                   | (22 + 5) <sup>5</sup>                   | (30 + 5) <sup>5</sup>                   | (0.15 + 0.05) <sup>5</sup>           |
|                            |            |                              |   | 35 + 5                                  | 40 + 5                                  | 45 + 5                                  | 2.0 + 0.5                            |
| 1000.0000 V <sup>4,6</sup> | 100 μV     | 10 MΩ ±1 %                   | 8 + 3   | (19 + 5) <sup>5</sup>                   | (23 + 5) <sup>5</sup>                   | (31 + 5) <sup>5</sup>                   | (0.15 + 0.05) <sup>5</sup>           |
|                            |            |                              |   | 35 + 5                                  | 40 + 5                                  | 45 + 4                                  | 2.0 + 0.5                            |

### RMS Noise (additional peak noise uncertainty)<sup>7</sup>

Applies to ±ppm of range.

Peak noise uncertainty is included in DC specifications for ≥1 PLC.

Add peak noise uncertainty to measurements for <1 PLC.

Input impedance set to Auto.

### NOTES

1. 20% overrange on all ranges except 1% for 1000 V range.
2. Relative to calibration accuracy.
3. Add per degree from  $T_{CAL} \pm 5^\circ\text{C}$ .
4. When properly zeroed using the Rel function with external cables.
5. Specified within 30 days of autocalibration,  $T_{OPER} \pm 5^\circ\text{C}$  from  $T_{ACAL}$ .
6. For signal levels greater than 500 V, add 0.02 ppm/V to the ppm of the readings specification for measurements exceeding 500 V.
7. Noise values are based on 1000 readings with autozero on and using low thermal 4-wire short.  $V_{RMS}$  noise is typical. Additional peak noise is guaranteed.

**Examples:**

10 V at 0.006 PLC: 1.2 (from Accuracy table) + 11 (additional peak noise uncertainty) = 12.2 ppm of range.

10 V at 1 PLC: 1.2 + 0 = 1.2 ppm of range.

| NPLC             | Digits | 100 mV   | 1 V       | 10 V      | 100 V     | 1000 V    |
|------------------|--------|----------|-----------|-----------|-----------|-----------|
| 5                | 7½     | 0.5      | 0.08      | 0.06      | 0.3       | 0.06      |
| 1                | 7½     | 0.5      | 0.09      | 0.07      | 0.4       | 0.07      |
| 0.2 <sup>8</sup> | 6½     | 2 (10)   | 0.2 (1.6) | 0.1 (1.1) | 1.1 (9.4) | 0.1 (1)   |
| 0.2              | 6½     | 2 (12)   | 0.2 (1.6) | 0.1 (1)   | 1.1 (8.9) | 0.2 (1.1) |
| 0.06             | 5½     | 3 (17)   | 0.4 (2.7) | 0.3 (2.1) | 3 (17)    | 0.3 (2.4) |
| 0.006            | 4½     | 6 (42)   | 3 (18)    | 1 (11)    | 20 (100)  | 3 (18)    |
| 0.0005           | 3½     | 30 (220) | 20 (150)  | 20 (130)  | 120 (690) | 20 (150)  |

**DC Voltage Sense Accuracy**

| Range        | Accuracy ±(ppm of reading + ppm of range) |                                 |                                 |                                 |   |
|--------------|---|---------------------------------|---------------------------------|---------------------------------|---|
|              | 24 Hour<br>T <sub>CAL</sub> ±1°C          | 90 Day<br>T <sub>CAL</sub> ±5°C | 1 Year<br>T <sub>CAL</sub> ±5°C | 2 Year<br>T <sub>CAL</sub> ±5°C | Temperature<br>Coefficient <sup>9</sup> |
| 100.00000 mV | 6 + 14                                    | 12 + 14                         | 18 + 14                         | 29 + 14                         | 0.1 + 2.5                               |
| 1.0000000 V  | 4 + 1.5                                   | 9 + 3                           | 15 + 3                          | 26 + 3                          | 0.1 + 0.5                               |
| 10.00000 V   | 2 + 1.0                                   | 9 + 1.8                         | 14 + 1.8                        | 22 + 1.8                        | 0.1 + 0.05                              |

**DC Voltage Ratio**

For input signals ≥1% of the range, ratio accuracy = ±[ $V_{\text{INPUT}}$  ppm of reading +  $V_{\text{INPUT}}$  ppm of range \* ( $V_{\text{INPUT}}$  range/ $V_{\text{INPUT}}$  input)] + [ $V_{\text{SENSE}}$  ppm of reading +  $V_{\text{SENSE}}$  ppm of range \* ( $V_{\text{SENSE}}$  range/ $V_{\text{SENSE}}$  input)].

**DC Voltage Characteristics**

|                               |  |
|-------------------------------|--|
| ADC Linearity                 | 1.0 ppm of reading + 1.0 ppm of range.   |
| Input Impedance               | 100 mV to 10 V Ranges: Selectable >10 GΩ    <400 pF (auto) or 10 MΩ ±1% (10 MΩ).<br>100 V to 1000 V Ranges: 10 MΩ ±1%. |
| Input Bias Current            | <50 pA at 23°C under the following conditions: Autozero off or input impedance 10 MΩ.                                  |
| Common Mode Current           | <2.1 μA peak-peak in 1 MHz bandwidth.<br><100 nA peak-peak in 1 kHz bandwidth.   |
| Common Mode Voltage           | 500 V <sub>peak</sub> LO terminal to chassis maximum.  |
| DC Voltage Autozero Off Error | For ±1°C and ≤10 minutes, add ±(8 ppm of reading + 15 μV).   |

**Normal Mode Rejection**

For DC voltage, line frequency ±0.1%.

|               | 5 PLC  | 1 PLC | ≤0.2 PLC | ≤0.01 PLC |
|---------------|--------|-------|----------|-----------|
| Line Sync On  | 110 dB | 90 dB | 45 dB    | —         |
| Line Sync Off | 60 dB  | 60 dB | —        | —         |

**NOTES**

- 8. With line sync on.
- 9. Add per degree from T<sub>CAL</sub> ±5°C.

## Common Mode Rejection

For DC voltage and 1k $\Omega$  unbalanced in LO terminal; AC CMRR is 70 dB.

| NPLC      | 5      | 1      | 0.2    | $\leq 0.2$ |
|-----------|--------|--------|--------|------------|
| Line Sync | On     | On     | On     | Off        |
| CMRR      | 140 dB | 140 dB | 120 dB | 80 dB      |

## Resistance

### Enhanced Accuracy (within 30 days of autocalibration, $T_{OPER} \pm 5^{\circ}C$ from $T_{ACAL}$ )<sup>10</sup>

| Range <sup>11</sup>                    | Resolution      | Test Current <sup>12</sup><br>( $\pm 5\%$ ) | Accuracy $\pm$ (ppm of reading + ppm of range)    |                                    |                                    |                                    |  |
|--|-----------------|---|---|------------------------------------|------------------------------------|------------------------------------|--|
|  |                 |   | 24 Hour<br>$T_{CAL} \pm 1^{\circ}C$ <sup>13</sup> | 90 Day<br>$T_{CAL} \pm 5^{\circ}C$ | 1 Year<br>$T_{CAL} \pm 5^{\circ}C$ | 2 Year<br>$T_{CAL} \pm 5^{\circ}C$ | Temperature<br>Coefficient <sup>14</sup> |
| 1.0000000 $\Omega$                     | 0.1 $\mu\Omega$ | 10 mA                                       | 15 + 50   | 30 + 50                            | 30 + 50                            | 30 + 50                            | 0.15 + 0.1                               |
| 10.000000 $\Omega$                     | 1 $\mu\Omega$   | 10 mA                                       | 15 + 5  | 30 + 5                             | 30 + 5                             | 30 + 5                             | 0.15 + 0.1                               |
| 100.00000 $\Omega$                     | 10 $\mu\Omega$  | 1 mA  | 12 + 4  | 27 + 4                             | 27 + 4                             | 27 + 4                             | 0.15 + 0.1                               |
| 1.0000000 k $\Omega$                   | 100 $\mu\Omega$ | 1 mA  | 12 + 3  | 24 + 3                             | 24 + 3                             | 24 + 3                             | 0.15 + 0.1                               |
| 10.000000 k $\Omega$ <sup>15</sup>     | 1 m $\Omega$    | 100 $\mu A$                                 | 13 + 3  | 30 + 3                             | 30 + 3                             | 30 + 3                             | 0.15 + 0.1                               |
| 100.00000 k $\Omega$ <sup>15, 16</sup> | 10 m $\Omega$   | 10 $\mu A$                                  | 13 + 3  | 30 + 3                             | 30 + 3                             | 30 + 3                             | 0.15 + 0.1                               |
| 1.0000000 M $\Omega$ <sup>15, 17</sup> | 100 m $\Omega$  | 10 $\mu A$                                  | 14 + 3  | 30 + 4                             | 30 + 4                             | 30 + 4                             | 0.15 + 0.1                               |
| 10.000000 M $\Omega$ <sup>18</sup>     | 1 $\Omega$      | 0.69 $\mu A$   10 M $\Omega$                | 150 + 6   | 200 + 10                           | 200 + 10                           | 200 + 10                           | 70 + 1                                   |
| 100.00000 M $\Omega$ <sup>18</sup>     | 10 $\Omega$     | 0.69 $\mu A$   10 M $\Omega$                | 800 + 30  | 2000 + 30                          | 2000 + 30                          | 2000 + 30                          | 385 + 1                                  |
| 1.0000000 G $\Omega$ <sup>18</sup>     | 100 $\Omega$    | 0.69 $\mu A$   10 M $\Omega$                | 9000 + 100  | 9000 + 100                         | 9000 + 100                         | 9000 + 100                         | 3000 + 1                                 |

### Accuracy<sup>19</sup>

| Range <sup>20</sup>              | Resolution      | Test Current <sup>21</sup><br>( $\pm 5\%$ ) | Accuracy $\pm$ (ppm of reading + ppm of range)    |                                    |                                    |                                    |  |
|----------------------------------|-----------------|---|---|------------------------------------|------------------------------------|------------------------------------|--|
|                                  |                 |   | 24 Hour<br>$T_{CAL} \pm 1^{\circ}C$ <sup>22</sup> | 90 Day<br>$T_{CAL} \pm 5^{\circ}C$ | 1 Year<br>$T_{CAL} \pm 5^{\circ}C$ | 2 Year<br>$T_{CAL} \pm 5^{\circ}C$ | Temperature<br>Coefficient <sup>23</sup> |
| 1 $\Omega$                       | 0.1 $\mu\Omega$ | 10 mA                                       | 15 + 50   | 40 + 50                            | 50 + 50                            | 70 + 50                            | 2.5 + 5                                  |
| 10 $\Omega$                      | 1 $\mu\Omega$   | 10 mA                                       | 15 + 5  | 40 + 5                             | 50 + 5                             | 70 + 5                             | 2.5 + 0.5                                |
| 100 $\Omega$                     | 10 $\mu\Omega$  | 1 mA  | 12 + 4  | 35 + 4                             | 47 + 4                             | 65 + 4                             | 5 + 0.25                                 |
| 1 k $\Omega$                     | 100 $\mu\Omega$ | 1 mA  | 12 + 3  | 30 + 3                             | 41 + 3                             | 65 + 3                             | 5 + 0.25                                 |
| 10 k $\Omega$ <sup>24</sup>      | 1 m $\Omega$    | 100 $\mu A$                                 | 10 + 3  | 30 + 3                             | 42 + 3                             | 65 + 3                             | 2.5 + 0.25                               |
| 100 k $\Omega$ <sup>24, 25</sup> | 10 m $\Omega$   | 10 $\mu A$                                  | 13 + 3  | 38 + 3                             | 50 + 3                             | 65 + 3                             | 5 + 1                                    |
| 1 M $\Omega$ <sup>24, 26</sup>   | 100 m $\Omega$  | 10 $\mu A$                                  | 14 + 3  | 38 + 5                             | 50 + 5                             | 65 + 5                             | 5 + 1                                    |
| 10 M $\Omega$ <sup>27</sup>      | 1 $\Omega$      | 0.69 $\mu A$   10 M $\Omega$                | 150 + 6   | 200 + 10                           | 400 + 10                           | 600 + 12                           | 70 + 1                                   |
| 100 M $\Omega$ <sup>27</sup>     | 10 $\Omega$     | 0.69 $\mu A$   10 M $\Omega$                | 800 + 30  | 2000 + 30                          | 2000 + 30                          | 2600 + 30                          | 385 + 1                                  |
| 1 G $\Omega$ <sup>27</sup>       | 100 $\Omega$    | 0.69 $\mu A$   10 M $\Omega$                | 9000 + 200  | 9000 + 200                         | 13000 + 200                        | 14000 + 200                        | 3000 + 1                                 |

## NOTES

- Specifications are for 4-wire resistance, offset compensation on for  $\leq 10$  k $\Omega$  measurements, and offset compensation off for  $\geq 10$  k $\Omega$  measurements. 1  $\Omega$  range is 4-wire only. For 2-wire, with Rel, add 50 m $\Omega$  to ppm of range uncertainty. Without Rel and with 1756 test leads, add 100 m $\Omega$  to ppm of range uncertainty.
- 20% overrange on all ranges.
- Test current with offset compensation off,  $\pm 5\%$ .
- Relative to calibration accuracy.
- Add per degree from  $T_{CAL} \pm 5^{\circ}C$ .
- Specifications are for external cable and load capacitance  $< 1nF$ .
- For offset compensation on, add 10ppm uncertainty to ppm of reading.
- For 4-wire 1 M $\Omega$ , open lead detector on, add 10 ppm uncertainty to ppm of reading.
- Specified for  $< 10\%$  lead resistance mismatch in HI and LO.
- Specifications are for 4-wire resistance, offset compensation on for  $\leq 10$  k $\Omega$  measurements, and offset compensation off for  $\geq 10$  k $\Omega$  measurements. 1  $\Omega$  range is 4-wire only. For 2-wire, with Rel, add 50 m $\Omega$  to ppm of range uncertainty. Without Rel and with 1756 test leads, add 100 m $\Omega$  to ppm of range uncertainty.
- 20% overrange on all ranges.
- Test current with offset compensation off.
- Relative to calibration accuracy.
- Add per degree from  $T_{CAL} \pm 5^{\circ}C$ .
- Specifications are for external cable and load capacitance  $< 1 nF$ .
- For offset compensation on, add 10ppm of uncertainty to ppm of reading.
- For 4-wire, 1 M $\Omega$ , open lead detector on, add 10ppm uncertainty to ppm of reading.
- Specified for  $< 10\%$  lead resistance mismatch in HI and LO.

## Resistance Open Circuit DC Voltage<sup>28</sup>

| Range <sup>20</sup> | 2-wire | Offset Compensation Off | Offset Compensation On    |
|---------------------|--------|-------------------------|---------------------------|
|                     |        | 4-wire                  | 4-wire                    |
| 1 Ω                 | –      | 9.2 V                   | 9.5 V                     |
| 10 Ω                | 9.2 V  | 9.2 V                   | 9.5 V                     |
| 100 Ω, 1 kΩ         | 14.0 V | 14.2 V                  | 14.3 V                    |
| 10 kΩ               | 9.5 V  | 9.5 V                   | 0.0 V                     |
| 100 kΩ, 1 MΩ        | 12.7 V | 14.3 V                  | 0.0 V (100 kΩ range only) |
| 10 MΩ to 1 GΩ       | 6.9 V  | 6.9 V                   | –                         |

## 4-Wire Ohms (≤10kΩ) Offset Compensation On

### RMS Noise (additional peak noise uncertainty)<sup>29</sup>

Applies to ± ppm of range.

Peak noise uncertainty is included in DC specifications for ≥1 PLC.

Add peak noise uncertainty to measurements for <1 PLC.

### Examples

1 kΩ at 0.006 PLC: 3 (from Accuracy table) + 26 (additional peak noise uncertainty) = 29 ppm of range.

1 kΩ at 1 PLC: 3 + 0 = 3 ppm of range.

| NPLC              | Digits | 1 Ω        | 10 Ω     | 100 Ω    | 1 kΩ      | 10 kΩ     |
|-------------------|--------|------------|----------|----------|-----------|-----------|
| 5                 | 7½     | 2.8        | 0.3      | 0.3      | 0.07      | 0.3       |
| 1                 | 7½     | 4.2        | 0.4      | 0.4      | 0.12      | 0.5       |
| 0.2 <sup>30</sup> | 6½     | 30 (160)   | 3 (13)   | 3 (13)   | 0.4 (2.6) | 1.2 (8.2) |
| 0.2               | 6½     | 50 (250)   | 5 (22)   | 5 (22)   | 0.6 (3.2) | 1.2 (8.3) |
| 0.06              | 5½     | 110 (490)  | 11 (47)  | 11 (46)  | 1.1 (6.6) | 2 (16)    |
| 0.006             | 4½     | 110 (710)  | 10 (70)  | 10 (70)  | 4 (26)    | 10 (60)   |
| 0.0005            | 3½     | 520 (3420) | 50 (340) | 50 (340) | 40 (220)  | 50 (300)  |

## 2-Wire Ohms

### RMS Noise (additional peak noise uncertainty)<sup>29</sup>

Applies to ± ppm of range.

Peak noise uncertainty is included in DC specifications for ≥1 PLC.

Add peak noise uncertainty to measurements for <1 PLC.

### Examples

10 kΩ at 0.006 PLC: 3 (from Accuracy table) + 5 (50 mΩ with Rel) + 43 (additional peak noise uncertainty) = 51 ppm of range.

10 kΩ at 1 PLC: 3 + 5 + 0 = 8 ppm of range.

| NPLC              | Digits | 10 Ω     | 100 Ω    | 1 kΩ      | 10 kΩ     |
|-------------------|--------|----------|----------|-----------|-----------|
| 5                 | 7½     | 1.1      | 0.8      | 0.1       | 0.2       |
| 1                 | 7½     | 0.6      | 0.6      | 0.09      | 0.4       |
| 0.2 <sup>30</sup> | 6½     | 2 (17)   | 2 (10)   | 0.2 (1.5) | 0.8 (6.3) |
| 0.2               | 6½     | 2 (17)   | 2 (14)   | 0.3 (1.6) | 0.8 (6.4) |
| 0.06              | 5½     | 3 (22)   | 3 (19)   | 0.4 (3.7) | 2 (12)    |
| 0.006             | 4½     | 6 (50)   | 6 (50)   | 3 (21)    | 6 (43)    |
| 0.0005            | 3½     | 30 (300) | 30 (230) | 20 (150)  | 30 (210)  |

## NOTES

28. Open circuit voltage is typical, measured from input HI to LO, SHI and SLO open. For 1 Ω to 1 MΩ ranges using an external digital multimeter (DMM) set to 10 MΩ input impedance; for 10 MΩ to 1 GΩ ranges, set external DMM to >10 GΩ input impedance.

29. Noise values are based on 1000 readings with autozero on and using low thermal 4-wire short. RMS noise is typical. Additional peak noise is guaranteed.

30. With line sync on.



## Resistance Characteristics

### Maximum 4-Wire Ohms Lead Resistance

5 Ω per lead for 1Ω range, 10% of range per lead for 10 Ω to 1 kΩ ranges; 1 kΩ per lead for all other ranges.

### Offset Compensation

Selectable on 4-wire, 1 Ω to 100 kΩ ranges.

### Open Lead Detector

Default is off.

### Autozero Off Error

For 2-wire ohms, ±1°C and ≤10 minutes, add ±(8ppm of reading) + 1.5 mΩ for 10 Ω, 15 mΩ for 100 Ω and 1 kΩ ranges, 150 mΩ for 10 kΩ range, 1.5 Ω for 100 kΩ range, and 15 Ω for all other ranges.  
For 4-wire ohms, ±1°C and ≤10 minutes, add ±(8 ppm of reading).

### Input Current Limit

For signals with a magnitude of +12 V to +40 V or -12 V to -40 V: ±13 mA source or sink, typical.  
For signals with a magnitude of greater than +40 V or -40 V: ±130 μA source or sink, typical.

## Dry Circuit Resistance

### Enhanced Accuracy (within 30 days of autocalibration, T<sub>OPER</sub> ±5°C from T<sub>ACAL</sub>)

| Range <sup>31</sup> | Resolution | Test Current <sup>35</sup> (±5%) | Open Circuit DUT Voltage <sup>32</sup> | Accuracy ±(ppm of reading + ppm of range)   |                              |                              |                               |                                       |
|---------------------|------------|----------------------------------|--|---|------------------------------|------------------------------|-------------------------------|---------------------------------------|
|                     |            |                                  |  | 24 Hour T <sub>CAL</sub> ±1°C <sup>33</sup> | 90 Day T <sub>CAL</sub> ±5°C | 1 Year T <sub>CAL</sub> ±5°C | 2 years T <sub>CAL</sub> ±5°C | Temperature Coefficient <sup>34</sup> |
| 1.000000 Ω          | 1 μΩ       | 10 mA                            | 25 mV                                  | 25 + 80                                     | 50 + 80                      | 50 + 80                      | 50 + 80                       | 1.5 + 0.1                             |
| 10.00000 Ω          | 10 μΩ      | 1 mA                             | 25 mV                                  | 25 + 80                                     | 50 + 80                      | 50 + 80                      | 50 + 80                       | 1.5 + 0.1                             |
| 100.0000 Ω          | 100 μΩ     | 100 μA                           | 25 mV                                  | 25 + 80                                     | 90 + 80                      | 90 + 80                      | 90 + 80                       | 1.5 + 0.1                             |
| 1.000000 kΩ         | 1 mΩ       | 10 μA                            | 25 mV                                  | 25 + 80                                     | 180 + 80                     | 180 + 80                     | 180 + 80                      | 1.5 + 0.1                             |
| 10.00000 kΩ         | 10 mΩ      | 5 μA                             | 25 mV                                  | 25 + 80                                     | 320 + 80                     | 320 + 80                     | 320 + 80                      | 1.5 + 0.1                             |

## Accuracy

| Range <sup>31</sup> | Resolution | Test Current <sup>35</sup> (±5%) | Open Circuit DUT Voltage <sup>32</sup> | Accuracy ±(ppm of reading + ppm of range)   |                              |                              |                              |                                       |
|---------------------|------------|----------------------------------|--|---|------------------------------|------------------------------|------------------------------|---------------------------------------|
|                     |            |                                  |  | 24 Hour T <sub>CAL</sub> ±1°C <sup>33</sup> | 90 Day T <sub>CAL</sub> ±5°C | 1 Year T <sub>CAL</sub> ±5°C | 2 Year T <sub>CAL</sub> ±5°C | Temperature Coefficient <sup>34</sup> |
| 1.000000 Ω          | 1 μΩ       | 10 mA                            | 25 mV                                  | 25 + 80                                     | 50 + 80                      | 70 + 80                      | 90 + 80                      | 2.5 + 1                               |
| 10.00000 Ω          | 10 μΩ      | 1 mA                             | 25 mV                                  | 25 + 80                                     | 50 + 80                      | 70 + 80                      | 90 + 80                      | 5 + 1                                 |
| 100.0000 Ω          | 100 μΩ     | 100 μA                           | 25 mV                                  | 25 + 80                                     | 90 + 80                      | 140 + 80                     | 200 + 80                     | 2.5 + 1                               |
| 1.000000 kΩ         | 1 mΩ       | 10 μA                            | 25 mV                                  | 25 + 80                                     | 180 + 80                     | 400 + 80                     | 600 + 80                     | 5 + 1                                 |
| 10.00000 kΩ         | 10 mΩ      | 5 μA                             | 25 mV                                  | 25 + 80                                     | 320 + 80                     | 800 + 80                     | 1300 + 80                    | 8 + 1                                 |

### RMS Noise (additional peak noise uncertainty)<sup>36</sup>

Applies to ± ppm of range.

Peak noise uncertainty is included in DC specifications for ≥1 PLC.

Add peak noise uncertainty to measurements when < 1 PLC.

## NOTES

31. 20% overrange on all ranges, except 2.4 kΩ for the 10 kΩ range.

32. Maximum clamp voltages are DC, typical accuracy is ±20%. Add 20% for offset compensation on.

33. Relative to calibration accuracy.

34. Add per degree from T<sub>CAL</sub> ±5°C.

35. Test current with offset compensation off.

36. Noise values are based on 1000 readings with autozero on and using low thermal 4-wire short. <sub>RMS</sub> noise is typical. Additional peak noise is guaranteed.

**Examples:**

10 Ω at 0.2 PLC: 80 (from Accuracy table) + 230 (additional peak noise uncertainty) = 310 ppm of range.

10 Ω at 1 PLC: 80 + 0 = 80 ppm of range.

| NPLC              | Digits | 1 Ω        | 10 Ω       | 100 Ω      | 1 kΩ       | 10 kΩ     |
|-------------------|--------|------------|------------|------------|------------|-----------|
| 5                 | 7½     | 10         | 11         | 6          | 5          | 0.9       |
| 1                 | 7½     | 9          | 9          | 7          | 7          | 0.8       |
| 0.2 <sup>37</sup> | 6½     | 30 (130)   | 30 (120)   | 30 (120)   | 30 (120)   | 3 (16)    |
| 0.2               | 6½     | 60 (220)   | 60 (230)   | 50 (190)   | 50 (190)   | 9 (35)    |
| 0.06              | 5½     | 70 (350)   | 70 (350)   | 50 (290)   | 50 (280)   | 20 (90)   |
| 0.006             | 4½     | 130 (750)  | 120 (830)  | 110 (700)  | 100 (690)  | 20 (110)  |
| 0.0005            | 3½     | 520 (3550) | 530 (3520) | 530 (3380) | 500 (3370) | 100 (670) |

**Dry Circuit Resistance Characteristics**

**Maximum 4-Wire Ohms Lead Resistance**

0.5 Ω per lead for 1 Ω range.  
 10% of range per lead for 10 Ω to 100 Ω ranges.  
 50 Ω per lead for 1 kΩ to 10 kΩ ranges.

**Input Current Limit**

For signals greater than ±20 mV, current limited, ±13 mA typical.

**Offset Compensation**

Selectable on 1 Ω to 10 kΩ ranges.

**Autozero Off Error**

For ±1°C and ≤10 minutes, add ±8 ppm of reading.

**DC Current**

**Enhanced Accuracy (within 30 days of autocalibration, T<sub>OPER</sub> ±5°C from T<sub>ACAL</sub>)**

| Range <sup>38</sup>         | Resolution | Maximum Burden Voltage | Accuracy ±(ppm of reading + ppm of range)      |                                 |                                 |                                 | Temperature Coefficient <sup>40</sup> |
|-----------------------------|------------|------------------------|--|---------------------------------|---------------------------------|---------------------------------|---------------------------------------|
|                             |            |                        | 24 Hour<br>T <sub>CAL</sub> ±1°C <sup>39</sup> | 90 Day<br>T <sub>CAL</sub> ±5°C | 1 Year<br>T <sub>CAL</sub> ±5°C | 2 Year<br>T <sub>CAL</sub> ±5°C |                                       |
| 10.000000 μA                | 1 pA       | 15 mV                  | 30 + 30  | 75 + 30                         | 75 + 30                         | 75 + 30                         | 0.15 + 0.1                            |
| 100.000000 μA               | 10 pA      | 15 mV                  | 20 + 5   | 60 + 9                          | 60 + 9                          | 60 + 9                          | 0.15 + 0.1                            |
| 1.00000000 mA               | 100 pA     | 15 mV                  | 30 + 5   | 60 + 9                          | 60 + 9                          | 60 + 9                          | 0.15 + 0.1                            |
| 10.00000000 mA              | 1 nA       | 20 mV                  | 40 + 5   | 60 + 9                          | 60 + 9                          | 60 + 9                          | 0.15 + 0.1                            |
| 100.00000000 mA             | 10 nA      | 200 mV                 | 50 + 18  | 150 + 30                        | 150 + 30                        | 150 + 30                        | 0.15 + 0.1                            |
| 1.00000000 A                | 100 nA     | 400 mV                 | 150 + 50                                       | 400 + 50                        | 400 + 50                        | 400 + 50                        | 0.15 + 0.1                            |
| 3.00000000 A                | 1 μA       | 1300 mV                | 200 + 40                                       | 400 + 40                        | 400 + 40                        | 400 + 40                        | 0.15 + 0.1                            |
| 10.00000000 A <sup>41</sup> | 1 μA       | 650 mV                 | 700 + 275                                      | 800 + 275                       | 1500 + 275                      | 2000 + 275                      | 50 + 10                               |

**NOTES**

37. With line sync on.  
 38. 20% overrange supported for all ranges except for 3 A and 10 A, which are 1% supported.  
 39. Relative to calibration accuracy.  
 40. Add per degree from T<sub>CAL</sub> ±5°C.  
 41. Rear input terminals only.

## Accuracy

| Range <sup>38</sup>        | Resolution | Maximum Burden Voltage | Accuracy ±(ppm of reading + ppm of range)      |                                 |                                 |                                 |                                       |
|----------------------------|------------|------------------------|--|---------------------------------|---------------------------------|---------------------------------|---------------------------------------|
|                            |            |                        | 24 Hour<br>T <sub>CAL</sub> ±1°C <sup>39</sup> | 90 Day<br>T <sub>CAL</sub> ±5°C | 1 Year<br>T <sub>CAL</sub> ±5°C | 2 Year<br>T <sub>CAL</sub> ±5°C | Temperature Coefficient <sup>40</sup> |
| 10.000000 µA               | 1 pA       | 15 mV                  | 30 + 30  | 100 + 30                        | 125 + 40                        | 175 + 50                        | 10 + 8                                |
| 100.000000 µA              | 10 pA      | 15 mV                  | 20 + 5   | 75 + 12                         | 100 + 15                        | 150 + 20                        | 10 + 3                                |
| 1.00000000 mA              | 100 pA     | 15 mV                  | 30 + 5   | 75 + 12                         | 100 + 15                        | 150 + 20                        | 10 + 3                                |
| 10.0000000 mA              | 1 nA       | 20 mV                  | 40 + 5   | 75 + 12                         | 100 + 15                        | 150 + 20                        | 10 + 3                                |
| 100.000000 mA              | 10 nA      | 200 mV                 | 50 + 18  | 300 + 30                        | 400 + 30                        | 500 + 30                        | 50 + 5                                |
| 1.00000000 A               | 100 nA     | 400 mV                 | 150 + 50                                       | 400 + 50                        | 450 + 50                        | 500 + 50                        | 10 + 10                               |
| 3.0000000 A                | 1 µA       | 1300 mV                | 200 + 40                                       | 400 + 40                        | 450 + 40                        | 500 + 40                        | 10 + 10                               |
| 10.0000000 A <sup>41</sup> | 1 µA       | 650 mV                 | 700 + 275                                      | 800 + 275                       | 1500 + 275                      | 2000 + 275                      | 50 + 10                               |

### RMS Noise (additional peak noise uncertainty)<sup>42</sup>

Applies to ± ppm of range.

Peak noise uncertainty is included in DC specifications for ≥1 PLC.

Add peak noise uncertainty to measurements when <1 PLC.

### Examples

1 mA at 0.006 PLC: 9 (from Accuracy table) + 20 (additional peak noise uncertainty) = 29 ppm of range.

1 mA at 1 PLC: 9 + 0 = 9 ppm of range.

| NPLC              | Digits | 10 µA      | 100 µA   | 1 mA      | 10 mA     | 100 mA    | 1 A      | 3 A       | 10 A <sup>43</sup> |
|-------------------|--------|------------|----------|-----------|-----------|-----------|----------|-----------|--------------------|
| 5                 | 7½     | 0.15       | 0.14     | 0.09      | 0.1       | 0.3       | 0.3      | 0.2       | 0.8                |
| 1                 | 7½     | 0.4        | 0.13     | 0.1       | 0.1       | 0.5       | 0.5      | 0.3       | 1.2                |
| 0.2               | 6½     | 0 (220)    | 0 (23)   | 0.2 (3.4) | 0.2 (1.6) | 2 (10)    | 2 (11)   | 0.7 (4.6) | 4 (32)             |
| 0.2 <sup>44</sup> | 6½     | 120 (260)  | 12 (26)  | 1.2 (3.8) | 0.3 (1.8) | 1.9 (9.8) | 2 (10)   | 0.8 (5)   | 8 (37)             |
| 0.06              | 5½     | 130 (280)  | 12 (29)  | 1.3 (5.6) | 0.4 (3.9) | 2 (14)    | 2 (14)   | 1.2 (7.7) | 10 (59)            |
| 0.006             | 4½     | 130 (350)  | 14 (42)  | 3 (20)    | 2 (20)    | 4 (30)    | 4 (31)   | 7 (51)    | 20 (110)           |
| 0.0005            | 3½     | 260 (2110) | 30 (300) | 20 (150)  | 20 (160)  | 30 (190)  | 30 (190) | 70 (510)  | 60 (420)           |

## DC Current Characteristics

| Range   | 10 µA  | 100 µA | 1 mA  | 10 mA  | 100 mA | 1 A    | 3 A    | 10 A <sup>43</sup> |
|---|--------|--------|-------|--------|--------|--------|--------|--------------------|
| Effective Internal Shunt Value <sup>45</sup>  | 1 kΩ   | 100 Ω  | 10 Ω  | 1 Ω    | 0.1 Ω  | 0.1 Ω  | 0.1 Ω  | 0.005 Ω            |
| <b>Autozero Off Error:</b> For ±1°C and ≤10 minutes add ±(8 ppm of reading + range error)   | 150 pA | 1.5 nA | 15 nA | 150 nA | 15 µA  | 150 µA | 150 µA | 3 mA               |
| <b>Overload Recovery:</b> For each additional sustained amp beyond ±1.5 A, add the following initial ppm of range error until thermally settled after overload recovery | 15500  | 1800   | 150   | 150    | 6500   | 200    | —      | —                  |

## NOTES

42. Noise values are based on 1000 readings with autozero on and AMPS terminal open. RMS noise is typical. Additional peak noise is guaranteed.

43. Rear input terminals only.

44. With line sync on.

45. Values are typical and guaranteed by design.

## Temperature

### 4-Wire RTD or 3-Wire RTD

Types: 100 Ω platinum PT100, D100, F100, PT385, PT3916; or user-configurable 0 Ω to 10 kΩ.

| Type                     | Range          | Resolution | Accuracy ±°C                  |                                       |
|--------------------------|----------------|------------|-------------------------------|---------------------------------------|
|                          |                |            | 2 Year, T <sub>CAL</sub> ±5°C | Temperature Coefficient <sup>46</sup> |
| 4-Wire RTD               | -200 to 850 °C | 0.01 °C    | 0.06 °C                       | 0.003 °C/°C                           |
| 3-Wire RTD <sup>47</sup> | -200 to 850 °C | 0.01 °C    | 0.75 °C                       | 0.003 °C/°C                           |

### Thermistor

Types: 2.252 kΩ, 5 kΩ, and 10 kΩ.

| Type       | Range          | Resolution | Accuracy ±°C                  |                                       |
|------------|----------------|------------|-------------------------------|---------------------------------------|
|            |                |            | 2 Year, T <sub>CAL</sub> ±5°C | Temperature Coefficient <sup>46</sup> |
| Thermistor | -80 to +150 °C | 0.01 °C    | 0.08 °C                       | 0.002 °C/°C                           |

### Thermocouple

Types: B, E, J, K, N, R, S, T

| Type | Range            | Resolution | Accuracy ±°C   |                                       |
|------|------------------|------------|--|---------------------------------------|
|      |                  |            | 2 Year, T <sub>CAL</sub> ±5°C <sup>48</sup><br>Simulated<br>Reference Junction | Temperature Coefficient <sup>46</sup> |
| B    | 350 to +1820 °C  | 0.1 °C     | 0.6 °C   | 0.03 °C/°C                            |
| E    | -200 to +1000 °C | 0.001 °C   | 0.2 °C   | 0.03 °C/°C                            |
| J    | -200 to +760 °C  | 0.001 °C   | 0.2 °C   | 0.03 °C/°C                            |
| K    | -200 to +1372 °C | 0.001 °C   | 0.2 °C   | 0.03 °C/°C                            |
| N    | -200 to +1300 °C | 0.001 °C   | 0.2 °C   | 0.03 °C/°C                            |
| R    | 0 to +1768 °C    | 0.1 °C     | 0.6 °C   | 0.03 °C/°C                            |
| S    | 0 to +1768 °C    | 0.1 °C     | 0.6 °C   | 0.03 °C/°C                            |
| T    | -100 to +400 °C  | 0.001 °C   | 0.2 °C   | 0.03 °C/°C                            |

## Continuity

| Range <sup>49</sup> | Resolution | Test Current | Open Circuit Voltage | Accuracy ±(ppm of reading + ppm of range) |                                       |
|---------------------|------------|--------------|----------------------|---|---------------------------------------|
|                     |            |              |                      | 2 Year, T <sub>CAL</sub> ±5°C             | Temperature Coefficient <sup>50</sup> |
| 1.0000 kΩ           | 100 mΩ     | 1 mA         | 14.0 V               | 100 + 100                                 | 2.5 + 1                               |

### Continuity Characteristics

Continuity High Limit                      User-selectable; default 10 Ω.

### NOTES

46. Add per degree from T<sub>CAL</sub> ±5°C; specifications without autocalibration.

47. For 3-wire RTD, accuracy is for <0.1 Ω lead resistance mismatch for input HI and LO. Add 0.25°C/0.1 Ω of HI-LO lead resistance mismatch.

48. Exclusive of cold-junction errors.

49. Specifications exclude lead resistance.

50. Add per degree from T<sub>CAL</sub> ±5°C; specifications without autocalibration.

## Capacitance

Accuracies specified for additional cable and stray capacitance properly zeroed with the Rel function.

### Accuracy

| Range <sup>51</sup> | Resolution | Charge Current <sup>52, 53</sup> | Maximum Circuit Voltage | Accuracy ±(% of reading + % of range) |                                       |
|---------------------|------------|----------------------------------|-------------------------|---------------------------------------|---------------------------------------|
|                     |            |                                  |                         | 2 years<br>T <sub>CAL</sub> ±5°C      | Temperature Coefficient <sup>50</sup> |
| 1.0000 nF           | 0.1 pF     | 1.1 µA                           | 2.8 V                   | 1 + 0.2                               | 0.15 + 0.05                           |
| 10.000 nF           | 1 pF       | 1.1 µA                           | 2.8 V                   | 1 + 0.1                               | 0.15 + 0.01                           |
| 100.00 nF           | 10 pF      | 10 µA                            | 3 V                     | 0.4 + 0.1                             | 0.01 + 0.01                           |
| 1.0000 µF           | 0.1 nF     | 100 µA                           | 3 V                     | 0.4 + 0.1                             | 0.01 + 0.01                           |
| 10.000 µF           | 1 nF       | 100 µA                           | 3 V                     | 0.4 + 0.1                             | 0.01 + 0.01                           |
| 100.00 µF           | 10 nF      | 1 mA                             | 3 V                     | 0.4 + 0.1                             | 0.01 + 0.01                           |
| 1000.0 µF           | 0.1 µF     | 10 mA                            | 3 V                     | 0.5 + 0.1                             | 0.01 + 0.01                           |

## Diode

| Voltage Measure Range <sup>51</sup> | Resolution | Bias Level (Selectable) | Accuracy ±(ppm of reading + ppm of range) |                                 |                                 |                                       |
|-------------------------------------|------------|-------------------------|---|---------------------------------|---------------------------------|---------------------------------------|
|                                     |            |                         | 90 Day<br>T <sub>CAL</sub> ±5°C           | 1 Year<br>T <sub>CAL</sub> ±5°C | 2 Year<br>T <sub>CAL</sub> ±5°C | Temperature Coefficient <sup>50</sup> |
| 10.000000 V                         | 1 µV       | 10 µA / 100 µA / 1 mA   | 20 + 5                                    | 30 + 5                          | 45 + 5                          | 2.5 + 1                               |

## Digitize Voltage

### Accuracy (Input Impedance AUTO)

| Range <sup>54, 55</sup> | Resolution <sup>56</sup> | Input Impedance <sup>57</sup> | Accuracy ±(ppm of reading + ppm of range) |                                 |                                 |                                       |
|-------------------------|--------------------------|-------------------------------|---|---------------------------------|---------------------------------|---------------------------------------|
|                         |                          |                               | 90 Day<br>T <sub>CAL</sub> ±5°C           | 1 Year<br>T <sub>CAL</sub> ±5°C | 2 Year<br>T <sub>CAL</sub> ±5°C | Temperature Coefficient <sup>58</sup> |
| 100.000 mV              | 1 µV                     | >10 GΩ or 10 MΩ ±1%           | 210 + 100                                 | 220 + 100                       | 230 + 100                       | 15 + 20                               |
| 1.00000 V               | 10 µV                    | >10 GΩ or 10 MΩ ±1%           | 110 + 75                                  | 120 + 75                        | 130 + 75                        | 15 + 20                               |
| 10.0000 V               | 0.1 mV                   | >10 GΩ or 10 MΩ ±1%           | 110 + 75                                  | 120 + 75                        | 130 + 75                        | 10 + 20                               |
| 100.000 V <sup>59</sup> | 1 mV                     | 10 MΩ ±1%                     | 110 + 75                                  | 120 + 75                        | 130 + 75                        | 15 + 20                               |
| 1000.00 V <sup>60</sup> | 10 mV                    | 10 MΩ ±1%                     | 110 + 75                                  | 120 + 75                        | 130 + 75                        | 10 + 20                               |

### NOTES

51. 20% overrange on all ranges.

52. Charging current values are typical, guaranteed by design.

53. Discharge current limited to <13 mA.

54. For DC coupling, 20% overrange for 100 mV to 100 V. For AC coupling, 500% overrange 100 mV to 100 V. 1% for 1000 V range DC and AC coupling.

55. Accuracy with sample rate 1k per second, aperture auto, and 100 reading buffer average.

56. Power up default is 4½ digits.

57. User-selectable.

58. Add per degree from T<sub>CAL</sub> ±5%.

59. For 100 V range, input impedance auto and without ACAL, add 100ppm of range additional uncertainty and 15 ppm/°C additional uncertainty for "of range" temperature coefficient for operation outside of T<sub>CAL</sub> ±5°C.

60. For signal levels greater than 500 V, add 0.02 ppm/V to the ppm of the readings specification for measurements exceeding 500 V.

**Signal Characteristics** <sup>61, 62, 63</sup>

**Typical AC and DC Coupled**

| Range      | Analog Bandwidth (-3dB) | Maximum Flatness Error 3 Hz to 20 kHz <sup>64</sup> | THD 20 kHz Signal (-1dB FS) <sup>65</sup> | DC-coupled Settling Time (0.5%) | AC-coupled Filter FAST Settling Time (0.5%) | AC-coupled Filter SLOW Settling Time (0.5%) | AC Coupling Low Frequency (-3dB) point <sup>66</sup> |
|------------|-------------------------|---|---|---------------------------------|---|---|--|
| 100.000 mV | 600 kHz                 | 0.015 dB  | 0.04 %                                    | 5 μs                            | 80 ms                                       | 2.3 s                                       | 1 Hz   |
| 1.00000 V  | 600 kHz                 | 0.01 dB   | 0.03 %                                    | 6 μs                            | 80 ms                                       | 2.5 s                                       | 1 Hz   |
| 10.0000 V  | 600 kHz                 | 0.01 dB   | 0.01 %                                    | 4 μs                            | 80 ms                                       | 2.5 s                                       | 1 Hz   |


**Typical DC Coupled**

| Range     | Analog Bandwidth (-3dB) | Maximum Flatness Error 3 Hz to 1 kHz <sup>64</sup> | Total Harmonic Distortion (THD) 1 kHz Signal (-1dB FS) <sup>65</sup> | Settling Time (0.5%) |
|-----------|-------------------------|--|--|----------------------|
| 100.000 V | 20 kHz <sup>67</sup>    | 0.1 dB   | 1.3 %  | 160 μs               |
| 1000.00 V | 20 kHz                  | 0.1 dB   | 1.8 %  | 80 μs                |


**Typical AC Coupled**

| Range     | Analog Bandwidth (-3dB) | Maximum Flatness Error 3 Hz to 20 kHz | Filter FAST Settling Time (0.5%) | Filter SLOW Settling Time (0.5%) | Low Frequency Coupling Point <sup>66</sup> (-3dB) |
|-----------|-------------------------|---------------------------------------|----------------------------------|----------------------------------|---|
| 100.000 V | 600 kHz                 | 0.1 dB                                | 80 ms                            | 2.3 s                            | 1 Hz  |
| 1000.00 V | 600 kHz                 | 0.1 dB                                | 80 ms                            | 2.3 s                            | 1 Hz  |

**DC-Coupled Additional Noise Uncertainty, Typical** <sup>68</sup>

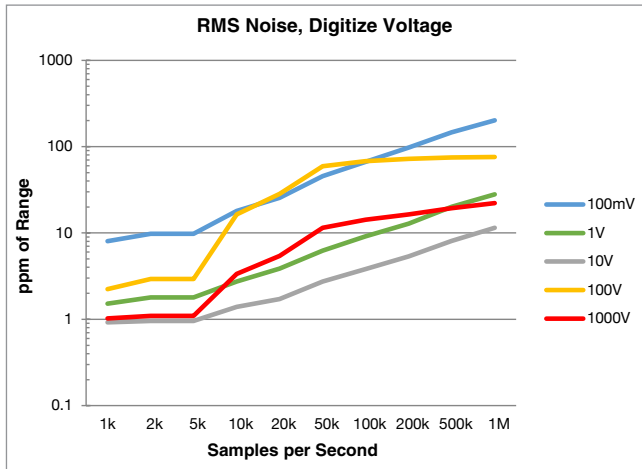


**DC-coupled Total Harmonic Distortion (THD), Typical** <sup>69</sup>

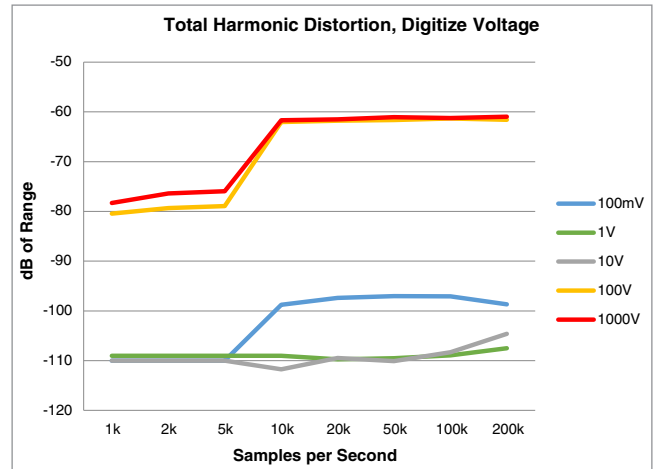

**NOTES**

- 61. Accuracy with sample rate 1M per second and aperture 1 μs.
- 62. Verified with sine wave input and DC content ≤3% of range.
- 63. For AC coupling, maximum crest factor of 5.
- 64. For DC coupled, 0dB reference frequency is 3 Hz. For AC coupled, 0dB reference frequency is 1 kHz. For AC coupled operation below 1 kHz, add 0.1 dB.
- 65. Exclusive of source input noise.
- 66. With AC coupling frequency = 3 Hz and AC coupling filter = Slow.
- 67. For input impedance auto, bandwidth is 6 kHz.
- 68. Specified with aperture auto and 4-wire short on input terminals. For 100 V range, input impedance 10 MΩ, multiply by 2.5. For all ranges and sample rate >1 k, add an additional 3× RMS noise uncertainty to ppm of range.
- 69. Specified with aperture auto and 1 kHz sine wave input. Distortion is calculated using first five harmonics.

**DC-Coupled Effective Number Of Bits (ENOB), Typical <sup>70</sup>**

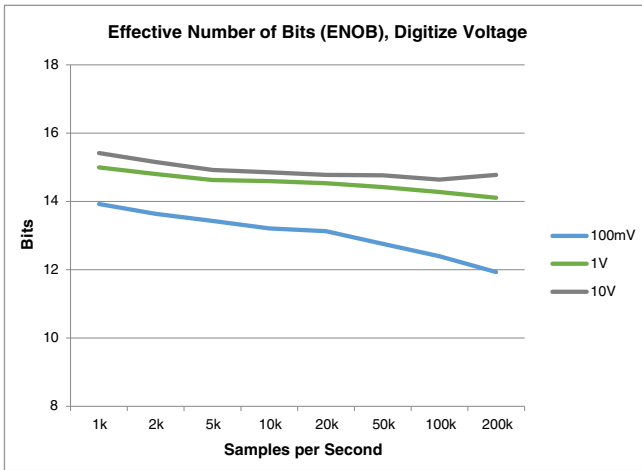

**Digitize Current**

**DC Accuracy <sup>71</sup>**

| Range <sup>72</sup>     | Resolution <sup>73</sup> | Burden Voltage | Accuracy ± (ppm of reading + ppm of range) |                                 |                                 |  |
|-------------------------|--------------------------|----------------|--|---------------------------------|---------------------------------|--|
|                         |                          |                | 90 Day<br>T <sub>CAL</sub> ±5°C            | 1 Year<br>T <sub>CAL</sub> ±5°C | 2 Year<br>T <sub>CAL</sub> ±5°C | Temperature<br>Coefficient <sup>74</sup> |
| 10.0000 µA              | 0.1 nA                   | 15 mV          | 150 + 75                                   | 160 + 75                        | 170 + 75                        | 30 + 15                                  |
| 100.000 µA              | 1 nA                     | 15 mV          | 150 + 75                                   | 160 + 75                        | 170 + 75                        | 30 + 15                                  |
| 1.00000 mA              | 10 nA                    | 15 mV          | 150 + 75                                   | 160 + 75                        | 170 + 75                        | 30 + 15                                  |
| 10.0000 mA              | 100 nA                   | 20 mV          | 150 + 75                                   | 160 + 75                        | 170 + 75                        | 30 + 15                                  |
| 100.000 mA              | 1 µA                     | 200 mV         | 340 + 100                                  | 450 + 100                       | 560 + 100                       | 50 + 20                                  |
| 1.00000 A               | 10 µA                    | 400 mV         | 400 + 110                                  | 500 + 110                       | 600 + 110                       | 50 + 25                                  |
| 3.00000 A               | 100 µA                   | 1300 mV        | 650 + 150                                  | 900 + 150                       | 900 + 150                       | 50 + 25                                  |
| 10.0000 A <sup>75</sup> | 100 µA                   | 650 mV         | 950 + 350                                  | 1500 + 350                      | 2000 + 350                      | 50 + 25                                  |

**NOTES**

70. Specified with aperture Auto, 100Hz sine wave for sample rate ≤5k, and 1kHz sine wave for sample rate ≥10k. For the 100V and 1000V ranges, use the 1V and 10V range ENOB, respectively; guaranteed by design.

71. Accuracy with sample rate 1k per second, aperture auto, and 100 reading buffer average.

72. 20% overrange on all ranges except 3.3% for 3A and 10A ranges.

73. Power up default is 4½ digits.


74. Add per degree from T<sub>CAL</sub> ±5°C.

75. Rear input terminals only.


**Signal Characteristics, Typical <sup>76</sup>**

| Range <sup>72</sup>             | Maximum Flatness Error<br>3 Hz to 20 kHz | Analog Bandwidth<br>(-3dB) | Total Harmonic<br>Distortion (THD)<br>20 kHz Signal<br>(-1dB FS) | DC-coupled<br>Settling Time<br>(0.5%) |
|---------------------------------|--|----------------------------|--|---------------------------------------|
| 10.0000 $\mu$ A                 | 0.15 dB                                  | 100 kHz                    | 0.02 %   | 8 $\mu$ s                             |
| 100.000 $\mu$ A                 | 0.15 dB                                  | 100 kHz                    | 0.01 %   | 7 $\mu$ s                             |
| 1.00000 mA                      | 0.1 dB                                   | 100 kHz                    | 0.01 %   | 3 $\mu$ s                             |
| 10.0000 mA                      | 0.1 dB                                   | 100 kHz                    | 0.01 %   | 8 $\mu$ s                             |
| 100.000 mA                      | 0.1 dB                                   | 100 kHz                    | 0.02 %   | 5 $\mu$ s                             |
| 1.00000 A <sup>77</sup>         | 0.1 dB                                   | 100 kHz                    | 0.02 %   | 6 $\mu$ s                             |
| 3.0000 A <sup>77</sup>          | 0.1 dB                                   | 100 kHz                    | 0.02 %   | 6 $\mu$ s                             |
| 10.0000 A <sup>75, 77, 78</sup> | 0.1 dB                                   | 100 kHz                    | 0.02 %   | 6 $\mu$ s                             |

**Additional Noise Uncertainty, Typical <sup>79</sup>**

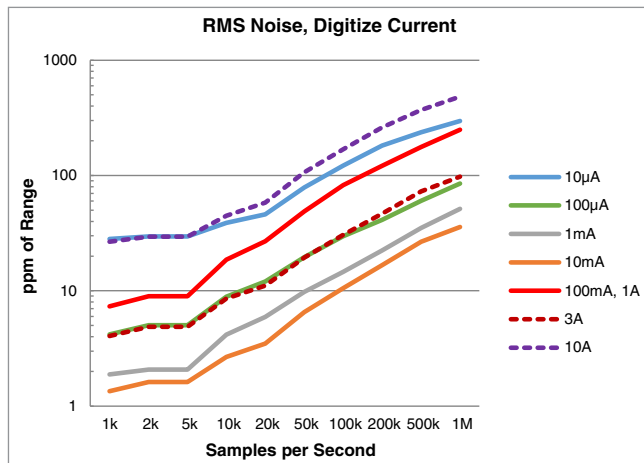

**Total Harmonic Distortion (THD), Typical <sup>80</sup>**

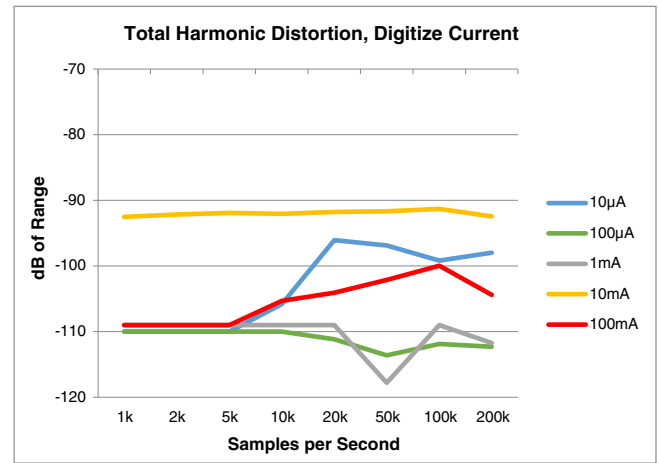

**NOTES**

76. Verified with sine wave input and DC content  $\leq 3\%$  of range.

77. 10A range is available only on the rear input terminals.


78. 10A flatness verified to 10kHz; 100kHz guaranteed by design.

79. Specified with aperture Auto and open input terminals. For all ranges and for  $\geq 1k$  sample rate, add an additional  $3 \times \text{RMS}$  noise uncertainty to ppm of range.

80. Specified with aperture Auto and 1kHz sine wave input. Distortion is calculated using first five harmonics. For the 1A, 3A, and 10A ranges, use the 100mA range accuracy; guaranteed by design.



## Effective Number Of Bits (ENOB), Typical<sup>81</sup>

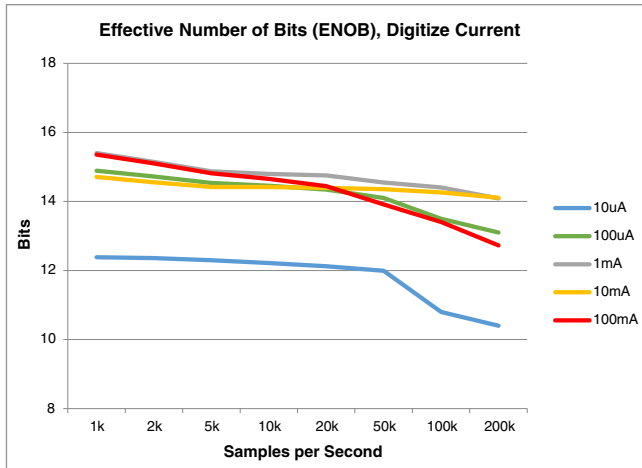

## Digitizer Characteristics

|                                       |   |
|---------------------------------------|---|
| Maximum Resolution                    | 18 bits.  |
| Measurement Input Coupling            | DC or AC (voltage only).  |
| Sampling Rate <sup>82</sup>           | Programmable 1 k through 1 million.   |
| Volatile Sample Memory with Timestamp | 27.5 million.   |
| Minimum Record Time                   | 1 $\mu$ s.  |
| Timestamp Resolution                  | 1 ns with standard or full buffer style. 1 $\mu$ s with compact buffer style.   |
| Timestamp Accuracy                    | With standard or full buffer style, 20 ns between adjacent readings, with total buffer time <2 s.<br>With compact buffer style, 2 $\mu$ s adjacent readings, with total buffer time <2 s. |
| Maximum Record Length                 | 8 million.  |

### NOTES

81. Specified with aperture Auto, 100 Hz sine wave for sample rate  $\leq$ 5 k, and 1 kHz sine wave for sample rate  $\geq$ 10 k. For the 1 A, 3 A, and 10 A ranges, use the 100 mA ENOB; guaranteed by design.

82. Sample rate is not continuously adjustable. For valid discrete settings, see the DMM7510 Reference Manual.

## True RMS AC Voltage and AC Current

| Function                                | Range <sup>83</sup> | Resolution | 1-Year Accuracy: ±(% of reading + % of range) T <sub>CAL</sub> ±5°C |               |                 |                  |                   |                    |
|---|---------------------|------------|---|---------------|-----------------|------------------|-------------------|--------------------|
|   |                     |            | 3 Hz to 5 Hz  | 5 Hz to 10 Hz | 10 Hz to 20 kHz | 20 kHz to 50 kHz | 50 kHz to 100 kHz | 100 kHz to 300 kHz |
| Voltage <sup>84</sup>                   | 100.0000 mV         | 0.1 µV     | 1.0 + 0.03  | 0.30 + 0.03   | 0.06 + 0.03     | 0.14 + 0.05      | 0.6 + 0.08        | 4.0 + 0.5          |
|   | 1.000000 V          | 1 µV       | 1.0 + 0.03  | 0.30 + 0.03   | 0.06 + 0.03     | 0.14 + 0.05      | 0.6 + 0.08        | 4.0 + 0.5          |
|   | 10.000000 V         | 10 µV      | 1.0 + 0.03  | 0.30 + 0.03   | 0.06 + 0.03     | 0.14 + 0.05      | 0.6 + 0.08        | 4.0 + 0.5          |
|   | 100.0000 V          | 100 µV     | 1.0 + 0.03  | 0.30 + 0.03   | 0.06 + 0.03     | 0.14 + 0.05      | 0.6 + 0.08        | 4.0 + 0.5          |
|   | 700.0000 V          | 1 mV       | 1.0 + 0.03  | 0.30 + 0.03   | 0.06 + 0.03     | 0.14 + 0.05      | 0.6 + 0.08        | 4.0 + 0.5          |
| Temperature Coefficient/°C (all ranges) | -                   | -          | 0.01 + 0.003  | 0.03 + 0.003  | 0.005 + 0.003   | 0.006 + 0.005    | 0.01 + 0.006      | 0.03 + 0.01        |

| Function                                | Range <sup>83</sup>       | Resolution | 1-Year Accuracy: ±(% of reading + % of range) T <sub>CAL</sub> ± 5°C |               |                |                |                 |
|---|---------------------------|------------|--|---------------|----------------|----------------|-----------------|
|   |                           |            | 3 Hz to 5 Hz   | 5 Hz to 10 Hz | 10 Hz to 2 kHz | 2 kHz to 5 kHz | 5 kHz to 10 kHz |
| Current <sup>84</sup>                   | 1.000000 mA               | 1 nA       | 1.0 + 0.04   | 0.30 + 0.04   | 0.08 + 0.03    | 0.09 + 0.03    | 0.09 + 0.03     |
|   | 10.000000 mA              | 10 nA      | 1.0 + 0.04   | 0.30 + 0.04   | 0.08 + 0.03    | 0.09 + 0.03    | 0.09 + 0.03     |
|   | 100.000000 mA             | 100 nA     | 1.0 + 0.04   | 0.30 + 0.04   | 0.08 + 0.03    | 0.09 + 0.03    | 0.01 + 0.006    |
|   | 1.000000 A                | 1 µA       | 1.0 + 0.04   | 0.30 + 0.04   | 0.20 + 0.04    | 0.88 + 0.04    | 0.01 + 0.006    |
|   | 3.000000 A                | 1 µA       | 1.0 + 0.05   | 0.30 + 0.05   | 0.20 + 0.05    | 0.88 + 0.05    | 2.0 + 0.04      |
|   | 10.000000 A <sup>85</sup> | 10 µA      | 1.0 + 0.05   | 0.40 + 0.05   | 0.40 + 0.05    | 0.88 + 0.05    | 2.0 + 0.05      |
| Temperature Coefficient/°C (all ranges) | -                         | -          | 0.10 + 0.004   | 0.030 + 0.004 | 0.005 + 0.003  | 0.006 + 0.005  | 0.006 + 0.005   |

### Additional AC Uncertainties – Low Frequency Uncertainty

| Additional Uncertainty ±(% of reading), Lower Frequency Uncertainty | Detector Bandwidth (BW) |                          |                            |
|---|-------------------------|--------------------------|----------------------------|
|   | 3 BW (3 Hz to 300 kHz)  | 30 BW (30 Hz to 300 kHz) | 300 BW (300 Hz to 300 kHz) |
| 20 Hz to 30 Hz  | 0                       | 0.3                      | —                          |
| 30 Hz to 50 Hz  | 0                       | 0                        | —                          |
| 50 Hz to 100 Hz   | 0                       | 0                        | 4.0                        |
| 100 Hz to 200 Hz  | 0                       | 0                        | 0.72                       |
| 200 Hz to 300 Hz  | 0                       | 0                        | 0.18                       |
| 300 Hz to 500 Hz  | 0                       | 0                        | 0.07                       |
| > 500 Hz  | 0                       | 0                        | 0                          |

#### NOTES

83. 20% overrange on AC functions except 1% on 700 V, 3.33% on 3 A, and 1% on 10 A. Default resolution is 6½ digits.

84. Specifications are for detector bandwidth of 3Hz and sine wave inputs >5% of range. Detector bandwidth of 3 Hz and 30 Hz are multisample A/D conversions. Detector bandwidth of 300 Hz is a single A/D conversion, programmable from 0.0005 PLC to 15 PLC (60 Hz), 12 PLC (50 Hz). Default condition set to 1 PLC.

85. Rear terminals only.

**Additional AC Voltage Crest Factor Uncertainties<sup>86</sup>**

Additional Uncertainty ±(% of reading)

| Input Signal Frequency | Detector Bandwidth | Maximum Crest Factor:<br>5 at Range Full Scale |        |        |        |
|------------------------|--------------------|--|--------|--------|--------|
|                        |                    | 1 to 2   | 2 to 3 | 3 to 4 | 4 to 5 |
| 3 Hz to 5 Hz           | 3 Hz               | 1.00   | 4.00   | 4.80   | 5.00   |
| 5 Hz to 10 Hz          | 3 Hz               | 0.50   | 1.20   | 1.30   | 1.40   |
| 10 Hz to 30 Hz         | 3 Hz               | 0.20   | 0.30   | 0.60   | 0.90   |
| 5 Hz to 100 Hz         | 30 Hz              | 0.20   | 0.30   | 0.60   | 0.90   |
| 100 Hz to 300 Hz       | 30 Hz              | 0.05   | 0.15   | 0.30   | 0.40   |
| 100 Hz to 300 Hz       | 300 Hz             | 0.50   | 1.20   | 1.30   | 1.50   |
| 500 Hz to 10 kHz       | 300 Hz             | 0.05   | 0.15   | 0.30   | 1.20   |

**AC Voltage Characteristics**

Measurement Method AC-coupled, true RMS.

Input Impedance  $1\text{ M}\Omega \pm 2\% \parallel <150\text{ pF}$ .Volt\*Hertz Product  $<2.1 \times 10^7\text{ V*Hz}$  verified; input frequency verified for  $<300\text{ kHz}$ .**AC Current Characteristics**

Measurement Method AC-coupled, true RMS.

| Range   | 1 mA   | 10 mA  | 100 mA | 1 A    | 3 A    | 10 A <sup>87</sup> |
|---|--------|--------|--------|--------|--------|--------------------|
| Burden Voltage (RMS)  | <16 mV | <20 mV | <0.2 V | <0.4 V | <1.3 V | <0.65 V            |
| <b>Overload Recovery:</b> For each additional sustained ampere beyond $\pm 1.5\text{ A}$ , add the following initial % of range error until thermally settled after overload recovery | 0.006  | 0.006  | 0.12   | 0.05   | —      | —                  |

**Frequency and Period****Measurement Accuracy<sup>88</sup>**

| Aperture | Measurement Resolution | Accuracy, $\pm$ (ppm of reading + ppm of aperture time)<br>Frequency: 3 Hz to 500 kHz<br>Period: 333 ms to 2 $\mu$ s |  |
|----------|------------------------|--|--|
|          |                        | 1 Year, $T_{\text{CAL}} \pm 5^\circ\text{C}$   | 2 Year, $T_{\text{CAL}} \pm 5^\circ\text{C}$ |
| 250 ms   | 0.1 ppm                | 80 + 0.333   | 160 + 0.333                                  |
| 100 ms   | 0.1 ppm                | 80 + 3.33  | 160 + 3.33                                   |
| 10 ms    | 0.1 ppm                | 80 + 33.3  | 160 + 33.3                                   |

**Threshold Level Accuracy<sup>89</sup>**

| Threshold Range | Threshold Resolution | Accuracy $\pm$ (% of reading)<br>2 Year, $T_{\text{CAL}} \pm 5^\circ\text{C}$ |
|-----------------|----------------------|---|
| 100 mV to 700 V | 0.05%                | 1.0%  |

**NOTES**86. Applies for non-sine wave inputs, DC content  $\leq 3\%$  of range, maximum crest factor  $\leq 5.0$ . For bandwidth 30Hz, autozero off, 6½ digits at 1 PLC, 3½ digits at 0.0005 PLC.

87. Rear input terminals only.

88. Specified for square wave inputs. Input signal must be  $>10\%$  of ACV range. If input is  $<20\text{ mV}$  on the 100 mV range, then the frequency must be  $>10\text{ Hz}$ . For sine wave inputs, frequency must be  $>100\text{ Hz}$ . For frequencies  $\leq 100\text{ Hz}$ , threshold level  $\leq 50\%$  of input signal and  $\leq 7\text{ Hz}$ , threshold level  $\leq 3\%$  of range.

## Frequency and Period Characteristics

|                    |                                    |
|--------------------|------------------------------------|
| Measurement Method | Reciprocal counting technique.     |
| Aperture           | 10 ms to 273 ms; default is 10 ms. |

## Typical Reading Rates, 60 Hz (50 Hz) Operation <sup>90, 91, 92, 93</sup>

| NPLC   | Digits | Functions:<br>DC Voltage (10 V),<br>2-wire Ohms ( $\leq 10\text{ k}\Omega$ ),<br>DC Current (1 mA) |                               | Functions:<br>4-wire ohms ( $\leq 1\text{ k}\Omega$ ),<br>4-wire/3-wire RTD |                               | Functions:<br>Thermistor    |                               | Functions:<br>Dry Circuit ( $\leq 1\text{ k}\Omega$ ) |                               |
|--------|--------|--|-------------------------------|---|-------------------------------|-----------------------------|-------------------------------|---|-------------------------------|
|        |        | Measurements<br>Into Buffer  | Measurements<br>Into Computer | Measurements<br>Into Buffer   | Measurements<br>Into Computer | Measurements<br>Into Buffer | Measurements<br>Into Computer | Measurements<br>Into Buffer                           | Measurements<br>Into Computer |
| 1      | 7½     | 59.8 (49.8)  | 58 (48)                       | 29 (24)   | 28 (24)                       | 57 (48)                     | 57 (48)                       | 27 (23)   | 26 (22)                       |
| 0.2    | 6½     | 295 (240)  | 250 (210)                     | 128 (109)   | 119 (100)                     | 230 (200)                   | 230 (200)                     | 100 (89)  | 96 (85)                       |
| 0.06   | 5½     | 965 (810)  | 950 (800)                     | 310 (280)   | 315 (280)                     | 900 (750)                   | 900 (750)                     | 190 (180)   | 190 (180)                     |
| 0.006  | 4½     | 7500 (6700)  | 7300 (6500)                   | 750 (730)   | 740 (720)                     | 6800 (6000)                 | 6800 (6000)                   | 295 (290)   | 295 (290)                     |
| 0.0005 | 3½     | 26000 (26000)  | 24000 (24000)                 | 860 (860)   | 860 (860)                     | 18000 (18000)               | 18000 (18000)                 | 310 (310)   | 310 (310)                     |

| Detector<br>Bandwidth (Hz) | Digits | Functions: ACV, ACI         |                               |
|----------------------------|--------|-----------------------------|-------------------------------|
|                            |        | Measurements<br>Into Buffer | Measurements<br>Into Computer |
| 3                          | 6½     | 0.5 (0.5)                   | 0.5 (0.5)                     |
| 30                         | 6½     | 3.3 (3.3)                   | 3.3 (3.3)                     |
| 300 <sup>94</sup>          | 6½     | 59.8 (49.8)                 | 55 (46)                       |
| 300 <sup>94</sup>          | 3½     | 26200 (26200)               | 24500 (24500)                 |

## Digitize, Typical

| Sampling Rate | Digits | Resolution | Measurements Into<br>Computer <sup>93</sup> |
|---------------|--------|------------|---|
| 10 kS/s       | 5½     | 18         | 9700  |
| 20 kS/s       | 4½     | 16         | 19000                                       |
| 50 kS/s       | 4½     | 16         | 44400                                       |
| 100 kS/s      | 4½     | 15         | 80000                                       |
| 1 MS/s        | 3½     | 12         | 108000                                      |

## System Performance, Typical

|      |  |
|------|--|
| Mode | 3½-digit, autozero off, 0.0005 PLC, excludes measurement time.                   |
|      | Time includes function change from DC voltage or 2-wire ohms to listed function. |

### NOTES

- 89. Threshold range is voltage  $V_{RMS}$  and threshold level voltage peak. Specified with 1kHz square wave. 100V and 700V threshold ranges guaranteed by design.
- 90. Reading speeds for autozero off, fixed range, autodelay off. Offset compensation off and open lead detector off where applicable.
- 91. Buffer measurements: For <0.2 PLC, multisample, single buffer transfer binary reading only.
- 92. PC measurements: For 1 and 0.2 PLC single reading and single transfer to computer (USB).
- 93. Reading rates using factory default operating conditions and autorange off, autodelay off. Speeds include measurement and data transfer out of the USB.  $\geq 1000$  readings with binary transfer over USB.
- 94. For bandwidth 300Hz, autozero off, 6½ digits at 1 PLC, 3½ digits at 0.0005 PLC.

| Function                           | Function Change (ms) | Range Change (ms) |
|------------------------------------|----------------------|-------------------|
| DC Voltage or 2-wire ohms (<10 kΩ) | 6                    | 1.3               |
| 4-wire ohms (<10 kΩ)               | 7                    | 1.3               |
| DC Current                         | 7                    | 1.3               |
| Frequency or Period <sup>95</sup>  | 7                    | 1.3               |
| AC Voltage or AC Current           | 7                    | 1.3               |
| Digitize Voltage or Current        | 7                    | 1.3               |

## Ranges for Function Change Times

Function change times apply to the ranges listed in the table below.

| Function              | Range                 |
|-----------------------|-----------------------|
| DC Voltage            | 10 V                  |
| 2-wire or 4-wire Ohms | 1 kΩ                  |
| DC Current            | 1 mA                  |
| Dry-circuit Ohms      | 10 Ω                  |
| Thermocouple          | Use DC Voltage rates  |
| Thermistor            | Use 2-wire Ohms rates |
| AC Current            | 1 mA                  |
| AC Voltage            | 1 V                   |

| Buffer Transfer Speed (Binary)           | Measurements into Computer (per second) |        |        |
|--|---|--------|--------|
|  | USB                                     | LAN    | GPIO   |
| Average for 1000 readings                | 280000                                  | 270000 | 190000 |
| Average for 1000 readings with timestamp | 170000                                  | 140000 | 100000 |

## Triggering

**Time Base Accuracy** 25ppm.

**Trigger Source** Analog DCV, DCI, or any system trigger.

**Trigger Coupling** DC or AC (DCV function only).

**Input Trigger Latency**<sup>96, 97, 98</sup> <225 ns.

**Input Trigger Jitter**<sup>96, 97</sup> <50 ns.

**Sample period Jitter**<sup>96, 97</sup> <1 ns.

## DMM Rear-Panel Triggers

**EXT TRIG IN and OUT** 0 V to 5 V logic signal input and output, TTL compatible.

**EXT trigger latency (IN and OUT)** <400 ns.

**EXT trigger latency (IN or OUT)** <200 ns (guaranteed by design).

## NOTES

95. For DC voltage or 2-wire ohms to frequency or period, 10ms aperture. For AC current or AC voltage, detector bandwidth is 300 Hz.

96. Guaranteed by design; for digital I/O only.

97. Stimulus command required to meet specifications.

98. If using trigger model, add 200 ns uncertainty.

## Analog Triggering <sup>99</sup>

### Analog Level, Edge, Or Window Trigger Types <sup>100</sup>

| Trigger Characteristics  | Voltage Input    | Current Input      |
|--|------------------|--------------------|
| Input  | 100 mV to 1000 V | 10 $\mu$ A to 10 A |
| Resolution   | 0.05%            | 0.05%              |
| Basic Accuracy ( $T_{ACAL} \pm 5^{\circ}C$ ) <sup>101, 102</sup> | 1%               | 1%                 |

### Analog Trigger Latencies

|                | Digital I/O           | External              |
|----------------|-----------------------|-----------------------|
| Positive Logic | 800 ns + 40 ns jitter | 930 ns + 40 ns jitter |
| Negative Logic | 800 ns + 40 ns jitter | 840 ns + 40 ns jitter |

## Window Filter and Memory (buffer)

|   |  |
|---|--|
| <b>Window Filter Size</b>               | 0 to 10% of reading, where 0 averages all readings.  |
| <b>Memory</b>                           | Up to 27.5 million timestamped readings with the compact buffer style, with additional memory available using an external USB flash drive.     |
| <b>Maximum Internal Memory (Buffer)</b> | 27.5 million readings with the compact buffer style (6½-digit without formatting), 11 million readings with the standard or full buffer style. |

### NOTES

99. For DC or AC coupled, the trigger level can be set up to 100% of measure range.  
 100. Rising or falling edge triggering supported. Window trigger requires setting two independent levels.  
 101. Trigger event occurs after the threshold crossing at a time determined by total trigger latencies.  
 102. Accuracy specifications require user  $T_{ACAL}$  and are verified with level trigger amplitude set to 50% of range with a 100 Hz sine wave at 100% full scale of range. High frequency rejection is off. NPLC 0.0005 (DC voltage/DC current) or aperture 1  $\mu$ s for digitize voltage or digitize current. Specified for fixed range, autozero off. For digitized DC voltage AC coupled, add 0.5%. For DC current and digitized DC current 3 A or 10 A ranges, add an additional 2%.

## General Instrument Specifications

|                                   |   |
|-----------------------------------|---|
| <b>Specification Conditions</b>   | This document contains specifications and supplemental information for the DMM7510 Precision Sampling Digital Multimeter instrument. Specifications are the standards against which the DMM7510 is tested. Upon leaving the factory, the DMM7510 meets these specifications. Supplemental, typical, and characteristic values are non-warranted, apply at 23°C, and are provided solely as useful information. All specifications apply to front or rear terminal inputs, except 10 A specifications (rear terminals only). |
| <b>Input Protection</b>           | 1010 V DC (715 $V_{RMS}$ V AC) all ranges and functions on HI and LO terminals; 350 V all ranges and functions on sense HI, sense LO terminals; 250 V rated current input terminal; fused 3 A and 10 A ranges; current input terminals protected to 1 kV.   |
| <b>3 A Input Fuse Protection</b>  | 3.5 A, 1 kV fast blow type.   |
| <b>10 A Input Fuse Protection</b> | 11 A, 1 kV fast blow type.  |
| <b>AC Voltage input</b>           | <b>Maximum DCV:</b> 1000V on any AC voltage range.  |
| <b>Common Mode Isolation</b>      | 500 VDC or ACV <sub>peak</sub> LO to chassis. All terminals >10 G $\Omega$ , <350 pF any terminal to chassis.   |
| <b>Power Line</b>                 | Universal input, 100 V to 240 V.  |
| <b>Line Frequency</b>             | 50 Hz or 60 Hz, automatically sensed at power-up.   |
| <b>Power Consumption</b>          | 60 VA.  |
| <b>Operating Environment</b>      | Specified for 0° to 50°C, $\leq$ 80% relative humidity at 35°C, altitude up to 2000 meters.   |
| <b>Storage Environment</b>        | -30° to 70°C.   |
| <b>Real Time Clock</b>            | Lithium battery backup (3+ years battery life).   |
| <b>EMC</b>                        | Conforms to European Union EMC Directive.   |

|   |  |
|---|--|
| <b>Safety</b>                                       | NRTL listed to UL61010-1, and CSA C22.2 No 61010-1; conforms with European Union Low Voltage Directive.  |
| <b>Vibration</b>                                    | MIL-PRF-28800F Class 3, Random.  |
| <b>Warm-up</b>                                      | 90 minutes to rated accuracy.  |
| <b>Input Signal Connections</b>                     | Front and rear safety banana jacks.  |
| <b>Cooling</b>                                      | Forced air, fixed speed.   |
| <b>Dimensions</b>                                   | <b>Without handle and bumpers:</b> 88 mm high × 213 mm wide × 410 mm deep (3.46 in. × 8.39 in. × 16.13 in.).<br><b>With handle and bumpers (bench configuration):</b> 106 mm high × 255 mm wide × 425 mm deep (4.18 in. × 10.05 in. × 16.75 in.).  |
| <b>Shipping weight (with bumpers and handle)</b>    | 4.08 kg (9.0 lb.).   |
| <b>Shipping weight (without bumpers and handle)</b> | 3.63 kg (8.0 lb.).   |
| <b>Digital I/O:</b>                                 |  |
| Connector   | 9-pin female D.  |
| 5V Power Supply Pin                                 | Limited to 500 mA at > 4 V (solidstate fuse protected).  |
| Lines   | Six input/output, user-defined, for digital I/O or triggering.   |
| Input Signal Levels:                                | 0.7 V (maximum logic low)<br>3.7 V (minimum logic high).   |
| Input Voltage Limits:                               | -0.25 V (absolute minimum)<br>+5.25 V (absolute maximum).  |
| Maximum Source Current                              | +2.0 mA at >2.7 V (per pin).   |
| Maximum Sink Current                                | -50 mA at 0.7 V (per pin, solid-state fuse protected).   |
| Handler   | User-defined start of test, end of test, four category bits  |
| <b>Math Functions</b>                               | Rel, dB, Limit Test, Percentage, 1/x, and mX + b.  |
| <b>Remote Interface:</b>                            |  |
| LAN   | RJ-45 connector, 10/100BT; Virtual Front Panel.  |
| IP Configuration                                    | Static or DHCP.  |
| GPIB  | IEEE-488.1 compliant. Supports IEEE-488.2 common commands and status model topology.   |
| USB Device (rear panel, type B)                     | 2.0 full speed, USBTMC compliant.  |
| USB Host (front panel, type A)                      | USB 2.0, support for flash drives, FAT 32.   |
| <b>LXI Compliance</b>                               | LXI version 1.4 Core 2011.   |
| <b>Language</b>                                     | Embedded Test Script Processor (TSP) accessible from any host interface; responds to high-speed test scripts comprised of remote commands and statements (for example, branching, looping, math); able to execute high-speed test scripts stored in memory without host intervention; also SCPI (default command set). |
| <b>Accessories Supplied</b>                         | Product Information CD-ROM, DMM7510 Quick Start Guide, power cord, 1 m USB cable (type A to type B), and 3 m LAN cable.  |
| <b>Accessories Available</b>                        | (Calibration / Data / ISO 17025), software IVI/VISA drivers for Microsoft® Visual Basic®, Visual C/C++®, National Instruments (NI™) LabVIEW™, Keithley Test Script Builder, Keithley KickStart Instrument Control Software, and NI LabWindows™/CVI.  |
| <b>Display</b>                                      | Five-inch capacitive touch, color thin-film-transistor (TFT) WVGA (800×480) with LED backlight.  |
| <b>Password Protection</b>                          | 30 characters.   |
| <b>Expansion Interface</b>                          | The TSP-Link® expansion interface allows TSP-enabled instruments to trigger and communicate with each other.   |
| <b>IP configuration</b>                             | Static or DHCP (manual or automatic).  |

## Ordering Information

|              |  |
|--------------|--|
| DMM7510      | 7½-Digit Graphical Sampling Multimeter                 |
| DMM7510-RACK | 7½-Digit Graphical Sampling Multimeter, with No Handle |

## Supplied Accessories

|   |
|---|
| DMM7510 QuickStart Guide  |
| Test Script Builder Software (available at <a href="http://www.keithley.com">www.keithley.com</a> ) |
| LabVIEW and IVI Drivers (available at <a href="http://www.keithley.com">www.keithley.com</a> )      |

## Available Accessories

### Test Leads and Probes

|      |  |
|------|--|
| 1752 | Premium Safety Test Lead Kit                     |
| 1754 | 2-Wire Universal 10-Piece Test Lead Kit          |
| 5804 | Kelvin (4-Wire) Universal 10-Piece Test Lead Kit |
| 5805 | Kelvin (4-Wire) Spring-Loaded Probes             |
| 5806 | Kelvin Clip Lead Set                             |
| 5808 | Low Cost Single-pin Kelvin Probe Set             |
| 8606 | High Performance Modular Probe Kit               |

### Cables, Connectors, Adapters

|         |   |
|---------|---|
| CA-18-1 | Shielded Dual Banana Cable, 1.2 m (4 ft.) |
|---------|---|

### Communication Interfaces & Cables

|             |  |
|-------------|--|
| KPCI-488LPA | IEEE-488 Interface for PCI Bus         |
| KUSB-488B   | IEEE-488 USB-to-GPIB Interface Adapter |
| 7007-1      | Shielded GPIB Cable, 1 m (3.2 ft)      |

### Triggering and Control

|        |   |
|--------|---|
| 8501-1 | Trigger Link Cable, DIN-to-DIN, 1 m (3.2 ft.) |
| 8503   | DIN-to-BNC Trigger Cable                      |

### Rack Mount Kits

|        |                             |
|--------|-----------------------------|
| 4299-8 | Single Fixed Rack Mount Kit |
| 4299-9 | Dual Fixed Rack Mount Kit   |



## Available Services

### Extended Warranties

|               |   |
|---------------|---|
| DMM7510-EW    | 1 Year Factory Warranty Extended to 2 Years from Date of Shipment |
| DMM7510-3Y-EW | 1 Year Factory Warranty Extended to 3 Years from Date of Shipment |
| DMM7510-5Y-EW | 1 Year Factory Warranty Extended to 5 Years from Date of Shipment |

### Calibration Contracts

|                    |  |
|--------------------|--|
| C/DMM7510-3Y-17025 | KeithleyCare 3 Year ISO-17025 Calibration Plan |
| C/DMM7510-3Y-DATA  | KeithleyCare 3 Year Calibration w/Data Plan    |
| C/DMM7510-3Y-STD   | KeithleyCare 3 Year Std Calibration Plan       |
| C/DMM7510-5Y-17025 | KeithleyCare 5 Year ISO-17025 Calibration Plan |
| C/DMM7510-5Y-DATA  | KeithleyCare 5 Year Calibration w/Data Plan    |
| C/DMM7510-5Y-STD   | KeithleyCare 5 Year Std Calibration Plan       |
| C/NEW DATA         | Calibration Data for New Units                 |
| C/NEW DATA ISO     | ISO-17025 Calibration Data for New Units       |

## Warranty Information

|                          |  |
|--------------------------|--|
| <b>Warranty Summary</b>  | This section summarizes the warranties of the DMM7510. For complete warranty information, refer to the DMM7510 Reference Manual. Any portion of the product that is not manufactured by Keithley is not covered by this warranty and Keithley will have no duty to enforce any other manufacturer's warranties.  |
| <b>Hardware Warranty</b> | Keithley Instruments, Inc. warrants the Keithley manufactured portion of the hardware for a period of one year from defects in materials or workmanship; provided that such defect has not been caused by use of the Keithley hardware which is not in accordance with the hardware instructions. The warranty does not apply upon any modification of Keithley hardware made by the customer or operation of the hardware outside the environmental specifications.   |
| <b>Software Warranty</b> | Keithley warrants for the Keithley produced portion of the software or firmware will conform in all material respects with the published specifications for a period of ninety (90) days; provided the software is used on the product for which it is intended in accordance with the software instructions. Keithley does not warrant that operation of the software will be uninterrupted or error-free, or that the software will be adequate for the customer's intended application. The warranty does not apply upon any modification of the software made by the customer. |

## Contact Information:

**Australia** 1 800 709 465  
**Austria\*** 00800 2255 4835  
**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Belgium\*** 00800 2255 4835  
**Brazil** +55 (11) 3759 7627  
**Canada** 1 800 833 9200  
**Central East Europe / Baltics** +41 52 675 3777  
**Central Europe / Greece** +41 52 675 3777  
**Denmark** +45 80 88 1401  
**Finland** +41 52 675 3777  
**France\*** 00800 2255 4835  
**Germany\*** 00800 2255 4835  
**Hong Kong** 400 820 5835  
**India** 000 800 650 1835  
**Indonesia** 007 803 601 5249  
**Italy** 00800 2255 4835  
**Japan** 81 (3) 6714 3086  
**Luxembourg** +41 52 675 3777  
**Malaysia** 1 800 22 55835  
**Mexico, Central/South America and Caribbean** 52 (55) 56 04 50 90  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**The Netherlands\*** 00800 2255 4835  
**New Zealand** 0800 800 238  
**Norway** 800 16098  
**People's Republic of China** 400 820 5835  
**Philippines** 1 800 1601 0077  
**Poland** +41 52 675 3777  
**Portugal** 80 08 12370  
**Republic of Korea** +82 2 565 1455  
**Russia / CIS** +7 (495) 6647564  
**Singapore** 800 6011 473  
**South Africa** +41 52 675 3777  
**Spain\*** 00800 2255 4835  
**Sweden\*** 00800 2255 4835  
**Switzerland\*** 00800 2255 4835  
**Taiwan** 886 (2) 2656 6688  
**Thailand** 1 800 011 931  
**United Kingdom / Ireland\*** 00800 2255 4835  
**USA** 1 800 833 9200  
**Vietnam** 12060128

\* European toll-free number. If not accessible, call: +41 52 675 3777

Rev. 02.2018



Find more valuable resources at [TEK.COM](http://TEK.COM)

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.  
091521 SBG 1KW-60022-3

